

# IAR C/C++ Development Guide

Compiling and Linking

for Arm Limited's **Arm® Cores** 



DARM-24

#### **COPYRIGHT NOTICE**

© 1999–2018 IAR Systems AB.

No part of this document may be reproduced without the prior written consent of IAR Systems AB. The software described in this document is furnished under a license and may only be used or copied in accordance with the terms of such a license.

#### DISCLAIMER

The information in this document is subject to change without notice and does not represent a commitment on any part of IAR Systems. While the information contained herein is assumed to be accurate, IAR Systems assumes no responsibility for any errors or omissions.

In no event shall IAR Systems, its employees, its contractors, or the authors of this document be liable for special, direct, indirect, or consequential damage, losses, costs, charges, claims, demands, claim for lost profits, fees, or expenses of any nature or kind.

#### TRADEMARKS

IAR Systems, IAR Embedded Workbench, Embedded Trust, IAR Connect, C-SPY, C-RUN, C-STAT, IAR Visual State, IAR KickStart Kit, I-jet, I-jet Trace, I-scope, IAR Academy, IAR, and the logotype of IAR Systems are trademarks or registered trademarks owned by IAR Systems AB.

Microsoft and Windows are registered trademarks of Microsoft Corporation.

Arm, Cortex, Thumb, and TrustZone are registered trademarks of Arm Limited. EmbeddedICE is a trademark of Arm Limited. uC/OS-II and uC/OS-III are trademarks of Micrium, Inc. CMX-RTX is a trademark of CMX Systems, Inc. ThreadX is a trademark of Express Logic. RTXC is a trademark of Quadros Systems. Fusion is a trademark of Unicoi Systems.

Renesas Synergy is a trademark of Renesas Electronics Corporation.

Adobe and Acrobat Reader are registered trademarks of Adobe Systems Incorporated.

All other product names are trademarks or registered trademarks of their respective owners.

#### **EDITION NOTICE**

Twenty-fourth edition: June 2018

Part number: DARM-24

This guide applies to version 8.30.x of IAR Embedded Workbench® for Arm.

Internal reference: BB4, csrct2010.1, V\_110411, IMAE.

## **Brief contents**

Tables
Preface
Part I. Using the build tools49
Introduction to the IAR build tools
Developing embedded applications
Data storage
Functions
Linking using ILINK
Linking your application
The DLIB runtime environment
Assembler language interface
Using C
Using C++
Application-related considerations
Efficient coding for embedded applications
Part 2. Reference information
External interface details
Compiler options
Linker options
Data representation
Extended keywords

Pragma directives	77
Intrinsic functions	)3
The preprocessor45	51
C/C++ standard library functions	55
The linker configuration file47	77
Section reference	11
The stack usage control file	17
IAR utilities	25
Implementation-defined behavior for Standard C	71
Implementation-defined behavior for C89	<b>)</b> 1
Index	)3

### Contents

Who should	read this guide	
	read this guide	
Required	8	
	l knowledge	41
How to use t	his guide	
What this gu	ide contains	
Part 1. U	Using the build tools	
Part 2. R	deference information	
Other docun	nentation	
User and	l reference guides	44
The onli	ne help system	
Further r	reading	
Web site	es	
Document c	onventions	
Typogra	phic conventions	46
Naming	conventions	

### Ρ

Introduction to the IAR build tools	51
The IAR build tools—an overview	51
IAR C/C++ Compiler	51
IAR Assembler	52
The IAR ILINK Linker	52
Specific ELF tools	52
External tools	52
IAR language overview	53
Device support	53
Supported Arm devices	53
Preconfigured support files	54
Examples for getting started	54

Special support for embedded systems	55
Extended keywords	55
Pragma directives	55
Predefined symbols	55
Accessing low-level features	55
Developing embedded applications	57
Developing embedded software using IAR build tools	57
Mapping of memory	57
Communication with peripheral units	58
Event handling	58
System startup	58
Real-time operating systems	58
Interoperability with other build tools	59
The build process—an overview	59
The translation process	60
The linking process	60
After linking	62
Application execution—an overview	62
The initialization phase	63
The execution phase	66
The termination phase	66
Building applications—an overview	67
Basic project configuration	67
Processor configuration	68
Optimization for speed and size	69
Data storage	71
Introduction	71
Different ways to store data	71
Storage of auto variables and parameters	72
The stack	72
Dynamic memory on the heap	73
Potential problems	73

Functions	75
Function-related extensions	75
Arm and Thumb code	76
Execution in RAM	76
Interrupt functions for Cortex-M devices	77
Interrupts for Cortex-M	77
Interrupt functions for Arm7/9/11, Cortex-A, and Co	rtex-R
devices	78
Interrupt functions	78
Installing exception functions	79
Interrupts and fast interrupts	80
Nested interrupts	
Software interrupts	
Interrupt operations	83
Inlining functions	84
C versus C++ semantics	
Features controlling function inlining	85
Stack protection	85
Stack protection in the IAR C/C++ compiler	
Using stack protection in your application	86
TrustZone interface	86
Linking using ILINK	87
Linking—an overview	
Modules and sections	
The linking process in detail	89
Placing code and data—the linker configuration file .	
A simple example of a configuration file	
Initialization at system startup	94
The initialization process	95
C++ dynamic initialization	96
Stack usage analysis	
Introduction to stack usage analysis	
Performing a stack usage analysis	97

Result of an analysis—the map file contents	
Specifying additional stack usage information	
Limitations	
Situations where warnings are issued	
Call graph log	
Call graph XML output	
Linking your application	105
Linking considerations	
Choosing a linker configuration file	
Defining your own memory areas	
Placing sections	
Reserving space in RAM	
Keeping modules	
Keeping symbols and sections	
Application startup	
Setting up stack memory	
Setting up heap memory	
Setting up the atexit limit	
Changing the default initialization	
Interaction between ILINK and the application	
Standard library handling	
Producing other output formats than ELF/DWARF	
Veneers	
Hints for troubleshooting	
Relocation errors	
Checking module consistency	117
Runtime model attributes	117
Using runtime model attributes	
Linker optimizations	
Virtual function elimination	119
Small function inlining	119
Duplicate section merging	119

The DLIB r	untime environment	121
Introd	luction to the runtime environment	. 121
	Runtime environment functionality	. 121
	Briefly about input and output (I/O)	. 122
	Briefly about C-SPY emulated I/O	. 123
	Briefly about retargeting	. 124
Settin	g up the runtime environment	. 125
	Setting up your runtime environment	. 125
	Retargeting—Adapting for your target system	. 126
	Overriding library modules	. 128
	Customizing and building your own runtime library	. 129
Additi	ional information on the runtime environment	. 131
	Bounds checking functionality	. 131
	Runtime library configurations	. 131
	Prebuilt runtime libraries	. 132
	Formatters for printf	. 135
	Formatters for scanf	. 137
	The C-SPY emulated I/O mechanism	. 138
	The semihosting mechanism	. 139
	Math functions	. 139
	System startup and termination	. 141
	System initialization	. 144
	The DLIB low-level I/O interface	. 145
	abort	. 146
	aeabi_assert	. 146
	clock	. 147
	close	. 147
	exit	. 148
	getenv	. 148
	getzone	. 149
	_lseek	. 149
	open	. 150
	raise	. 150

	read	150
	remove	152
	rename	152
	signal	152
	system	153
	time32,time64	153
	write	153
	Configuration symbols for file input and output	155
	Locale	155
Mana	iging a multithreaded environment	156
	Multithread support in the DLIB runtime environment	157
	Enabling multithread support	158
	C++ exceptions in threads	158
Assembler	language interface	159
Mixin	ng C and assembler	159
	Intrinsic functions	159
	Mixing C and assembler modules	160
	Inline assembler	160
	Reference information for inline assembler	162
	An example of how to use clobbered memory	168
Callir	ng assembler routines from C	168
	Creating skeleton code	169
	Compiling the skeleton code	170
Callir	ng assembler routines from C++	171
Callir	ng convention	171
	Function declarations	172
	Using C linkage in C++ source code	172
	Preserved versus scratch registers	173
	Function entrance	174
	Function exit	175
	Examples	177
Call f	frame information	178
	CFI directives	178

	Creating assembler source with CFI support	179
Using C		183
C lan	guage overview	
Exter	sions overview	
	Enabling language extensions	185
IAR C	Clanguage extensions	
	Extensions for embedded systems programming	185
	Relaxations to Standard C	187
Using C++		191
Over	view—Standard C++	191
	Modes for exceptions and RTTI support	191
	Exception handling	192
Enabl	ling support for C++	194
C++ f	eature descriptions	
	Using IAR attributes with Classes	194
	Templates	194
	Function types	194
	Using static class objects in interrupts	195
	Using New handlers	195
	Debug support in C-SPY	196
C++	anguage extensions	
Porti	ng code from EC++ or EEC++	199
Application	-related considerations	201
Outp	ut format considerations	
Stack	considerations	
	Stack size considerations	
	Stack alignment	
	Exception stack	
Heap	considerations	
	Advanced, basic, and no-free heap	
	Heap size and standard I/O	
Intera	action between the tools and your application	

Checksum calculation for verifying image integrity	. 206
Briefly about checksum calculation	. 207
Calculating and verifying a checksum	. 208
Troubleshooting checksum calculation	. 214
AEABI compliance	. 215
Linking AEABI-compliant modules using the IAR ILINK linker .	. 215
Linking AEABI-compliant modules using a third-party linker	.216
Enabling AEABI compliance in the compiler	. 216
CMSIS integration	. 217
CMSIS DSP library	.217
Customizing the CMSIS DSP library	. 217
Building with CMSIS on the command line	.217
Building with CMSIS in the IDE	.218
Arm TrustZone®	218
An example using the Armv8-M Security Extensions (CMSE)	. 219
Efficient coding for embedded applications	. 223
Selecting data types	223
Using efficient data types	223
Floating-point types	224
Alignment of elements in a structure	. 224
Anonymous structs and unions	. 225
Controlling data and function placement in memory	226
Data placement at an absolute location	. 227
Data and function placement in sections	. 228
Data placement in registers	. 229
Controlling compiler optimizations	. 230
Scope for performed optimizations	. 231
Multi-file compilation units	. 231
Optimization levels	. 232
Speed versus size	. 233
Fine-tuning enabled transformations	. 233
Facilitating good code generation	. 236
Writing optimization-friendly source code	. 236

Saving stack space and RAM memory	237
Function prototypes	237
Integer types and bit negation	238
Protecting simultaneously accessed variables	238
Accessing special function registers	239
Passing values between C and assembler objects	240
Non-initialized variables	240

### Part 2. Reference information \_\_\_\_\_243

Invocation syntax24Compiler invocation syntax24ILINK invocation syntax24Passing options24Environment variables24Include file search procedure24Compiler output24Error return codes24ILINK output25Text encodings25
ILINK invocation syntax       240         Passing options       240         Environment variables       241         Include file search procedure       242         Compiler output       243         Error return codes       244         ILINK output       250
Passing options
Environment variables
Include file search procedure
Compiler output
Error return codes
ILINK output250
•
Text encodings
Characters and string literals252
Diagnostics
Message format for the compiler
Message format for the linker252
Severity levels
Setting the severity level
Internal error
Compiler options
Options syntax
Types of options255
Rules for specifying parameters25:
Summary of compiler options

Descriptions of compiler options	
aapcs	
aeabi	
align_sp_on_irq	
arm	264
c89	
char_is_signed	
char_is_unsigned	265
cmse	265
cpu	
cpu_mode	
c++	
-D	
debug, -r	
dependencies	
deprecated_feature_warnings	269
diag_error	270
diag_remark	270
diag_suppress	271
diag_warning	271
diagnostics_tables	271
discard_unused_publics	272
dlib_config	272
do_explicit_zero_opt_in_named_sections	273
-е	274
enable_hardware_workaround	274
enable_restrict	274
endian	275
enum_is_int	275
error_limit	275
-f	
fpu	276
guard_calls	277
header_context	

-I
-1
lock_regs
macro_positions_in_diagnostics
make_all_definitions_weak
max_cost_constexpr_call
max_depth_constexpr_call
mfc
no_alignment_reduction
no_bom
no_clustering
no_code_motion
no_const_align
no_cse
no_dwarf3_cfi
no_exceptions
no_fragments
no_inline
no_literal_pool
no_loop_align
no_mem_idioms
no_path_in_file_macros
no_rtti
no_rw_dynamic_init
no_scheduling
no_size_constraints
no_static_destruction
no_system_include
no_tbaa
no_typedefs_in_diagnostics
no_unaligned_access
no_uniform_attribute_syntax
no_unroll
no_var_align

no_warnings
no_wrap_diagnostics
nonportable_path_warnings
-0
only_stdout
output, -o
pending_instantiations
predef_macros
preinclude
preprocess
public_equ
relaxed_fp
remarks
require_prototypes
ropi
ropi_cb
rwpi
rwpi_near
section
silent
source_encoding
stack_protection
strict
system_include_dir
text_out
thumb
uniform_attribute_syntax
use_c++_inline
use_unix_directory_separators
utf8_text_in
vectorize
version
vla
warn_about_c_style_casts

warnings_affect_exit_code	
warnings_are_errors	
Linker options	305
Summary of linker options	305
Descriptions of linker options	
advanced_heap	
basic_heap	
BE32	
call_graph	
config_def	
config_search	
cpp_init_routine	
cpu	
default_to_complex_ranges	
define_symbol	
dependencies	
diag_error	
diag_remark	
diag_suppress	
diag_warning	
diagnostics_tables	
do_segment_pad	
enable_hardware_workaround	
enable_stack_usage	
entry	
error_limit	
exception_tables	
export_builtin_config	
extra_init	
-f	
force_exceptions	

force_output
fpu
image_input
import_cmse_lib_in
import_cmse_lib_out
inline
keep
log
log_file
mangled_names_in_messages
manual_dynamic_initialization
map
merge_duplicate_sections
no_bom
no_dynamic_rtti_elimination
no_entry
no_exceptions
no_fragments
no_free_heap
no_inline
no_library_search
no_literal_pool
no_locals
no_range_reservations
no_remove
no_vfe
no_warnings
no_wrap_diagnostics
only_stdout
output, -o
pi_veneers
place_holder
preconfig
printf_multibytes

	redirect	
	remarks	
	scanf_multibytes	
	search, -L	
	semihosting	
	silent	
	stack_usage_control	
	strip	
	text_out	
	threaded_lib	
	timezone_lib	
	treat_rvct_modules_as_softfp	
	use_full_std_template_names	
	utf8_text_in	
	version	
	vfe	
	warnings_affect_exit_code	
	warnings_are_errors	
	whole_archive	
repre	esentation	343
Align	ment	
0	Alignment on the Arm core	
Byte	order	
•	data types—integer types	
	Integer types—an overview	
	Bool	
	The enum type	
	The char type	
	The wchar_t type	
	The char16_t type	
	The char32_t type	
	Bitfields	

Data

Basic	: data types—floating-point types	
	Floating-point environment	
	32-bit floating-point format	351
	64-bit floating-point format	
	Representation of special floating-point numbers	
Point	ter types	
	Function pointers	
	Data pointers	
	Casting	
Struc	cture types	
	Alignment of structure types	
	General layout	
	Packed structure types	
Туре	qualifiers	
	Declaring objects volatile	
	Declaring objects volatile and const	
	Declaring objects const	
Data	types in C++	
Extended	<eywords< td=""><td> 359</td></eywords<>	359
Gene	eral syntax rules for extended keywords	
	Type attributes	
	Object attributes	
Sumi	mary of extended keywords	
Desc	riptions of extended keywords	
	absolute	
	arm	
	big_endian	
	cmse_nonsecure_call	
	cmse_nonsecure_entry	
	fiq	
	interwork	
	intrinsic	
	irq	

	little_endian	300
	nested	366
	no_alloc,no_alloc16	367
	no_alloc_str,no_alloc_str16	367
	no_init	368
	noreturn	368
	packed	369
	ramfunc	370
	ro_placement	371
	root	371
	stackless	372
	swi	372
	task	373
	thumb	374
	weak	374
Supp	orted GCC attributes	375
Pragma dir	ectives	377
Sumr	mary of pragma directives	377
	mary of pragma directives riptions of pragma directives	
		380
	riptions of pragma directives	380 380
	riptions of pragma directives bitfields	380 380 381
	riptions of pragma directives bitfields calls	380 380 381 382
	riptions of pragma directives bitfields calls call_graph_root	380 380 381 382 382
	riptions of pragma directives bitfields calls call_graph_root data_alignment	380 380 381 382 382 383
	riptions of pragma directives bitfields calls call_graph_root data_alignment default_function_attributes	380 380 381 382 382 383 384
	riptions of pragma directives bitfields calls call_graph_root data_alignment default_function_attributes default_variable_attributes	380 380 381 382 382 383 384 385
	riptions of pragma directives bitfields calls call_graph_root data_alignment default_function_attributes default_variable_attributes deprecated	380 380 381 382 382 383 384 385 385
	riptions of pragma directives bitfields calls data_alignment default_function_attributes default_variable_attributes default_variable_attributes default_variable_attributes default_variable_attributes default_variable_attributes	380 380 381 382 382 383 383 385 386
	riptions of pragma directives bitfields calls call_graph_root data_alignment default_function_attributes default_variable_attributes deprecated diag_default diag_error	380 380 381 382 383 383 384 385 386 386
	riptions of pragma directives bitfields calls call_graph_root data_alignment default_function_attributes default_variable_attributes deprecated diag_default diag_remark	380 380 381 382 383 383 384 385 385 386 386 387
	riptions of pragma directives bitfields calls data_alignment default_function_attributes default_variable_attributes deprecated diag_default diag_remark diag_suppress	380 380 381 382 383 384 385 385 386 386 387
	riptions of pragma directives	380 380 381 382 382 383 384 385 385 386 386 387 387

	include_alias	
	inline	
	language	
	location	
	message	
	no_stack_protect	
	object_attribute	
	optimize	
	pack	
	printf_args	
	public_equ	
	required	
	rtmodel	
	scanf_args	
	section	
	stack_protect	
	STDC CX_LIMITED_RANGE	
	STDC FENV_ACCESS	
	STDC FP_CONTRACT	
	swi_number	
	type_attribute	
	unroll	
	vectorize	
	weak	
Intrinsic fun	octions	403
Summ	nary of intrinsic functions	
	Intrinsic functions for ACLE	
	Intrinsic functions for Neon instructions	
Descr	iptions of IAR Systems intrinsic functions	
	arm_cdp	
	arm_cdp2	
	arm_ldc	
	arm_ldcl	

arm_ldc24	405
arm_ldc21	405
arm_mcr4	406
arm_mcr24	406
arm_mcrr4	406
arm_mcrr24	406
arm_mrc4	407
arm_mrc24	407
arm_mrrc4	407
arm_mrrc24	407
arm_rsr4	407
arm_rsr644	407
arm_rsrp4	407
arm_stc	408
arm_stcl4	408
arm_stc2	408
arm_stc21	408
arm_wsr4	409
arm_wsr644	409
arm_wsrp	409
CDP	410
CDP2	410
CLREX	410
CLZ	411
crc32b	411
crc32h4	411
crc32w	411
crc32d4	411
crc32cb4	412
crc32ch4	412
crc32cw	412
crc32cd	412
disable_fiq4	412
disable_interrupt4	412

disable_irq	
DMB	
DSB	
enable_fiq	413
enable_interrupt	
enable_irq	
fma	414
fmaf	
get_BASEPRI	
get_CONTROL	
get_CPSR	415
get_FAULTMASK	
get_FPSCR	
get_interrupt_state	
get_IPSR	
get_LR	
get_MSP	417
get_PRIMASK	417
get_PSP	
get_PSR	417
get_SB	
get_SP	
ISB	
LDC	
LDCL	
LDC2	
LDC2L	
LDC_noidx	
LDCL_noidx	
LDC2_noidx	
LDC2L_noidx	
LDREX	
LDREXB	
LDREXD	

LDREXH	. 420
MCR	. 420
MCR2	.420
MCRR	.421
MCRR2	. 421
MRC	. 422
MRC2	.422
MRRC	.422
MRRC2	. 422
no_operation	. 423
PKHBT	. 423
PKHTB	. 424
PLD	. 424
PLDW	. 424
PLI	. 424
QADD	. 425
QDADD	. 425
QDSUB	. 425
QSUB	. 425
QADD8	. 425
QADD16	.425
QASX	. 425
QSAX	. 425
QSUB8	. 425
QSUB16	. 425
QCFlag	. 426
QDOUBLE	. 426
QFlag	. 426
RBIT	. 426
reset_Q_flag	. 427
reset_QC_flag	.427
REV	. 427
REV16	.427
REVSH	. 427

rintnf       427        ROR       428        RX       428        SADD8       428        SADD16       428        SASX       428        SASX       428        SSUB8       428        SSUB8       428        SSUB8       428        SSUB8       428        SSUB8       428        SEL       429        set_CONTROL       429        set_CONTROL       429        set_FAULTMASK       430        set_FPSCR       430        set_FPSCR       430        set_SB       431        set_SP       431<	rintn
RRX       428        SADD8       428        SADD16       428        SASX       428        SSAX       428        SSAX       428        SSUB8       428        SSUB8       428        SSUB8       428        SSUB8       428        SEL       429        set_BASEPRI       429        set_CONTROL       429        set_CPSR       429        set_FAULTMASK       430        set_FPSCR       430        set_FPSCR       430        set_MSP       431        set_PSP       431        set_SB       431        set_SP       431         _set_SP <t< td=""><td>rintnf</td></t<>	rintnf
SADD8       428         _SADD16       428         _SASX       428         _SSAX       428         _SSAX       428         _SSUB8       428         _SSUB8       428         _SSUB8       428         _SSUB16       428         _SEL       429         _set_BASEPRI       429         _set_CONTROL       429         _set_FPSCR       430         _set_FPSCR       430         _set_IR       430         _set_PSP       431         _set_PSP       431         _set_SB       431         _set_SP       431         _set_SP       431         _set_SP       431         _set_SB       431         _set_SP       431         _starterse       432         _SHADD8       432         _SHADB8       432         _SHSUB8       432         _SHSUB16       432         _SMLABB       433         _SMLATB       433	ROR
SADD16       428         _SASX       428         _SSAX       428         _SSUB8       428         _SSUB8       428         _SSUB16       428         _SEL       429         _set_BASEPRI       429         _set_CONTROL       429         _set_CPSR       429         _set_FPSCR       430         _set_FPSCR       430         _set_IR       430         _set_PSP       431         _set_PSP       431         _set_SB       431         _set_SB       431         _set_SP       431         _set_SB       431         _set_SB       431         _set_SB       431         _set_SB       431         _set_SP       431         _set_SB       431         _set_SB       431         _set_SB       432         _SHADD8       432         _SHADB8       432         _SHSUB8       432         _SHSUB16       432         _SHLABB       433         _SMLABT       433	RRX
SASX       428         _SSAX       428         _SSUB8       428         _SSUB16       428         _SEL       429         _set_BASEPRI       429         _set_CONTROL       429         _set_CONTROL       429         _set_FAULTMASK       430         _set_FPSCR       430         _set_IR       430         _set_LR       430         _set_SB       431         _set_SB       431         _set_SP       431         _set_SP       431         _set_SP       432         _SHADD8       432         _SHADB8       432         _SHSUB8       432         _SMLABB       433         _SMLATB       433	SADD8
SSAX       428         _SSUB8       428         _SSUB16       428         _SEL       429         _set_BASEPRI       429         _set_CONTROL       429         _set_CPSR       429         _set_FAULTMASK       430         _set_FPSCR       430         _set_IRP       430         _set_PSCR       430         _set_SB       431         _set_SB       431         _set_SP       431         _set_SP       431         _set_SB       431         _set_SB       431         _SEV       432         _SHADD8       432         _SHAD16       432         _SHSUB8       433         _SMLABB       433	SADD16
SSUB8       428         _SSUB16       428         _SEL       429         _set_BASEPRI       429         _set_CONTROL       429         _set_CPSR       429         _set_FAULTMASK       430         _set_FPSCR       430         _set_IR       430         _set_IR       430         _set_PSCR       431         _set_NSP       431         _set_PRIMASK       431         _set_SP       432         _SHADD8       432         _SHAD16       432         _SHSUB8       432         _SMLABB       433         _SMLABT       433	SASX
SSUB16       428        SEL       429        set_BASEPRI       429        set_CONTROL       429        set_CPSR       429        set_FAULTMASK       430        set_IFPSCR       430        set_interrupt_state       430        set_IR       430        set_PRIMASK       431        set_PSP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       432         _SHADD8       432         _SHASX       432         _SHSUB8       432         _SHSUB8       432         _SMLABT       433        SMLATB       433	SSAX
SEL       429        set_BASEPRI       429        set_CONTROL       429        set_CPSR       429        set_FAULTMASK       430        set_FPSCR       430        set_interrupt_state       430        set_LR       430        set_PRIMASK       431        set_SP       432        shADD8       432        SHAB8       432        SHSUB8       432        SMLAB5       433        SMLAB5       433	SSUB8
set_BASEPRI       429        set_CONTROL       429        set_CPSR       429        set_FAULTMASK       430        set_FPSCR       430        set_interrupt_state       430        set_LR       430        set_PRIMASK       431        set_PSP       431        set_SB       431        set_SP       431        set_SP       431        set_SP       431        set_SB       431        set_SP       432        SHADD8       432        SHADB8       432        SHSUB8       432        SHSUB8       433        SMLABT       433        SMLABT       433	SSUB16
set_CONTROL       429        set_CPSR       429        set_FAULTMASK       430        set_FPSCR       430        set_Interrupt_state       430        set_LR       430        set_PRIMASK       431        set_SB       431        set_SP       432        SHADD8       432        SHADB8       432        SHSAX       432        SHSUB8       433        SMLABB       433        SMLATB       433	SEL
set_CPSR       429        set_FAULTMASK       430        set_FPSCR       430        set_interrupt_state       430        set_IR       430        set_MSP       431        set_PRIMASK       431        set_SB       431        set_SP       432        SHADD8       432        SHADD8       432        SHASX       432        SHSAX       432        SHSUB8       432        SMLABB       433        SMLATB       433	set_BASEPRI
set_FAULTMASK       430        set_FPSCR       430        set_interrupt_state       430        set_LR       430        set_MSP       431        set_PRIMASK       431        set_SB       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       432        SHADD8       432        SHADD16       432        SHSAX       432        SHSUB8       432        SMLABB       433        SMLATB       433	set_CONTROL
set_FPSCR       430        set_interrupt_state       430        set_LR       430        set_MSP       431        set_PSP       431        set_SB       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       432        SHADD8       432        SHADD16       432        SHSX       432        SHSUB8       432        SHSUB8       433        SMLABB       433        SMLATB       433	set_CPSR
set_interrupt_state       430        set_LR       430        set_MSP       431        set_PRIMASK       431        set_PSP       431        set_SB       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       432        SHADD8       432        SHADD8       432        SHASX       432        SHSUB8       432        SHSUB8       432        SMLABB       433        SMLATB       433	set_FAULTMASK
set_LR       430        set_MSP       431        set_PRIMASK       431        set_PSP       431        set_SB       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       432        SHADD8       432        SHADD16       432        SHASX       432        SHSUB8       432        SHSUB8       432        SMLABB       433        SMLABT       433        SMLATB       433	set_FPSCR
set_MSP       431        set_PRIMASK       431        set_PSP       431        set_SB       431        set_SP       432        SHADD8       432        SHADD16       432        SHSX       432        SHSUB8       432        SHSUB16       432        SMLABB       433        SMLABT       433        SMLATB       433	set_interrupt_state
set_PRIMASK       431        set_PSP       431        set_SB       431        set_SP       431        set_SP       431        set_SP       431        set_SP       431        set_SP       432        SHADD8       432        SHADD16       432        SHASX       432        SHSAX       432        SHSUB8       432        SHSUB16       433        SMLABB       433        SMLATB       433	set_LR
set_PSP       431        set_SB       431        set_SP       431        set_SP       431        sEV       432        SHADD8       432        SHADD16       432        SHASX       432        SHSAX       432        SHSUB8       432        SHSUB16       433        SMLABB       433        SMLATB       433	set_MSP
set_SB       431        set_SP       431        SEV       432        SHADD8       432        SHADD16       432        SHASX       432        SHSAX       432        SHSUB8       432        SHSUB16       432        SMLABB       433        SMLATB       433	set_PRIMASK
set_SP       431        SEV       432        SHADD8       432        SHADD16       432        SHASX       432        SHSAX       432        SHSUB8       432        SHSUB8       432        SMLABB       433        SMLATB       433	set_PSP
SEV       432        SHADD8       432        SHADD16       432        SHASX       432        SHSAX       432        SHSUB8       432        SHSUB16       432        SMLABB       433        SMLABT       433        SMLATB       433	set_SB
SHADD8       432        SHADD16       432        SHASX       432        SHSAX       432        SHSUB8       432        SHSUB16       432        SMLABB       433        SMLABT       433        SMLATB       433	set_SP
SHADD16       432        SHASX       432        SHSAX       432        SHSUB8       432        SHSUB16       432        SMLABB       433        SMLABT       433        SMLATB       433	SEV
SHASX       432        SHSAX       432        SHSUB8       432        SHSUB16       432        SMLABB       433        SMLABT       433        SMLATB       433	SHADD8
SHSAX       432        SHSUB8       432        SHSUB16       432        SMLABB       433        SMLABT       433        SMLATB       433	SHADD16
SHSUB8	SHASX
SHSUB16	SHSAX
SMLABB	SHSUB8
SMLABT	SHSUB16
SMLATB	SMLABB
	SMLABT
SMLATT	SMLATB
	SMLATT

SMLAWB	433
SMLAWT	433
SMLAD	433
SMLADX	433
SMLSD	433
SMLSDX	433
SMLALBB	434
SMLALBT	434
SMLALTB	434
SMLALTT	434
SMLALD	434
SMLALDX	434
SMLSLD	434
SMLSLDX	434
SMMLA	435
SMMLAR	435
SMMLS	435
SMMLSR	435
SMMUL	435
SMMULR	435
SMUAD	435
SMUADX	435
SMUSD	435
SMUSDX	435
SMUL	436
SMULBB	436
SMULBT	436
SMULTB	436
SMULTT	436
SMULWB	436
SMULWT	436
sqrt	436
sqrtf	436
SSAT	437

SSAT16
STC
STCL
STC2
STC2L
STC_noidx
STCL_noidx
STC2_noidx
STC2L_noidx
STREX
STREXB
STREXD
STREXH
SWP
SWPB
SXTAB
SXTAB16
SXTAH
SXTB16
TT
TTT
TTA
TTAT
UADD8
UADD16
UASX
USAX
USUB8
USUB16
UHADD8
UHADD16
UHASX
UHSAX

UHSUB16	
UMAAL	
UQADD8	
UQADD16	
UQASX	
UQSAX	
UQSUB8	
UQSUB16	
USAD8	
USADA8	
USAT	
USAT16	
UXTAB	
UXTAB16	
UXTAH	
UXTB16	
VFMA_F64	
VFMS_F64	
VFNMA_F64	
VFNMS_F64	
VFMA_F32	
VFMS_F32	
VFNMA_F32	
VFNMS_F32	
VMINNM_F64	
VMAXNM_F64	
VMINNM_F32	
VMAXNM_F32	
VRINTA_F64	
VRINTM_F64	
VRINTN_F64	
VRINTP_F64	
VRINTX_F64	
VRINTR_F64	

VRINTZ_F64	
VRINTA_F32	
VRINTM_F32	448
VRINTN_F32	
VRINTP_F32	
VRINTX_F32	
VRINTR_F32	
VRINTZ_F32	
VSQRT_F64	
VSQRT_F32	
WFE	
WFI	
YIELD	
The preprocessor	451
Overview of the preprocessor	451
Description of predefined preprocessor symbols	
AAPCS	
AAPCS_VFP	
ARM_ADVANCED_SIMD	
ARM_ARCH	
ARM_ARCH_ISA_ARM	
ARM_ARCH_ISA_THUMB	
ARM_ARCH_PROFILE	
ARM BIG ENDIAN	
ARM FEATURE DIRECTED ROUNDING	
ARM_FEATURE_DSP	
ARM_FEATURE_FMA	
ARM_FEATURE_UNALIGNED	

ARM_FP	455
ARM_MEDIA	
ARM_NEON	455
ARM_NEON_FP	
ARM_PROFILE_M	
ARMVFP	456
ARMVFP_D16	456
ARMVFP_SP	
BASE_FILE	457
BUILD_NUMBER	
CORE	457
COUNTER	457
cplusplus	457
CPU_MODE	458
DATE	458
EXCEPTIONS	458
FILE	458
func	
FUNCTION	459
IAR_SYSTEMS_ICC	459
ICC arm	459
LINE	459
LITTLE_ENDIAN	459
PRETTY_FUNCTION	459
ROPI	
RTTI	460
RWPI	
STDC	460
STDC_LIB_EXT1	
STDC_NO_ATOMICS	
STDC_NO_THREADS	
STDC_NO_VLA	
STDC_UTF16	461
STDC_UTF32	461

STDC_VERSION	461
TIME	461
TIMESTAMP	462
VER	462
Descriptions of miscellaneous preprocessor extensions	462
NDEBUG	462
STDC_WANT_LIB_EXT1	462
#warning message	463
C/C++ standard library functions	465
C/C++ standard library overview	465
Header files	465
Library object files	466
Alternative more accurate library functions	466
Reentrancy	466
The longjmp function	467
<b>DLIB</b> runtime environment—implementation details	467
Briefly about the DLIB runtime environment	
C header files	468
C++ header files	469
Library functions as intrinsic functions	473
Not supported C/C++ functionality	473
Atomic operations	473
Added C functionality	473
Non-standard implementations	476
Symbols used internally by the library	476
The linker configuration file	477
Overview	477
Defining memories and regions	478
define memory directive	479
define region directive	479
logical directive	480
Regions	481
Region literal	482

	Region expression	
	Empty region	
	Section handling	
	define block directive	
	define section directive	
	define overlay directive	
	initialize directive	
	do not initialize directive	
	keep directive	
	place at directive	
	place in directive	
	use init table directive	
	Section selection	
	section-selectors	
	extended-selectors	
	Using symbols, expressions, and numbers	
	check that directive	
	define symbol directive	
	export directive	
	expressions	
	numbers	
	Structural configuration	
	error directive	
	if directive	
	include directive	
Section	on reference	511
	Summary of sections	511
	Descriptions of sections and blocks	
	.bss	
	CSTACK	
	.data	
	.data_init	
	.exc.text	

	HEAP	.513
	iar_tls.\$\$DATA	. 513
	.iar.dynexit	. 514
	.init_array	.514
	.intvec	. 514
	IRQ_STACK	. 514
	.noinit	. 515
	.preinit_array	. 515
	.prepreinit_array	. 515
	.rodata	. 515
	.text	. 515
	.textrw	. 516
	.textrw_init	. 516
	Veneer\$\$CMSE	. 516
The stack u	usage control file	517
Over	view	. 517
	C++ names	. 517
Stack	usage control directives	. 517
	call graph root directive	. 518
	exclude directive	. 518
	function directive	. 518
	max recursion depth directive	. 519
	no calls from directive	. 519
	possible calls directive	. 520
Synta	ctic components	. 520
	category	. 521
	func-spec	. 521
	module-spec	. 521
	name	. 522
	call-info	. 522
	stack-size	. 522
	size	. 523

utilities	525
The IAR Archive Tool—iarchive	525
Invocation syntax	526
Summary of iarchive commands	526
Summary of iarchive options	527
Diagnostic messages	527
The IAR ELF Tool—ielftool	529
Invocation syntax	529
Summary of ielftool options	530
The IAR ELF Dumper—ielfdump	530
Invocation syntax	531
Summary of ielfdump options	531
The IAR ELF Object Tool—iobjmanip	532
Invocation syntax	532
Summary of iobjmanip options	533
Diagnostic messages	533
The IAR Absolute Symbol Exporter—isymexport	535
Invocation syntax	535
Summary of isymexport options5	537
Steering files	537
Show directive	538
Show-weak directive	538
Hide directive	539
Rename directive	539
Diagnostic messages	540
The IAR ELF Relocatable Object Creator—iexe2obj	541
Invocation syntax	541
Building the input file	542
Summary of iexe2obj options	543
Descriptions of options	543
a5	543
all	544
bin	544

bin-multi
checksum
code
create
delete, -d
disasm_data
edit
extract, -x
-f
fill
front_headers
generate_vfe_header
hide_symbols
ihex
keep_mode_symbols
no_bom
no_header
no_rel_section
no_strtab
no_utf8_in
offset
output, -o
parity
prefix
ram_reserve_ranges
range
raw
remove_file_path
remove_section
rename_section
rename_symbol
replace, -r
reserve_ranges
section, -s

	segment, -g	563
	self_reloc	564
	show_entry_as	564
	silent	564
	simple	565
	simple-ne	565
	source	565
	srec	566
	srec-len	566
	srec-s3only	566
	strip	567
	symbols	567
	text_out	568
	titxt	568
	toc, -t	568
	use_full_std_template_names	569
	utf8_text_in	569
	verbose, -V	570
	version	570
	wrap	570
Implementa	ation-defined behavior for Standard C	571
Descr	iptions of implementation-defined behavior	571
	J.3.1 Translation	571
	J.3.2 Environment	572
	J.3.3 Identifiers	573
	J.3.4 Characters	573
	J.3.5 Integers	575
	J.3.6 Floating point	576
	J.3.7 Arrays and pointers	577
	J.3.8 Hints	577
	J.3.9 Structures, unions, enumerations, and bitfields	577
	J.3.10 Qualifiers	578
	J.3.11 Preprocessing directives	578

	J.3.12 Library functions	
	J.3.13 Architecture	
	J.4 Locale	
Implen	nentation-defined behavior for C89	591
0	Descriptions of implementation-defined behavior	
	Translation	591
	Environment	591
	Identifiers	592
	Characters	592
	Integers	593
	Floating point	594
	Arrays and pointers	595
	Registers	595
	Structures, unions, enumerations, and bitfields	595
	Qualifiers	596
	Declarators	596
	Statements	
	Preprocessing directives	596
	Library functions for the IAR DLIB Runtime Environment	
Index		603

# **Tables**

1: Typographic conventions used in this guide	46
2: Naming conventions used in this guide	47
3: Sections holding initialized data	94
4: Description of a relocation error	116
5: Example of runtime model attributes	118
6: Library configurations	131
7: Formatters for printf	136
8: Formatters for scanf	137
9: Library objects using TLS	157
10: Inline assembler operand constraints	163
11: Supported constraint modifiers	165
12: List of valid clobbers	167
13: Operand modifiers and transformations	167
14: Registers used for passing parameters	174
15: Registers used for returning values	176
16: Call frame information resources defined in a names block	179
17: Language extensions	185
18: Section operators and their symbols	187
19: Exception stacks for Arm7/9/11, Cortex-A, and Cortex-R	202
20: Memory ranges for TrustZone example	220
21: Compiler optimization levels	232
22: Compiler environment variables	247
23: ILINK environment variables	247
24: Error return codes	249
25: Compiler options summary	257
26: Linker options summary	305
27: Integer types	345
28: Floating-point types	350
29: Extended keywords summary	362
30: Pragma directives summary	377
31: Traditional Standard C header files—DLIB	468

32:	C++ header files
33:	New Standard C header files—DLIB 472
34:	Examples of section selector specifications 502
35:	Section summary 511
36:	iarchive parameters
37:	iarchive commands summary 526
38:	iarchive options summary 527
39:	ielftool parameters
40:	ielftool options summary 530
41:	ielfdumparm parameters 531
42:	ielfdumparm options summary 531
43:	iobjmanip parameters 532
44:	iobjmanip options summary 533
45:	isymexport parameters 536
46:	isymexport options summary 537
47:	iexe2obj parameters 542
48:	iexe2obj options summary 543
49:	Execution character sets and their encodings 574
50:	Translation of multibyte characters in the extended source character set 587
51:	Message returned by strerror()-DLIB runtime environment 589
52:	Execution character sets and their encodings 592
53:	Message returned by strerror()-DLIB runtime environment 601

# Preface

Welcome to the IAR C/C++ Development Guide for Arm. The purpose of this guide is to provide you with detailed reference information that can help you to use the build tools to best suit your application requirements. This guide also gives you suggestions on coding techniques so that you can develop applications with maximum efficiency.

# Who should read this guide

Read this guide if you plan to develop an application using the C or C++ language for 32-bit Arm cores and need detailed reference information on how to use the build tools.

#### **REQUIRED KNOWLEDGE**

To use the tools in IAR Embedded Workbench, you should have working knowledge of:

- The architecture and instruction set of the Arm core you are using (refer to the chip manufacturer's documentation)
- The C or C++ programming language
- Application development for embedded systems
- The operating system of your host computer.

For more information about the other development tools incorporated in the IDE, refer to their respective documentation, see *Other documentation*, page 43.

### How to use this guide

When you start using the IAR C/C++ compiler and linker for Arm, you should read *Part 1. Using the build tools* in this guide.

When you are familiar with the compiler and linker and have already configured your project, you can focus more on *Part 2. Reference information*.

If you are new to using this product, we suggest that you first read the guide *Getting Started with IAR Embedded Workbench*® for an overview of the tools and the features that the IDE offers. The tutorials, which you can find in IAR Information Center, will help you get started using IAR Embedded Workbench.

# What this guide contains

Below is a brief outline and summary of the chapters in this guide.

#### PART I. USING THE BUILD TOOLS

- Introduction to the IAR build tools gives an introduction to the IAR build tools, which includes an overview of the tools, the programming languages, the available device support, and extensions provided for supporting specific features of the various Arm cores and devices.
- *Developing embedded applications* gives the information you need to get started developing your embedded software using the IAR build tools.
- Data storage describes how to store data in memory.
- *Functions* gives a brief overview of function-related extensions—mechanisms for controlling functions—and describes some of these mechanisms in more detail.
- *Linking using ILINK* describes the linking process using the IAR ILINK Linker and the related concepts.
- *Linking your application* lists aspects that you must consider when linking your application, including using ILINK options and tailoring the linker configuration file.
- *The DLIB runtime environment* describes the DLIB runtime environment in which an application executes. It covers how you can modify it by setting options, overriding default library modules, or building your own library. The chapter also describes system initialization introducing the file cstartup, how to use modules for locale, and file I/O.
- Assembler language interface contains information required when parts of an application are written in assembler language. This includes the calling convention.
- Using C gives an overview of the two supported variants of the C language and an overview of the compiler extensions, such as extensions to Standard C.
- Using  $C^{++}$  gives an overview of the level of  $C^{++}$  support.
- *Application-related considerations* discusses a selected range of application issues related to using the compiler and linker.
- *Efficient coding for embedded applications* gives hints about how to write code that compiles to efficient code for an embedded application.

#### **PART 2. REFERENCE INFORMATION**

• *External interface details* provides reference information about how the compiler and linker interact with their environment—the invocation syntax, methods for passing options to the compiler and linker, environment variables, the include file

search procedure, and the different types of compiler and linker output. The chapter also describes how the diagnostic system works.

- *Compiler options* explains how to set options, gives a summary of the options, and contains detailed reference information for each compiler option.
- *Linker options* gives a summary of the options, and contains detailed reference information for each linker option.
- *Data representation* describes the available data types, pointers, and structure types. This chapter also gives information about type and object attributes.
- *Extended keywords* gives reference information about each of the Arm-specific keywords that are extensions to the standard C/C++ language.
- Pragma directives gives reference information about the pragma directives.
- *Intrinsic functions* gives reference information about functions to use for accessing Arm-specific low-level features.
- *The preprocessor* gives a brief overview of the preprocessor, including reference information about the different preprocessor directives, symbols, and other related information.
- *C/C++ standard library functions* gives an introduction to the C or C++ library functions, and summarizes the header files.
- *The linker configuration file* describes the purpose of the linker configuration file and describes its contents.
- Section reference gives reference information about the use of sections.
- *The stack usage control file* describes the syntax and semantics of stack usage control files.
- *IAR utilities* describes the IAR utilities that handle the ELF and DWARF object formats.
- *Implementation-defined behavior for Standard C* describes how the compiler handles the implementation-defined areas of Standard C.
- *Implementation-defined behavior for C89* describes how the compiler handles the implementation-defined areas of the C language standard C89.

## **Other documentation**

User documentation is available as hypertext PDFs and as a context-sensitive online help system in HTML format. You can access the documentation from the Information Center or from the **Help** menu in the IAR Embedded Workbench IDE. The online help system is also available via the F1 key.

#### **USER AND REFERENCE GUIDES**

The complete set of IAR Systems development tools is described in a series of guides. Information about:

- System requirements and information about how to install and register the IAR Systems products, is available in the booklet Quick Reference (available in the product box) and the *Installation and Licensing Guide*.
- Using the IDE for project management and building, is available in the *IDE Project* Management and Building Guide for Arm.
- Using the IAR C-SPY® Debugger and C-RUN runtime error checking, is available in the C-SPY® Debugging Guide for Arm.
- Programming for the IAR C/C++ Compiler for Arm and linking using the IAR ILINK Linker, is available in the *IAR C/C++ Development Guide for Arm*.
- Programming for the IAR Assembler for Arm, is available in the *IAR Assembler* User Guide for Arm.
- Performing a static analysis using C-STAT and the required checks, is available in the *C-STAT*® *Static Analysis Guide*.
- Developing safety-critical applications using the MISRA C guidelines, is available in the *IAR Embedded Workbench*® *MISRA C:2004 Reference Guide* or the *IAR Embedded Workbench*® *MISRA C:1998 Reference Guide*.
- Using I-jet, refer to the *IAR Debug probes User Guide for I-jet*®, *I-jet Trace, and I-scope*.
- Using JTAGjet-Trace, refer to the JTAGjet-Trace User Guide for ARM.
- Using IAR J-Link and IAR J-Trace, refer to the J-Link/J-Trace User Guide.
- Porting application code and projects created with a previous version of the IAR Embedded Workbench for Arm, is available in the *IAR Embedded Workbench*® *Migration Guide*.

**Note:** Additional documentation might be available depending on your product installation.

#### THE ONLINE HELP SYSTEM

The context-sensitive online help contains information about:

- IDE project management and building
- Debugging using the IAR C-SPY® Debugger
- The IAR C/C++ Compiler
- The IAR Assembler

- Keyword reference information for the DLIB library functions. To obtain reference information for a function, select the function name in the editor window and press F1.
- C-STAT
- MISRA C

#### FURTHER READING

These books might be of interest to you when using the IAR Systems development tools:

- Seal, David, and David Jagger. *ARM Architecture Reference Manual*. Addison-Wesley.
- Barr, Michael, and Andy Oram, ed. *Programming Embedded Systems in C and C++*. O'Reilly & Associates.
- Furber, Steve. ARM System-on-Chip Architecture. Addison-Wesley.
- Harbison, Samuel P. and Guy L. Steele (contributor). *C: A Reference Manual.* Prentice Hall.
- Labrosse, Jean J. Embedded Systems Building Blocks: Complete and Ready-To-Use Modules in C. R&D Books.
- Mann, Bernhard. C für Mikrocontroller. Franzis-Verlag. [Written in German.]
- Meyers, Scott. *Effective* C++: 50 Specific Ways to Improve Your Programs and Designs. Addison-Wesley.
- Meyers, Scott. *More Effective* C++. Addison-Wesley.
- Meyers, Scott. *Effective STL*. Addison-Wesley.
- Sloss, Andrew N. et al, ARM System Developer's Guide: Designing and Optimizing System Software. Morgan Kaufmann.
- Sutter, Herb. Exceptional C++: 47 Engineering Puzzles, Programming Problems, and Solutions. Addison-Wesley.

The web site isocpp.org also has a list of recommended books about C++ programming.

#### WEB SITES

Recommended web sites:

- The Arm Limited web site, **www.arm.com**, that contains information and news about the Arm cores.
- The IAR Systems web site, **www.iar.com**, that holds application notes and other product information.
- The web site of the C standardization working group, www.open-std.org/jtc1/sc22/wg14.

- The web site of the C++ Standards Committee, www.open-std.org/jtc1/sc22/wg21.
- The C++ programming language web site, **isocpp.org**.

This web site also has a list of recommended books about C++ programming.

• The C and C++ reference web site, en.cppreference.com.

# **Document conventions**

When, in the IAR Systems documentation, we refer to the programming language C, the text also applies to C++, unless otherwise stated.

When referring to a directory in your product installation, for example arm\doc, the full path to the location is assumed, for example c:\Program Files\IAR

Systems \Embedded Workbench *N.n*\arm\doc, where the initial digit of the version number reflects the initial digit of the version number of the IAR Embedded Workbench shared components.

#### **TYPOGRAPHIC CONVENTIONS**

The IAR Systems documentation set uses the following typographic conventions:

Style	Used for	
computer	<ul> <li>Source code examples and file paths.</li> <li>Text on the command line.</li> <li>Binary, hexadecimal, and octal numbers.</li> </ul>	
parameter	A placeholder for an actual value used as a parameter, for example <i>filename</i> .h where <i>filename</i> represents the name of the file.	
[option]	An optional part of a directive, where <b>[</b> and <b>]</b> are not part of the actual directive, but any [, ], {, or } are part of the directive syntax.	
{option}	A mandatory part of a directive, where <b>{</b> and <b>}</b> are not part of the actual directive, but any [, ], {, or } are part of the directive syntax.	
[option]	An optional part of a command.	
[a b c]	An optional part of a command with alternatives.	
{a b c}	A mandatory part of a command with alternatives.	
bold	Names of menus, menu commands, buttons, and dialog boxes that appear on the screen.	
italic	<ul> <li>A cross-reference within this guide or to another guide.</li> <li>Emphasis.</li> </ul>	
	An ellipsis indicates that the previous item can be repeated an arbitrary number of times.	

Table 1: Typographic conventions used in this guide

Style	Used for
	Identifies instructions specific to the IAR Embedded Workbench® IDE interface.
	Interface. Identifies instructions specific to the command line interface.
	Identifies helpful tips and programming hints.
	Identifies warnings.

Table 1: Typographic conventions used in this guide (Continued)

### NAMING CONVENTIONS

The following naming conventions are used for the products and tools from IAR Systems®, when referred to in the documentation:

Brand name	Generic term
IAR Embedded Workbench® for Arm	IAR Embedded Workbench®
IAR Embedded Workbench® IDE for Arm	the IDE
IAR C-SPY® Debugger for Arm	C-SPY, the debugger
IAR C-SPY® Simulator	the simulator
IAR C/C++ Compiler™ for Arm	the compiler
IAR Assembler™ for Arm	the assembler
IAR ILINK Linker™	ILINK, the linker
IAR DLIB Runtime Environment™	the DLIB runtime environment


Table 2: Naming conventions used in this guide


Document conventions

# Part I. Using the build tools

This part of the IAR C/C++ Development Guide for Arm includes these chapters:

- Introduction to the IAR build tools
- Developing embedded applications
- Data storage
- Functions
- Linking using ILINK
- Linking your application
- The DLIB runtime environment
- Assembler language interface
- Using C
- Using C++
- Application-related considerations
- Efficient coding for embedded applications.





# Introduction to the IAR build tools

- The IAR build tools—an overview
- IAR language overview
- Device support
- Special support for embedded systems

# The IAR build tools-an overview

In the IAR product installation you can find a set of tools, code examples, and user documentation, all suitable for developing software for Arm-based embedded applications. The tools allow you to develop your application in C, C++, or in assembler language.



IAR Embedded Workbench® is a very powerful Integrated Development Environment (IDE) that allows you to develop and manage complete embedded application projects. It provides an easy-to-learn and highly efficient development environment with maximum code inheritance capabilities, comprehensive and specific target support. IAR Embedded Workbench promotes a useful working methodology, and thus a significant reduction of the development time.

For information about the IDE, see the *IDE Project Management and Building Guide* for Arm.



The compiler, assembler, and linker can also be run from a command line environment, if you want to use them as external tools in an already established project environment.

#### IAR C/C++ COMPILER

The IAR C/C++ Compiler for Arm is a state-of-the-art compiler that offers the standard features of the C and C++ languages, plus extensions designed to take advantage of the Arm-specific facilities.

#### IAR ASSEMBLER

The IAR Assembler for Arm is a powerful relocating macro assembler with a versatile set of directives and expression operators. The assembler features a built-in C language preprocessor and supports conditional assembly.

The IAR Assembler for Arm uses the same mnemonics and operand syntax as the Arm Limited Arm Assembler, which simplifies the migration of existing code. For more information, see the *IAR Assembler User Guide for Arm*.

#### THE IAR ILINK LINKER

The IAR ILINK Linker for Arm is a powerful, flexible software tool for use in the development of embedded controller applications. It is equally well suited for linking small, single-file, absolute assembler programs as it is for linking large, relocatable input, multi-module, C/C++, or mixed C/C++ and assembler programs.

#### SPECIFIC ELF TOOLS

ILINK both uses and produces industry-standard ELF and DWARF as object format, additional IAR utilities that handle these formats are provided:

- The IAR Archive Tool—iarchive—creates and manipulates a library (archive) of several ELF object files
- The IAR ELF Tool—ielftool—performs various transformations on an ELF executable image (such as, fill, checksum, format conversion etc)
- The IAR ELF Dumper for ARM—ielfdumparm—creates a text representation of the contents of an ELF relocatable or executable image
- The IAR ELF Object Tool—iobjmanip—is used for performing low-level manipulation of ELF object files
- The IAR Absolute Symbol Exporter—isymexport—exports absolute symbols from a ROM image file, so that they can be used when linking an add-on application.

**Note:** These ELF utilities are well-suited for object files produced by the tools from IAR Systems. Thus, we recommend using them instead of the GNU binary utilities.

#### **EXTERNAL TOOLS**

For information about how to extend the tool chain in the IDE, see the *IDE Project* Management and Building Guide for Arm.

# IAR language overview

The IAR C/C++ Compiler for Arm supports:

- C, the most widely used high-level programming language in the embedded systems industry. You can build freestanding applications that follow these standards:
  - Standard C—also known as C11. Hereafter, this standard is referred to as *Standard C* in this guide.
  - C89—also known as C94, C90, and ANSI C. This standard is required when MISRA C is enabled in the compiler.
- C++, a modern object-oriented programming language with a full-featured library well suited for modular programming:
  - Standard C++—also known as C++14—can be used with different levels of support for exceptions and runtime type information (RTTI).

Each of the supported languages can be used in *strict* or *relaxed* mode, or relaxed with IAR extensions enabled. The strict mode adheres to the standard, whereas the relaxed mode allows some common deviations from the standard. Both the strict and the relaxed mode might contain support for features in future versions of the C/C++ standards.

For more information about C, see the chapter Using C.

For more information about C++, see the chapter Using C++.

For information about how the compiler handles the implementation-defined areas of the languages, see the chapter *Implementation-defined behavior for Standard C*.

It is also possible to implement parts of the application, or the whole application, in assembler language. See the *IAR Assembler User Guide for Arm*.

# **Device support**

To get a smooth start with your product development, the IAR product installation comes with a wide range of device-specific support.

#### SUPPORTED ARM DEVICES

The IAR C/C++ Compiler for Arm supports most 32-bit Arm cores and devices. The object code that the compiler generates is not always binary compatible between the

cores. Therefore it is crucial to specify a processor option to the compiler. The default core is Cortex-M3.

#### PRECONFIGURED SUPPORT FILES

The IAR product installation contains preconfigured files for supporting different devices. If you need additional files for device support, they can be created using one of the provided ones as a template.

#### Header files for I/O

Standard peripheral units are defined in device-specific I/O header files with the filename extension h. The product package supplies I/O files for all devices that are available at the time of the product release. You can find these files in the arm\inc\<vendor> directory. Make sure to include the appropriate include file in your application source files. If you need additional I/O header files, they can be created using one of the provided ones as a template. For detailed information about the header file format, see EWARM\_HeaderFormat.pdf located in the arm\doc directory.

#### Linker configuration files

The arm\config directory contains ready-made linker configuration files for all supported devices. The files have the filename extension icf and contain the information required by the linker. For more information about the linker configuration file, see *Placing code and data—the linker configuration file*, page 91, and for reference information, the chapter *The linker configuration file*.

#### **Device description files**

The debugger handles several of the device-specific requirements, such as definitions of available memory areas, peripheral registers and groups of these, by using device description files. These files are located in the arm\config directory and they have the filename extension ddf. The peripheral registers and groups of these can be defined in separate files (filename extension sfr), which in that case are included in the ddf file. For more information about these files, see the *C-SPY® Debugging Guide for Arm* and EWARM\_DDFFORMAT.pdf located in the arm\doc directory.

#### **EXAMPLES FOR GETTING STARTED**

Example applications are provided with IAR Embedded Workbench. You can use these examples to get started using the development tools from IAR Systems. You can also use the examples as a starting point for your application project.

The examples are ready to be used as is. They are supplied with ready-made workspace files, together with source code files and all other related files. For information about

how to run an example project, see the *IDE Project Management and Building Guide* for Arm.

## Special support for embedded systems

This section briefly describes the extensions provided by the compiler to support specific features of the various Arm cores and devices.

#### **EXTENDED KEYWORDS**

The compiler provides a set of keywords that can be used for configuring how the code is generated. For example, there are keywords for controlling how to access and store data objects, as well as for controlling how a function should work internally and how it should be called/returned.

By default, language extensions are enabled in the IDE.

The command line option -e makes the extended keywords available, and reserves them so that they cannot be used as variable names. See, -*e*, page 274 for additional information.

For more information about the extended keywords, see the chapter *Extended keywords*. See also, *Data storage*, page 71 and *Functions*, page 75.

#### **PRAGMA DIRECTIVES**

The pragma directives control the behavior of the compiler, for example how it allocates memory, whether it allows extended keywords, and whether it issues warning messages.

The pragma directives are always enabled in the compiler. They are consistent with standard C, and are very useful when you want to make sure that the source code is portable.

For more information about the pragma directives, see the chapter *Pragma directives*.

#### PREDEFINED SYMBOLS

With the predefined preprocessor symbols, you can inspect your compile-time environment, for example time of compilation or the build number of the compiler.

For more information about the predefined symbols, see the chapter The preprocessor.

#### **ACCESSING LOW-LEVEL FEATURES**

For hardware-related parts of your application, accessing low-level features is essential. The compiler supports several ways of doing this: intrinsic functions, mixing C and assembler modules, and inline assembler. For information about the different methods, see *Mixing C and assembler*, page 159.

# Developing embedded applications

- Developing embedded software using IAR build tools
- The build process—an overview
- Application execution—an overview
- Building applications—an overview
- Basic project configuration

# Developing embedded software using IAR build tools

Typically, embedded software written for a dedicated microcontroller is designed as an endless loop waiting for some external events to happen. The software is located in ROM and executes on reset. You must consider several hardware and software factors when you write this kind of software. To your help, you have compiler options, extended keywords, pragma directives, etc.

#### MAPPING OF MEMORY

Embedded systems typically contain various types of memory, such as on-chip RAM, external DRAM or SRAM, ROM, EEPROM, or flash memory.

As an embedded software developer, you must understand the features of the different types of memory. For example, on-chip RAM is often faster than other types of memories, and variables that are accessed often would in time-critical applications benefit from being placed here. Conversely, some configuration data might be accessed seldom but must maintain their value after power off, so they should be saved in EEPROM or flash memory.

For efficient memory usage, the compiler provides several mechanisms for controlling placement of functions and data objects in memory. For more information, see *Controlling data and function placement in memory*, page 226. The linker places sections of code and data in memory according to the directives you specify in the linker configuration file, see *Placing code and data—the linker configuration file*, page 91.

#### COMMUNICATION WITH PERIPHERAL UNITS

If external devices are connected to the microcontroller, you might need to initialize and control the signaling interface, for example by using chip select pins, and detect and handle external interrupt signals. Typically, this must be initialized and controlled at runtime. The normal way to do this is to use special function registers (SFR). These are typically available at dedicated addresses, containing bits that control the chip configuration.

Standard peripheral units are defined in device-specific I/O header files with the filename extension h. See *Device support*, page 53. For an example, see *Accessing special function registers*, page 239.

#### **EVENT HANDLING**

In embedded systems, using *interrupts* is a method for handling external events immediately; for example, detecting that a button was pressed. In general, when an interrupt occurs in the code, the core immediately stops executing the code it runs, and starts executing an interrupt routine instead.

The compiler provides various primitives for managing hardware and software interrupts, which means that you can write your interrupt routines in C, see *Interrupt functions for Cortex-M devices*, page 77 and *Interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices*, page 78.

#### SYSTEM STARTUP

In all embedded systems, system startup code is executed to initialize the system—both the hardware and the software system—before the main function of the application is called. The CPU imposes this by starting execution from a fixed memory address.

As an embedded software developer, you must ensure that the startup code is located at the dedicated memory addresses, or can be accessed using a pointer from the vector table. This means that startup code and the initial vector table must be placed in non-volatile memory, such as ROM, EPROM, or flash.

A C/C++ application further needs to initialize all global variables. This initialization is handled by the linker and the system startup code in conjunction. For more information, see *Application execution—an overview*, page 62.

#### **REAL-TIME OPERATING SYSTEMS**

In many cases, the embedded application is the only software running in the system. However, using an RTOS has some advantages.

For example, the timing of high-priority tasks is not affected by other parts of the program which are executed in lower priority tasks. This typically makes a program

more deterministic and can reduce power consumption by using the CPU efficiently and putting the CPU in a lower-power state when idle.

Using an RTOS can make your program easier to read and maintain, and in many cases smaller as well. Application code can be cleanly separated in tasks which are truly independent of each other. This makes teamwork easier, as the development work can be easily split into separate tasks which are handled by one developer or a group of developers.

Finally, using an RTOS reduces the hardware dependence and creates a clean interface to the application, making it easier to port the program to different target hardware.

See also Managing a multithreaded environment, page 156.

#### INTEROPERABILITY WITH OTHER BUILD TOOLS

The IAR compiler and linker provide support for AEABI, the Embedded Application Binary Interface for Arm. For more information about this interface specification, see the www.arm.com web site.

The advantage of this interface is the interoperability between vendors supporting it; an application can be built up of libraries of object files produced by different vendors and linked with a linker from any vendor, as long as they adhere to the AEABI standard.

AEABI specifies full compatibility for C and C++ object code, and for the C library. The AEABI does not include specifications for the C++ library.

For more information about the AEABI support in the IAR build tools, see *AEABI* compliance, page 215.

The IAR build tools for Arm with version numbers from 8.xx and up are not fully compatible with earlier versions of the product, see the *IAR Embedded Workbench*® *Migration Guide for ARM*® for more information.

For more information, see Linker optimizations, page 119.

### The build process—an overview


This section gives an overview of the build process; how the various build tools compiler, assembler, and linker—fit together, going from source code to an executable image.

To get familiar with the process in practice, you should run one or more of the tutorials available from the IAR Information Center.

#### THE TRANSLATION PROCESS

There are two tools in the IDE that translate application source files to intermediary object files. The IAR C/C++ Compiler and the IAR Assembler. Both produce relocatable object files in the industry-standard format ELF, including the DWARF format for debug information.

**Note:** The compiler can also be used for translating C source code into assembler source code. If required, you can modify the assembler source code which then can be assembled into object code. For more information about the IAR Assembler, see the *IAR Assembler User Guide for Arm*.

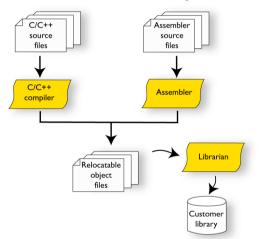

This illustration shows the translation process:

After the translation, you can choose to pack any number of modules into an archive, or in other words, a library. The important reason you should use libraries is that each module in a library is conditionally linked in the application, or in other words, is only included in the application if the module is used directly or indirectly by a module supplied as an object file. Optionally, you can create a library; then use the IAR utility iarchive.

#### THE LINKING PROCESS


The relocatable modules, in object files and libraries, produced by the IAR compiler and assembler cannot be executed as is. To become an executable application, they must be *linked*.

**Note:** Modules produced by a toolset from another vendor can be included in the build as well. Be aware that this also might require a compiler utility library from the same vendor.

The IAR ILINK Linker (ilinkarm.exe) is used for building the final application. Normally, the linker requires the following information as input:

- Several object files and possibly certain libraries
- A program start label (set by default)
- The linker configuration file that describes placement of code and data in the memory of the target system

This illustration shows the linking process:

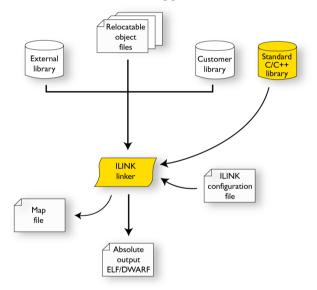

**Note:** The Standard C/C++ library contains support routines for the compiler, and the implementation of the C/C++ standard library functions.

During the linking, the linker might produce error messages and logging messages on stdout and stderr. The log messages are useful for understanding why an application was linked the way it was, for example, why a module was included or a section removed.


For more information about the procedure performed by the linker, see *The linking process in detail*, page 89.

#### **AFTER LINKING**

The IAR ILINK Linker produces an absolute object file in ELF format that contains the executable image. After linking, the produced absolute executable image can be used for:

- Loading into the IAR C-SPY Debugger or any other compatible external debugger that reads ELF and DWARF.
- Programming to a flash/PROM using a flash/PROM programmer. Before this is possible, the actual bytes in the image must be converted into the standard Motorola 32-bit S-record format or the Intel Hex-32 format. For this, use ielftool, see *The IAR ELF Tool—ielftool*, page 529.

This illustration shows the possible uses of the absolute output ELF/DWARF file:

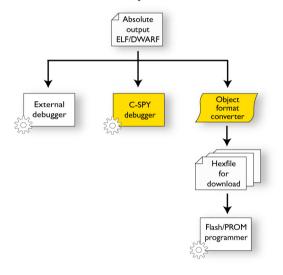

# Application execution—an overview

This section gives an overview of the execution of an embedded application divided into three phases, the:

- Initialization phase
- Execution phase
- Termination phase.

#### THE INITIALIZATION PHASE

Initialization is executed when an application is started (the CPU is reset) but before the main function is entered. The initialization phase can for simplicity be divided into:

• Hardware initialization, which generally at least initializes the stack pointer.

The hardware initialization is typically performed in the system startup code cstartup.s and if required, by an extra low-level routine that you provide. It might include resetting/starting the rest of the hardware, setting up the CPU, etc, in preparation for the software C/C++ system initialization.

• Software C/C++ system initialization

Typically, this includes assuring that every global (statically linked) C/C++ symbol receives its proper initialization value before the main function is called.


• Application initialization

This depends entirely on your application. It can include setting up an RTOS kernel and starting initial tasks for an RTOS-driven application. For a bare-bone application, it can include setting up various interrupts, initializing communication, initializing devices, etc.


For a ROM/flash-based system, constants and functions are already placed in ROM. All symbols placed in RAM must be initialized before the main function is called. The linker has already divided the available RAM into different areas for variables, stack, heap, etc.

The following sequence of illustrations gives a simplified overview of the different stages of the initialization.

I When an application is started, the system startup code first performs hardware initialization, such as initialization of the stack pointer to point at the end of the predefined stack area:

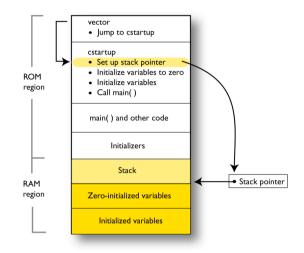


.

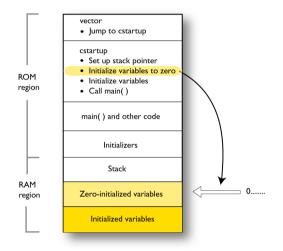


**2** Then, memories that should be zero-initialized are cleared, in other words, filled with zeros:

Typically, this is data referred to as *zero-initialized data*; variables declared as, for example, int i = 0;

**3** For *initialized data*, data declared, for example, like int i = 6; the initializers are copied from ROM to RAM:

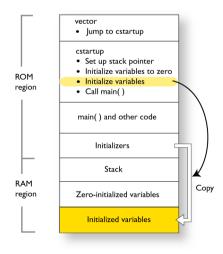

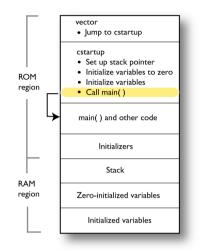

**4** Finally, the main function is called:

For more information about each stage, see *System startup and termination*, page 141. For more information about initialization of data, see *Initialization at system startup*, page 94.

#### THE EXECUTION PHASE

The software of an embedded application is typically implemented as a loop which is either interrupt-driven or uses polling for controlling external interaction or internal events. For an interrupt-driven system, the interrupts are typically initialized at the beginning of the main function.

In a system with real-time behavior and where responsiveness is critical, a multi-task system might be required. This means that your application software should be complemented with a real-time operating system. In this case, the RTOS and the different tasks must also be initialized at the beginning of the main function.

#### THE TERMINATION PHASE

Typically, the execution of an embedded application should never end. If it does, you must define a proper end behavior.

To terminate an application in a controlled way, either call one of the Standard C library functions exit, \_Exit, quick\_exit, or abort, or return from main. If you return from main, the exit function is executed, which means that C++ destructors for static and global variables are called (C++ only) and all open files are closed.

Of course, in case of incorrect program logic, the application might terminate in an uncontrolled and abnormal way—a system crash.

For more information about this, see System termination, page 143.

## **Building applications**—an overview

In the command line interface, this line compiles the source file myfile.c into the object file myfile.o using the default settings:

iccarm myfile.c

You must also specify some critical options, see Basic project configuration, page 67.

On the command line, this line can be used for starting the linker:

ilinkarm myfile.o myfile2.o -o a.out --config my\_configfile.icf

In this example, myfile.o and myfile2.o are object files, and my\_configfile.icf is the linker configuration file. The option -o specifies the name of the output file.

**Note:** By default, the label where the application starts is <u>\_\_iar\_program\_start</u>. You can use the --entry command line option to change this.

When building a project, the IAR Embedded Workbench IDE can produce extensive build information in the **Build** messages window. This information can be useful, for example, as a base for producing batch files for building on the command line. You can copy the information and paste it in a text file. To activate extensive build information, right-click in the **Build** messages window and select **All** on the context menu.

# **Basic project configuration**

This section gives an overview of the basic settings needed to generate the best code for the Arm device you are using. You can specify the options either from the command line interface or in the IDE. On the command line, you must specify each option separately, but if you use the IDE, many options will be set automatically, based on your setting of some of the fundamental options.

You need to make settings for:

- Processor configuration, that is processor variant, CPU mode, VFP and floating-point arithmetic, and byte order
- Optimization settings
- Runtime environment, see Setting up the runtime environment, page 125
- Customizing the ILINK configuration, see the chapter Linking your application.



In addition to these settings, many other options and settings can fine-tune the result even further. For information about how to set options and for a list of all available options, see the chapters *Compiler options*, *Linker options*, and the *IDE Project Management and Building Guide for Arm*, respectively.

#### **PROCESSOR CONFIGURATION**

To make the compiler generate optimum code, you should configure it for the Arm core you are using.

#### **Processor variant**

The IAR C/C++ Compiler for Arm supports most 32-bit Arm cores and devices. All supported cores support Thumb instructions and 64-bit multiply instructions. The object code that the compiler generates is not always binary compatible between the cores. Therefore it is crucial to specify a processor option to the compiler. The default core is Cortex-M3.



See the *IDE Project Management and Building Guide for Arm*, for information about setting the **Processor variant** option in the IDE.



Use the --cpu option to specify the Arm core; see --*arm*, page 264 and --*thumb*, page 301, for syntax information.

#### VFP and floating-point arithmetic

If you are using an Arm core that contains a Vector Floating Point (VFP) coprocessor, you can use the --fpu option to generate code that carries out floating-point operations utilizing the coprocessor, instead of using the software floating-point library routines.



See the *IDE Project Management and Building Guide for Arm*, for information about setting the **FPU** option in the IDE.



Use the --fpu option to specify the Arm core; see --*fpu*, page 276 for syntax information.

#### Byte order

The compiler supports the big-endian and little-endian byte order. All user and library modules in your application must use the same byte order.



See the *IDE Project Management and Building Guide for Arm* for information about setting the **Endian mode** option in the IDE.



Use the --endian option to specify the byte order for your project; see --endian, page 275, for syntax information.

#### **OPTIMIZATION FOR SPEED AND SIZE**

The compiler's optimizer performs, among other things, dead-code elimination, constant propagation, inlining, common sub-expression elimination, static clustering, instruction scheduling, and precision reduction. It also performs loop optimizations, such as unrolling and induction variable elimination.

You can choose between several optimization levels, and for the highest level you can choose between different optimization goals—*size, speed*, or *balanced*. Most optimizations will make the application both smaller and faster. However, when this is not the case, the compiler uses the selected optimization goal to decide how to perform the optimization.

The optimization level and goal can be specified for the entire application, for individual files, and for individual functions. In addition, some individual optimizations, such as function inlining, can be disabled.

For information about compiler optimizations and for more information about efficient coding techniques, see the chapter *Efficient coding for embedded applications*.

Basic project configuration

# Data storage

- Introduction
- Storage of auto variables and parameters
- Dynamic memory on the heap

# Introduction

An Arm core can address 4 Gbytes of continuous memory, ranging from 0x00000000 to 0xFFFFFFFF. Different types of physical memory can be placed in the memory range. A typical application will have both read-only memory (ROM) and read/write memory (RAM). In addition, some parts of the memory range contain processor control registers and peripheral units.

#### DIFFERENT WAYS TO STORE DATA

In a typical application, data can be stored in memory in three different ways:

Auto variables

All variables that are local to a function, except those declared static, are stored either in registers or on the stack. These variables can be used as long as the function executes. When the function returns to its caller, the memory space is no longer valid. For more information, see *Storage of auto variables and parameters*, page 72.

• Global variables, module-static variables, and local variables declared static

In this case, the memory is allocated once and for all. The word static in this context means that the amount of memory allocated for this kind of variables does not change while the application is running. The Arm core has one single address space and the compiler supports full memory addressing.

• Dynamically allocated data.

An application can allocate data on the *heap*, where the data remains valid until it is explicitly released back to the system by the application. This type of memory is useful when the number of objects is not known until the application executes. Note that there are potential risks connected with using dynamically allocated data in systems with a limited amount of memory, or systems that are expected to run for a long time. For more information, see *Dynamic memory on the heap*, page 73.

# Storage of auto variables and parameters

Variables that are defined inside a function—and not declared static—are named auto variables by the C standard. A few of these variables are placed in processor registers; the rest are placed on the stack. From a semantic point of view, this is equivalent. The main differences are that accessing registers is faster, and that less memory is required compared to when variables are located on the stack.

Auto variables can only live as long as the function executes; when the function returns, the memory allocated on the stack is released.

#### THE STACK

The stack can contain:

- Local variables and parameters not stored in registers
- Temporary results of expressions
- The return value of a function (unless it is passed in registers)
- Processor state during interrupts
- Processor registers that should be restored before the function returns (callee-save registers).
- Canaries, used in stack-protected functions. See Stack protection, page 85.

The stack is a fixed block of memory, divided into two parts. The first part contains allocated memory used by the function that called the current function, and the function that called it, etc. The second part contains free memory that can be allocated. The borderline between the two areas is called the top of stack and is represented by the stack pointer, which is a dedicated processor register. Memory is allocated on the stack by moving the stack pointer.

A function should never refer to the memory in the area of the stack that contains free memory. The reason is that if an interrupt occurs, the called interrupt function can allocate, modify, and—of course—deallocate memory on the stack.

See also Stack considerations, page 202 and Setting up stack memory, page 109.

#### Advantages

The main advantage of the stack is that functions in different parts of the program can use the same memory space to store their data. Unlike a heap, a stack will never become fragmented or suffer from memory leaks.

It is possible for a function to call itself either directly or indirectly—a recursive function—and each invocation can store its own data on the stack.

## **Potential problems**

The way the stack works makes it impossible to store data that is supposed to live after the function returns. The following function demonstrates a common programming mistake. It returns a pointer to the variable x, a variable that ceases to exist when the function returns.

```
int *MyFunction()
{
    int x;
    /* Do something here. */
    return &x; /* Incorrect */
}
```

Another problem is the risk of running out of stack space. This will happen when one function calls another, which in turn calls a third, etc., and the sum of the stack usage of each function is larger than the size of the stack. The risk is higher if large data objects are stored on the stack, or when recursive functions are used.

# Dynamic memory on the heap

Memory for objects allocated on the heap will live until the objects are explicitly released. This type of memory storage is very useful for applications where the amount of data is not known until runtime.

In C, memory is allocated using the standard library function malloc, or one of the related functions calloc and realloc. The memory is released again using free.

In C++, a special keyword, new, allocates memory and runs constructors. Memory allocated with new must be released using the keyword delete.

For information about how to set up the size for heap memory, see *Setting up heap memory*, page 110.

### POTENTIAL PROBLEMS

Applications that use heap-allocated data objects must be very carefully designed, because it is easy to end up in a situation where it is not possible to allocate objects on the heap.

The heap can become exhausted if your application uses too much memory. It can also become full if memory that no longer is in use was not released.

For each allocated memory block, a few bytes of data for administrative purposes is required. For applications that allocate a large number of small blocks, this administrative overhead can be substantial.

There is also the matter of fragmentation; this means a heap where small sections of free memory is separated by memory used by allocated objects. It is not possible to allocate a new object if no piece of free memory is large enough for the object, even though the sum of the sizes of the free memory exceeds the size of the object.

Unfortunately, fragmentation tends to increase as memory is allocated and released. For this reason, applications that are designed to run for a long time should try to avoid using memory allocated on the heap.

# **Functions**

- Function-related extensions
- Arm and Thumb code
- Execution in RAM
- Interrupt functions for Cortex-M devices
- Interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices
- Inlining functions
- Stack protection
- TrustZone interface

# **Function-related extensions**

In addition to supporting Standard C, the compiler provides several extensions for writing functions in C. Using these, you can:

- Generate code for the different CPU modes Arm and Thumb.
- Execute functions in RAM
- Write interrupt functions for the different devices
- Control function inlining
- Facilitate function optimization
- Access hardware features.
- Create interface functions for TrustZone

The compiler uses compiler options, extended keywords, pragma directives, and intrinsic functions to support this.

For more information about optimizations, see *Efficient coding for embedded applications*, page 223. For information about the available intrinsic functions for accessing hardware operations, see the chapter *Intrinsic functions*.

# Arm and Thumb code

The IAR C/C++ Compiler for Arm can generate code for either the 32-bit Arm, or the 16-bit Thumb or Thumb2 instruction set. Use the --cpu\_mode option, alternatively the --arm or --thumb options, to specify which instruction set should be used for your project. For individual functions, it is possible to override the project setting by using the extended keywords \_\_arm and \_\_thumb. You can freely mix Arm and Thumb code in the same application.

The size of all code pointers is 4 bytes. There are restrictions to implicit and explicit casts from code pointers to data pointers or integer types or vice versa. For further information about the restrictions, see *Pointer types*, page 352.

In the chapter *Assembler language interface*, the generated code is studied in more detail in the description of calling C functions from assembler language and vice versa.

# **Execution in RAM**

The \_\_ramfunc keyword makes a function execute in RAM. In other words it places the function in a section that has read/write attributes. The function is copied from ROM to RAM at system startup just like any initialized variable, see *System startup and termination*, page 141.

The keyword is specified before the return type:

\_\_ramfunc void foo(void);

If a function declared \_\_\_ramfunc tries to access ROM, the compiler will issue a warning.

If the whole memory area used for code and constants is disabled—for example, when the whole flash memory is being erased—only functions and data stored in RAM may be used. Interrupts must be disabled unless the interrupt vector and the interrupt service routines are also stored in RAM.

String literals and other constants can be avoided by using initialized variables. For example, the following lines:

```
_ramfunc void test()
{
   /* myc: initializer in ROM */
   const int myc[] = { 10, 20 };
```

```
/* string literal in ROM */
msg("Hello");
}
```

#### can be rewritten to:

```
__ramfunc void test()
{
   /* myc: initialized by cstartup */
   static int myc[] = { 10, 20 };
   /* hello: initialized by cstartup */
   static char hello[] = "Hello";
   msg(hello);
}
```

For more information, see Initializing code-copying ROM to RAM, page 113.

# Interrupt functions for Cortex-M devices

Cortex-M has a different interrupt mechanism than previous Arm architectures, which means the primitives provided by the compiler are also different.

## **INTERRUPTS FOR CORTEX-M**

On Cortex-M, an interrupt service routine enters and returns in the same way as a normal function, which means no special keywords are required. Thus, the keywords \_\_irq, \_\_fiq, and \_\_nested are not available when you compile for Cortex-M.

These exception function names are defined in cstartup\_M.c and cstartup\_M.s. They are referred to by the library exception vector code:

NMI\_Handler HardFault\_Handler MemManage\_Handler BusFault\_Handler UsageFault\_Handler SVC\_Handler DebugMon\_Handler PendSV\_Handler SysTick\_Handler

The vector table is implemented as an array. It should always have the name \_\_vector\_table, because the C-SPY debugger looks for that symbol when determining where the vector table is located.

The predefined exception functions are defined as weak symbols. A weak symbol is only included by the linker as long as no duplicate symbol is found. If another symbol is defined with the same name, it will take precedence. Your application can therefore simply define its own exception function by just defining it using the correct name from the list above. If you need other interrupts or other exception handlers, you must make a copy of the cstartup\_M.c or cstartup\_M.s file and make the proper addition to the vector table.

The intrinsic functions \_\_get\_CPSR and \_\_set\_CPSR are not available when you compile for Cortex-M. Instead, if you need to get or set values of these or other registers, you can use inline assembler. For more information, see *Passing values between C and assembler objects*, page 240.

# Interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices

The IAR C/C++ Compiler for Arm provides the following primitives related to writing interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices:

- The extended keywords: \_\_irg, \_\_fig, \_\_swi , \_\_nested,
- The intrinsic functions: \_\_enable\_interrupt, \_\_disable\_interrupt, \_\_get\_interrupt\_state, \_\_set\_interrupt\_state.

**Note:** Cortex-M has a different interrupt mechanism than other Arm devices, and for these devices a different set of primitives is available. For more information, see *Interrupt functions for Cortex-M devices*, page 77.

#### **INTERRUPT FUNCTIONS**

In embedded systems, using interrupts is a method for handling external events immediately; for example, detecting that a button was pressed.

#### Interrupt service routines

In general, when an interrupt occurs in the code, the core immediately stops executing the code it runs, and starts executing an interrupt routine instead. It is important that the environment of the interrupted function is restored after the interrupt is handled (this includes the values of processor registers and the processor status register). This makes it possible to continue the execution of the original code after the code that handled the interrupt was executed.

The compiler supports interrupts, software interrupts, and fast interrupts. For each interrupt type, an interrupt routine can be written.

All interrupt functions must be compiled in Arm mode; if you are using Thumb mode, use the \_\_arm extended keyword or the #pragma type\_attribute=\_\_arm directive to override the default behavior. This is not applicable for Cortex-M devices.

#### Interrupt vectors and the interrupt vector table

Each interrupt routine is associated with a vector address/instruction in the exception vector table, which is specified in the Arm cores documentation. The interrupt vector is the address in the exception vector table. For the Arm cores, the exception vector table starts at address  $0 \times 0$ .

By default, the vector table is populated with a *default interrupt handler* which loops indefinitely. For each interrupt source that has no explicit interrupt service routine, the default interrupt handler will be called. If you write your own service routine for a specific vector, that routine will override the default interrupt handler.

#### Defining an interrupt function-an example

To define an interrupt function, the \_\_irq or the \_\_fiq keyword can be used. For example:

```
__irq __arm void IRQ_Handler(void)
{
   /* Do something */
}
```

See the Arm cores documentation for more information about the interrupt vector table.

Note: An interrupt function must have the return type void, and it cannot specify any parameters.

## Interrupt and C++ member functions

Only static member functions can be interrupt functions. When a non-static member function is called, it must be applied to an object. When an interrupt occurs and the interrupt function is called, there is no object available to apply the member function to.

## INSTALLING EXCEPTION FUNCTIONS

All interrupt functions and software interrupt handlers must be installed in the vector table. This is done in assembler language in the system startup file cstartup.s.

The default implementation of the Arm exception vector table in the standard runtime library jumps to predefined functions that implement an infinite loop. Any exception that occurs for an event not handled by your application will therefore be caught in the infinite loop (B.).

The predefined functions are defined as weak symbols. A weak symbol is only included by the linker as long as no duplicate symbol is found. If another symbol is defined with the same name, it will take precedence. Your application can therefore simply define its own exception function by just defining it using the correct name.

These exception function names are defined in cstartup.s and referred to by the library exception vector code:

```
Undefined_Handler
SWI_Handler
Prefetch_Handler
Abort_Handler
IRQ_Handler
FIQ_Handler
```

To implement your own exception handler, define a function using the appropriate exception function name from the list above.

For example to add an interrupt function in C, it is sufficient to define an interrupt function named IRQ\_Handler:

```
__irq __arm void IRQ_Handler()
{
}
```

An interrupt function must have C linkage, read more in Calling convention, page 171.

If you use C++, an interrupt function could look, for example, like this:

```
extern "C"
{
    __irq __arm void IRQ_Handler(void);
}
__irq __arm void IRQ_Handler(void)
{
}
```

No other changes are needed.

## **INTERRUPTS AND FAST INTERRUPTS**

The interrupt and fast interrupt functions are easy to handle as they do not accept parameters or have a return value. Use any of these keywords:

• To declare an interrupt function, use the \_\_irq extended keyword or the #pragma type\_attribute=\_\_irq directive. For syntax information, see \_\_*irq*, page 366 and *type\_attribute*, page 400, respectively.

• To declare a fast interrupt function, use the \_\_fiq extended keyword or the #pragma type\_attribute=\_\_fiq directive. For syntax information, see \_\_fiq, page 365, and type\_attribute, page 400, respectively.

**Note:** An interrupt function (irq) and a fast interrupt function (fiq) must have a return type of void and cannot have any parameters. A software interrupt function (swi) may have parameters and return values. By default, only four registers, R0-R3, can be used for parameters and only the registers R0-R1 can be used for return values.

## **NESTED INTERRUPTS**

Interrupts are automatically disabled by the Arm core prior to entering an interrupt handler. If an interrupt handler re-enables interrupts, calls functions, and another interrupt occurs, then the return address of the interrupted function—stored in LR—is overwritten when the second IRQ is taken. In addition, the contents of SPSR will be destroyed when the second interrupt occurs. The \_\_irq keyword itself does not save and restore LR and SPSR. To make an interrupt handler perform the necessary steps needed when handling nested interrupts, the keyword \_\_nested must be used in addition to \_\_irq. The function prolog—function entrance sequence—that the compiler generates for nested interrupt handlers will switch from IRQ mode to system mode. Make sure that both the IRQ stack and system stack is set up. If you use the default cstartup.s file, both stacks are correctly set up.

Compiler-generated interrupt handlers that allow nested interrupts are supported for IRQ interrupts only. The FIQ interrupts are designed to be serviced quickly, which in most cases mean that the overhead of nested interrupts would be too high.

This example shows how to use nested interrupts with the Arm vectored interrupt controller (VIC):

```
__irq __nested __arm void interrupt_handler(void)
{
    void (*interrupt_task)();
    unsigned int vector;
    /* Get interrupt vector. */
    vector = VICVectAddr;
    interrupt_task = (void(*)()) vector;
    /* Allow other IRQ interrupts to be serviced. */
    __enable_interrupt();
    /* Execute the task associated with this interrupt. */
    (*interrupt_task)();
}
```

**Note:** The \_\_nested keyword requires the processor mode to be in either User or System mode.

## SOFTWARE INTERRUPTS

Software interrupt functions are slightly more complex than other interrupt functions, in the way that they need a software interrupt handler (a dispatcher), are invoked (called) from running application software, and that they accept arguments and have return values. The mechanisms for calling a software interrupt function and how the software interrupt handler dispatches the call to the actual software interrupt function is described here.

## Calling a software interrupt function

To call a software interrupt function from your application source code, the assembler instruction SVC #immed is used, where immed is an integer value that is referred to as the software interrupt number—or swi\_number—in this guide. The compiler provides an easy way to implicitly generate this instruction from C/C++ source code, by using the \_\_swi keyword and the #pragma swi\_number directive when declaring the function.

A \_\_\_\_\_swi function can for example be declared like this:

#pragma swi\_number=0x23
\_\_swi int swi\_function(int a, int b);

In this case, the assembler instruction SVC 0x23 will be generated where the function is called.

Software interrupt functions follow the same calling convention regarding parameters and return values as an ordinary function, except for the stack usage, see *Calling convention*, page 171.

For more information, see \_\_swi, page 372, and swi\_number, page 399, respectively.

#### The software interrupt handler and functions

The interrupt handler, for example SWI\_Handler works as a dispatcher for software interrupt functions. It is invoked from the interrupt vector and is responsible for retrieving the software interrupt number and then calling the proper software interrupt function. The SWI\_Handler must be written in assembler as there is no way to retrieve the software interrupt number from C/C++ source code.

#### The software interrupt functions

The software interrupt functions can be written in C or C++. Use the \_\_swi keyword in a function definition to make the compiler generate a return sequence suited for a

specific software interrupt function. The #pragma swi\_number directive is not needed in the interrupt function definition.

For more information, see \_\_swi, page 372.

#### Setting up the software interrupt stack pointer

If software interrupts will be used in your application, then the software interrupt stack pointer (SVC\_STACK) must be set up and some space must be allocated for the stack. The SVC\_STACK pointer can be set up together with the other stacks in the cstartup.s file. As an example, see the set up of the interrupt stack pointer. Relevant space for the SVC\_STACK pointer is set up in the linker configuration file, see *Setting up stack memory*, page 109.

## **INTERRUPT OPERATIONS**

An interrupt function is called when an external event occurs. Normally it is called immediately while another function is executing. When the interrupt function has finished executing, it returns to the original function. It is imperative that the environment of the interrupted function is restored; this includes the value of processor registers and the processor status register.

When an interrupt occurs, the following actions are performed:

- The operating mode is changed corresponding to the particular exception
- The address of the instruction following the exception entry instruction is saved in R14 of the new mode
- The old value of the CPSR is saved in the SPSR of the new mode
- Interrupt requests are disabled by setting bit 7 of the CPSR and, if the exception is a fast interrupt, further fast interrupts are disabled by setting bit 6 of the CPSR
- The PC is forced to begin executing at the relevant vector address.

For example, if an interrupt for vector 0x18 occurs, the processor will start to execute code at address 0x18. The memory area that is used as start location for interrupts is called the interrupt vector table. The content of the interrupt vector is normally a branch instruction jumping to the interrupt routine.

**Note:** If the interrupt function enables interrupts, the special processor registers needed to return from the interrupt routine must be assumed to be destroyed. For this reason they must be stored by the interrupt routine to be restored before it returns. This is handled automatically if the \_\_nested keyword is used.

# **Inlining functions**

Function inlining means that a function, whose definition is known at compile time, is integrated into the body of its caller to eliminate the overhead of the function call. This optimization, which is performed at optimization level High, normally reduces execution time, but might increase the code size. The resulting code might become more difficult to debug. Whether the inlining actually occurs is subject to the compiler's heuristics.

The compiler heuristically decides which functions to inline. Different heuristics are used when optimizing for speed, size, or when balancing between size and speed. Normally, code size does not increase when optimizing for size.

# **C VERSUS C++ SEMANTICS**

In C++, all definitions of a specific inline function in separate translation units must be exactly the same. If the function is not inlined in one or more of the translation units, then one of the definitions from these translation units will be used as the function implementation.

In C, you must manually select one translation unit that includes the non-inlined version of an inline function. You do this by explicitly declaring the function as extern in that translation unit. If you declare the function as extern in more than one translation unit, the linker will issue a *multiple definition* error. In addition, in C, inline functions cannot refer to static variables or functions.

For example:

```
// In a header file.
static int sX;
inline void F(void)
{
    //static int sY; // Cannot refer to statics.
    //sX; // Cannot refer to statics.
}
// In one source file.
// Declare this F as the non-inlined version to use.
extern inline void F();
```

## FEATURES CONTROLLING FUNCTION INLINING

There are several mechanisms for controlling function inlining:

• The inline keyword advises the compiler that the function defined immediately after the directive should be inlined.

If you compile your function in C or C++ mode, the keyword will be interpreted according to its definition in Standard C or Standard C++, respectively.

The main difference in semantics is that in Standard C you cannot (in general) simply supply an inline definition in a header file. You must supply an external definition in one of the compilation units, by designating the inline definition as being external in that compilation unit.

• #pragma inline is similar to the inline keyword, but with the difference that the compiler always uses C++ inline semantics.

By using the #pragma inline directive you can also disable the compiler's heuristics to either force inlining or completely disable inlining. For more information, see *inline*, page 389.

- --use\_c++\_inline forces the compiler to use C++ semantics when compiling a Standard C source code file.
- --no\_inline, #pragma optimize=no\_inline, and #pragma inline=never all disable function inlining. By default, function inlining is enabled at optimization level High.

The compiler can only inline a function if the definition is known. Normally, this is restricted to the current translation unit. However, when the --mfc compiler option for multi-file compilation is used, the compiler can inline definitions from all translation units in the multi-file compilation unit. For more information, see *Multi-file compilation units*, page 231.

For more information about the function inlining optimization, see *Function inlining*, page 234.

# **Stack protection**

In software, a stack buffer overflow occurs when a program writes to a memory address on the program's call stack outside of the intended data structure, which is usually a fixed-length buffer. The result is, almost always, corruption of nearby data, and it can even change which function to return to. If it is deliberate, it is often called stack smashing. One method to guard against stack buffer overflow is to use stack canaries, named for their analogy to the use of canaries in coal mines.

# STACK PROTECTION IN THE IAR C/C++ COMPILER

The IAR C/C++ compiler for Arm supports stack protection.

To enable stack protection for functions considered needing it, use the compiler option --stack\_protection. For more information, see --stack\_protection, page 299.

The IAR Systems implementation of stack protection uses a heuristic to determine whether a function needs stack protection or not. If any defined local variable has the array type or a structure type that contains a member of array type, the function will need stack protection. In addition, if the address of any local variable is propagated outside of a function, such a function will also need stack protection.

If a function needs stack protection, the local variables are sorted to let the variables with array type to be placed as high as possible in the function stack block. After those variables, a canary element is placed. The canary is initialized at function entrance. The initialization value is taken from the global variable \_\_stack\_chk\_guard. At function exit, the code verifies that the canary element still contains the initialization value. If not, the function \_\_stack\_chk\_fail is called.

# USING STACK PROTECTION IN YOUR APPLICATION

To use stack protection, you must define these objects in your application:

• extern uint32\_t \_\_stack\_chk\_guard

The global variable \_\_stack\_chk\_guard must be initialized prior to first use. If the initialization value is randomized, it will be more secure.

• \_\_interwork \_\_nounwind \_\_noreturn void \_\_stack\_chk\_fail(void)

The purpose of the function  $\__stack\_chk\_fail$  is to notify about the problem and then terminate the application.

Note that the return address from this function will point into the function that failed.

The file stack\_protection.c in the directory arm\src\lib\runtime can be used as a template for both \_\_stack\_chk\_guard and \_\_stack\_chk\_fail.

# TrustZone interface

TrustZone for Arm V8-M needs some compiler support to create a secure interface between the secure and the non-secure code. For this purpose, there are two function type attributes that control how code is generated: \_\_cmse\_nonsecure\_entry and \_\_cmse\_nonsecure\_call. For more information, see *Arm TrustZone*®, page 218.



# Linking using ILINK

- Linking—an overview
- Modules and sections
- The linking process in detail
- Placing code and data-the linker configuration file
- Initialization at system startup
- Stack usage analysis

# Linking-an overview

The IAR ILINK Linker is a powerful, flexible software tool for use in the development of embedded applications. It is equally well suited for linking small, single-file, absolute assembler programs as it is for linking large, relocatable, multi-module, C/C++, or mixed C/C++ and assembler programs.

The linker combines one or more relocatable object files—produced by the IAR Systems compiler or assembler—with selected parts of one or more object libraries to produce an executable image in the industry-standard format *Executable and Linking Format* (ELF).

The linker will automatically load only those library modules—user libraries and Standard C or C++ library variants—that are actually needed by the application you are linking. Further, the linker eliminates duplicate sections and sections that are not required.

ILINK can link both Arm and Thumb code, as well as a combination of them. By automatically inserting additional instructions (veneers), ILINK will assure that the destination will be reached for any calls and branches, and that the processor state is switched when required. For more details about how to generate veneers, see *Veneers*, page 115.

The linker uses a *configuration file* where you can specify separate locations for code and data areas of your target system memory map. This file also supports automatic handling of the application's initialization phase, which means initializing global variable areas and code areas by copying initializers and possibly decompressing them as well.

The final output produced by ILINK is an absolute object file containing the executable image in the ELF (including DWARF for debug information) format. The file can be downloaded to C-SPY or any other compatible debugger that supports ELF/DWARF, or it can be stored in EPROM or flash.

To handle ELF files, various tools are included. For information about included utilities, see *Specific ELF tools*, page 52.

# **Modules and sections**

Each relocatable object file contains one module, which consists of:

- Several sections of code or data
- Runtime attributes specifying various types of information, for example the version of the runtime environment
- Optionally, debug information in DWARF format
- A symbol table of all global symbols and all external symbols used.

A *section* is a logical entity containing a piece of data or code that should be placed at a physical location in memory. A section can consist of several *section fragments*, typically one for each variable or function (symbols). A section can be placed either in RAM or in ROM. In a normal embedded application, sections that are placed in RAM do not have any content, they only occupy space.

Each section has a name and a type attribute that determines the content. The type attribute is used (together with the name) for selecting sections for the ILINK configuration.

The main purpose of section attributes is to distinguish between sections that can be placed in ROM and sections that must be placed in RAM:

ro readonly	ROM sections
rw readwrite	RAM sections

In each category, sections can be further divided into those that contain code and those that contain data, resulting in four main categories:

ro	code	Normal code
ro	data	Constants
rw	code	Code copied to RAM
rw	data	Variables

readwrite data also has a subcategory—zi|zeroinit—for sections that are zero-initialized at application startup.

**Note:** In addition to these section types—sections that contain the code and data that are part of your application—a final object file will contain many other types of sections, for example sections that contain debugging information or other type of meta information.

A section is the smallest linkable unit; but if possible, ILINK can exclude smaller units—section fragments—from the final application. For more information, see *Keeping modules*, page 109, and *Keeping symbols and sections*, page 109.

At compile time, data and functions are placed in different sections. At link time, one of the most important functions of the linker is to assign addresses to the various sections used by the application.

The IAR build tools have many predefined section names. See the chapter *Section reference* for more information about each section.

You can group sections together for placement by using blocks. See *define block directive*, page 486.

# The linking process in detail

The relocatable modules in object files and libraries, produced by the IAR compiler and assembler, cannot be executed as is. To become an executable application, they must be *linked*.


**Note:** Modules produced by a toolset from another vendor can be included in the build as well, as long as the module is AEABI (Arm Embedded Application Binary Interface) compliant. Be aware that this also might require a compiler utility library from the same vendor.

The linker is used for the link process. It normally performs the following procedure (note that some of the steps can be turned off by command line options or by directives in the linker configuration file):

- Determine which modules to include in the application. Modules provided in object files are always included. A module in a library file is only included if it provides a definition for a global symbol that is referenced from an included module.
- Select which standard library files to use. The selection is based on attributes of the included modules. These libraries are then used for satisfying any still outstanding undefined symbols.
- Handle symbols with more than one definition. If there is more than one non-weak definition, an error is emitted. Otherwise, one of the definitions is picked (the non-weak one, if there is one) and the others are suppressed. Weak definitions are

typically used for inline and template functions. If you need to override some of the non-weak definitions from a library module, you must ensure that the library module is not included (typically by providing alternate definitions for all the symbols your application uses in that library module).

- Determine which sections/section fragments from the included modules to include in the application. Only those sections/section fragments that are actually needed by the application are included. There are several ways to determine of which sections/section fragments that are needed, for example, the \_\_root object attribute, the #pragma required directive, and the keep linker directive. In case of duplicate sections, only one is included.
- Where appropriate, arrange for the initialization of initialized variables and code in RAM. The initialize directive causes the linker to create extra sections to enable copying from ROM to RAM. Each section that will be initialized by copying is divided into two sections, one for the ROM part and one for the RAM part. If manual initialization is not used, the linker also arranges for the startup code to perform the initialization.
- Determine where to place each section according to the section placement directives in the *linker configuration file*. Sections that are to be initialized by copying appear twice in the matching against placement directives, once for the ROM part and once for the RAM part, with different attributes. During the placement, the linker also adds any required veneers to make a code reference reach its destination or to switch CPU modes.
- Produce an absolute file that contains the executable image and any debug information provided. The contents of each needed section in the relocatable input files is calculated using the relocation information supplied in its file and the addresses determined when placing sections. This process can result in one or more relocation failures if some of the requirements for a particular section are not met, for instance if placement resulted in the destination address for a PC-relative jump instruction being out of range for that instruction.
- Optionally, produce a map file that lists the result of the section placement, the address of each global symbol, and finally, a summary of memory usage for each module and library.

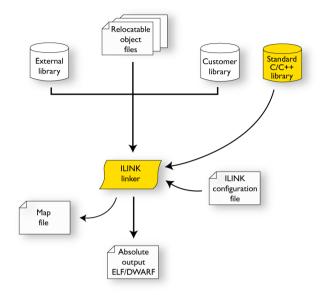

This illustration shows the linking process:

During the linking, ILINK might produce error messages and logging messages on stdout and stderr. The log messages are useful for understanding why an application was linked as it was. For example, why a module or section (or section fragment) was included.

Note: To see the actual content of an ELF object file, use ielfdumparm. See *The IAR ELF Dumper—ielfdump*, page 530.

# Placing code and data-the linker configuration file

The placement of sections in memory is performed by the IAR ILINK Linker. It uses the *linker configuration file* where you can define how ILINK should treat each section and how they should be placed into the available memories.

A typical linker configuration file contains definitions of:

- Available addressable memories
- Populated regions of those memories
- How to treat input sections
- Created sections

• How to place sections into the available regions.

The file consists of a sequence of declarative directives. This means that the linking process will be governed by all directives at the same time.

To use the same source code with different derivatives, just rebuild the code with the appropriate configuration file.

## A SIMPLE EXAMPLE OF A CONFIGURATION FILE

Assume a simple 32-bit architecture that has these memory prerequisites:

- There are 4 Gbytes of addressable memory.
- There is ROM memory in the address range 0x0000-0x10000.
- There is RAM memory in the range 0x20000-0x30000.
- The stack has an alignment of 8.
- The system startup code must be located at a fixed address.

A simple configuration file for this assumed architecture can look like this:

```
/* The memory space denoting the maximum possible amount
   of addressable memory */
define memory Mem with size = 4G;
/* Memory regions in an address space */
define region ROM = Mem: [from 0x00000 size 0x10000];
define region RAM = Mem: [from 0x20000 size 0x10000];
/* Create a stack */
define block STACK with size = 0x1000, alignment = 8 { };
/* Handle initialization */
initialize by copy { readwrite }; /* Initialize RW sections */
/* Place startup code at a fixed address */
place at start of ROM { readonly section .cstartup };
/* Place code and data */
place in ROM { readonly }; /* Place constants and initializers in
                             ROM: .rodata and .data init */
place in RAM { readwrite, /* Place .data, .bss, and .noinit */
               block STACK }; /* and STACK
                                                             */
```

This configuration file defines one addressable memory Mem with the maximum of 4 Gbytes of memory. Further, it defines a ROM region and a RAM region in Mem, namely ROM and RAM. Each region has the size of 64 Kbytes.


The file then creates an empty block called STACK with a size of 4 Kbytes in which the application stack will reside. To create a *block* is the basic method which you can use to get detailed control of placement, size, etc. It can be used for grouping sections, but also as in this example, to specify the size and placement of an area of memory.

Next, the file defines how to handle the initialization of variables, read/write type (readwrite) sections. In this example, the initializers are placed in ROM and copied at startup of the application to the RAM area. By default, ILINK may compress the initializers if this appears to be advantageous.

The last part of the configuration file handles the actual placement of all the sections into the available regions. First, the startup code—defined to reside in the read-only (readonly) section .cstartup—is placed at the start of the ROM region, that is at address 0x10000. Note that the part within {} is referred to as *section selection* and it selects the sections for which the directive should be applied to. Then the rest of the read-only section .cstartup } takes precedence over the more generic section selection { readonly }.

Finally, the read/write (readwrite) sections and the STACK block are placed in the RAM region.

This illustration gives a schematic overview of how the application is placed in memory:

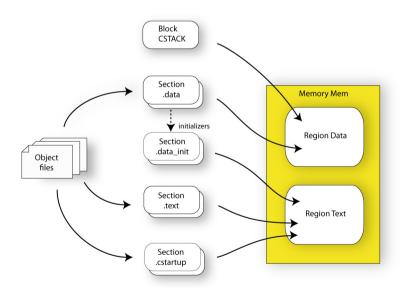

In addition to these standard directives, a configuration file can contain directives that define how to:

- Map a memory that can be addressed in multiple ways
- Handle conditional directives
- Create symbols with values that can be used in the application
- More in detail, select the sections a directive should be applied to
- More in detail, initialize code and data.

For more details and examples about customizing the linker configuration file, see the chapter *Linking your application*.

For more information about the linker configuration file, see the chapter *The linker configuration file*.

# Initialization at system startup

In Standard C, all static variables—variables that are allocated at a fixed memory address—must be initialized by the runtime system to a known value at application startup. This value is either an explicit value assigned to the variable, or if no value is given, it is cleared to zero. In the compiler, there are exceptions to this rule, for example variables declared \_\_no\_init, which are not initialized at all.

The compiler generates a specific type of section for each type of variable initialization:

Categories of declared data	Source	Section type	Section name	Section content
Zero-initialized data	int i;	Read/write data, zero-init	.bss	None
Zero-initialized data	int i = 0;	Read/write data, zero-init	.bss	None
Initialized data (non-zero)	int i = 6;	Read/write data	.data	The initializer
Non-initialized data	<pre>no_init int i;</pre>	Read/write data, zero-init	.noinit	None
Constants	<pre>const int i = 6;</pre>	Read-only data	.rodata	The constant
Code	<pre>ramfunc void   myfunc() {}</pre>	Read/write code	.textrw	The code

Table 3: Sections holding initialized data

**Note:** Clustering of static variables might group zero-initialized variables together with initialized data in .data. The compiler can decide to place constants in the .text section to avoid loading the address of a constant from a constant table.

For information about all supported sections, see the chapter Section reference.

## THE INITIALIZATION PROCESS

Initialization of data is handled by ILINK and the system startup code in conjunction.

To configure the initialization of variables, you must consider these issues:

- Sections that should be zero-initialized, or not initialized at all (\_\_no\_init) are handled automatically by ILINK.
- Sections that should be initialized, except for zero-initialized sections, should be listed in an initialize directive.

Normally during linking, a section that should be initialized is split into two sections, where the original initialized section will keep the name. The contents are placed in the new initializer section, which will get the original name suffixed with \_init. The initializers should be placed in ROM and the initialized sections in RAM, by means of placement directives. The most common example is the .data section which the linker splits into .data and .data\_init.

• Sections that contains constants should not be initialized; they should only be placed in flash/ROM.

In the linker configuration file, it can look like this:

**Note:** When compressed initializers are used (see *initialize directive*, page 492), the contents sections (that is, sections with the \_init suffix) are not listed as separate sections in the map file. Instead, they are combined into aggregates of "initializer bytes". You can place the contents sections the usual way in the linker configuration file; however, this affects the placement (and possibly the number) of the "initializer bytes" aggregates.

For more information about and examples of how to configure the initialization, see *Linking considerations*, page 105.

## C++ DYNAMIC INITIALIZATION

The compiler places subroutine pointers for performing C++ dynamic initialization into sections of the ELF section types SHT\_PREINIT\_ARRAY and SHT\_INIT\_ARRAY. By default, the linker will place these into a linker-created block, ensuring that all sections of the section type SHT\_PREINIT\_ARRAY are placed before those of the type SHT\_INIT\_ARRAY. If any such sections were included, code to call the routines will also be included.

The linker-created blocks are only generated if the linker configuration does not contain section selector patterns for the preinit\_array and init\_array section types. The effect of the linker-created blocks will be very similar to what happens if the linker configuration file contains this:

If you put this into your linker configuration file, you must also mention the CPP\_INIT block in one of the section placement directives. If you wish to select where the linker-created block is placed, you can use a section selector with the name ".init\_array".

See also section-selectors, page 500.

# Stack usage analysis

This section describes how to perform a stack usage analysis using the linker.

In the arm\src directory, you can find an example project that demonstrates stack usage analysis.

## INTRODUCTION TO STACK USAGE ANALYSIS

Under the right circumstances, the linker can accurately calculate the maximum stack usage for each call graph, starting from the program start, interrupt functions, tasks etc. (each function that is not called from another function, in other words, the root).

If you enable stack usage analysis, a stack usage chapter will be added to the linker map file, listing for each call graph root the particular call chain which results in the maximum stack depth.

The analysis is only accurate if there is accurate stack usage information for each function in the application.

In general, the compiler will generate this information for each C function, but if there are indirect calls (calls using function pointers) in your application, you must supply a list of possible functions that can be called from each calling function.

If you use a stack usage control file, you can also supply stack usage information for functions in modules that do not have stack usage information.

You can use the check that directive in your stack usage control file to check that the stack usage calculated by the linker does not exceed the stack space you have allocated.

## PERFORMING A STACK USAGE ANALYSIS

Enable stack usage analysis:

In the IDE, choose Project>Options>Linker>Advanced>Enable stack usage analysis

On the command line, use the linker option --enable\_stack\_usage

See --enable\_stack\_usage, page 317.

**2** Enable the linker map file:

In the IDE, choose Project>Options>Linker>List>Generate linker map file



On the command line, use the linker option --map

- **3** Link your project. Note that the linker will issue warnings related to stack usage under certain circumstances, see *Situations where warnings are issued*, page 102.
- 4 Review the linker map file, which now contains a stack usage chapter with a summary of the stack usage for each call graph root. For more information, see *Result of an analysis—the map file contents*, page 98.
- **5** For more details, analyze the call graph log, see *Call graph log*, page 102.

Note that there are limitations and sources of inaccuracy in the analysis, see *Limitations*, page 101.

You might need to specify more information to the linker to get a more representative result. See *Specifying additional stack usage information*, page 99



In the IDE, choose Project>Options>Linker>Advanced>Enable stack usage analysis>Control file



On the command line, use the linker option --stack\_usage\_control

See --stack usage control, page 336.

**6** To add an automatic check that you have allocated memory enough for the stack, use the check that directive in your linker configuration file. For example, assuming a stack block named MY\_STACK, you can write like this:

When linking, the linker emits an error if the check fails. In this example, an error will be emitted if the sum of the following exceeds the size of the MY\_STACK block:

- The maximum stack usage in the category Program entry (the main program).
- The sum of each individual maximum stack usage in the category interrupt (assuming that all interrupt routines need space at the same time).
- A safety margin of 100 bytes (to account for stack usage not visible to the analysis).

See also check that directive, page 504 and Stack considerations, page 202.

## **RESULT OF AN ANALYSIS—THE MAP FILE CONTENTS**

When stack usage analysis is enabled, the linker map file contains a stack usage chapter with a summary of the stack usage for each call graph root category, and lists the call chain that results in the maximum stack depth for each call graph root. This is an example of what the stack usage chapter in the map file might look like:

***************************************			
*** STACK USAGE			
* * *			
Call Graph Root Category	Max Use	Total Use	
interrupt	104	136	
Program entry	168	168	
Program entry			
"iar_program_start": 0x	000085ac		
Maximum call chain		168 bytes	

"iar_program_start"	0			
"cmain"	0			
"main"	8			
"printf"	24			
"_PrintfTiny"	56			
"_Prout"	16			
"putchar"	16			
"write"	0			
"dwrite"	0			
"iar_sh_stdout"	24			
"iar_get_ttio"	24			
"iar_lookup_ttioh"	0			
interrupt "FaultHandler": 0x00008434 Maximum call chain	32 bytes			
Maximum carr chain	JZ Dyces			
"FaultHandler"	32			
interrupt "IRQHandler": 0x00008424				
Maximum call chain	104 bytes			
"IRQHandler" "do_something" in suexample.o [1]	24 80			

The summary contains the depth of the deepest call chain in each category as well as the sum of the depths of the deepest call chains in that category.

Each call graph root belongs to a call graph root category to enable convenient calculations in check that directives.

# SPECIFYING ADDITIONAL STACK USAGE INFORMATION

To specify additional stack usage information you can use either a stack usage control file (suc) where you specify stack usage control directives or annotate the source code.

You can:

• Specify complete stack usage information (call graph root category, stack usage, and possible calls) for a function, by using the stack usage control directive

function. Typically, you do this if stack usage information is missing, for example in an assembler module. In your suc file you can for example write like this:

```
function MyFunc: 32,
calls MyFunc2,
calls MyFunc3, MyFunc4: 16;
```

function [interrupt] MyInterruptHandler: 44;

See also function directive, page 518.

• Exclude certain functions from stack usage analysis, by using the stack usage control directive exclude. In your suc file you can for example write like this:

exclude MyFunc5, MyFunc6;

See also exclude directive, page 518.

• Specify a list of possible destinations for indirect calls in a function, by using the stack usage control directive possible calls. Use this for functions which are known to perform indirect calls and where you know exactly which functions that might be called in this particular application. In your suc file you can for example write like this:

possible calls MyFunc7: MyFunc8, MyFunc9;

If the information about which functions that might be called is available at compile time, consider using the #pragma calls directive instead.

See also *possible calls directive*, page 520 and *calls*, page 381.

• Specify that functions are call graph roots, including an optional call graph root category, by using the stack usage control directive call graph root or the #pragma call\_graph\_root directive. In your suc file you can for example write like this:

call graph root [task]: MyFunc10, MyFunc11;

If your interrupt functions have not already been designated as call graph roots by the compiler, you must do so manually. You can do this either by using the #pragma call\_graph\_root directive in your source code or by specifying a directive in your suc file, for example:

call graph root [interrupt]: Irq1Handler, Irq2Handler;

See also *call graph root directive*, page 518 and *call\_graph\_root*, page 382.

• Specify a maximum number of iterations through any of the cycles in the recursion nest of which the function is a member. In your suc file you can for example write like this:

max recursion depth MyFunc12: 10;

 Selectively suppress the warning about unmentioned functions referenced by a module for which you have supplied stack usage information in the stack usage control file. Use the no calls from directive in your suc file, for example like this:

no calls from [file.o] to MyFunc13, MyFunc14;

• Instead of specifying stack usage information about assembler modules in a stack usage control file, you can annotate the assembler source with call frame information. For more information, see the *IAR Assembler User Guide for Arm*.

For more information, see the chapter The stack usage control file.

## LIMITATIONS

Apart from missing or incorrect stack usage information, there are also other sources of inaccuracy in the analysis:

- The linker cannot always identify all functions in object modules that lack stack usage information. In particular, this might be a problem with object modules written in assembly language or produced by non-IAR tools. You can provide stack usage information for such modules using a stack usage control file, and for assembly language modules you can also annotate the assembler source code with CFI directives to provide stack usage information. See the *IAR Assembler User Guide for Arm.*
- If you use inline assembler to change the frame size or to perform function calls, this will not be reflected in the analysis.
- Extra space consumed by other sources (the processor, an operating system, etc) is not accounted for.
- Source code that uses exceptions is not supported.
- If you use other forms of function calls, like software interrupts, they will not be reflected in the call graph.
- Using multi-file compilation (--mfc) can interfere with using a stack usage control file to specify properties of module-local functions in the involved files.

Note that stack usage analysis produces a worst case result. The program might not actually ever end up in the maximum call chain, by design, or by coincidence. In particular, the set of possible destinations for a virtual function call in C++ might sometimes include implementations of the function in question which cannot, in fact, be called from that point in the code.



Stack usage analysis is only a complement to actual measurement. If the result is important, you need to perform independent validation of the results of the analysis.

## SITUATIONS WHERE WARNINGS ARE ISSUED

When stack usage analysis is enabled in the linker, warnings will be generated in the following circumstances:

- There is a function without stack usage information.
- There is an indirect call site in the application for which a list of possible called functions has not been supplied.
- There are no known indirect calls, but there is an uncalled function that is not known to be a call graph root.
- The application contains recursion (a cycle in the call graph) for which no maximum recursion depth has been supplied, or which is of a form for which the linker is unable to calculate a reliable estimate of stack usage.
- There are calls to a function declared as a call graph root.
- You have used the stack usage control file to supply stack usage information for functions in a module that does not have such information, and there are functions referenced by that module which have not been mentioned as being called in the stack usage control file.

## **CALL GRAPH LOG**

To help you interpret the results of the stack usage analysis, there is a log output option that produces a simple text representation of the call graph (--log call\_graph).

Example output:

```
Program entry:
0 ___iar_program_start [168]
 0 _____cmain [168]
    0 iar data init3 [16]
      8 __iar_zero_init3 [8]
        16 - [0]
      8 ___iar_copy_init3 [8]
        16 - [0]
    0 __low_level_init [0]
    0 main [168]
      8 printf [160]
        32 _PrintfTiny [136]
          88 _Prout [80]
            104 putchar [64]
              120 write [48]
                120 dwrite [48]
                  120 _____iar__sh__stdout [48]
                    144 ____iar_get_ttio [24]
                       168 iar lookup ttioh [0]
                  120 ____iar__sh_write [24]
                    144 - [0]
          88 __aeabi_uidiv [0]
            88 __aeabi_idiv0 [0]
          88 strlen [0]
    0 exit [8]
      0 _exit [8]
        0 __exit [8]
          0 __iar_close_ttio [8]
            8 __iar_lookup_ttioh [0] ***
    0 __exit [8] ***
```

Each line consists of this information:

- The stack usage at the point of call of the function
- The name of the function, or a single '-' to indicate usage in a function at a point with no function call (typically in a leaf function)
- The stack usage along the deepest call chain from that point. If no such value could be calculated, "[---]" is output instead. "\*\*\*" marks functions that have already been shown.

## CALL GRAPH XML OUTPUT

The linker can also produce a call graph file in XML format. This file contains one node for each function in your application, with the stack usage and call information relevant

to that function. It is intended to be input for post-processing tools and is not particularly human-readable.

For more information about the XML format used, see the  ${\tt callGraph.txt}$  file in your product installation.

# Linking your application

- Linking considerations
- Hints for troubleshooting
- Checking module consistency
- Linker optimizations

# Linking considerations

Before you can link your application, you must set up the configuration required by ILINK. Typically, you must consider:

- Choosing a linker configuration file
- Defining your own memory areas
- Placing sections
- Reserving space in RAM
- Keeping modules
- Keeping symbols and sections
- Application startup
- Setting up stack memory
- Setting up heap memory
- Setting up the atexit limit
- Changing the default initialization
- Interaction between ILINK and the application
- Standard library handling
- Producing other output formats than ELF/DWARF

#### **CHOOSING A LINKER CONFIGURATION FILE**

The config directory contains two ready-made templates for the linker configuration files:

- generic.icf, designed for all cores except for Cortex-M cores
- generic\_cortex.icf, designed for all Cortex-M cores.

The files contain the information required by ILINK. The only change, if any, you will normally have to make to the supplied configuration file is to customize the start and end addresses of each region so they fit the target system memory map. If, for example, your application uses additional external RAM, you must also add details about the external RAM memory area.

For some devices, device-specific configuration files are automatically selected.

To edit a linker configuration file, use the editor in the IDE, or any other suitable editor. Alternatively, choose **Project>Options>Linker** and click the **Edit** button on the **Config** page to open the dedicated linker configuration file editor.

Do not change the original template file. We recommend that you make a copy in the working directory, and modify the copy instead. If you are using the linker configuration file editor in the IDE, the IDE will make a copy for you.

Each project in the IDE should have a reference to one, and only one, linker configuration file. This file can be edited, but for the majority of all projects it is sufficient to configure the vital parameters in **Project>Options>Linker>Config**.

## DEFINING YOUR OWN MEMORY AREAS

The default configuration file that you selected has predefined ROM and RAM regions. This example will be used as a starting-point for all further examples in this chapter:

```
/* Define the addressable memory */
define memory Mem with size = 4G;
/* Define a region named ROM with start address 0 and to be 64
Kbytes large */
define region ROM = Mem:[from 0 size 0x10000];
/* Define a region named RAM with start address 0x20000 and to be
64 Kbytes large */
define region RAM = Mem:[from 0x20000 size 0x10000];
```

Each region definition must be tailored for the actual hardware.

To find out how much of each memory that was filled with code and data after linking, inspect the memory summary in the map file (command line option --map).

#### Adding an additional region

To add an additional region, use the define region directive, for example:

```
/* Define a 2nd ROM region to start at address 0x80000 and to be
128 Kbytes large */
define region ROM2 = Mem:[from 0x80000 size 0x20000];
```

#### Merging different areas into one region

If the region is comprised of several areas, use a region expression to merge the different areas into one region, for example:

or equivalently

## **PLACING SECTIONS**

The default configuration file that you selected places all predefined sections in memory, but there are situations when you might want to modify this. For example, if you want to place the section that holds constant symbols in the CONSTANT region instead of in the default place. In this case, use the place in directive, for example:

```
/* Place sections with readonly content in the ROM region */
place in ROM {readonly};
```

/\* Place the constant symbols in the CONSTANT region \*/
place in CONSTANT {readonly section .rodata};

**Note:** Placing a section—used by the IAR build tools—in a different memory which use a different way of referring to its content, will fail.

For the result of each placement directive after linking, inspect the placement summary in the map file (the command line option --map).

#### Placing a section at a specific address in memory

To place a section at a specific address in memory, use the place at directive, for example:

```
/* Place section .vectors at address 0 */
place at address Mem:0x0 {readonly section .vectors};
```

#### Placing a section first or last in a region

To place a section first or last in a region is similar, for example:

```
/* Place section .vectors at start of ROM */
place at start of ROM {readonly section .vectors};
```

#### Declare and place your own sections

To declare new sections—in addition to the ones used by the IAR build tools—to hold specific parts of your code or data, use mechanisms in the compiler and assembler. For example:

```
/* Place a variable in that section. */
const short MyVariable @ "MYOWNSECTION" = 0xF0F0;
```

This is the corresponding example in assembler language:

name	createSection		
section	MYOWNSECTION: CONST	;	Create a section,
		;	and fill it with
dc16	0xF0F0	;	constant bytes.
end			

To place your new section, the original place in ROM  $\{readonly\}$ ; directive is sufficient.

However, to place the section MyOwnSection explicitly, update the linker configuration file with a place in directive, for example:

```
/* Place MyOwnSection in the ROM region */
place in ROM {readonly section MyOwnSection};
```

#### **RESERVING SPACE IN RAM**

Often, an application must have an empty uninitialized memory area to be used for temporary storage, for example a heap or a stack. It is easiest to achieve this at link time. You must create a block with a specified size and then place it in a memory.

In the linker configuration file, it can look like this:

```
define block TempStorage with size = 0x1000, alignment = 4 { };
place in RAM { block TempStorage };
```

To retrieve the start of the allocated memory from the application, the source code could look like this:

```
/* Define a section for temporary storage. */
#pragma section = "TempStorage"
char *GetTempStorageStartAddress()
{
    /* Return start address of section TempStorage. */
    return __section_begin("TempStorage");
}
```

### **KEEPING MODULES**

If a module is linked as an object file, it is always kept. That is, it will contribute to the linked application. However, if a module is part of a library, it is included only if it is symbolically referred to from other parts of the application. This is true, even if the library module contains a root symbol. To assure that such a library module is always included, use iarchive to extract the module from the library, see *The IAR Archive Tool—iarchive*, page 525.

For information about included and excluded modules, inspect the log file (the command line option --log modules).

For more information about modules, see Modules and sections, page 88.

### **KEEPING SYMBOLS AND SECTIONS**

By default, ILINK removes any sections, section fragments, and global symbols that are not needed by the application. To retain a symbol that does not appear to be needed—or actually, the section fragment it is defined in—you can either use the root attribute on the symbol in your C/C++ or assembler source code, or use the ILINK option --keep. To retain sections based on attribute names or object names, use the directive keep in the linker configuration file.

To prevent ILINK from excluding sections and section fragments, use the command line options --no\_remove or --no\_fragments, respectively.

For information about included and excluded symbols and sections, inspect the log file (the command line option --log sections).

For more information about the linking procedure for keeping symbols and sections, see *The linking process*, page 60.

### **APPLICATION STARTUP**

By default, the point where the application starts execution is defined by the \_\_iar\_program\_start label, which is defined to point at the start of the cstartup.s file. The label is also communicated via ELF to any debugger that is used.

To change the start point of the application to another label, use the ILINK option --entry; see --entry, page 318.

### SETTING UP STACK MEMORY

The size of the CSTACK block is defined in the linker configuration file. To change the allocated amount of memory, change the block definition for CSTACK:

define block CSTACK with size = 0x2000, alignment = 8{ };

Specify an appropriate size for your application.

For more information about the stack, see Stack considerations, page 202.

### SETTING UP HEAP MEMORY

The size of the heap is defined in the linker configuration file as a block:

```
define block HEAP with size = 0x1000, alignment = 8{ };
place in RAM {block HEAP};
```

Specify the appropriate size for your application. If you use a heap, you must allocate at least 50 bytes for it.

### SETTING UP THE ATEXIT LIMIT

By default, the atexit function can be called a maximum of 32 times from your application. To either increase or decrease this number, add a line to your configuration file. For example, to reserve room for 10 calls instead, write:

```
define symbol __iar_maximum_atexit_calls = 10;
```

### CHANGING THE DEFAULT INITIALIZATION

By default, memory initialization is performed during application startup. ILINK sets up the initialization process and chooses a suitable packing method. If the default initialization process does not suit your application and you want more precise control over the initialization process, these alternatives are available:

- Suppressing initialization
- Choosing the packing algorithm
- Manual initialization
- Initializing code—copying ROM to RAM.

For information about the performed initializations, inspect the log file (the command line option --log initialization).

### Suppressing initialization

If you do not want the linker to arrange for initialization by copying, for some or all sections, make sure that those sections do not match a pattern in an initialize by copy directive (or use an except clause to exclude them from matching). If you do not want any initialization by copying at all, you can omit the initialize by copy directive entirely.

This can be useful if your application, or just your variables, are loaded into RAM by some other mechanism before application startup.

### Choosing a packing algorithm

To override the default packing algorithm, write for example:

initialize by copy with packing = 1z77 { readwrite };

For more information about the available packing algorithms, see *initialize directive*, page 492.

### **Manual initialization**

In the usual case, the initialize by copy directive is used for making the linker arrange for initialization by copying (with or without packing) of sections with content at application startup. The linker achieves this by logically creating an initialization section for each such section, holding the content of the section, and turning the original section into a section without content. Then, the linker adds table elements to the initialization table so that the initialization will be performed at application startup. You can use initialize manually to suppress the creation of table elements to take control over when and how the elements are copied. This is useful for overlays, but also in a number of other circumstances.

For sections without content (zero-initialized sections), the situation is reversed. The linker arranges for zero initialization of all such sections at application startup, except for those that are mentioned in a do not initialize directive.

### Simple copying example with an implicit block

Assume that you have some initialized variables in MYSECTION. If you add this directive to your linker configuration file:

```
initialize manually { section MYSECTION };
```

you can use this source code example to initialize the section:

```
#pragma section = "MYSECTION"
#pragma section = "MYSECTION_init"
void DoInit()
{
    char * from = __section_begin("MYSECTION_init");
    char * to = __section_begin("MYSECTION");
    memcpy(to, from, __section_size("MYSECTION"));
}
```

This piece of source code takes advantage of the fact that if you use \_\_section\_begin (and related operators) with a section name, a synthetic block is created by the linker for those sections.

### Example with explicit blocks

Assume that you instead of needing manual initialization for variables in a specific section, you need it for all initialized variables from a particular library. In that case, you must create explicit blocks for both the variables and the content. Like this:

initialize manually { section .data object mylib.a }; define block MYBLOCK { section .data object mylib.a }; define block MYBLOCK\_init { section .data\_init object mylib.a };

You must also place the two new blocks using one of the section placement directives, the block MYBLOCK in RAM and the block MYBLOCK\_init in ROM.

Then you can initialize the sections using the same source code as in the previous example, only with MYBLOCK instead of MYSECTION.

### **Overlay example**

This is a simple overlay example that takes advantage of automatic block creation:

initialize manually { section MYOVERLAY\* }; define overlay MYOVERLAY { section MYOVERLAY1 }; define overlay MYOVERLAY { section MYOVERLAY2 };

You must also place overlay MYOVERLAY somewhere in RAM. The copying could look like this:

```
#pragma section = "MYOVERLAY"
#pragma section = "MYOVERLAY1_init"
#pragma section = "MYOVERLAY2_init"
void SwitchToOverlay1()
{
    char * from = __section_begin("MYOVERLAY1_init");
    char * to = __section_begin("MYOVERLAY1_init"));
    woid SwitchToOverlay2()
    {
        char * from = __section_begin("MYOVERLAY2_init");
        char * to = __section_begin("MYOVERLAY2_init");
    }
```

### Initializing code—copying ROM to RAM

Sometimes, an application copies pieces of code from flash/ROM to RAM. You can direct the linker to arrange for this to be done automatically at application startup, or do it yourself at some later time using the techniques described in *Manual initialization*, page 111.

You need to list the code sections that should be copied in an initialize by copy directive. The easiest way is usually to place the relevant functions in a particular section (for example, RAMCODE), and add section RAMCODE to your initialize by copy directive. For example:

initialize by copy { rw, section RAMCODE };

If you need to place the RAMCODE functions in some particular location, you must mention them in a placement directive, otherwise they will be placed together with other read/write sections.

If you need to control the manner and/or time of copying, you must use an initialize manually directive instead. See *Manual initialization*, page 111.

If the functions need to run without accessing the flash/ROM, you can use the \_\_\_\_ramfunc keyword when compiling. See *Execution in RAM*, page 76.

### Running all code from RAM

If you want to copy the entire application from ROM to RAM at program startup, use the initilize by copy directive, for example:

initialize by copy { readonly, readwrite };

The readwrite pattern will match all statically initialized variables and arrange for them to be initialized at startup. The readonly pattern will do the same for all read-only code and data, except for code and data needed for the initialization.

Because the function \_\_low\_level\_init, if present, is called before initialization, it and anything it needs, will not be copied from ROM to RAM either. In some circumstances—for example, if the ROM contents are no longer available to the program after startup—you might need to avoid using the same functions during startup and in the rest of the code.

If anything else should not be copied, include it in an except clause. This can apply to, for example, the interrupt vector table.

It is also recommended to exclude the C++ dynamic initialization table from being copied to RAM, as it is typically only read once and then never referenced again. For example, like this:

### INTERACTION BETWEEN ILINK AND THE APPLICATION

ILINK provides the command line options --config\_def and --define\_symbol to define symbols which can be used for controlling the application. You can also use symbols to represent the start and end of a continuous memory area that is defined in the linker configuration file. For more information, see *Interaction between the tools and your application*, page 204.

To change a reference to one symbol to another symbol, use the ILINK command line option --redirect. This is useful, for example, to redirect a reference from a non-implemented function to a stub function, or to choose one of several different implementations of a certain function, for example, how to choose the DLIB formatter for the standard library functions printf and scanf.

The compiler generates mangled names to represent complex C/C++ symbols. If you want to refer to these symbols from assembler source code, you must use the mangled names.

For information about the addresses and sizes of all global (statically linked) symbols, inspect the entry list in the map file (the command line option --map).

For more information, see Interaction between the tools and your application, page 204.

### STANDARD LIBRARY HANDLING

By default, ILINK determines automatically which variant of the standard library to include during linking. The decision is based on the sum of the runtime attributes available in each object file and the library options passed to ILINK.

To disable the automatic inclusion of the library, use the option --no\_library\_search. In this case, you must explicitly specify every library file to be included. For information about available library files, see *Prebuilt runtime libraries*, page 132.

### PRODUCING OTHER OUTPUT FORMATS THAN ELF/DWARF

ILINK can only produce an output file in the ELF/DWARF format. To convert that format into a format suitable for programming PROM/flash, see *The IAR ELF Tool— ielftool*, page 529.

### VENEERS

Veneers are small sequences of code inserted by the linker to bridge the gap when a call instruction does not reach its destination or cannot switch to the correct mode.

Code for veneers can be inserted between any caller and called function. As a result, the R12 register must be treated as a scratch register at function calls, including functions written in assembler. This also applies to jumps.

# Hints for troubleshooting

ILINK has several features that can help you manage code and data placement correctly, for example:

- · Messages at link time, for examples when a relocation error occurs
- The --log option that makes ILINK log information to stdout, which can be useful to understand why an executable image became the way it is, see --log, page 324
- The --map option that makes ILINK produce a memory map file, which contains the result of the linker configuration file, see *--map*, page 326.

### **RELOCATION ERRORS**

For each instruction that cannot be relocated correctly, ILINK will generate a *relocation error*. This can occur for instructions where the target is out of reach or is of an incompatible type, or for many other reasons.

A relocation error produced by ILINK can look like this:

```
Error[Lp002]: relocation failed: out of range or illegal value
Kind : R_XXX_YYY[0x1]
Location : 0x40000448
    "myfunc" + 0x2c
Module: somecode.o
Section: 7 (.text)
Offset: 0x2c
Destination: 0x900000c
    "read"
    Module: read.o(iolib.a)
Section: 6 (.text)
Offset: 0x0
```

The message entries are described in this table:

Message entry	Description
Kind	The relocation directive that failed. The directive depends on the instruction used.
Location	<ul> <li>The location where the problem occurred, described with the following details:</li> <li>The instruction address, expressed both as a hexadecimal value and as a label with an offset. In this example, 0x40000448 and "myfunc" + 0x2c.</li> </ul>
	<ul> <li>The module, and the file. In this example, the module somecode.o.</li> <li>The section number and section name. In this example, section number 7 with the name .text.</li> <li>The offset, specified in number of bytes, in the section. In this example, 0x2c.</li> </ul>
Destination	<ul> <li>The target of the instruction, described with the following details:</li> <li>The instruction address, expressed both as a hexadecimal value and as a label with an offset. In this example, 0x9000000c and "read" (thus, no offset).</li> <li>The module, and when applicable the library. In this example, the module read.o and the library iolib.a.</li> <li>The section number and section name. In this example, section number 6 with the name .text.</li> <li>The offset, specified in number of bytes, in the section. In this example, 0x0.</li> </ul>

Table 4: Description of a relocation error

### **Possible solutions**

In this case, the distance from the instruction in myfunc to \_\_read is too long for the branch instruction.

Possible solutions include ensuring that the two .text sections are allocated closer to each other or using some other calling mechanism that can reach the required distance. It is also possible that the referring function tried to refer to the wrong target and that this caused the range error.

Different range errors have different solutions. Usually, the solution is a variant of the ones presented above, in other words modifying either the code or the section placement.

### **Checking module consistency**

This section introduces the concept of runtime model attributes, a mechanism used by the tools provided by IAR Systems to ensure that modules that are linked into an application are compatible, in other words, are built using compatible settings. The tools use a set of predefined runtime model attributes. In addition to these, you can define your own that you can use to ensure that incompatible modules are not used together.

**Note:** In addition to the predefined attributes, compatibility is also checked against the AEABI runtime attributes. These attributes deal mainly with object code compatibility, etc. They reflect compilation settings and are not user-configurable.

### **RUNTIME MODEL ATTRIBUTES**

A runtime attribute is a pair constituted of a named key and its corresponding value. In general, two modules can only be linked together if they have the same value for each key that they both define.

There is one exception: if the value of an attribute is \*, then that attribute matches any value. The reason for this is that you can specify this in a module to show that you have considered a consistency property, and this ensures that the module does not rely on that property.

**Note:** For IAR predefined runtime model attributes, the linker checks them in several ways.

### Example

In this table, the object files could (but do not have to) define the two runtime attributes color and taste:

Object file	Color	Taste
file1	blue	not defined
file2	red	not defined
file3	red	*
file4	red	spicy
file5	red	lean

Table 5: Example of runtime model attributes

In this case, file1 cannot be linked with any of the other files, since the runtime attribute color does not match. Also, file4 and file5 cannot be linked together, because the taste runtime attribute does not match.

On the other hand, file2 and file3 can be linked with each other, and with either file4 or file5, but not with both.

### USING RUNTIME MODEL ATTRIBUTES

To ensure module consistency with other object files, use the #pragmartmodel directive to specify runtime model attributes in your C/C++ source code. For example, if you have a UART that can run in two modes, you can specify a runtime model attribute, for example uart. For each mode, specify a value, for example model and mode2. Declare this in each module that assumes that the UART is in a particular mode. This is how it could look like in one of the modules:

#pragma rtmodel="uart", "model"

Alternatively, you can also use the rtmodel assembler directive to specify runtime model attributes in your assembler source code. For example:

rtmodel "uart", "model"

Note that key names that start with two underscores are reserved by the compiler. For more information about the syntax, see *rtmodel*, page 396 and the *IAR Assembler User Guide for Arm*, respectively.

At link time, the IAR ILINK Linker checks module consistency by ensuring that modules with conflicting runtime attributes will not be used together. If conflicts are detected, an error is issued.

# Linker optimizations

This section contains information about:

- Virtual function elimination, page 119
- Small function inlining, page 119
- Duplicate section merging, page 119

### VIRTUAL FUNCTION ELIMINATION

Virtual Function Elimination (VFE) is a linker optimization that removes unneeded virtual functions and dynamic runtime type information.

In order for Virtual Function Elimination to work, all relevant modules must provide information about virtual function table layout, which virtual functions are called, and for which classes dynamic runtime type information is needed. If one or more modules do not provide this information, a warning is generated by the linker and Virtual Function Elimination is not performed.



If you know that modules that lack such information do not perform any virtual function calls and do not define any virtual function tables, you can use the --vfe=forced linker option to enable Virtual Function Elimination anyway.



In the IDE, select **Project>Options>Linker>Optimizations>Perform C++ Virtual Function Elimination** to enable this optimization.

Note that you can disable Virtual Function Elimination entirely by using the --no\_vfe linker option. In this case, no warning will be issued for modules that lack VFE information.

For more information, see --vfe, page 339 and --no\_vfe, page 331.

### **SMALL FUNCTION INLINING**

Small function inlining is a linker optimization that replaces some calls to very small functions with the body of the function. This requires the body to fit in the space of the instruction that calls the function.



In the IDE, select **Project>Options>Linker>Optimizations>Inline small routines** to enable this optimization.



Use the linker option --inline.

### **DUPLICATE SECTION MERGING**

The linker can detect read-only sections with identical contents and keep only one copy of each such section, redirecting all references to any of the duplicate sections to the retained section.



>\_

In the IDE, select **Project>Options>Linker>Optimizations>Merge duplicate** sections to enable this optimization.

Use the linker option --merge\_duplicate\_sections.

Note that this optimization can cause different functions or constants to have the same address, so if your application depends on the addresses being different, for example by using the addresses as keys into a table, you should not enable this optimization.

# The DLIB runtime environment

- Introduction to the runtime environment
- Setting up the runtime environment
- Additional information on the runtime environment
- Managing a multithreaded environment

# Introduction to the runtime environment

A runtime environment is the environment in which your application executes.

This section contains information about:

- Runtime environment functionality, page 121
- Briefly about input and output (I/O), page 122
- Briefly about C-SPY emulated I/O, page 123
- Briefly about retargeting, page 124

### **RUNTIME ENVIRONMENT FUNCTIONALITY**

The DLIB runtime environment supports Standard C and C++ and consists of:

- The *C/C++ standard library*, both its interface (provided in the system header files) and its implementation.
- Startup and exit code.
- Low-level I/O interface for managing input and output (I/O).
- Special compiler support, for instance functions for switch handling or integer arithmetics.
- Support for hardware features:
  - Direct access to low-level processor operations by means of *intrinsic* functions, such as functions for interrupt mask handling
  - Peripheral unit registers and interrupt definitions in include files
  - The Vector Floating Point (VFP) coprocessor.

Runtime environment functions are provided in a runtime library.

The runtime library is delivered both as a prebuilt library and (depending on your product package) as source files. The prebuilt libraries are available in different *configurations* to meet various needs, see *Runtime library configurations*, page 131. You can find the libraries in the product subdirectories arm\lib and arm\src\lib, respectively.


For more information about the library, see the chapter C/C++ standard library functions.

### **BRIEFLY ABOUT INPUT AND OUTPUT (I/O)**

Every application must communicate with its environment. The application might for example display information on an LCD, read a value from a sensor, get the current date from the operating system, etc. Typically, your application performs I/O via the C/C++ standard library or some third-party library.

There are many functions in the C/C++ standard library that deal with I/O, including functions for: standard character streams, file system access, time and date, miscellaneous system actions, and termination and assert. This set of functions is referred to as the *standard I/O interface*.

On a desktop computer or a server, the operating system is expected to provide I/O functionality to the application via the standard I/O interface in the runtime environment. However, in an embedded system, the runtime library cannot assume that such functionality is present, or even that there is an operating system at all. Therefore, the low-level part of the standard I/O interface is not completely implemented by default:




To make the standard I/O interface work, you can:

- Let the C-SPY debugger emulate I/O operations on the host computer, see *Briefly* about C-SPY emulated I/O, page 123
- *Retarget* the standard I/O interface to your target system by providing a suitable implementation of the interface, see *Briefly about retargeting*, page 124.

It is possible to mix these two approaches. You can, for example, let debug printouts and asserts be emulated by the C-SPY debugger, but implement your own file system. The debug printouts and asserts are useful during debugging, but no longer needed when running the application stand-alone (not connected to the C-SPY debugger).

### **BRIEFLY ABOUT C-SPY EMULATED I/O**

*C-SPY emulated I/O* is a mechanism which lets the runtime environment interact with the C-SPY debugger to emulate I/O actions on the host computer:



For example, when C-SPY emulated I/O is enabled:

- Standard character streams are directed to the C-SPY Terminal I/O window
- File system operations are performed on the host computer
- Time and date functions return the time and date of the host computer
- Termination and failed asserts break execution and notify the C-SPY debugger.

This behavior can be valuable during the early development of an application, for example in an application that uses file I/O before any flash file system I/O drivers are implemented, or if you need to debug constructions in your application that use stdin and stdout without the actual hardware device for input and output being available.


See Setting up your runtime environment, page 125 and The semihosting mechanism, page 139.

### **BRIEFLY ABOUT RETARGETING**

*Retargeting* is the process where you adapt the runtime environment so that your application can execute I/O operations on your target system.

The standard I/O interface is large and complex. To make retargeting easier, the DLIB runtime environment is designed so that it performs all I/O operations through a small set of simple functions, which is referred to as the *DLIB low-level I/O interface*. By default, the functions in the low-level interface lack usable implementations. Some are unimplemented, others have stub implementations that do not perform anything except returning error codes.

To retarget the standard I/O interface, all you have to do is to provide implementations for the functions in the DLIB low-level I/O interface.



Target system environment

For example, if your application calls the functions printf and fputc in the standard I/O interface, the implementations of those functions both call the low-level function \_\_write to output individual characters. To make them work, you just need to provide an implementation of the \_\_write function—either by implementing it yourself, or by using a third-party implementation.

For information about how to override library modules with your own implementations, see *Overriding library modules*, page 128. See also *The DLIB low-level I/O interface*, page 145 for information about the functions that are part of the interface.

## Setting up the runtime environment

This section contains these tasks:

• Setting up your runtime environment, page 125

A runtime environment with basic project settings to be used during the initial phase of development.

- Retargeting—Adapting for your target system, page 126
- Overriding library modules, page 128
- Customizing and building your own runtime library, page 129

See also:

• *Managing a multithreaded environment*, page 156 for information about how to adapt the runtime environment to treat all library objects according to whether they are global or local to a thread.

### SETTING UP YOUR RUNTIME ENVIRONMENT

You can set up the runtime environment based on some basic project settings. It is also often convenient to let the C-SPY debugger manage things like standard streams, file I/O, and various other system interactions. This basic runtime environment can be used for simulation before you have any target hardware.

### To set up the runtime environment:

- I Before you build your project, choose **Project>Options>General Options** to open the **Options** dialog box.
- 2 On the Library Configuration page, verify the following settings:
  - Library: choose which *library configuration* to use. Typically, choose None, Normal, Full, or Custom.

For information about the various library configurations, see *Runtime library* configurations, page 131.

- **3** On the Library Options page, select Auto with multibyte support or Auto without multibyte support for both Printf formatter and Scanf formatter. This means that the linker will automatically choose the appropriate formatters based on information from the compiler. For more information about the available formatters and how to choose one manually, see *Formatters for printf*, page 135 and *Formatters for scanf*, page 137, respectively.
- 4 To enable C-SPY emulated I/O, choose Project>Options>General Options>Library Configuration and choose Semihosted (--semihosted) or IAR breakpoint (--semihosting=iar\_breakpoint).

Note that for some Cortex-M devices it is also possible to direct stdout/stderr via SWO. This can significantly improve stdout/stderr performance compared to semihosting. For hardware requirements, see the *C-SPY® Debugging Guide for Arm*.



To enable stdout via SWO on the command line, use the linker option --redirect \_\_iar\_sh\_stdout=\_\_iar\_sh\_stdout\_swo.



To enable stdout via SWO in the IDE, select the **Semihosted** option and the **stdout/stderr via SWO** option.

See *Briefly about C-SPY emulated I/O*, page 123 and *The semihosting mechanism*, page 139.

**5** On some systems, terminal output might be slow because the host computer and the target system must communicate for each character.

For this reason, a replacement for the \_\_write function called \_\_write\_buffered is included in the runtime library. This module buffers the output and sends it to the debugger one line at a time, speeding up the output. Note that this function uses about 80 bytes of RAM memory.

To use this feature in the IDE, choose **Project>Options>General Options>Library Options 1** and select the option **Buffered terminal output**.



To enable this function on the command line, add this to the linker command line:

--redirect \_\_write=\_\_write\_buffered

**6** Some math functions are available in different versions: default versions, smaller than the default versions, and larger but more accurate than default versions. Consider which versions you should use.

For more information, see Math functions, page 139.

**7** When you build your project, a suitable prebuilt library and library configuration file are automatically used based on the project settings you made.

For information about which project settings affect the choice of library file, see *Runtime library configurations*, page 131.

You have now set up a runtime environment that can be used while developing your application source code.

### **RETARGETING—ADAPTING FOR YOUR TARGET SYSTEM**

Before you can run your application on your target system, you must adapt some parts of the runtime environment, typically the system initialization and the DLIB low-level I/O interface functions.

### To adapt your runtime environment for your target system:

Adapt system initialization.

It is likely that you must adapt the system initialization, for example, your application might need to initialize interrupt handling, I/O handling, watchdog timers, etc. You do this by implementing the routine \_\_low\_level\_init, which is executed before the data sections are initialized. See *System startup and termination*, page 141 and *System initialization*, page 144. Note that you can find device-specific examples on this in the example projects provided in the product installation; see the Information Center.

**2** Adapt the runtime library for your target system. To implement such functions, you need a good understanding of the DLIB low-level I/O interface, see *Briefly about retargeting*, page 124.

Typically, you must implement your own functions if your application uses:

• Standard streams for input and output

If any of these streams are used by your application, for example by the functions printf and scanf, you must implement your versions of the low-level functions \_\_read and \_\_write.

The low-level functions identify I/O streams, such as an open file, with a file handle that is a unique integer. The I/O streams normally associated with stdin, stdout, and stderr have the file handles 0, 1, and 2, respectively. When the handle is -1, all streams should be flushed. Streams are defined in stdio.h.

• File input and output

The library contains a large number of powerful functions for file I/O operations, such as fopen, fclose, fprintf, fputs, etc. All these functions call a small set of low-level functions, each designed to accomplish one particular task; for example, \_\_open opens a file, and \_\_write outputs characters. Implement your version of these low-level functions.

• signal and raise

If the default implementation of these functions does not provide the functionality you need, you can implement your own versions.

• Time and date

To make the time and date functions work, you must implement the functions clock, \_\_time32, \_\_time64, and \_\_getzone. Whether you use \_\_time32 or \_\_time64 depends on which interface you use for time\_t, see *time.h*, page 475.

- Assert, see \_\_aeabi\_assert, page 146.
- Environment interaction

If the default implementation of system or getenv does not provide the functionality you need, you can implement your own versions.

For more information about the functions, see *The DLIB low-level I/O interface*, page 145.

The library files that you can override with your own versions are located in the arm\src\lib directory.

**3** When you have implemented your functions of the low-level I/O interface, you must add your version of these functions to your project. For information about this, see *Overriding library modules*, page 128.

**Note:** If you have implemented a DLIB low-level I/O interface function and added it to a project that you have built with support for C-SPY emulated I/O, your low-level function will be used and not the functions provided with C-SPY emulated I/O. For example, if you implement your own version of \_\_write, output to the C-SPY **Terminal I/O** window will not be supported. See *Briefly about C-SPY emulated I/O*, page 123.

4 Before you can execute your application on your target system, you must rebuild your project with a Release build configuration. This means that the linker will not include the C-SPY emulated I/O mechanism and the low-level I/O functions it provides. If your application calls any of the low-level functions of the standard I/O interface, either directly or indirectly, and your project does not contain these, the linker will issue an error for every missing low-level function. Also, note that the NDEBUG symbol is defined in a Release build configuration, which means asserts will no longer be generated. For more information, see \_\_aeabi\_assert, page 146.

### **OVERRIDING LIBRARY MODULES**

# To override a library function and replace it with your own implementation:

Use a template source file—a library source file or another template—and place a copy of it in your project directory.

The library files that you can override with your own versions are located in the arm\src\lib directory.

**2** Modify the file.

**Note:** To override the functions in a module, you must provide alternative implementations for all the needed symbols in the overridden module. Otherwise you will get error messages about duplicate definitions.

**3** Add the modified file to your project, like any other source file.

**Note:** If you have implemented a DLIB low-level I/O interface function and added it to a project that you have built with support for C-SPY emulated I/O, your low-level function will be used and not the functions provided with C-SPY emulated I/O. For

example, if you implement your own version of \_\_write, output to the C-SPY **Terminal I/O** window will not be supported. See *Briefly about C-SPY emulated I/O*, page 123.

You have now finished the process of overriding the library module with your version.

# CUSTOMIZING AND BUILDING YOUR OWN RUNTIME LIBRARY

If the prebuilt library configurations do not meet your requirements, you can customize your own library configuration, but that requires that you *rebuild* relevant parts of the library.

Building a customized library is a complex process. Therefore, consider carefully whether it is really necessary. You must build your own runtime library when:

• You want to define your own library configuration with support for locale, file descriptors, multibyte characters, etc. This will include or exclude certain parts of the DLIB runtime environment.

In those cases, you must:

- Make sure that you have installed the library source code (src\lib). If not already installed, you can install it using the IAR License Manager, see the *Installation and Licensing Guide*.
- Set up a library project
- Make the required library customizations
- Build your customized runtime library
- Finally, make sure your application project will use the customized runtime library.

Note that the customized library only replaces the part of the DLIB runtime environment implemented in the libraries for C and C++ library functions. Rebuilding libraries for the following is not supported:

- math functions
- runtime support functions
- thread support functions
- timezone and daylight saving time functions
- debug support functions

### To set up a library project:

I In the IDE, choose **Project>Create New Project** and use the library project template which can be used for customizing the runtime environment configuration. There is a library template for the Full library configuration, see *Runtime library configurations*, page 131

Note that when you create a new library project from a template, the majority of the files included in the new project are the original installation files. If you are going to modify these files, make copies of them first and replace the original files in the project with these copies.

### To customize the library functionality:

I The library functionality is determined by a set of *configuration symbols*. The default values of these symbols are defined in the file DLib\_Defaults.h which you can find in arm\inc\c. This read-only file describes the configuration possibilities. Note that you should not modify this file.

In addition, your custom library has its own *library configuration file* dlarmCustom.h—which you can find in the newly created library project—and which sets up that specific library with the required library configuration. Customize this file by setting the values of the configuration symbols according to the application requirements.

For information about configuration symbols that you might want to customize, see:

- Configuration symbols for file input and output, page 155
- Locale, page 155
- Managing a multithreaded environment, page 156
- **2** When you are finished, build your library project with the appropriate project options.

After you build your library, you must make sure to use it in your application project.

To build IAR Embedded Workbench projects from the command line, use the IAR Command Line Build Utility (iarbuild.exe). However, no make or batch files for building the library from the command line are provided. For information about the build process and the IAR Command Line Build Utility, see the *IDE Project Management and Building Guide for Arm.* 

### To use the customized runtime library in your application project:

- I In the IDE, choose **Project>Options>General Options** and click the **Library Configuration** tab.
- 2 From the Library drop-down menu, choose Custom.
- 3 In the Configuration file text box, locate your library configuration file.
- **4** Click the **Library** tab, also in the **Linker** category. Use the **Additional libraries** text box to locate your library file.

# Additional information on the runtime environment

This section gives additional information on the runtime environment:

- Bounds checking functionality, page 131
- Runtime library configurations, page 131
- Prebuilt runtime libraries, page 132
- Formatters for printf, page 135
- Formatters for scanf, page 137
- The C-SPY emulated I/O mechanism, page 138
- The semihosting mechanism, page 139
- Math functions, page 139
- System startup and termination, page 141
- System initialization, page 144
- The DLIB low-level I/O interface, page 145
- Configuration symbols for file input and output, page 155
- Locale, page 155

### **BOUNDS CHECKING FUNCTIONALITY**

To enable the bounds checking functions specified in Annex K (*Bounds-checking interfaces*) of the C standard, define the preprocessor symbol \_\_\_STDC\_WANT\_LIB\_EXT1\_\_ to 1 prior to including any system headers.

### **RUNTIME LIBRARY CONFIGURATIONS**

The runtime library is provided with different *library configurations*, where each configuration is suitable for different application requirements.

The runtime library configuration is defined in the *library configuration file*. It contains information about what functionality is part of the runtime environment. The less functionality you need in the runtime environment, the smaller the environment becomes.

These predefined library configurations are available:

Library configuration	Description
Normal DLIB (default)	C locale, but no locale interface, no file descriptor support, no
	multibyte characters in printf and scanf.

Table 6: Library configurations

Library configuration	Description
Full DLIB	Full locale interface, C locale, file descriptor support, and optionally
	multibyte characters in printf and scanf.


Table 6: Library configurations (Continued)

**Note:** In addition to these predefined library configurations, you can provide your own configuration, see *Customizing and building your own runtime library*, page 129

If you do not specify a library configuration explicitly you will get the default configuration. If you use a prebuilt runtime library, a configuration file that matches the runtime library file will automatically be used. See *Setting up your runtime environment*, page 125.

### To override the default library configuration, use one of these methods:

Use a prebuilt configuration of your choice—to specify a runtime configuration explicitly:





Use the --dlib\_config compiler option, see --dlib\_config, page 272.

The prebuilt libraries are based on the default configurations, see *Runtime library configurations*, page 131.

2 If you have built your own customized library, choose Project>Options>Library Configuration>Library and choose Custom to use your own configuration. For more information, see *Customizing and building your own runtime library*, page 129.

### PREBUILT RUNTIME LIBRARIES

The prebuilt runtime libraries are configured for different combinations of these options:

• Library configuration—Normal or Full.

The linker will automatically include the correct library object file and library configuration file. To explicitly specify a library configuration, use the --dlib\_config compiler option.

### Library filename syntax

The names of the libraries are constructed from these elements:

{architecture}	Specifies the CPU architecture:
	<pre>4t = Armv4T 5E = Armv5E 6M or 6Mx = Armv6M (6Mx is built with no_literal_pool) 7M or 7Mx = Armv7M (7Mx is built with no_literal_pool) 7Sx = Armv7-A and Armv7-R, built with no_literal_pool 4as = Generic Armv4, built with bounds-checking 7as = Generic Armv7, built with bounds-checking</pre>
{cpu-mode}	Specifies the default processor mode:
	a = Arm mode t = Thumb mode
{byte-order}	Specifies the byte order:
	1 = little-endian b = big-endian
{lib-config}	Specifies the library configuration:
	n = Normal f = Full
{rwpi}	Specifies whether the library supports RWPI:
	s = RWPI supported not present = no RWPI support
{fp-implementation}	Specifies how floating-point operations are implemented:
	v = VFP s = VFP for single precision only not present = software implementation
{debug-interface}	Specifies a semihosting mechanism:
	s = SVC b = BKPT i = IAR-breakpoint

You can find the library files in the subdirectory arm\lib\ and the library configuration files in the arm\inc\ subdirectory.

### **Groups of library files**

The libraries are delivered in groups of library functions:

### Library files for C library functions

These are the functions defined by Standard C, for example functions like printf and scanf. Note that this library does not include math functions.

The names of the library files are constructed in the following way:

dl{architecture}\_{cpu-mode}{byte-order}{lib-config}[rwpi].a

which more specifically means

 $dl{4t|5E|6M|6Mx|7M|7Mx|7Sx}_{a|t}{1|b}{n|f}[s].a$ 

### Library files for C++ library functions

These are the functions defined by C++, compiled with support for Standard C++.

The names of the library files are constructed in the following way:

dlpp{architecture}\_{cpu-mode}{byte-order}
\_{lib-config}c[rwpi].a

which more specifically means

 $dlpp{4t|5E|6M|6Mx|7M|7Mx|7Sx|4as|7as}_{a|t}{1|b}_{n|f}c[s].a$ 

#### Library files for math functions

These are the functions for floating-point arithmetic and functions with a floating-point type in its signature as defined by Standard C, for example functions like sqrt.

The names of the library files are constructed in the following way:

```
m{architecture}_{cpu-mode}{byte-order}{fp-implementation}.a
```

which more specifically means

 $m\{4t|5E|6M|6Mx|7M|7Mx|7Sx\}_{a|t}\{1|b\}\{|v|s\}.a$ 

### Library files for thread support functions

These are the functions for thread support.

The names of the library files are constructed in the following way:

th{architecture}\_{cpu-mode}{byte-order}{lib-config}.a

which more specifically means

 $th{4t|5E|6M|6Mx|7M|7Mx|7Sx}_{a|t}{1|b}{n|f}.a$ 

### Library files for timezone and daylight saving time support functions

These are the functions with support for timezone and daylight saving time functionality.

The names of the library files are constructed in the following way:

tz{architecture}\_{cpu-mode}{byte-order}[rwpi].a

which more specifically means

 $tz{4t|5E|6M|6Mx|7M|7Mx|7Sx}_{a|t}{1|b}[s].a$ 

### Library files for runtime support functions

These are functions for system startup, initialization, non floating-point AEABI support routines, and some of the functions that are part of Standard C and C++.

The names of the library files are constructed in the following way:

rt{architecture}\_{cpu-mode}{byte-order}.a

which more specifically means

 $rt{4t|5E|6M|6Mx|7M|7Mx|7Sx}_{a|t}{1|b}.a$ 

### Library files for debug support functions

These are functions for debug support for the semihosting interface. The names of the library files are constructed in the following way:

```
sh{debug-interface}_{byte-order}.a
or
sh{architecture}_{byte-order}.a
which more specifically means
sh{s|b|i}_{1|b}.a
or
sh{6Mx|7Mx|7Sx}_{1|b}.a
```

### FORMATTERS FOR PRINTF

The printf function uses a formatter called \_Printf. The full version is quite large, and provides facilities not required in many embedded applications. To reduce the

memory consumption, three smaller, alternative versions are also provided. Note that the wprintf variants are not affected.

This table summarizes the capabilities of the different formatters:

Formatting capabilities	Tiny	Small/ SmallNoMb†	Large/ LargeNoMb†	Full/ FullNoMb†
Basic specifiers c, d, i, o, p, s, u, X, x, and $\%$	Yes	Yes	Yes	Yes
Multibyte support	No	Yes/No	Yes/No	Yes/No
Floating-point specifiers a, and A	No	No	No	Yes
Floating-point specifiers e, E, f, F, g, and ${\rm G}$	No	No	Yes	Yes
Conversion specifier n	No	No	Yes	Yes
Format flag +, -, #, 0, and space	No	Yes	Yes	Yes
Length modifiers h, 1, L, s, t, and ${\tt Z}$	No	Yes	Yes	Yes
Field width and precision, including *	No	Yes	Yes	Yes
long long support	No	No	Yes	Yes
wchar_t support	No	No	No	Yes

Table 7: Formatters for printf

† NoMb means without multibytes.

The compiler can automatically detect which formatting capabilities are needed in a direct call to printf, if the formatting string is a string literal. This information is passed to the linker, which combines the information from all modules to select a suitable formatter for the application. However, if the formatting string is a variable, or if the call is indirect through a function pointer, the compiler cannot perform the analysis, forcing the linker to select the Full formatter. In this case, you might want to override the automatically selected printf formatter.



### To override the automatically selected printf formatter in the IDE:

I Choose **Project>Options>General Options** to open the **Options** dialog box.

2 On the Library Options page, select the appropriate formatter.

### ٠\_

# To override the automatically selected printf formatter from the command line:

Use one of these ILINK command line options:

redirect _Printf=_PrintfFull
redirect _Printf=_PrintfFullNoMb
redirect _Printf=_PrintfLarge
redirect _Printf=_PrintfLargeNoMb
redirect _Printf=_PrintfSmall
redirect _Printf=_PrintfSmallNoMb
redirect _Printf=_PrintfTiny
redirect _Printf=_PrintfTinyNoMb

If the compiler does not recognize multibyte support, you can enable it:



Select Project>Options>General Options>Library Options 1>Enable multibyte support.

Use the linker option --printf\_multibytes.

### FORMATTERS FOR SCANF

In a similar way to the printf function, scanf uses a common formatter, called \_Scanf. The full version is quite large, and provides facilities that are not required in many embedded applications. To reduce the memory consumption, two smaller, alternative versions are also provided. Note that the wscanf versions are not affected.

This table summarizes the capabilities of the different formatters:

Formatting capabilities	Small/ SmallNoMb†	Large/ LargeNoMb†	Full/ FullNoMb†
Basic specifiers <code>c</code> , <code>d</code> , <code>i</code> , <code>o</code> , <code>p</code> , <code>s</code> , <code>u</code> , <code>X</code> , <code>x</code> , and <code>%</code>	Yes	Yes	Yes
Multibyte support	Yes/No	Yes/No	Yes/No
Floating-point specifiers $a,$ and $\ensuremath{\mathbb{A}}$	No	No	Yes
Floating-point specifiers e, E, f, F, g, and ${\rm G}$	No	No	Yes
Conversion specifier n	No	No	Yes
Scan set [ and ]	No	Yes	Yes
Assignment suppressing *	No	Yes	Yes
long long support	No	No	Yes
wchar_t <b>support</b>	No	No	Yes

Table 8: Formatters for scanf

† NoMb means without multibytes.

The compiler can automatically detect which formatting capabilities are needed in a direct call to scanf, if the formatting string is a string literal. This information is passed to the linker, which combines the information from all modules to select a suitable formatter for the application. However, if the formatting string is a variable, or if the call is indirect through a function pointer, the compiler cannot perform the analysis, forcing the linker to select the full formatter. In this case, you might want to override the automatically selected scanf formatter.



### To manually specify the scanf formatter in the IDE:

Choose Project>Options>General Options to open the Options dialog box.

To manually specify the scanf formatter from the command line:

2 On the Library Options page, select the appropriate formatter.





Use one of these ILINK command line options:

```
--redirect _Scanf=_ScanfFull
--redirect Scanf= ScanfFullNoMb
--redirect Scanf= ScanfLarge
--redirect _Scanf=_ScanfLargeNoMb
--redirect _Scanf=_ScanfSmall
--redirect Scanf= ScanfSmallNoMb
```

If the compiler does not recognize multibyte support, you can enable it:



>\_

Select Project>Options>General Options>Library Options 1>Enable multibyte support.

Use the linker option --scanf\_multibytes.

### THE C-SPY EMULATED I/O MECHANISM

- 1 The debugger will detect the presence of the function DebugBreak, which will be part of the application if you linked it with the linker option for C-SPY emulated I/O.
- 2 In this case, the debugger will automatically set a breakpoint at the \_\_DebugBreak function.
- 3 When your application calls a function in the DLIB low-level I/O interface, for example, open, the \_\_DebugBreak function is called, which will cause the application to stop at the breakpoint and perform the necessary services.
- 4 The execution will then resume.

See also Briefly about C-SPY emulated I/O, page 123.

### THE SEMIHOSTING MECHANISM

C-SPY emulated I/O is compatible with the semihosting interface provided by Arm Limited. When an application invokes a semihosting call, the execution stops at a debugger breakpoint. The debugger then handles the call, performs any necessary actions on the host computer and then resumes the execution.

There are three variants of semihosting mechanisms available:

- For Cortex-M, the interface uses BKPT instructions to perform semihosting calls
- For other Arm cores, SVC instructions are used for the semihosting calls
- IAR breakpoint, which is an IAR-specific alternative to semihosting that uses SVC.

To support semihosting via SVC, the debugger must set its semihosting breakpoint on the Supervisor Call vector to catch SVC calls. If your application uses SVC calls for other purposes than semihosting, the handling of this breakpoint will cause a severe performance penalty for each such call. IAR breakpoint is a way to get around this. By using a special function call instead of an SVC instruction to perform semihosting, the semihosting breakpoint can be set on that special function instead. This means that semihosting will not interfere with other uses of the Supervisor Call vector.

Note that IAR breakpoint is an IAR-specific extension of the semihosting standard. If you link your application with libraries built with toolchains from other vendors than IAR Systems and use IAR breakpoint, semihosting calls made from code in those libraries will not work.

### MATH FUNCTIONS

Some C/C++ standard library math functions are available in different versions:

- The default versions
- Smaller versions (but less accurate)
- More accurate versions (but larger).

### Smaller versions

The functions cos, exp, log, log2, log10, pow, sin, and tan exist in additional, smaller versions in the library. They are about 20% smaller and about 20% faster than the default versions. The functions handle INF and NaN values. The drawbacks are that they almost always lose some precision and they do not have the same input range as the default versions.

The names of the functions are constructed like:

\_\_iar\_xxx\_small<f|1>

where f is used for float variants, l is used for long double variants, and no suffix is used for double variants.



To specify individual math functions from the command line:

Redirect the default function names to these names when linking, using these options:

```
--redirect sin=__iar_sin_small
--redirect cos=__iar_cos_small
--redirect tan= iar tan small
--redirect log=__iar_log_small
--redirect log2=__iar_log2_small
--redirect log10= iar log10 small
--redirect exp=__iar_exp_small
--redirect pow=__iar_pow_small
--redirect sinf=__iar_sin_smallf
--redirect cosf=__iar_cos_smallf
--redirect tanf=__iar_tan_smallf
--redirect logf=__iar_log_smallf
--redirect log2f=__iar_log2_smallf
--redirect log10f= iar log10 smallf
--redirect expf=__iar_exp_smallf
--redirect powf=__iar_pow_smallf
--redirect sinl= iar sin small1
--redirect cosl=__iar_cos_small1
--redirect tanl=__iar_tan_small1
--redirect log1=__iar_log_small1
--redirect log21=__iar_log2_small1
--redirect log101=__iar_log10_small1
--redirect expl=__iar_exp_small1
--redirect powl=__iar_pow_small1
```

### More accurate versions

The functions cos, pow, sin, and tan exist in versions in the library that are more exact and can handle larger argument ranges. The drawback is that they are larger and slower than the default versions.

The names of the functions are constructed like:

```
__iar_xxx_accurate<f|1>
```

where f is used for float variants, l is used for long double variants, and no suffix is used for double variants.



### To specify individual math functions from the command line:

Redirect the default function names to these names when linking, using these options:

```
--redirect sin=__iar_sin_accurate
--redirect cos=__iar_cos_accurate
--redirect tan=__iar_tan_accurate
--redirect pow=__iar_pow_accurate
--redirect sinf=__iar_sin_accuratef
--redirect cosf=__iar_cos_accuratef
--redirect tanf=__iar_tan_accuratef
--redirect sinl=__iar_pow_accuratef
--redirect cosl=__iar_cos_accuratel
--redirect tanl=__iar_tan_accuratel
--redirect tanl=__iar_tan_accuratel
--redirect tanl=__iar_tan_accuratel
--redirect tanl=__iar_tan_accuratel
--redirect powl=__iar_pow_accuratel
```

### SYSTEM STARTUP AND TERMINATION


This section describes the runtime environment actions performed during startup and termination of your application.

The code for handling startup and termination is located in the source files <code>cstartup.s, cmain.s, cexit.s located in the arm\src\lib\arm or arm\src\lib\thumb directory (thumb for Cortex-M), and low\_level\_init.c located in the arm\src\lib\runtime directory.</code>

For information about how to customize the system startup code, see *System initialization*, page 144.

### System startup


During system startup, an initialization sequence is executed before the main function is entered. This sequence performs initializations required for the target hardware and the C/C++ environment.

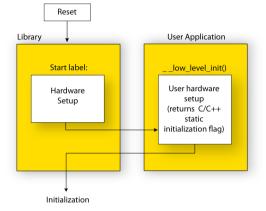

For the hardware initialization, it looks like this:

- When the CPU is reset it will start executing at the program entry label \_\_iar\_program\_start in the system startup code.
- The stack pointer is initialized to the end of the CSTACK block
- For Arm7/9/11, Cortex-A, and Cortex-R devices, exception stack pointers are initialized to the end of each corresponding section
- The function \_\_low\_level\_init is called if you defined it, giving the application a chance to perform early initializations.

For the C/C++ initialization, it looks like this:

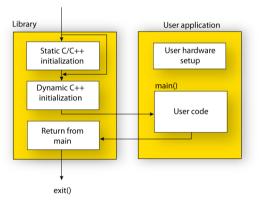


• Static and global variables are initialized. That is, zero-initialized variables are cleared and the values of other initialized variables are copied from ROM to RAM memory. This step is skipped if \_\_low\_level\_init returns zero. For more information, see *Initialization at system startup*, page 94.

- Static C++ objects are constructed
- The main function is called, which starts the application.

For information about the initialization phase, see *Application execution—an overview*, page 62.

### System termination

This illustration shows the different ways an embedded application can terminate in a controlled way:



An application can terminate normally in two different ways:

- Return from the main function
- Call the exit function.

Because the C standard states that the two methods should be equivalent, the system startup code calls the exit function if main returns. The parameter passed to the exit function is the return value of main.

The default exit function is written in C. It calls a small assembler function \_exit that will:

- Call functions registered to be executed when the application ends. This includes C++ destructors for static and global variables, and functions registered with the standard function atexit. See also *Setting up the atexit limit*, page 110.
- Close all open files
- Call \_\_exit
- When \_\_exit is reached, stop the system.

An application can also exit by calling the abort, the \_Exit, or the quick\_exit function. The abort function just calls \_\_exit to halt the system, and does not perform any type of cleanup. The \_Exit function is equivalent to the abort function, except for the fact that \_Exit takes an argument for passing exit status information. The quick\_exit function is equivalent to the \_Exit function, except that it calls each function passed to at\_quick\_exit before calling \_\_exit.

If you want your application to do anything extra at exit, for example resetting the system (and if using atexit is not sufficient), you can write your own implementation of the \_\_\_exit(int) function.

The library files that you can override with your own versions are located in the arm\src\lib directory. See *Overriding library modules*, page 128.

### C-SPY debugging support for system termination

If you have enabled C-SPY emulated I/O during linking, the normal \_\_exit function is replaced with a special one. C-SPY will then recognize when this function is called and can take appropriate actions to emulate program termination. For more information, see *Briefly about C-SPY emulated I/O*, page 123.

### SYSTEM INITIALIZATION

It is likely that you need to adapt the system initialization. For example, your application might need to initialize memory-mapped special function registers (SFRs), or omit the default initialization of data sections performed by the system startup code.

You can do this by implementing your own version of the routine \_\_low\_level\_init, which is called from the cmain.s file before the data sections are initialized. Modifying the cmain.s file directly should be avoided.

For Cortex-M, the code for handling system startup is located in the source files cstartup\_M.s and low\_level\_init.c, located in the arm\src\lib directory.

For other Arm devices, the code for handling system startup is located in the source files cstartup.s and low\_level\_init.c, located in the arm\src\lib directory.

Note: Normally, you do not need to customize either of the files cmain.s or cexit.s.

**Note:** Regardless of whether you implement your own version of <u>\_\_low\_level\_init</u> or the file cstartup.s, you do not have to rebuild the library.

### Customizing \_\_low\_level\_init

A skeleton low-level initialization file is supplied with the product: low\_level\_init.c. Note that static initialized variables cannot be used within the file, because variable initialization has not been performed at this point. The value returned by \_\_low\_level\_init determines whether or not data sections should be initialized by the system startup code. If the function returns 0, the data sections will not be initialized.

#### Modifying the cstartup file

As noted earlier, you should not modify the cstartup.s file if implementing your own version of \_\_low\_level\_init is enough for your needs. However, if you do need to modify the cstartup.s file, we recommend that you follow the general procedure for creating a modified copy of the file and adding it to your project, see *Overriding library modules*, page 128.

Note that you must make sure that the linker uses the start label used in your version of cstartup.s. For information about how to change the start label used by the linker, see *--entry*, page 318.

For Cortex-M, you must create a modified copy of cstartup\_M.s or cstartup\_M.c to use interrupts or other exception handlers.

#### THE DLIB LOW-LEVEL I/O INTERFACE

The runtime library uses a set of low-level functions—which are referred to as the *DLIB low-level I/O interface*—to communicate with the target system. Most of the low-level functions have no implementation.

For more information about this, see Briefly about input and output (I/O), page 122.

These are the functions in the DLIB low-level I/O interface:

abort

```
__aeabi_assert
```

clock

\_\_close

\_\_exit

getenv

\_\_getzone

\_\_lseek

\_\_open

raise

\_\_\_read

remove rename signal system \_\_time32, \_\_time64 \_\_write

Note: You should normally not use the low-level functions prefixed with \_\_\_ directly in your application. Instead you should use the standard library functions that use these functions. For example, to write to stdout, you should use standard library functions like printf or puts, which in turn calls the low-level function \_\_write. If you have forgot to implement a low-level function and your application calls that function via a standard library function, the linker issues an error when you link in release build configuration.

**Note:** If you implement your own variants of the functions in this interface, your variants will be used even though you have enabled C-SPY emulated I/O, see *Briefly about C-SPY emulated I/O*, page 123.

#### abort

Source file	arm\src\lib\runtime\abort.c
Declared in	stdlib.h
Description	Standard C library function that aborts execution.
C-SPY debug action	Exits the application.
Default implementation	Callsexit(EXIT_FAILURE).
See also	Briefly about retargeting, page 124
	System termination, page 143.

#### \_\_aeabi\_assert

Source file	arm\src\lib\runtime\assert.c
Declared in	assert.h

Description	Low-level function that handles a failed assert.
C-SPY debug action	Notifies the C-SPY debugger about the failed assert.
Default implementation	Failed asserts are reported by the functionaeabi_assert. By default, it prints an error message and calls abort. If this is not the behavior you require, you can implement your own version of the function.
	The assert macro is defined in the header file <code>assert.h</code> . To turn off assertions, define the symbol NDEBUG.
ШË	In the IDE, the symbol NDEBUG is by default defined in a Release project and <i>not</i> defined in a Debug project. If you build from the command line, you must explicitly define the symbol according to your needs. See <i>NDEBUG</i> , page 462.
See also	Briefly about retargeting, page 124.

## clock

Source file	arm\src\lib\time\clock.c
Declared in	time.h
Description	Standard C library function that accesses the processor time.
C-SPY debug action	Returns the clock on the host computer.
Default implementation	Returns -1 to indicate that processor time is not available.
See also	Briefly about retargeting, page 124.

## \_\_close

Source file	arm\src\lib\file\close.c
Declared in	LowLevelIOInterface.h
Description	Low-level function that closes a file.
C-SPY debug action	Closes the associated host file on the host computer.
Default implementation	None.

See also

Briefly about retargeting, page 124.

## \_\_exit

Source file	arm\src\lib\runtime\xxexit.c
Declared in	LowLevelIOInterface.h
Description	Low-level function that halts execution.
C-SPY debug action	Notifies that the end of the application was reached.
Default implementation	Loops forever.
See also	Briefly about retargeting, page 124
	System termination, page 143.

## getenv

Source file	arm\src\lib\runtime\getenv.c arm\src\lib\runtime\environ.c
Declared in	Stdlib.h and LowLevelIOInterface.h
C-SPY debug action	Accesses the host environment.
Default implementation	The getenv function in the library searches the string pointed to by the global variableenviron, for the key that was passed as argument. If the key is found, the value of it is returned, otherwise 0 (zero) is returned. By default, the string is empty.
	To create or edit keys in the string, you must create a sequence of null-terminated strings where each string has the format:
	key=value\0
	End the string with an extra null character (if you use a C string, this is added automatically). Assign the created sequence of strings to theenviron variable.
	For example:
	<pre>const char MyEnv[] = "Key=Value\0Key2=Value2\0"; environ = MyEnv;</pre>

If you need a more sophisticated environment variable handling, you should implement your own getenv, and possibly putenv function.

Note: The putenv function is not required by the standard, and the library does not provide an implementation of it.

See also Briefly about retargeting, page 124.

## \_\_getzone

Source file	arm\src\lib\time\getzone.c
Declared in	LowLevelIOInterface.h
Description	Low-level function that returns the current time zone.
	<b>Note:</b> You must enable the time zone functionality in the library by using the linker optiontimezone_lib.
C-SPY debug action	Not applicable.
Default implementation	Returns ":".
See also	Briefly about retargeting, page 124 andtimezone_lib, page 338.
	For more information, see the source file getzone.c.

## \_lseek

Source file	arm\src\lib\file\lseek.c
Declared in	LowLevelIOInterface.h
Description	Low-level function for changing the location of the next access in an open file.
C-SPY debug action	Searches in the associated host file on the host computer.
Default implementation	None.
See also	Briefly about retargeting, page 124.

## \_\_open

Source file	arm\src\lib\file\open.c
Declared in	LowLevelIOInterface.h
Description	Low-level function that opens a file.
C-SPY debug action	Opens a file on the host computer.
Default implementation	None.
See also	Briefly about retargeting, page 124.

## raise

Source file	arm\src\lib\runtime\raise.c
Declared in	signal.h
Description	Standard C library function that raises a signal.
C-SPY debug action	Not applicable.
Default implementation	Calls the signal handler for the raised signal, or terminates with call toexit(EXIT_FAILURE).
See also	Briefly about retargeting, page 124.

## \_\_read

Source file	arm\src\lib\file\read.c
Declared in	LowLevelIOInterface.h
Description	Low-level function that reads characters from stdin and from files.
C-SPY debug action	Directs stdin to the <b>Terminal I/O</b> window. All other files will read the associated host file.
Default implementation	None.

The code in this example uses memory-mapped I/O to read from a keyboard, whose port is assumed to be located at 0x1000:

```
#include <stddef.h>
#include <LowLevelIOInterface.h>
__no_init volatile unsigned char kbIO @ 0x1000;
size_t __read(int handle,
              unsigned char *buf,
              size_t bufSize)
{
 size_t nChars = 0;
  /* Check for stdin
     (only necessary if FILE descriptors are enabled) */
 if (handle != 0)
  {
   return -1;
  }
 for (/*Empty*/; bufSize > 0; --bufSize)
  {
   unsigned char c = kbIO;
   if (c == 0)
      break;
    *buf++ = c;
    ++nChars;
 }
 return nChars;
}
```

For information about the handles associated with the streams, see *Retargeting—Adapting for your target system*, page 126.

For information about the @ operator, see *Controlling data and function placement in memory*, page 226.

See also Briefly about retargeting, page 124.

Example

#### remove

Source file	arm\src\lib\file\remove.c
Declared in	stdio.h
Description	Standard C library function that removes a file.
C-SPY debug action	Removes a file on the host computer.
Default implementation	Returns 0 to indicate success, but without removing a file.
See also	Briefly about retargeting, page 124.

#### rename

Source file	arm\src\lib\file\rename.c
Declared in	stdio.h
Description	Standard C library function that renames a file.
C-SPY debug action	Renames a file on the host computer.
Default implementation	Returns -1 to indicate failure.
See also	Briefly about retargeting, page 124.

## signal

Source file	arm\src\lib\runtime\signal.c
Declared in	signal.h
Description	Standard C library function that changes signal handlers.
C-SPY debug action	Not applicable.
Default implementation	As specified by Standard C. You might want to modify this behavior if the environment supports some kind of asynchronous signals.
See also	Briefly about retargeting, page 124.

## system

Source file	arm\src\lib\runtime\system.c
Declared in	stdlib.h
Description	Standard C library function that executes commands.
C-SPY debug action	Notifies the C-SPY debugger that system has been called and then returns $-1$ .
Default implementation	The system function available in the library returns 0 if a null pointer is passed to it to indicate that there is no command processor; otherwise it returns -1 to indicate failure. If this is not the functionality that you require, you can implement your own version. This does not require that you rebuild the library.
See also	Briefly about retargeting, page 124.

## \_\_time32, \_\_time64

Source file	arm\src\lib\time\time.c arm\src\lib\time\time64.c
Declared in	time.h
Description	Low-level functions that return the current calendar time.
C-SPY debug action	Returns the time on the host computer.
Default implementation	Returns -1 to indicate that calendar time is not available.
See also	Briefly about retargeting, page 124.

## \_\_write

C-SPY debug action	Directs stdout and stderr to the <b>Terminal I/O</b> window. All other files will write to the associated host file.
Description	Low-level function that writes to stdout, stderr, or a file.
Declared in	LowLevelIOInterface.h
Source file	arm\src\lib\file\write.c

Default implementation None. Example The code in this example uses memory-mapped I/O to write to an LCD display, whose port is assumed to be located at address 0x1000: #include <stddef.h> #include <LowLevelIOInterface.h> no init volatile unsigned char lcdIO @ 0x1000; size\_t \_\_write(int handle, const unsigned char \*buf, size\_t bufSize) { size\_t nChars = 0; /\* Check for the command to flush all handles \*/ if (handle == -1){ return 0; } /\* Check for stdout and stderr (only necessary if FILE descriptors are enabled.) \*/ if (handle != 1 && handle != 2) { return -1; } for (/\* Empty \*/; bufSize > 0; --bufSize) { lcdIO = \*buf; ++buf; ++nChars; } return nChars; } For information about the handles associated with the streams, see Retargeting-Adapting for your target system, page 126.

Briefly about retargeting, page 124.

IAR C/C++ Development GuideI54 Compiling and Linking for Arm

See also

#### CONFIGURATION SYMBOLS FOR FILE INPUT AND OUTPUT

File I/O is only supported by libraries with the Full library configuration, see *Runtime library configurations*, page 131, or in a customized library when the configuration symbol \_\_DLIB\_FILE\_DESCRIPTOR is defined. If this symbol is not defined, functions taking a FILE \* argument cannot be used.

To customize your library and rebuild it, see *Customizing and building your own runtime library*, page 129.

#### LOCALE

*Locale* is a part of the C language that allows language- and country-specific settings for several areas, such as currency symbols, date and time, and multibyte character encoding.

Depending on which library configuration you are using, you get different levels of locale support. However, the more locale support, the larger your code will get. It is therefore necessary to consider what level of support your application needs. See *Runtime library configurations*, page 131.

The DLIB runtime library can be used in two main modes:

• Using a full library configuration that has a locale interface, which makes it possible to switch between different locales during runtime

The application starts with the C locale. To use another locale, you must call the setlocale function or use the corresponding mechanisms in C++. The locales that the application can use are set up at linkage.

• Using a normal library configuration that does not have a locale interface, where the C locale is hardwired into the application.

**Note:** If multibytes are to be printed, you must make sure that the implementation of \_\_write in the DLIB low-level I/O interface can handle them.

#### Specifying which locales that should be available in your application



Choose Project>Options>General Options>Library Options 2>Locale support.



Use the linker option --keep with the tag of the locale as the parameter, for example:

--keep \_Locale\_cs\_CZ\_iso8859\_2

The available locales are listed in the file SupportedLocales.json in the arm\config directory, for example:

['Czech language locale for Czech Republic', 'iso8859-2', 'cs\_CZ.iso8859-2', '\_Locale\_cs\_CZ\_iso8859\_2'], The line contains the full locale name, the encoding for the locale, the abbreviated locale name, and the tag to be used as parameter to the linker option --keep.

#### Changing locales at runtime

The standard library function setlocale is used for selecting the appropriate portion of the application's locale when the application is running.

The setlocale function takes two arguments. The first one is a locale category that is constructed after the pattern LC\_CATEGORY. The second argument is a string that describes the locale. It can either be a string previously returned by setlocale, or it can be a string constructed after the pattern:

lang\_REGION

or

lang\_REGION.encoding

The *lang* part specifies the language code, and the *REGION* part specifies a region qualifier, and *encoding* specifies the multibyte character encoding that should be used. The available encodings are ISO-8859-1, ISO-8859-2, ISO-8859-4, ISO-8859-5, ISO-8859-7, ISO-8859-8, ISO-8859-9, ISO-8859-15, CP932, and UTF-8.

For a complete list of the available locales and their respective encoding, see the file SupportedLocales.json in the arm\config directory.

#### Example

This example sets the locale configuration symbols to Swedish to be used in Finland and UTF8 multibyte character encoding:

```
setlocale (LC_ALL, "sv_FI.UTF8");
```

## Managing a multithreaded environment

This section contains information about:

- Multithread support in the DLIB runtime environment, page 157
- Enabling multithread support, page 158
- *C*++ *exceptions in threads*, page 158

In a multithreaded environment, the standard library must treat all library objects according to whether they are global or local to a thread. If an object is a true global object, any updates of its state must be guarded by a locking mechanism to make sure that only one thread can update it at any given time. If an object is local to a thread, the static variables containing the object state must reside in a variable area local to that thread. This area is commonly named *thread-local storage* (TLS).

The low-level implementations of locks and TLS are system-specific, and is not included in the DLIB runtime environment. If you are using an RTOS, check if it provides some or all of the required functions. Otherwise, you must provide your own.

## MULTITHREAD SUPPORT IN THE DLIB RUNTIME ENVIRONMENT

The DLIB runtime environment uses two kinds of locks—*system locks* and *file stream locks*. The file stream locks are used as guards when the state of a file stream is updated, and are only needed in the Full library configuration. The following objects are guarded with system locks:

- The heap (in other words when malloc, new, free, delete, realloc, or calloc is used).
- The C file system (only available in the Full library configuration), but not the file streams themselves. The file system is updated when a stream is opened or closed, in other words when fopen, fclose, fdopen, fflush, or freopen is used.
- The signal system (in other words when signal is used).
- The temporary file system (in other words when tmpnam is used).
- C++ dynamically initialized function-local objects with static storage duration.
- C++ locale facet handling
- C++ regular expression handling
- C++ terminate and unexpected handling

These library objects use TLS:

Library objects using TLS	When these functions are used
Error functions	errno, strerror
C++ exception engine	Not applicable

Table 9: Library objects using TLS


Note: If you are using printf/scanf (or any variants) with formatters, each individual formatter will be guarded, but the complete printf/scanf invocation will not be guarded.

If one of the C++ variants is used together with the DLIB runtime environment with multithread support, the compiler option --guard\_calls must be used to make sure that function-static variables with dynamic initializers are not initialized simultaneously by several threads.

#### **ENABLING MULTITHREAD SUPPORT**

#### To configure multithread support for use with threaded applications:

I To enable multithread support:



If one of the C++ variants is used, the compiler option --guard\_calls should be used as well to make sure that function-static variables with dynamic initializers are not initialized simultaneously by several threads.



#### In the IDE, choose Project>Options>General Options>Library

**Configuration>Enable thread support in the library**. This will invoke the linker option --threaded\_lib and if one of the C++ variants is used, the IDE will automatically use the compiler option --guard\_calls to make sure that function-static variables with dynamic initializers are not initialized simultaneously by several threads.

- **2** To complement the built-in multithread support in the runtime library, you must also:
  - Implement code for the library's system locks interface.
  - If file streams are used, implement code for the library's file stream locks interface.
  - Implement code that handles thread creation, thread destruction, and TLS access methods for the library.


You can find the required declaration of functions in the DLib\_Threads.h file. There you will also find more information.

3 Build your project.

**Note:** If you are using a third-party RTOS, check their guidelines for how to enable multithread support with IAR Systems tools.

#### C++ EXCEPTIONS IN THREADS

Using exceptions in threads works as long as the main function for the thread has the noexcept exception specification. Otherwise non-caught exceptions will not correctly terminate the application.



# Assembler language interface

- Mixing C and assembler
- Calling assembler routines from C
- Calling assembler routines from C++
- Calling convention
- Call frame information

## Mixing C and assembler

The IAR C/C++ Compiler for Arm provides several ways to access low-level resources:

- Modules written entirely in assembler
- Intrinsic functions (the C alternative)
- Inline assembler.

It might be tempting to use simple inline assembler. However, you should carefully choose which method to use.

#### **INTRINSIC FUNCTIONS**

The compiler provides a few predefined functions that allow direct access to low-level processor operations without having to use the assembler language. These functions are known as intrinsic functions. They can be very useful in, for example, time-critical routines.

An intrinsic function looks like a normal function call, but it is really a built-in function that the compiler recognizes. The intrinsic functions compile into inline code, either as a single instruction, or as a short sequence of instructions.

For more information about the available intrinsic functions, see the chapter *Intrinsic functions*.

#### MIXING C AND ASSEMBLER MODULES

It is possible to write parts of your application in assembler and mix them with your C or C++ modules.

This causes some overhead in the form of function call and return instruction sequences, and the compiler will regard some registers as scratch registers. In many cases, the overhead of the extra instructions can be removed by the optimizer.

An important advantage is that you will have a well-defined interface between what the compiler produces and what you write in assembler. When using inline assembler, you will not have any guarantees that your inline assembler lines do not interfere with the compiler generated code.

When an application is written partly in assembler language and partly in C or C++, you are faced with several questions:

- How should the assembler code be written so that it can be called from C?
- Where does the assembler code find its parameters, and how is the return value passed back to the caller?
- How should assembler code call functions written in C?
- How are global C variables accessed from code written in assembler language?
- Why does not the debugger display the call stack when assembler code is being debugged?

The first question is discussed in the section *Calling assembler routines from C*, page 168. The following two are covered in the section *Calling convention*, page 171.

The answer to the final question is that the call stack can be displayed when you run assembler code in the debugger. However, the debugger requires information about the call frame, which must be supplied as annotations in the assembler source file. For more information, see *Call frame information*, page 178.

The recommended method for mixing C or C++ and assembler modules is described in *Calling assembler routines from C*, page 168, and *Calling assembler routines from* C++, page 171, respectively.

#### **INLINE ASSEMBLER**

Inline assembler can be used for inserting assembler instructions directly into a C or C++ function. Typically, this can be useful if you need to:

- Access hardware resources that are not accessible in C (in other words, when there is no definition for an SFR or there is no suitable intrinsic function available).
- Manually write a time-critical sequence of code that if written in C will not have the right timing.

• Manually write a speed-critical sequence of code that if written in C will be too slow.

An inline assembler statement is similar to a C function in that it can take input arguments (input operands), have return values (output operands), and read or write to C symbols (via the operands). An inline assembler statement can also declare *clobbered resources* (that is, values in registers and memory that have been overwritten).

#### Limitations

Most things you can to do in normal assembler language are also possible with inline assembler, with the following differences:

- Alignment cannot be controlled; this means, for example, that DC32 directives might be misaligned.
- The only accepted register synonyms are SP (for R13), LR (for R14), and PC (for R15).
- In general, assembler directives will cause errors or have no meaning. However, data definition directives will work as expected.
- Resources used (registers, memory, etc) that are also used by the C compiler must be declared as operands or clobbered resources.
- If you do not want to risk that the inline assembler statement to be optimized away by the compiler, you must declare it volatile.
- Accessing a C symbol or using a constant expression requires the use of operands.
- Dependencies between the expressions for the operands might result in an error.
- The pseudo-instruction LDR Rd, =expr is not available from inline assembler.

#### **Risks with inline assembler**

Without operands and clobbered resources, inline assembler statements have no interface with the surrounding C source code. This makes the inline assembler code fragile, and might also become a maintenance problem if you update the compiler in the future. There are also several limitations to using inline assembler without operands and clobbered resources:

- The compiler's various optimizations will disregard any effects of the inline statements, which will not be optimized at all.
- Inlining of functions with assembler statements without declared side-effects will not be done.
- The inline assembler statement will be volatile and *clobbered memory* is not implied. This means that the compiler will not remove the assembler statement. It will simply be inserted at the given location in the program flow. The consequences or side-effects that the insertion might have on the surrounding code are not taken

into consideration. If, for example, registers or memory locations are altered, they might have to be restored within the sequence of inline assembler instructions for the rest of the code to work properly.



The following example (for Arm mode) demonstrates the risks of using the asm keyword without operands and clobbers:

```
int Add(int term1, int term2)
{
   asm("adds r0,r0,r1");
   return term1;
}
```

In this example:

- The function Add assumes that values are passed and returned in registers in a way that they might not always be, for example if the function is inlined.
- The s in the adds instruction implies that the condition flags are updated, which you specify using the cc clobber operand. Otherwise, the compiler will assume that the condition flags are not modified.

Inline assembler without using operands or clobbered resources is therefore often best avoided. The compiler will issue a remark for them.

#### Reference information for inline assembler

The asm and \_\_asm keywords both insert inline assembler instructions. However, when you compile C source code, the asm keyword is not available when the option --strict is used. The \_\_asm keyword is always available.

Syntax

The syntax of an inline assembler statement is (similar to the one used by GNU GCC):

asm [volatile] ( string [assembler-interface])

*string* can contain one or more valid assembler instructions or data definition assembler directives, separated by n.

For example:

asm("label:nop\n"
 "b label");

Note that any labels you define in the inline assembler statement will be local to that statement. You can use this for loops or conditional code.

If you define a label in an inline assembler statement using two colons (for example: "*label:*: nop\n") instead of one, the label will be public, not only in the inline assembler statement, but in the module as well. This feature is intended for testing only.

An assembler statement without declared side-effects will be treated as a volatile assembler statement, which means it cannot be optimized at all. The compiler will issue a remark for such an assembler statement. assembler-interface is: : comma-separated list of output operands /\* optional \*/ : comma-separated list of input operands /\* optional \*/ : comma-separated list of clobbered resources /\* optional \*/ Operands An inline assembler statement can have one input and one output comma-separated list of operands. Each operand consists of an optional symbolic name in brackets, a quoted constraint, followed by a C expression in parentheses. Syntax of operands [[ symbolic-name ]] "[modifiers]constraint" (expr) For example: int Add(int term1, int term2) { int sum; asm("add %0,%1,%2" : "=r" (sum) : "r" (term1), "r" (term2)); return sum; } In this example, the assembler instruction uses one output operand, sum, two input operands, term1 and term2, and no clobbered resources. It is possible to omit any list by leaving it empty. For example: int matrix[M][N]; void MatrixPreloadRow(int row) { asm volatile ("pld [%0]" : : "r" (&matrix[row][0])); } Operand constraints Constraint Description r Uses a general purpose register for the expression: R0-R12, R14 (for Arm and Thumb2) R0-R7 (for Thumb1) 1 R0-R7 (only valid for Thumb1)

Table 10: Inline assembler operand constraints

Constraint	Description
Rp	Uses a pair of general purpose registers, for example ${\tt R0, R1}$
i	An immediate integer operand with a constant value. Symbolic constants are allowed.
j	A 16-bit constant suitable for a MOVW instruction (valid for Arm and Thumb2).
n	An immediate operand, alias for i.
I	An immediate constant valid for a data processing instruction (for Arm and Thumb2), or a constant in the range 0 to 255 (for Thumb1).
J	An immediate constant in the range -4095 to 4095 (for Arm and Thumb2), or a constant in the range -255 to -1 (for Thumb1).
K	An immediate constant that satisfies the $I$ constraint if inverted (for Arm and Thumb2), or a constant that satisfies the $I$ constraint multiplied by any power of 2 (for Thumb1).
L	An immediate constant that satisfies the ${\tt I}$ constraint if negated (for Arm and Thumb2), or a constant in the range -7 to 7 (for Thumb1).
М	An immediate constant that is a multiple of 4 in the range 0 to 1020 (only valid for Thumb1).
N	An immediate constant in the range 0 to 31 (only valid for Thumb1).
0	An immediate constant that is a multiple of 4 in the range -508 to 508 (only valid for Thumb1).
t	An S register.
W	A D register.
đ	A Q register.
Dv	A 32-bit floating-point immediate constant for the $\texttt{VMOV}.\texttt{F32}$ instruction.
Dy	A 64-bit floating-point immediate constant for the $\texttt{VMOV}$ . $\texttt{F64}$ instruction.
v2S v4Q	A vector of 2, 3, or 4 consecutive S, D, or Q registers. For example, $v4Q$ is a vector of four Q registers. The vectors do not overlap, so the available $v4Q$ register vectors are Q0-Q3, Q4-Q7, Q8-Q11, and Q12-Q15.

Table 10: Inline assembler operand constraints (Continued)

		upported constraint modifiers:
	Modifier	Desciption
	=	Write-only operand
	+	Read-write operand
	&	Early clobber output operand which is written to before the instruction has processed all the input operands.
	Table 11: Supporte	d constraint modifiers
Referring to operands		rructions refer to operands by prefixing their order number with %. The as order number 0 and is referred to by %0.
	If the operand has a symbolic name, you can refer to it using the syntax %[operand.name]. Symbolic operand names are in a separate namespace from C/C++ code and can be the same as a C/C++ variable names. Each operand name must however be unique in each assembler statement. For example:	
	int Add(int { int sum;	term1, int term2)
	: [Rd	%[Rd],%[Rn],%[Rm]" ]"=r"(sum) ]"r" (term1), [Rm]"r" (term2));
	return su }	m;
Input operands		cannot have any constraint modifiers, but they can have any valid C ong as the type of the expression fits the register.
	-	on will be evaluated just before any of the assembler instructions in the er statement and assigned to the constraint, for example a register.
Output operands	l-value and spe register. The co immediately af operands are as use the same re constraint with	ds must have = as a constraint modifier and the C expression must be an cify a writable location. For example, $=r$ for a write-only general purpose onstraint will be assigned to the evaluated C expression (as an l-value) for the last assembler instruction in the inline assembler statement. Input sumed to be consumed before output is produced and the compiler may egister for an input and output operand. To prohibit this, prefix the output & to make it an early clobber resource, for example $=&r$ . This will ensure operand will be allocated in a different register than the input operands.

```
Input/output operands
                           An operand that should be used both for input and output must be listed as an output
                           operand and have the + modifier. The C expression must be an l-value and specify a
                           writable location. The location will be read immediately before any assembler
                           instructions and it will be written to right after the last assembler instruction.
                           This is an example of using a read-write operand:
                           int Double(int value)
                           {
                             asm("add %0,%0,%0" : "+r"(value));
                             return value;
                           }
                           In the example above, the input value for value will be placed in a general purpose
                           register. After the assembler statement, the result from the ADD instruction will be placed
                           in the same register.
Clobbered resources
                           An inline assembler statement can have a list of clobbered resources.
                           "resource1", "resource2", ...
                           Specify clobbered resources to inform the compiler about which resources the inline
                           assembler statement destroys. Any value that resides in a clobbered resource and that is
                           needed after the inline assembler statement will be reloaded.
                           Clobbered resources will not be used as input or output operands.
                           This is an example of how to use clobbered resources:
                           int Add(int term1, int term2)
                           {
                             int sum;
                             asm("adds %0,%1,%2"
                                  : "=r"(sum)
                                  : "r" (term1), "r" (term2)
                                   : "cc");
                             return sum;
                           }
```

In this example the condition codes will be modified by the ADDS instruction. Therefore, "cc" must be listed in the clobber list.

This table lists valid clobbered resources:

Clobber	Description
R0-R12, R14 <b>for Arm mode and Thumb2</b> R0-R7, R12, R14 <b>for Thumb1</b>	General purpose registers
S0-S31, D0-D31, Q0-Q15	Floating-point registers
сс	The condition flags (N, Z, V, and C)
memory	To be used if the instructions modify any memory. This will avoid keeping memory values cached in registers across the inline assembler statement.

Table 12: List of valid clobbers

Operand modifiers An operand modifier is a single letter between the % and the operand number, which is used for transforming the operand.

In the example below, the modifiers L and H are used for accessing the least and most significant 16 bits, respectively, of an immediate operand:

```
int Mov32()
{
    int a;
    asm("movw %0,%L1 \n"
        "movt %0,%H1 \n" : "=r"(a) : "i"(0x12345678UL));
    return a;
}
```

Some operand modifiers can be combined, in which case each letter will transform the result from the previous modifier. This table describes the transformation performed by each valid modifier:

Modifier	Description
L	The lowest-numbered register of a register pair, or the low 16 bits of an immediate constant.
Н	The highest-numbered register of a register pair, or the high 16 bits of an immediate constant.
С	For an immediate operand, an integer or symbol address without a preceding # sign. Cannot be transformed by additional operand modifiers.
В	For an immediate operand, the bitwise inverse of integer or symbol without a preceding # sign. Cannot be transformed by additional operand modifiers.

Table 13: Operand modifiers and transformations

Modifier	Description
Q	The least significant register of a register pair.
R	The most significant register of a register pair.
М	For a register or a register pair, the register list suitable for $1dm$ or stm. Cannot be transformed by additional operand modifiers.
a	Transforms a register ${\tt Rn}$ into a memory operand $[{\tt Rn}, \#0]$ suitable for pld.
b	The low S register part of a D register.
р	The high ${\rm S}$ register part of a ${\rm D}$ register.
е	The low $\mathbb D$ register part of a $\mathbb Q$ register, or the low register in a vector of Neon registers.
f	The high $\mathbb D$ register part of a $\mathbb Q$ register, or the high register in a vector of Neon registers.
h	For a (vector of) D or Q registers, the corresponding list of D registers within curly braces. For example, Q0 becomes {D0,D1}. Cannot be transformed by additional operand modifiers.
У	S register as indexed D register, for example S7 becomes D3 [1]. Cannot be transformed by additional operand modifiers.

Table 13: Operand modifiers and transformations

#### AN EXAMPLE OF HOW TO USE CLOBBERED MEMORY

```
int StoreExclusive(unsigned long * location, unsigned long value)
{
  int failed;
  asm("strex %0,%2,[%1]"
      : "=&r"(failed)
      : "r"(location), "r"(value)
      : "memory");
  /* Note: 'strex' requires Armv6 (Arm) or Armv6T2 (THUMB) */
  return failed;
}
```

## Calling assembler routines from C

An assembler routine that will be called from C must:

• Conform to the calling convention

- Have a PUBLIC entry-point label
- Be declared as external before any call, to allow type checking and optional promotion of parameters, as in these examples:

```
extern int foo(void);
or
extern int foo(int i, int j);
```

One way of fulfilling these requirements is to create skeleton code in C, compile it, and study the assembler list file.

#### **CREATING SKELETON CODE**

The recommended way to create an assembler language routine with the correct interface is to start with an assembler language source file created by the C compiler. Note that you must create skeleton code for each function prototype.

The following example shows how to create skeleton code to which you can easily add the functional body of the routine. The skeleton source code only needs to declare the variables required and perform simple accesses to them. In this example, the assembler routine takes an int and a char, and then returns an int:

```
extern int gInt;
extern char gChar;
int Func(int arg1, char arg2) {
    int locInt = arg1;
    gInt = arg1;
    gChar = arg2;
    return locInt;
}
int main()
{
    int locInt = gInt;
    gInt = Func(locInt, gChar);
    return 0;
}
```

**Note:** In this example we use a low optimization level when compiling the code to show local and global variable access. If a higher level of optimization is used, the required references to local variables could be removed during the optimization. The actual function declaration is not changed by the optimization level.

#### **COMPILING THE SKELETON CODE**

In the IDE, specify list options on file level. Select the file in the workspace window. Then choose **Project>Options**. In the **C/C++ Compiler** category, select **Override inherited settings**. On the **List** page, deselect **Output list file**, and instead select the **Output assembler file** option and its suboption **Include source**. Also, be sure to specify a low level of optimization.



ΠĤ

Use these options to compile the skeleton code:

iccarm skeleton.c -lA . -On -e

The -1A option creates an assembler language output file including C or C++ source lines as assembler comments. The . (period) specifies that the assembler file should be named in the same way as the C or C++ module (skeleton), but with the filename extension s. The -On option means that no optimization will be used and -e enables language extensions. In addition, make sure to use relevant compiler options, usually the same as you use for other C or C++ source files in your project.

The result is the assembler source output file skeleton.s.

**Note:** The -lA option creates a list file containing call frame information (CFI) directives, which can be useful if you intend to study these directives and how they are used. If you only want to study the calling convention, you can exclude the CFI directives from the list file.



>\_

In the IDE, to exclude the CFI directives from the list file, choose **Project>Options>C/C++ Compiler>List** and deselect the suboption **Include call** frame information.

On the command line, to exclude the CFI directives from the list file, use the option -1B instead of -1A. Note that CFI information must be included in the source code to make the C-SPY **Call Stack** window work.

#### The output file

The output file contains the following important information:

- The calling convention
- The return values
- The global variables
- The function parameters
- How to create space on the stack (auto variables)
- Call frame information (CFI).

The CFI directives describe the call frame information needed by the **Call Stack** window in the debugger. For more information, see *Call frame information*, page 178.

## Calling assembler routines from C++

The C calling convention does not apply to C++ functions. Most importantly, a function name is not sufficient to identify a C++ function. The scope and the type of the function are also required to guarantee type-safe linkage, and to resolve overloading.

Another difference is that non-static member functions get an extra, hidden argument, the this pointer.

However, when using C linkage, the calling convention conforms to the C calling convention. An assembler routine can therefore be called from C++ when declared in this manner:

```
extern "C"
{
    int MyRoutine(int);
}
```

The following example shows how to achieve the equivalent to a non-static member function, which means that the implicit this pointer must be made explicit. It is also possible to "wrap" the call to the assembler routine in a member function. Use an inline member function to remove the overhead of the extra call—this assumes that function inlining is enabled:

```
class MyClass;
extern "C"
{
  void DoIt(MyClass *ptr, int arg);
}
class MyClass
{
public:
  inline void DoIt(int arg)
  {
   ::DoIt(this, arg);
  }
};
```

## **Calling convention**

A calling convention is the way a function in a program calls another function. The compiler handles this automatically, but, if a function is written in assembler language, you must know where and how its parameters can be found, how to return to the program location from where it was called, and how to return the resulting value.

It is also important to know which registers an assembler-level routine must preserve. If the program preserves too many registers, the program might be ineffective. If it preserves too few registers, the result would be an incorrect program.

This section describes the calling convention used by the compiler. These items are examined:

- Function declarations
- C and C++ linkage
- Preserved versus scratch registers
- Function entrance
- Function exit
- Return address handling

At the end of the section, some examples are shown to describe the calling convention in practice.

The calling convention used by the compiler adheres to the Procedure Call Standard for the Arm architecture, AAPCS, a part of AEABI; see *AEABI compliance*, page 215. AAPCS is not fully described here. For example, the use of floating-point coprocessor registers when using the VFP calling convention is not covered.

#### FUNCTION DECLARATIONS

In C, a function must be declared in order for the compiler to know how to call it. A declaration could look as follows:

int MyFunction(int first, char \* second);

This means that the function takes two parameters: an integer and a pointer to a character. The function returns a value, an integer.

In the general case, this is the only knowledge that the compiler has about a function. Therefore, it must be able to deduce the calling convention from this information.

#### **USING C LINKAGE IN C++ SOURCE CODE**

In C++, a function can have either C or C++ linkage. To call assembler routines from C++, it is easiest if you make the C++ function have C linkage.

This is an example of a declaration of a function with C linkage:

```
extern "C"
{
    int F(int);
}
```

It is often practical to share header files between C and C++. This is an example of a declaration that declares a function with C linkage in both C and C++:

```
#ifdef __cplusplus
extern "C"
{
#endif
int F(int);
#ifdef __cplusplus
}
#endif
```

#### PRESERVED VERSUS SCRATCH REGISTERS

The general Arm CPU registers are divided into three separate sets, which are described in this section.

#### Scratch registers

Any function is permitted to destroy the contents of a scratch register. If a function needs the register value after a call to another function, it must store it during the call, for example on the stack.

Any of the registers R0 to R3, and R12, can be used as a scratch register by the function. Note that R12 is a scratch register also when calling between assembler functions only because of automatically inserted instructions for veneers.

#### **Preserved registers**

Preserved registers, on the other hand, are preserved across function calls. The called function can use the register for other purposes, but must save the value before using the register and restore it at the exit of the function.

The registers R4 through to R11 are preserved registers. They are preserved by the called function.

#### **Special registers**

For some registers, you must consider certain prerequisites:

• The stack pointer register, R13/SP, must at all times point to or below the last element on the stack. In the eventuality of an interrupt, everything below the point the stack pointer points to, can be destroyed. At function entry and exit, the stack pointer must be 8-byte aligned. In the function, the stack pointer must always be word aligned. At exit, SP must have the same value as it had at the entry.

- The register R15/PC is dedicated for the Program Counter.
- The link register, R14/LR, holds the return address at the entrance of the function.

#### **FUNCTION ENTRANCE**

Parameters can be passed to a function using one of these basic methods:

- In registers
- On the stack

It is much more efficient to use registers than to take a detour via memory, so the calling convention is designed to use registers as much as possible. Only a limited number of registers can be used for passing parameters; when no more registers are available, the remaining parameters are passed on the stack. These exceptions to the rules apply:

- Interrupt functions cannot take any parameters, except software interrupt functions that accept parameters and have return values
- Software interrupt functions cannot use the stack in the same way as ordinary functions. When an SVC instruction is executed, the processor switches to supervisor mode where the supervisor stack is used. Arguments can therefore not be passed on the stack if your application is not running in supervisor mode previous to the interrupt.

#### **Hidden parameters**

In addition to the parameters visible in a function declaration and definition, there can be hidden parameters:

- If the function returns a structure larger than 32 bits, the memory location where the structure is to be stored is passed as an extra parameter. Notice that it is always treated as the *first parameter*.
- If the function is a non-static C++ member function, then the this pointer is passed as the first parameter (but placed after the return structure pointer, if there is one). For more information, see *Calling assembler routines from C*, page 168.

#### **Register parameters**

Parameters	Passed in registers
Scalar and floating-point values no larger than 32 bits,	Passed using the first free register:
and single-precision (32-bits) floating-point values	R0-R3
long long and double-precision (64-bit) values	Passed in the first available register pair:
	R0:R1 or R2:R3

Table 14: Registers used for passing parameters


The assignment of registers to parameters is a straightforward process. Traversing the parameters from left to right, the first parameter is assigned to the available register or registers. Should there be no more available registers, the parameter is passed on the stack in reverse order.

When functions that have parameters smaller than 32 bits are called, the values are sign or zero extended to ensure that the unused bits have consistent values. Whether the values will be sign or zero extended depends on their type—signed or unsigned.

#### Stack parameters and layout

Stack parameters are stored in memory, starting at the location pointed to by the stack pointer. Below the stack pointer (towards low memory) there is free space that the called function can use. The first stack parameter is stored at the location pointed to by the stack pointer. The next one is stored at the next location on the stack that is divisible by four, etc. It is the responsibility of the caller to clean the stack after the called function has returned.

This figure illustrates how parameters are stored on the stack:

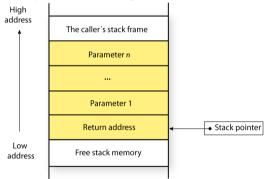

#### **FUNCTION EXIT**

A function can return a value to the function or program that called it, or it can have the return type void.

The return value of a function, if any, can be scalar (such as integers and pointers), floating-point, or a structure.

#### **Registers used for returning values**

The registers available for returning values are R0 and R0:R1.

Return values	Passed in registers
Scalar and structure return values no larger than 32 bits, and single-precision (32-bit) floating-point return values	RO
The memory address of a structure return value larger than 32 bits	RO
long long and double-precision (64-bit) return values	R0:R1

Table 15: Registers used for returning values

If the returned value is smaller than 32 bits, the value is sign- or zero-extended to 32 bits.

#### Stack layout at function exit

It is the responsibility of the caller to clean the stack after the called function has returned.

#### **Return address handling**

A function written in assembler language should, when finished, return to the caller, by jumping to the address pointed to by the register LR.

At function entry, non-scratch registers and the LR register can be pushed with one instruction. At function exit, all these registers can be popped with one instruction. The return address can be popped directly to PC.

The following example shows what this can look like:

```
name call
section .text:CODE
extern func
push {r4-r6,lr} ; Preserve stack alignment 8
bl func
; Do something here.
pop {r4-r6,pc} ; return
end
```

#### **EXAMPLES**

The following section shows a series of declaration examples and the corresponding calling conventions. The complexity of the examples increases toward the end.

#### Example I

Assume this function declaration:

```
int add1(int);
```

This function takes one parameter in the register R0, and the return value is passed back to its caller in the register R0.

This assembler routine is compatible with the declaration; it will return a value that is one number higher than the value of its parameter:

```
name return
section .text:CODE
add r0, r0, #1
bx lr
end
```

#### Example 2

This example shows how structures are passed on the stack. Assume these declarations:

```
struct MyStruct
{
   short a;
   short b;
   short c;
   short d;
   short e;
};
int MyFunction(struct MyStruct x, int y);
```

The values of the structure members a, b, c, and d are passed in registers R0-R3. The last structure member e and the integer parameter y are passed on the stack. The calling function must reserve eight bytes on the top of the stack and copy the contents of the two stack parameters to that location. The return value is passed back to its caller in the register R0.

#### Example 3

The function below will return a structure of type struct MyStruct.

```
struct MyStruct
{
    int mA[20];
};
struct MyStruct MyFunction(int x);
```

It is the responsibility of the calling function to allocate a memory location for the return value and pass a pointer to it as a hidden first parameter. The pointer to the location where the return value should be stored is passed in  $\mathbb{R}^0$ . The parameter x is passed in  $\mathbb{R}^1$ .

Assume that the function instead was declared to return a pointer to the structure:

struct MyStruct \*MyFunction(int x);

In this case, the return value is a scalar, so there is no hidden parameter. The parameter x is passed in R0, and the return value is returned in R0.

## **Call frame information**

When you debug an application using C-SPY, you can view the *call stack*, that is, the chain of functions that called the current function. To make this possible, the compiler supplies debug information that describes the layout of the call frame, in particular information about where the return address is stored.

If you want the call stack to be available when debugging a routine written in assembler language, you must supply equivalent debug information in your assembler source using the assembler directive CFI. This directive is described in detail in the *IAR Assembler User Guide for Arm*.

#### **CFI DIRECTIVES**

The CFI directives provide C-SPY with information about the state of the calling function(s). Most important of this is the return address, and the value of the stack pointer at the entry of the function or assembler routine. Given this information, C-SPY can reconstruct the state for the calling function, and thereby unwind the stack.

A full description about the calling convention might require extensive call frame information. In many cases, a more limited approach will suffice.

When describing the call frame information, the following three components must be present:

• A names block describing the available resources to be tracked

- A common block corresponding to the calling convention
- A *data block* describing the changes that are performed on the call frame. This typically includes information about when the stack pointer is changed, and when permanent registers are stored or restored on the stack.

Resource	Description
CFA R13	The call frames of the stack
R0-R12	Processor general-purpose 32-bit registers
R13	Stack pointer, SP
R14	Link register, LR
D0-D31	Vector Floating Point (VFP) 64-bit coprocessor register
CPSR	Current program status register
SPSR	Saved program status register

Table 16: Call frame information resources defined in a names block

#### **CREATING ASSEMBLER SOURCE WITH CFI SUPPORT**

The recommended way to create an assembler language routine that handles call frame information correctly is to start with an assembler language source file created by the compiler.

Start with suitable C source code, for example:

```
int F(int);
int cfiExample(int i)
{
  return i + F(i);
}
```

**2** Compile the C source code, and make sure to create a list file that contains call frame information—the CFI directives.



On the command line, use the option -1A.



In the IDE, choose **Project>Options>C/C++ Compiler>List** and make sure the suboption **Include call frame information** is selected.

For the source code in this example, the list file looks like this:

```
NAME Cfi
        RTMODEL "___SystemLibrary", "DLib"
        EXTERN F
        PUBLIC cfiExample
        CFI Names cfiNames0
        CFI StackFrame CFA R13 DATA
        CFI Resource R0:32, R1:32, R2:32, R3:32, R4:32, R5:32,
R6:32, R7:32
        CFI Resource R8:32, R9:32, R10:32, R11:32, R12:32,
R13:32, R14:32
        CFI EndNames cfiNames0
        CFI Common cfiCommon0 Using cfiNames0
        CFI CodeAlign 4
        CFI DataAlign 4
        CFI ReturnAddress R14 CODE
        CFT CFA R13+0
        CFI R0 Undefined
        CFI R1 Undefined
        CFI R2 Undefined
        CFI R3 Undefined
        CFI R4 SameValue
        CFI R5 SameValue
        CFI R6 SameValue
        CFI R7 SameValue
        CFI R8 SameValue
        CFI R9 SameValue
        CFI R10 SameValue
        CFI R11 SameValue
        CFI R12 Undefined
        CFI R14 SameValue
        CFI EndCommon cfiCommon0
        SECTION `.text`:CODE:NOROOT(2)
        CFI Block cfiBlock0 Using cfiCommon0
        CFI Function cfiExample
        ARM
cfiExample:
        PUSH
                 \{R4, LR\}
        CFI R14 Frame(CFA, -4)
        CFI R4 Frame(CFA, -8)
```

```
CFI CFA R13+8
MOVS R4,R0
MOVS R0,R4
BL F
ADDS R0,R0,R4
POP {R4,PC} ;; return
CFI EndBlock cfiBlock0
```

END

**Note:** The header file Common.i contains the macros CFI\_NAMES\_BLOCK, CFI\_COMMON\_ARM, and CFI\_COMMON\_Thumb, which declare a typical names block and a typical common block. These two macros declare several resources, both concrete and virtual. Call frame information

# Using C

- C language overview
- Extensions overview
- IAR C language extensions

# C language overview

The IAR C/C++ Compiler for Arm supports the INCITS/ISO/IEC 9899:2012 standard, also known as C11. In this guide, this standard is referred to as *Standard C* and is the default standard used in the compiler. This standard is stricter than C89.

The compiler will accept source code written in the C11 standard or a superset thereof.

In addition, the compiler also supports the ISO 9899:1990 standard (including all technical corrigenda and addenda), also known as C94, C90, C89, and ANSI C. In this guide, this standard is referred to as *C89*. Use the --c89 compiler option to enable this standard.

With C11 enabled, the IAR C/C++ Compiler for Arm can compile all C11 source code files, except for those that depend on thread-related system header files.

The C11 standard adds features like these:

- VLA (variable length arrays) must be explicitly enabled with the compiler option --vla
- Inline assembler using the asm or the \_\_asm keyword, see *Inline assembler*, page 160.
- Atomic operations (for cores where the instruction set supports it), see *Atomic operations*, page 473.

Annex K (*Bounds-checking interfaces*) of the C standard is supported. See *Bounds checking functionality*, page 131.

# **Extensions overview**

The compiler offers the features of Standard C and a wide set of extensions, ranging from features specifically tailored for efficient programming in the embedded industry to the relaxation of some minor standards issues.

This is an overview of the available extensions:

• IAR C language extensions

For information about available language extensions, see *LAR C language extensions*, page 185. For more information about the extended keywords, see the chapter *Extended keywords*. For information about C++, the two levels of support for the language, and C++ language extensions; see the chapter *Using* C++.

Pragma directives

The #pragma directive is defined by Standard C and is a mechanism for using vendor-specific extensions in a controlled way to make sure that the source code is still portable.

The compiler provides a set of predefined pragma directives, which can be used for controlling the behavior of the compiler, for example how it allocates memory, whether it allows extended keywords, and whether it outputs warning messages. Most pragma directives are preprocessed, which means that macros are substituted in a pragma directive. The pragma directives are always enabled in the compiler. For several of them there is also a corresponding C/C++ language extension. For information about available pragma directives, see the chapter *Pragma directives*.

Preprocessor extensions

The preprocessor of the compiler adheres to Standard C. The compiler also makes several preprocessor-related extensions available to you. For more information, see the chapter *The preprocessor*.

Intrinsic functions

The intrinsic functions provide direct access to low-level processor operations and can be very useful in, for example, time-critical routines. The intrinsic functions compile into inline code, either as a single instruction or as a short sequence of instructions. For more information about using intrinsic functions, see *Mixing C and assembler*, page 159. For information about available functions, see the chapter *Intrinsic functions*.

• Library functions

The DLIB runtime environment provides the C and C++ library definitions in the C/C++ standard library that apply to embedded systems. For more information, see *DLIB runtime environment—implementation details*, page 467.

**Note:** Any use of these extensions, except for the pragma directives, makes your source code inconsistent with Standard C.

#### **ENABLING LANGUAGE EXTENSIONS**

You can choose different levels of language conformance by means of project options:

Command line	IDE*	Description
strict	Strict	All IAR C language extensions are disabled; errors are issued for anything that is not part of Standard C.
None	Standard	All extensions to Standard C are enabled, but no extensions for embedded systems programming. For information about extensions, see IAR C language extensions, page 185.
-е	Standard with IAR extensions	All IAR C language extensions are enabled.

Table 17: Language extensions

\* In the IDE, choose **Project>Options>C/C++ Compiler>Language 1>Language conformance** and select the appropriate option. Note that language extensions are enabled by default.

## IAR C language extensions

The compiler provides a wide set of C language extensions. To help you to find the extensions required by your application, they are grouped like this in this section:

- *Extensions for embedded systems programming*—extensions specifically tailored for efficient embedded programming for the specific core you are using, typically to meet memory restrictions
- *Relaxations to Standard C*—that is, the relaxation of some minor Standard C issues and also some useful but minor syntax extensions, see *Relaxations to Standard C*, page 187.

#### EXTENSIONS FOR EMBEDDED SYSTEMS PROGRAMMING

The following language extensions are available both in the C and the C++ programming languages and they are well suited for embedded systems programming:

• Type attributes and object attributes

For information about the related concepts, the general syntax rules, and for reference information, see the chapter *Extended keywords*.

• Placement at an absolute address or in a named section

The @ operator or the directive #pragma location can be used for placing global and static variables at absolute addresses, or placing a variable or function in a named

section. For more information about using these features, see *Controlling data and function placement in memory*, page 226, and *location*, page 390.

Alignment control

Each data type has its own alignment; for more information, see *Alignment*, page 343. If you want to change the alignment, the \_\_packed data type attribute, the #pragma pack, and the #pragma data\_alignment directives are available. If you want to check the alignment of an object, use the \_\_ALIGNOF\_\_() operator.

The \_\_ALIGNOF\_\_ operator is used for accessing the alignment of an object. It takes one of two forms:

- \_\_ALIGNOF\_\_ (*type*)
- \_\_ALIGNOF\_\_ (*expression*)

In the second form, the expression is not evaluated.

See also the C11 file stdalign.h.

Bitfields and non-standard types

In Standard C, a bitfield must be of the type int or unsigned int. Using IAR C language extensions, any integer type or enumeration can be used. The advantage is that the struct will sometimes be smaller. For more information, see *Bitfields*, page 346.

#### **Dedicated section operators**

The compiler supports getting the start address, end address, and size for a section with these built-in section operators:

section_begin	Returns the address of the first byte of the named section or block.
section_end	Returns the address of the first byte <i>after</i> the named section or block.
section_size	Returns the size of the named section or block in bytes.

Note: The aliases \_\_segment\_begin/\_\_sfb, \_\_segment\_end/\_\_sfe, and \_\_segment\_size/\_\_sfs can also be used.

The operators can be used on named sections or on named blocks defined in the linker configuration file.

These operators behave syntactically as if declared like:

void \* \_\_section\_begin(char const \* section) void \* \_\_section\_end(char const \* section) size\_t \_\_section\_size(char const \* section) When you use the @ operator or the #pragma location directive to place a data object or a function in a user-defined section, or when you use named blocks in the linker configuration file, the section operators can be used for getting the start and end address of the memory range where the sections or blocks were placed.

The named *section* must be a string literal and it must have been declared earlier with the #pragma *section* directive. The type of the \_\_section\_begin operator is a pointer to void. Note that you must enable language extensions to use these operators.

The operators are implemented in terms of *symbols* with dedicated names, and will appear in the linker map file under these names:

Operator	Symbol
section_begin(sec)	sec\$\$Base
<pre>section_end(sec)</pre>	sec\$\$Limit
section_size(sec)	sec\$\$Length

Table 18: Section operators and their symbols

Note that the linker will not necessarily place sections with the same name consecutively when these operators are not used. Using one of these operators (or the equivalent symbols) will cause the linker to behave as if the sections were in a named block. This is to assure that the sections are placed consecutively, so that the operators can be assigned meaningful values. If this is in conflict with the section placement as specified in the linker configuration file, the linker will issue an error.

#### Example

In this example, the type of the \_\_section\_begin operator is void \*.

```
#pragma section="MYSECTION"
...
section_start_address = __section_begin("MYSECTION");
```

See also section, page 397, and location, page 390.

#### **RELAXATIONS TO STANDARD C**

This section lists and briefly describes the relaxation of some Standard C issues and also some useful but minor syntax extensions:

Arrays of incomplete types

An array can have an incomplete struct, union, or enum type as its element type. The types must be completed before the array is used (if it is), or by the end of the compilation unit (if it is not). • Forward declaration of enum types

The extensions allow you to first declare the name of an enum and later resolve it by specifying the brace-enclosed list.

• Accepting missing semicolon at the end of a struct or union specifier

A warning—instead of an error—is issued if the semicolon at the end of a struct or union specifier is missing.

• Null and void

In operations on pointers, a pointer to void is always implicitly converted to another type if necessary, and a null pointer constant is always implicitly converted to a null pointer of the right type if necessary. In Standard C, some operators allow this kind of behavior, while others do not allow it.

• Casting pointers to integers in static initializers

In an initializer, a pointer constant value can be cast to an integral type if the integral type is large enough to contain it. For more information about casting pointers, see *Casting*, page 353.

Taking the address of a register variable

In Standard C, it is illegal to take the address of a variable specified as a register variable. The compiler allows this, but a warning is issued.

• long float means double

The type long float is accepted as a synonym for double.

• Repeated typedef declarations

Redeclarations of  $t_{ypedef}$  that occur in the same scope are allowed, but a warning is issued.

• Mixing pointer types

Assignment and pointer difference is allowed between pointers to types that are interchangeable but not identical; for example, unsigned char \* and char \*. This includes pointers to integral types of the same size. A warning is issued.

Assignment of a string constant to a pointer to any kind of character is allowed, and no warning is issued.

• Non-lvalue arrays

A non-lvalue array expression is converted to a pointer to the first element of the array when it is used.

• Comments at the end of preprocessor directives

This extension, which makes it legal to place text after preprocessor directives, is enabled unless the strict Standard C mode is used. The purpose of this language extension is to support compilation of legacy code; we do not recommend that you write new code in this fashion. • An extra comma at the end of enum lists

Placing an extra comma is allowed at the end of an enum list. In strict Standard C mode, a warning is issued.

• A label preceding a }

In Standard C, a label must be followed by at least one statement. Therefore, it is illegal to place the label at the end of a block. The compiler allows this, but issues a warning.

Note that this also applies to the labels of switch statements.

• Empty declarations

An empty declaration (a semicolon by itself) is allowed, but a remark is issued (provided that remarks are enabled).

• Single-value initialization

Standard C requires that all initializer expressions of static arrays, structs, and unions are enclosed in braces.

Single-value initializers are allowed to appear without braces, but a warning is issued. The compiler accepts this expression:

```
struct str
{
    int a;
} x = 10;
```

• Declarations in other scopes

External and static declarations in other scopes are visible. In the following example, the variable y can be used at the end of the function, even though it should only be visible in the body of the *if* statement. A warning is issued.

```
int test(int x)
{
    if (x)
    {
        extern int y;
        y = 1;
    }
    return y;
}
```

• Static functions in function and block scopes

Static functions may be declared in function and block scopes. Their declarations are moved to the file scope.

• Numbers scanned according to the syntax for numbers

Numbers are scanned according to the syntax for numbers rather than the pp-number syntax. Thus, 0x123e+1 is scanned as three tokens instead of one valid token. (If the --strict option is used, the pp-number syntax is used instead.)

• Empty translation unit

A translation unit (input file) might be empty of declarations.

Assignment of pointer types

Assignment of pointer types is allowed in cases where the destination type has added type qualifiers that are not at the top level (for example int \*\* to const int \*\*). Comparisons and pointer difference of such pairs of pointer types are also allowed. A warning is issued.

• Pointers to different function types

Pointers to different function types might be assigned or compared for equality (==) or inequality (!=) without an explicit type cast. A warning is issued. This extension is not allowed in C++ mode.

Assembler statements

Assembler statements are accepted. This is disabled in strict C mode because it conflicts with the C standard for a call to the implicitly declared asm function.

• #include\_next

The non-standard preprocessing directive #include\_next is supported. This is a variant of the #include directive. It searches for the named file only in the directories on the search path that follow the directory in which the current source file (the one containing the #include\_next directive) is found. This is an extension found in the GNU C compiler.

#warning

The non-standard preprocessing directive #warning is supported. It is similar to the #error directive, but results in a warning instead of a catastrophic error when processed. This directive is not recognized in strict mode. This is an extension found in the GNU C compiler.

Concatenating strings

Mixed string concatenations are accepted.

wchar\_t \* str="a" L "b";

# Using C++

- Overview—Standard C++
- Enabling support for C++
- C++ feature descriptions
- C++ language extensions
- Porting code from EC++ or EEC++

## **Overview—Standard C++**

The IAR C++ implementation fully complies with the ISO/IEC 14882:2015 C++ standard, also known as C++14. In this guide, this standard is referred to as Standard C++.

The IAR C/C++ compiler accepts source code written in the C++14 standard or a superset thereof.

The IAR C/C++ compiler does not support source code that depends on thread-related system headers.

Atomic operations are available for cores where the instruction set supports them. See *Atomic operations*, page 473.

#### MODES FOR EXCEPTIONS AND RTTI SUPPORT

Both exceptions and runtime type information result in increased code size simply by being included in your application. You might want to disable either or both of these features to avoid this increase:

- Support for runtime type information constructs can be disabled by using the compiler option --no\_rtti
- Support for exceptions can be disabled by using the compiler option --no\_exceptions

Even if support is enabled while compiling, the linker can avoid including the extra code and tables in the final application. If no part of your application actually throws an exception, the code and tables supporting the use of exceptions are not included in the application code image. Also, if dynamic runtime type information constructs (dynamic\_cast/typeid) are not used with polymorphic types, the objects needed to support them are not included in the application code image. To control this behavior, use the linker options --no\_exceptions, --force\_exceptions, and --no\_dynamic\_rtti\_elimination.

#### **Disabling exception support**

When you use the compiler option --no\_exceptions, the following will generate a compiler error:

- throw expressions
- try-catch statements
- Exception specifications on function definitions.

In addition, the extra code and tables needed to handle destruction of objects with auto storage duration when an exception is propagated through a function will not be generated when the compiler option  $--no\_exceptions$  is used.

All functionality in system header files not directly involving exceptions is supported when the compiler option --no\_exceptions is used.

The linker will produce an error if you try to link C++ modules compiled with exception support with modules compiled without exception support

For more information, see --no\_exceptions, page 283.

#### **Disabling RTTI support**

When you use the compiler option --no\_rtti, the following will generate a compiler error:

- The typeid operator
- The dynamic\_cast operator.

**Note:** If --no\_rtti is used but exception support is enabled, most RTTI support is still included in the compiler output object file because it is needed for exceptions to work.

For more information, see --no rtti, page 286.

#### **EXCEPTION HANDLING**

Exception handling can be divided into three parts:

- Exception raise mechanisms—in C++ they are the throw and rethrow expressions.
- Exception catch mechanisms—in C++ they are the try-catch statements, the exception specifications for a function, and the implicit catch to prevent an exception leaking out from main.

• Information about currently active functions—if they have try-catch statements and the set of auto objects whose destructors need to be run if an exception is propagated through the function.

When an exception is raised, the function call stack is unwound, function by function, block by block. For each function or block, the destructors of auto objects that need destruction are run, and a check is made whether there is a catch handler for the exception. If there is, the execution will continue from that catch handler.

An application that mixes C++ code with assembler and C code, and that throws exceptions from one C++ function to another via assembler routines and C functions must use the linker option --exception\_tables with the argument unwind.

#### The implementation of exceptions

Exceptions are implemented using a table method. For each function, the tables describe:

- How to unwind the function, that is, how to find its caller on the stack and restore registers that need restoring
- Which catch handlers that exist in the function
- Whether the function has an exception specification and which exceptions it allows to propagate
- The set of auto objects whose destructors must be run.

When an exception is raised, the runtime will proceed in two phases. The first phase will use the exception tables to search the stack for a function invocation containing a catch handler or exception specification that would cause stack unwinding to halt at that point. Once this point is found, the second phase is entered, doing the actual unwinding, and running the destructors of auto objects where that is needed.

The table method results in virtually no overhead in execution time or RAM usage when an exception is not actually thrown. It does incur a significant penalty in read-only memory usage for the tables and the extra code, and throwing and catching an exception is a relatively expensive operation.

The destruction of auto objects when the stack is being unwound as a result of an exception is implemented in code separated from the code that handles the normal operation of a function. This code, together with the code in catch handlers, is placed in a separate section (.exc.text) from the normal code (normally placed in .text). In some cases, for instance when there is fast and slow ROM memory, it can be advantageous to select on this difference when placing sections in the linker configuration file.

# Enabling support for C++

In the compiler, the default language is C.

To compile files written in Standard C++, use the --c++ compiler option. See -c++, page 267.



To enable C++ in the IDE, choose **Project>Options>C/C++ Compiler>Language 1>Language>C++**.

# **C++** feature descriptions

When you write C++ source code for the IAR C/C++ Compiler for Arm, you must be aware of some benefits and some possible quirks when mixing C++ features—such as classes, and class members—with IAR language extensions, such as IAR-specific attributes.

#### USING IAR ATTRIBUTES WITH CLASSES

Static data members of C++ classes are treated the same way global variables are, and can have any applicable IAR type and object attribute.

Member functions are in general treated the same way free functions are, and can have any applicable IAR type and object attributes. Virtual member functions can only have attributes that are compatible with default function pointers, and constructors and destructors cannot have any such attributes.

The location operator @ and the #pragma location directive can be used on static data members and with all member functions.

#### TEMPLATES

C++ supports templates according to the C++ standard. The implementation uses a two-phase lookup which means that the keyword typename must be inserted wherever needed. Furthermore, at each use of a template, the definitions of all possible templates must be visible. This means that the definitions of all templates must be in include files or in the actual source file.

#### **FUNCTION TYPES**

A function type with extern "C" linkage is compatible with a function that has C++ linkage.

#### Example

```
extern "C"
{
  typedef void (*FpC)(void);
                                // A C function typedef
3
typedef void (*FpCpp)(void);
                                // A C++ function typedef
FpC F1;
FpCpp F2;
void MyF(FpC);
void MyG()
{
 MyF(F1);
                                // Always works
 M_{VF}(F2);
                                // FpCpp is compatible with FpC
3
```

#### USING STATIC CLASS OBJECTS IN INTERRUPTS

If interrupt functions use static class objects that need to be constructed (using constructors) or destroyed (using destructors), your application will not work properly if the interrupt occurs before the objects are constructed, or, during or after the objects are destroyed.

To avoid this, make sure that these interrupts are not enabled until the static objects have been constructed, and are disabled when returning from main or calling exit. For information about system startup, see *System startup and termination*, page 141.

Function local static class objects are constructed the first time execution passes through their declaration, and are destroyed when returning from main or when calling exit.

#### **USING NEW HANDLERS**

To handle memory exhaustion, you can use the set\_new\_handler function.

#### New handlers in Standard C++ with exceptions enabled

If you do not call set\_new\_handler, or call it with a NULL new handler, and operator new fails to allocate enough memory, operator new will throw std::bad\_alloc if exceptions are enabled. If exceptions are not enabled, operator new will instead call abort.

If you call set\_new\_handler with a non-NULL new handler, the provided new handler will be called by operator new if the operator new fails to allocate enough memory. The new handler must then make more memory available and return, or abort execution in some manner. If exceptions are enabled, the new handler can also throw a

std::bad\_alloc exception. The nothrow variant of operator new will only return NULL in the presence of a new handler if exceptions are enabled and the new handler throws std::bad\_alloc.

#### **DEBUG SUPPORT IN C-SPY**

C-SPY® has built-in display support for the STL containers. The logical structure of containers is presented in the watch views in a comprehensive way that is easy to understand and follow.

Using C++, you can make C-SPY stop at a throw statement or if a raised exception does not have any corresponding catch statement.

For more information about this, see the C-SPY® Debugging Guide for Arm.

## C++ language extensions

When you use the compiler in C++ mode and enable IAR language extensions, the following C++ language extensions are available in the compiler:

• In a friend declaration of a class, the class keyword can be omitted, for example:

• In the declaration of a class member, a qualified name can be used, for example:

```
struct A
{
    int A::F(); // Possible when using IAR language extensions
    int G(); // According to the standard
};
```

 It is permitted to use an implicit type conversion between a pointer to a function with C linkage (extern "C") and a pointer to a function with C++ linkage (extern "C++"), for example:

```
extern "C" void F(); // Function with C linkage
void (*PF)() // PF points to a function with C++ linkage
= &F; // Implicit conversion of function pointer.
```

According to the standard, the pointer must be explicitly converted.

• If the second or third operands in a construction that contains the ? operator are string literals or wide string literals (which in C++ are constants), the operands can be implicitly converted to char \* or wchar\_t \*, for example: bool X;

- Default arguments can be specified for function parameters not only in the top-level function declaration, which is according to the standard, but also in typedef declarations, in pointer-to-function function declarations, and in pointer-to-member function declarations.
- In a function that contains a non-static local variable and a class that contains a non-evaluated expression (for example a sizeof expression), the expression can reference the non-static local variable. However, a warning is issued.
- An anonymous union can be introduced into a containing class by a typedef name. It is not necessary to first declare the union. For example:

```
typedef union
{
    int i,j;
} U; // U identifies a reusable anonymous union.
class A
{
public:
    U; // OK -- references to A::i and A::j are allowed.
};
```

In addition, this extension also permits *anonymous classes* and *anonymous structs*, as long as they have no C++ features (for example, no static data members or member functions, and no non-public members) and have no nested types other than other anonymous classes, structs, or unions. For example:

```
struct A
{
   struct
   {
    int i,j;
   }; // OK -- references to A::i and A::j are allowed.
};
```

• The friend class syntax allows nonclass types as well as class types expressed through a typedef without an elaborated type name. For example: typedef struct S ST;

• It is allowed to specify an array with no size or size 0 as the last member of a struct. For example:

```
typedef struct
{
    int i;
    char ir[0]; // Zero-length array
};
typedef struct
{
    int i;
    char ir[]; // Zero-length array
};
```

• Arrays of incomplete types

An array can have an incomplete struct, union, enum, or class type as its element type. The types must be completed before the array is used (if it is), or by the end of the compilation unit (if it is not).

• Concatenating strings

Mixed string literal concatenations are accepted.

wchar\_t \* str = "a" L "b";

Trailing comma

A trailing comma in the definition of an enumeration type is silently accepted.

Except where noted, all of the extensions described for C are also allowed in C++ mode.

**Note:** If you use any of these constructions without first enabling language extensions, errors are issued.

# Porting code from EC++ or EEC++

Apart from the fact that Standard C++ is a much larger language than EC++ or EEC++, there are two issues that might prevent EC++ and EEC++ code from compiling:

• The library is placed in namespace std.

There are two remedy options:

- Prefix each used library symbol with std::.
- Insert using namespace std; after the last include directive for a C++ system header file.
- Some library symbols have changed names or parameter passing.

To resolve this, look up the new names and parameter passing.

Porting code from EC++ or EEC++

# Application-related considerations

- Output format considerations
- Stack considerations
- Heap considerations
- Interaction between the tools and your application
- Checksum calculation for verifying image integrity
- AEABI compliance
- CMSIS integration
- Arm TrustZone®

## **Output format considerations**

The linker produces an absolute executable image in the ELF/DWARF object file format.

You can use the IAR ELF Tool—ielftool— to convert an absolute ELF image to a format more suitable for loading directly to memory, or burning to a PROM or flash memory etc.

ielftool can produce these output formats:

- Plain binary
- Motorola S-records
- Intel hex.

For a complete list of supported output formats, run ielftool without options.

**Note:** ielftool can also be used for other types of transformations, such as filling and calculating checksums in the absolute image.

The source code for ielftool is provided in the arm/src directory. For more information about ielftool, see *The IAR ELF Tool—ielftool*, page 529.

# **Stack considerations**

To make your application use stack memory efficiently, there are some considerations to be made.

#### STACK SIZE CONSIDERATIONS

The required stack size depends heavily on the application's behavior. If the given stack size is too large, RAM will be wasted. If the given stack size is too small, one of two things can happen, depending on where in memory you located your stack:

- Variable storage will be overwritten, leading to undefined behavior
- The stack will fall outside of the memory area, leading to an abnormal termination of your application.

Both alternatives are likely to result in application failure. Because the second alternative is easier to detect, you should consider placing your stack so that it grows toward the end of the memory.

For more information about the stack size, see *Setting up stack memory*, page 109, and *Saving stack space and RAM memory*, page 237.

#### **STACK ALIGNMENT**

The default cstartup code automatically initializes all stacks to an 8-byte aligned address.

For more information about aligning the stack, see *Calling convention*, page 171 and more specifically *Special registers*, page 173 and *Stack parameters and layout*, page 175.

#### **EXCEPTION STACK**

Cortex-M does not have individual exception stacks. By default, all exception stacks are placed in the CSTACK section.

The Arm7/9/11, Cortex-A, and Cortex-R devices support five exception modes which are entered when different exceptions occur. Each exception mode has its own stack to avoid corrupting the System/User mode stack.

The table shows proposed stack names for the various exception stacks, but any name can be used:

Processor mode	Proposed stack section name	Description
Supervisor	SVC_STACK	Operation system stack.

Table 19: Exception stacks for Arm7/9/11, Cortex-A, and Cortex-R

Processor mode	Proposed stack section name	Description
IRQ	IRQ_STACK	Stack for general-purpose (IRQ) interrupt handlers.
FIQ	FIQ_STACK	Stack for high-speed (FIQ) interrupt handlers.
Undefined	UND_STACK	Stack for undefined instruction interrupts. Supports software emulation of hardware coprocessors and instruction set extensions.
Abort	ABT_STACK	Stack for instruction fetch and data access memory abort interrupt handlers.

Table 19: Exception stacks for Arm7/9/11, Cortex-A, and Cortex-R

For each processor mode where a stack is needed, a separate stack pointer must be initialized in your startup code, and section placement should be done in the linker configuration file. The IRQ and FIQ stacks are the only exception stacks which are preconfigured in the supplied cstartup.s and lnkarm.icf files, but other exception stacks can easily be added.

To view any of these stacks in the Stack window available in the IDE, these preconfigured section names must be used instead of user-defined section names.

# **Heap considerations**

The heap contains dynamic data allocated by use of the C function malloc (or a corresponding function) or the C++ operator new.

If your application uses dynamic memory allocation, you should be familiar with:

- The use of advanced, basic, and no-free heap memory allocation
- Linker sections used for the heap
- Allocating the heap size, see *Setting up heap memory*, page 110.

#### ADVANCED, BASIC, AND NO-FREE HEAP

The system library contains three separate heap memory handlers—the *basic*, the *advanced*, and the *no-free* heap handler.

• If there are calls to heap memory allocation routines in your application, but no calls to heap deallocation routines, the linker automatically chooses the no-free heap.



- If there are calls to heap memory allocation routines in your application, the linker automatically chooses the advanced heap.
- If there are calls to heap memory allocation routines in, for example, the library, the linker automatically chooses the basic heap.

**Note:** If your product has a size-limited KickStart license, the basic heap is automatically chosen.

You can use a linker option to explicitly specify which handler you want to use:

- The basic heap (--basic\_heap) is a very simple heap allocator, suitable for use in applications that do not use the heap very much. In particular, it can be used in applications that only allocate heap memory and never free it. The basic heap is not particularly speedy, and using it in applications that repeatedly free memory is quite likely to lead to unneeded fragmentation of the heap. The code for the basic heap is significantly smaller than that for the advanced heap. See --basic\_heap, page 309.
- The advanced heap (--advanced\_heap) provides efficient memory management for applications that use the heap extensively. In particular, applications that repeatedly allocate and free memory will likely get less overhead in both space and time. The code for the advanced heap is significantly larger than that for the basic heap. See --advanced\_heap, page 309. For information about the definition, see *iar\_dlmalloc.h*, page 474.
- The no-free heap (--no\_free\_heap) is the smallest possible heap implementation. This heap does not support free or realloc. See --no\_free\_heap, page 329.

#### HEAP SIZE AND STANDARD I/O

If you excluded FILE descriptors from the DLIB runtime environment, as in the Normal configuration, there are no input and output buffers at all. Otherwise, as in the Full configuration, be aware that the size of the input and output buffers is set to 512 bytes in the stdio library header file. If the heap is too small, I/O will not be buffered, which is considerably slower than when I/O is buffered. If you execute the application using the simulator driver of the IAR C-SPY® Debugger, you are not likely to notice the speed penalty, but it is quite noticeable when the application runs on an Arm core. If you use the standard I/O library, you should set the heap size to a value which accommodates the needs of the standard I/O buffer.

## Interaction between the tools and your application

The linking process and the application can interact symbolically in four ways:

• Creating a symbol by using the linker command line option --define\_symbol. The linker will create a public absolute constant symbol that the application can use as a label, as a size, as setup for a debugger, etc. • Creating an exported configuration symbol by using the command line option --config\_def or the configuration directive define symbol, and exporting the symbol using the export symbol directive. ILINK will create a public absolute constant symbol that the application can use as a label, as a size, as setup for a debugger, etc.

One advantage of this symbol definition is that this symbol can also be used in expressions in the configuration file, for example to control the placement of sections into memory ranges.

- Using the compiler operators \_\_section\_begin, \_\_section\_end, or \_\_section\_size, or the assembler operators SFB, SFE, or SIZEOF on a named section or block. These operators provide access to the start address, end address, and size of a contiguous sequence of sections with the same name, or of a linker block specified in the linker configuration file.
- The command line option --entry informs the linker about the start label of the application. It is used by the linker as a root symbol and to inform the debugger where to start execution.

The following lines illustrate how to use -D to create a symbol. If you need to use this mechanism, add these options to your command line like this:

```
--define_symbol NrOfElements=10
--config_def HEAP_SIZE=1024
```

The linker configuration file can look like this:

```
define memory Mem with size = 4G;
define region ROM = Mem:[from 0x00000 size 0x10000];
define region RAM = Mem:[from 0x20000 size 0x10000];
/* Export of symbol */
export symbol MY_HEAP_SIZE;
/* Setup a heap area with a size defined by an ILINK option */
```

```
define block MyHEAP with size = MY_HEAP_SIZE, alignment = 8 {};
```

place in RAM { block MyHEAP };

Add these lines to your application source code:

```
#include <stdlib.h>
/* Use symbol defined by ILINK option to dynamically allocate an
array of elements with specified size. The value takes the form
of a label.
*/
extern int NrOfElements;
typedef char Elements;
Elements *GetElementArray()
{
 return malloc(sizeof(Elements) * (long) &NrOfElements);
}
/* Use a symbol defined by ILINK option, a symbol that in the
 * configuration file was made available to the application.
 * /
extern char MY_HEAP_SIZE;
/* Declare the section that contains the heap. */
#pragma section = "MYHEAP"
char *MyHeap()
{
  /* First get start of statically allocated section, */
 char *p = __section_begin("MYHEAP");
  /* ...then we zero it, using the imported size. */
  for (int i = 0; i < (int) &MY_HEAP_SIZE; ++i)</pre>
  {
   p[i] = 0;
 }
 return p;
}
```

# Checksum calculation for verifying image integrity

This section contains information about checksum calculation:

- Briefly about checksum calculation, page 207
- Calculating and verifying a checksum, page 208
- Troubleshooting checksum calculation, page 214

For more information, see also The IAR ELF Tool-ielftool, page 529.

#### **BRIEFLY ABOUT CHECKSUM CALCULATION**

You can use a checksum to verify that the image is the same at runtime as when the image's original checksum was generated. In other words, to verify that the image has not been corrupted.

This works as follows:

• You need an initial checksum.

You can either use the IAR ELF Tool—ielftool—to generate an initial checksum or you might have a third-party checksum available.

• You must generate a second checksum during runtime.

You can either add specific code to your application source code for calculating a checksum during runtime or you can use some dedicated hardware on your device for calculating a checksum during runtime.

• You must add specific code to your application source code for comparing the two checksums and take an appropriate action if they differ.

If the two checksums have been calculated in the same way, and if there are no errors in the image, the checksums should be identical. If not, you should first suspect that the two checksums were not generated in the same way.

No matter which solutions you use for generating the two checksum, you must make sure that both checksums are calculated *in the exact same way*. If you use *ielftool* for the initial checksum and use a software-based calculation during runtime, you have full control of the generation for both checksums. However, if you are using a third-party checksum for the initial checksum or some hardware support for the checksum calculation during runtime, there might be additional requirements that you must consider.

For the two checksums, there are some choices that you must always consider and there are some choices to make only if there are additional requirements. Still, all of the details must be the same for both checksums.

Details always to consider:

Checksum range

The memory range (or ranges) that you want to verify by means of checksums. Typically, you might want to calculate a checksum for all ROM memory. However, you might want to calculate a checksum only for specific ranges. Remember that:

- It is OK to have several ranges for one checksum.
- The checksum must be calculated from the lowest to the highest address for every memory range.
- Each memory range must be verified in the same order as defined (for example, 0x100-0x1FF,0x400-0x4FF is not the same as 0x400-0x4FF,0x100-0x1FF).

- If several checksums are used, you should place them in sections with unique names and use unique symbol names.
- A checksum should never be calculated on a memory range that contains a checksum or a software breakpoint.
- Algorithm and size of checksum

You should consider which algorithm is most suitable in your case. There are two basic choices, Sum (a simple arithmetic algorithm) or CRC (which is the most commonly used algorithm). For CRC there are different sizes to choose for the checksum, 2, 4, or 8 bytes where the predefined polynomials are wide enough to suit the size, for more error detecting power. The predefined polynomials work well for most, but possibly not for all data sets. If not, you can specify your own polynomial. If you just want a decent error detecting mechanism, use the predefined CRC algorithm for your checksum size, typically CRC16 or CRC32.

Note that for an *n*-bit polynomial, the *n*:th bit is always considered to be set. For a 16-bit polynomial (for example, CRC16) this means that 0x11021 is the same as 0x1021.

For more information about selecting an appropriate polynomial for data sets with non-uniform distribution, see for example section 3.5.3 in *Tannenbaum*, *A.S.*, *Computer Networks,*"*Prentice Hall 1981, ISBN: 0131646990*.

• Fill

Every byte in the checksum range must have a well-defined value before the checksum can be calculated. Typically, bytes with unknown values are *pad bytes* that have been added for alignment. This means that you must specify which fill pattern to be used during calculation, typically  $0 \times FF$  or  $0 \times 00$ .

Initial value

The checksum must always have an explicit initial value.

In addition to these mandatory details, there might be other details to consider. Typically, this might happen when you have a third-party checksum, you want the checksum be compliant with the Rocksoft<sup>TM</sup> checksum model, or when you use hardware support for generating a checksum during runtime. ielftool provides support for also controlling alignment, complement, bit order, byte order within words, and checksum unit size.

#### CALCULATING AND VERIFYING A CHECKSUM

In this example procedure, a checksum is calculated for ROM memory from  $0 \times 8002$  up to  $0 \times 8FFF$  and the 2-byte calculated checksum is placed at  $0 \times 8000$ .

I If you are using ielftool from the command line, you must first allocate a memory location for the calculated checksum.

Note: If you instead are using the IDE (and not the command line), the \_\_checksum, \_\_checksum\_begin, and \_\_checksum\_end symbols, and the . checksum section are *automatically* allocated when you calculate the checksum, which means that you can skip this step.

You can allocate the memory location in two ways:

- By creating a global C/C++ or assembler constant symbol with a proper size, residing in a specific section (in this example .checksum)
- By using the linker option --place\_holder.

For example, to allocate a 2-byte space for the symbol \_\_checksum in the section .checksum, with alignment 4, specify:

- --place\_holder \_\_checksum,2,.checksum,4
- 2 The .checksum section will only be included in your application if the section appears to be needed. If the checksum is not needed by the application itself, use the linker option --keep=\_\_checksum (or the linker directive keep) to force the section to be included.

Alternatively, choose Project>Options>Linker>Output and specify \_\_checksum:

otions for node "proj	ect4"
Category: General Options Static Analysis Runtime Checking C/C++ Compiler	Config Library Input Optimizations Advanced Output List 4
Assembler Output Converter Custom Build Build Actions Linker	Keep symbols: (one per line) 
Debugger Simulator	Raw binary image File: Symbol: Section: Align:

**3** To control the placement of the .checksum section, you must modify the linker configuration file. For example, it can look like this (note the handling of the block CHECKSUM):

define block CHECKSUM { ro section .checksum };
place in ROM\_region { ro, first block CHECKSUM };

**Note:** It is possible to skip this step, but in that case the .checksum section will automatically be placed with other read-only data.

- **4** When configuring ielftool to calculate a checksum, there are some basic choices to make:
  - Checksum algorithm

Choose which checksum algorithm you want to use. In this example, the CRC16 algorithm is used.


• Memory range

Using the IDE, you can specify one memory range for which the checksum should be calculated. From the command line, you can specify any ranges.

• Fill pattern

Specify a fill pattern—typically  $0 \times FF$  or  $0 \times 00$ —for bytes with unknown values. The fill pattern will be used in all checksum ranges.

For more information, see Briefly about checksum calculation, page 207.



Fill unused code m	emory		
Fill pattem:	0x00		
Start address:	0x8002	End addres	s: Ox8FFF
Generate chec	ksum		
Checksum size	e: 2 bytes 🔹	Alignment:	1
Algorithm: CRC16		▼ 0x11	021
Result i	n full size	Initial	value
Complement:	As is	▼ 0x0	
Bit order: MSB first		- U	se as input
Reverse by	te order within wo	rd	
Checksum uni	size: 8-bit	-	

In the simplest case, you can ignore (or leave with default settings) these options: **Complement**, **Bit order**, **Reverse byte order within word**, and **Checksum unit size**.



To run ielftool from the command line, specify the command, for example, like this:

```
ielftool --fill=0x00;0x8002-0x8FFF
--checksum=__checksum:2,crc16;0x8002-0x8FFF sourceFile.out
destinationFile.out
```

Note that ielftool needs an unstripped input ELF image. If you use the linker option --strip, remove it and use the ielftooloption --strip instead.

The checksum will be created later on when you build your project and will be automatically placed in the specified symbol \_\_checksum in the section .checksum.

**5** You can specify several ranges instead of only one range.

If you are using the IDE, perform these steps:

- Choose Project>Options>Linker>Checksum and make sure to deselect Fill unused code memory.
- Choose **Project>Options>Build Actions** and specify the ranges together with the rest of the required commands in the **Post-build command line** text field, for example like this:

\$TOOLKIT\_DIR\$\bin\ielftool \$PROJ\_DIR\$\debug\exe\output.out
\$PROJ\_DIR\$\debug\exe\output.out
--fill 0x0;0x0-0x3FF;0x8002-0x8FFF

--checksum=\_\_checksum:2,crc16;0x0-0x3FF;0x8002-0x8FFF

In your example, replace *output.out* with the name of your output file.

Options for node "proje	ct4"
Category: General Options Static Analysis Runtime Checking C/C++ Compiler Assembler Output Converter Custom Build Build Actions Linker Debugger Simulator	Build Actions Configuration Pre-build command line: Post-build command line: \$TOOLKIT_DIR\$\bin\veltool -fill 0x0:0x0-0x3FF;0x8002-0x8FFF -cht



IF

If you are using the command line, specify the ranges, for example like this:

ielftool output.out output.out --fill 0x0;0x0-0x3FF;0x8002-0x8FFF
--checksum=\_\_checksum:2,crc16;0x0-0x3FF;0x8002-0x8FFF

In your example, replace *output.out* with the name of your output file.

6 Add a function for checksum calculation to your source code. Make sure that the function uses the same algorithm and settings as for the checksum calculated by ielftool. For example, a slow variant of the crc16 algorithm but with small memory footprint (in contrast to the fast variant that uses more memory):

```
unsigned short SmallCrc16(uint16_t
sum,
                          unsigned char *p,
                          unsigned int len)
{
 while (len--)
 {
   int i;
   unsigned char byte = *(p++);
    for (i = 0; i < 8; ++i)
    {
      unsigned long oSum = sum;
      sum <<= 1;
      if (byte & 0x80)
        sum |= 1;
      if (oSum & 0x8000)
        sum ^= 0x1021;
      byte <<= 1;
    }
 }
 return sum;
}
```

You can find the source code for this checksum algorithm in the arm\src\linker directory of your product installation.

7 Make sure that your application also contains a call to the function that calculates the checksum, compares the two checksums, and takes appropriate action if the checksum values do not match. This code gives an example of how the checksum can be calculated for your application and to be compared with the ielftool generated checksum:

```
/* The calculated checksum */
/* Linker generated symbols */
extern unsigned short const __checksum;
extern int ___checksum_begin;
extern int ___checksum_end;
void TestChecksum()
{
 unsigned short calc = 0;
 unsigned char zeros[2] = \{0, 0\};
  /* Run the checksum algorithm */
 calc = SmallCrc16(0,
                  (unsigned char *) & ___checksum_begin,
                  ((unsigned char *) &__checksum_end -
                  ((unsigned char *) & __checksum_begin)+1));
  /* Fill the end of the byte sequence with zeros. */
 calc = SmallCrc16(calc, zeros, 2);
  /* Test the checksum */
  if (calc != __checksum)
  {
   printf("Incorrect checksum!\n");
    abort(); /* Failure */
  }
  /* Checksum is correct */
}
```

**8** Build your application project and download it.

During the build, ielftool creates a checksum and places it in the specified symbol \_\_\_checksum in the section .checksum.

9 Choose Download and Debug to start the C-SPY debugger.

During execution, the checksum calculated by ielftool and the checksum calculated by your application should be identical.

#### **TROUBLESHOOTING CHECKSUM CALCULATION**

If the two checksums do not match, there are several possible causes. These are some troubleshooting hints:

- If possible, start with a small example when trying to get the checksums to match.
- Verify that the exact same memory range or ranges are used in both checksum calculations.

To help you do this, ielftool lists the ranges for which the checksum is calculated on stdout about the exact addresses that were used and the order in which they were accessed.

- Make sure that all checksum symbols are excluded from all checksum calculations. Compare the checksum placement with the checksum range and make sure they do not overlap. You can find information in the **Build** message window after ielftool has generated a checksum.
- Verify that the checksum calculations use the same polynomial.
- Verify that the bits in the bytes are processed in the same order in both checksum calculations, from the least to the most significant bit or the other way around. You control this with the **Bit order** option (or from the command line, the -m parameter of the --checksum option).
- If you are using the small variant of CRC, check whether you need to feed additional bytes into the algorithm.

The number of zeros to add at the end of the byte sequence must match the size of the checksum, in other words, one zero for a 1-byte checksum, two zeros for a 2-byte checksum, four zeros for a 4-byte checksum, and eight zeros for an 8-byte checksum.

- Any breakpoints in flash memory change the content of the flash. This means that the checksum which is calculated by your application will no longer match the initial checksum calculated by ielftool. To make the two checksums match again, you must disable all your breakpoints in flash and any breakpoints set in flash by C-SPY internally. The stack plugin and the debugger option **Run to** both require C-SPY to set breakpoints. Read more about possible breakpoint consumers in the *C-SPY® Debugging Guide for Arm*.
- By default, a symbol that you have allocated in memory by using the linker option --place\_holder is considered by C-SPY to be of the type int. If the size of the checksum is different than the size of an int, you can change the display format of the checksum symbol to match its size.

In the C-SPY **Watch** window, select the symbol and choose **Show As** from the context menu. Choose the display format that matches the size of the checksum symbol.

# **AEABI** compliance

The IAR build tools for Arm support the Embedded Application Binary Interface for Arm, AEABI, defined by Arm Limited. This interface is based on the Intel IA64 ABI interface. The advantage of adhering to AEABI is that any such module can be linked with any other AEABI-compliant module, even modules produced by tools provided by other vendors.

The IAR build tools for Arm support the following parts of the AEABI:

AAPCS	Procedure Call Standard for the Arm architecture
CPPABI	C++ ABI for the Arm architecture
AAELF	ELF for the Arm architecture
AADWARF	DWARF for the Arm architecture
RTABI	Runtime ABI for the Arm architecture
CLIBABI	C library ABI for the Arm architecture

The IAR build tools only support a *bare metal* platform, that is a ROM-based system that lacks an explicit operating system.

Note that:

- The AEABI is specified for C89 only
- The AEABI does not specify C++ library compatibility
- Neither the size of an enum or of wchar\_t is constant in the AEABI.

If AEABI compliance is enabled, certain preprocessor constants become real constant variables instead.

# LINKING AEABI-COMPLIANT MODULES USING THE IAR ILINK LINKER

When building an application using the IAR ILINK Linker, the following types of modules can be combined:

- Modules produced using IAR build tools, both AEABI-compliant modules as well as modules that are not AEABI-compliant
- AEABI-compliant modules produced using build tools from another vendor.

**Note:** To link a module produced by a compiler from another vendor, extra support libraries from that vendor might be required.

The IAR ILINK Linker automatically chooses the appropriate standard C/C++ libraries to use based on attributes from the object files. Imported object files might not have all

these attributes. Therefore, you might need to help ILINK choose the standard library by verifying one or more of the following details:

- Include at least one module built with the IAR C/C++ Compiler for Arm.
- The used CPU by specifying the --cpu linker option
- If full I/O is needed; make sure to link with a Full library configuration in the standard library

Potential incompatibilities include but are not limited to:

- The size of enum
- The size of wchar\_t
- The calling convention
- The instruction set used.

When linking AEABI-compliant modules, also consider the information in the chapters *Linking using ILINK* and *Linking your application*.

# LINKING AEABI-COMPLIANT MODULES USING A THIRD-PARTY LINKER

If you have a module produced using the IAR C/C++ Compiler and you plan to link that module using a linker from a different vendor, that module must be AEABI-compliant, see *Enabling AEABI compliance in the compiler*, page 216.

In addition, if that module uses any of the IAR-specific compiler extensions, you must make sure that those features are also supported by the tools from the other vendor. Note specifically:

- Support for the following extensions must be verified: #pragma pack, \_\_no\_init, \_\_root, and \_\_ramfunc
- The following extensions are harmless to use: #pragma location/@, \_\_arm, \_\_thumb, \_\_swi, \_\_irg, \_\_fig, and \_\_nested.

#### ENABLING AEABI COMPLIANCE IN THE COMPILER

You can enable AEABI compliance in the compiler by setting the --aeabi option. In this case, you must also use the --guard\_calls option.



In the IDE, use the **Project>Options>C/C++ Compiler>Extra Options** page to specify the --aeabi and --guard\_calls options.



On the command line, use the options --aeabi and --guard\_calls to enable AEABI support in the compiler.

Alternatively, to enable support for AEABI for a specific system header file, you must define the preprocessor symbol \_AEABI\_PORTABILITY\_LEVEL to non-zero prior to

including a system header file, and make sure that the symbol AEABI\_PORTABLE is set to non-zero after the inclusion of the header file:

```
#define _AEABI_PORTABILITY_LEVEL 1
#undef AEABI PORTABLE
#include <header.h>
#ifndef _AEABI_PORTABLE
 #error "header.h not AEABI compatible"
#endif
```

#### **CMSIS** integration

The arm\CMSIS subdirectory contains CMSIS (Cortex Microcontroller Software Interface Standard) and CMSIS DSP header and library files, and documentation. For more information about CMSIS, see http://www.arm.com/cmsis.

The special header file inc\c\cmsis\_iar.h is provided as a CMSIS adaptation of the current version of the IAR C/C++ Compiler.

#### **CMSIS DSP LIBRARY**

IAR Embedded Workbench comes with prebuilt CMSIS DSP libraries in the arm\CMSIS\Lib\IAR directory. The names of the library files are constructed in this wav:

 $iar_cortexM<0|3|4><1|b>[f]_math.a$ 

where <0|3|4> selects the Cortex–M variant, <1|b> selects the byte order, and [f] indicates that the library is built for FPU (Cortex-M4 only).

The libraries for Cortex-M4 are applicable also to Cortex-M7.

#### CUSTOMIZING THE CMSIS DSP LIBRARY

The source code of the CMSIS DSP library is provided in the arm\CMSIS\DSP\_Lib\Source directory. You can find an IAR Embedded Workbench project which is prepared for building a customized DSP library in the arm\CMSIS\DSP\_Lib\Source\IAR directory.

#### **BUILDING WITH CMSIS ON THE COMMAND LINE**

This section contains examples of how to build your CMSIS-compatible application on the command line.

#### CMSIS only (that is without the DSP library)

iccarm -I \$EW\_DIR\$\arm\CMSIS\Include

#### With the DSP library, for Cortex-M4, little-endian, and with FPU

iccarm --endian=little --cpu=Cortex-M4 --fpu=VFPv4 sp -I SEW DIRS\arm\CMSIS\Include -D ARM MATH CM4

ilinkarm \$EW DIR\$\arm\CMSIS\Lib\IAR\iar cortexM31 math.a

#### BUILDING WITH CMSIS IN THE IDE

Choose Project>Options>General Options>Library Configuration to enable CMSIS support.

When enabled, CMSIS include paths and the DSP library will automatically be used. For more information, see the IDE Project Management and Building Guide for Arm.

### Arm TrustZone®

The Arm TrustZone® technology is a System on Chip (SOC) and CPU system-wide approach to security.

The Arm TrustZone for ArmV8-M adds a security extension (CMSE) to the Armv8-M core. This extension includes two modes of execution-secure and non-secure. It also adds memory protection and instructions for validating memory access and controlled transition between the two modes.

To use TrustZone for Armv8-M, build two separate images-one for secure mode and one for non-secure mode. The secure image can export function entries that can be used by the non-secure image.

The IAR build tools support TrustZone by means of intrinsic functions, linker options, compiler options, predefined preprocessor symbols, extended keywords, and the section Veneer\$\$CMSE.

You can find the data types and utility functions needed for working with TrustZone in the header file arm cmse.h.

The function type attributes \_\_cmse\_nonsecure\_call and \_\_cmse\_nonsecure\_entry add code to clear the used registers when calling from secure code to non-secure code.

The IAR build tools follow the standard interface for development tools targeting Cortex-M Security Extensions (CMSE), with the following exceptions:

- Variadic secure entry functions are not allowed.
- Secure entry functions with parameters or return values that do not fit in registers are not allowed.

- Non-secure calls with parameters or return values that do not fit in registers are not allowed.
- Non-secure calls with parameters or return values in floating-point registers.
- The compiler option --cmse requires the architecture Armv8-M with security extensions, and is not supported when building ROPI (read-only position-independent) images or RWPI (read-write position-independent) images.

For more information about Arm TrustZone, see www.arm.com.

## AN EXAMPLE USING THE ARMV8-M SECURITY EXTENSIONS (CMSE)

In the arm\src\ARMv8M\_Secure directory, you can find an example project that demonstrates the use of Arm TrustZone and CMSE.

The example consists of two projects:

- hello\_s: The secure part of the application
- hello\_ns: The non-secure part of the application

Note: You must build the secure project before building the non-secure project.

There are two entry functions in hello\_s, available to hello\_ns via secure gateways in a non-secure callable region:

- secure\_hello: Prints a greeting, in the style of the classic Hello world example.
- register\_secure\_goodbye: A callback that returns a string printed on exiting the secure part.

The linker will automatically generate the code for the needed secure gateways and place them in the section Veneers\$\$CMSE.

#### To set up and build the example:

- Open the example workspace hello\_s.eww located in arm\src\ARMv8M\_Secure\Hello\_Secure.
- Set up the project hello\_s to run in secure mode by choosing
   Project>Options>General Options>Target and then selecting the options
   TrustZone and Mode:Secure.
- 3 Set up the project hello\_ns to run in non-secure mode by choosing Project>Options>General Options>Target and then selecting the options TrustZone and Mode: Non-secure.

The non-secure part must populate a small vector at 0x200000 with addresses to the initialization routine, non-secure top of stack, and non-secure main. This vector is used

by the secure part to set up and interact with the non-secure part. In this example, this is done with the following code in nonsecure\_hello.c:

```
/* Interface towards the secure part */
#pragma location=NON_SECURE_ENTRY_TABLE
__root const non_secure_init_t init_table =
{
    __iar_data_init3, /* initialization function */
    __section_end("CSTACK"), /* non-secure stack */
    main_ns /* non-secure main */
};
```

- 4 When the secure project is built, the linker will automatically generate an import library file for the non-secure part that only includes references to functions in the secure part that can be called from the non-secure part. Specify this file by using Project>Options>Linker>Output>TrustZone import library.
- **5** Build the secure project.
- 6 Include the TrustZone import library file manually in the project hello\_ns by specifying an additional library: Project>Options>Linker>Library>Additional libraries.
- **7** Build the non-secure project.
- 8 The secure project must specify the non-secure project output file as an extra image that should be loaded by the debugger. To do this, use
   Project>Options>Debugger>Images>Download extra images.

#### To debug the example:

- I To debug in the simulator, set the hello\_s project as the active project by right-clicking on the project and choosing **Set as Active**.
- 2 Choose Project>Options>Debugger>Driver and select Simulator.
- **3** Choose **Simulator>Memory Configuration**. Make sure that the option **Use ranges based on** is deselected.
- 4 Select Use manual ranges and add the following new ranges:

Access type	Start address	End address	
RAM	0x0000000	0x003FFFFF	
RAM	0x2000000	0x203FFFFF	
SFR	0x40000000	0x5FFFFFF	
SFR	0xE0000000	0xE00FFFFF	

Table 20: Memory ranges for TrustZone example

- 5 Click OK to close the Memory Configuration dialog box.
- 6 Start C-SPY by choosing Project>Download and Debug.
- 7 Choose View>Terminal I/O to open the Terminal I/O window.
- 8 Choose **Debug>Go** to start the execution.
- **9** The Terminal I/O window should now print this text:

Hello from secure World! Hello from non-secure World! Goodbye, for now. Arm TrustZone®

# Efficient coding for embedded applications

- Selecting data types
- Controlling data and function placement in memory
- Controlling compiler optimizations
- Facilitating good code generation

#### Selecting data types

For efficient treatment of data, you should consider the data types used and the most efficient placement of the variables.

#### **USING EFFICIENT DATA TYPES**

The data types you use should be considered carefully, because this can have a large impact on code size and code speed.

- Use int or long instead of char or short whenever possible, to avoid sign extension or zero extension. In particular, loop indexes should always be int or long to minimize code generation. Also, in Thumb mode, accesses through the stack pointer (SP) is restricted to 32-bit data types, which further emphasizes the benefits of using one of these data types.
- Use unsigned data types, unless your application really requires signed values.
- Be aware of the costs of using 64-bit data types, such as double and long long.
- Bitfields and packed structures generate large and slow code.
- Using floating-point types on a microprocessor without a math co-processor is very inefficient, both in terms of code size and execution speed.
- Declaring a pointer to const data tells the calling function that the data pointed to will not change, which opens for better optimizations.

For information about representation of supported data types, pointers, and structures types, see the chapter *Data representation*.

#### **FLOATING-POINT TYPES**

Using floating-point types on a microprocessor without a math coprocessor is very inefficient, both in terms of code size and execution speed. Thus, you should consider replacing code that uses floating-point operations with code that uses integers, because these are more efficient.

The compiler supports two floating-point formats—32 and 64 bits. The 32-bit floating-point type float is more efficient in terms of code size and execution speed. However, the 64-bit format double supports higher precision and larger numbers.

In the compiler, the floating-point type float always uses the 32-bit format, and the type double always uses the 64-bit format.

Unless the application requires the extra precision that 64-bit floating-point numbers give, we recommend using 32-bit floating-point numbers instead.

By default, a *floating-point constant* in the source code is treated as being of the type double. This can cause innocent-looking expressions to be evaluated in double precision. In the example below a is converted from a float to a double, the double constant 1.0 is added and the result is converted back to a float:

```
double Test(float a)
{
    return a + 1.0;
}
```

To treat a floating-point constant as a float rather than as a double, add the suffix f to it, for example:

```
double Test(float a)
{
    return a + 1.0f;
}
```

For more information about floating-point types, see *Basic data types—floating-point types*, page 350.

#### ALIGNMENT OF ELEMENTS IN A STRUCTURE

Some Arm cores require that when accessing data in memory, the data must be aligned. Each element in a structure must be aligned according to its specified type requirements. This means that the compiler might need to insert *pad bytes* to keep the alignment correct.

There are situations when this can be a problem:

• There are external demands; for example, network communication protocols are usually specified in terms of data types with no padding in between

• You need to save data memory.

For information about alignment requirements, see Alignment, page 343.

Use the #pragma pack directive or the \_\_packed data type attribute for a tighter layout of the structure. The drawback is that each access to an unaligned element in the structure will use more code.

Alternatively, write your own customized functions for *packing* and *unpacking* structures. This is a more portable way, which will not produce any more code apart from your functions. The drawback is the need for two views on the structure data—packed and unpacked.

For more information about the #pragma pack directive, see pack, page 394.

#### ANONYMOUS STRUCTS AND UNIONS

When a structure or union is declared without a name, it becomes anonymous. The effect is that its members will only be seen in the surrounding scope.

#### Example

In this example, the members in the anonymous union can be accessed, in function F, without explicitly specifying the union name:

```
struct S
{
    char mTag;
    union
    {
        long mL;
        float mF;
    };
    St;
void F(void)
{
        St.mL = 5;
}
```

The member names must be unique in the surrounding scope. Having an anonymous struct or union at file scope, as a global, external, or static variable is also allowed. This could for instance be used for declaring I/O registers, as in this example:

```
___no__init volatile
union
{
  unsigned char IOPORT;
  struct
  {
    unsigned char way: 1;
    unsigned char out: 1;
  };
} @ 0x1000;
/* The variables are used here. */
void Test(void)
{
  IOPORT = 0;
  way = 1;
  out = 1;
}
```

This declares an I/O register byte IOPORT at address  $0 \times 1000$ . The I/O register has 2 bits declared, Way and Out. Note that both the inner structure and the outer union are anonymous.

Anonymous structures and unions are implemented in terms of objects named after the first field, with a prefix \_A\_ to place the name in the implementation part of the namespace. In this example, the anonymous union will be implemented through an object named \_A\_IOPORT.

#### Controlling data and function placement in memory

The compiler provides different mechanisms for controlling placement of functions and data objects in memory. To use memory efficiently, you should be familiar with these mechanisms and know which one is best suited for different situations. You can use:

• The @ operator and the #pragma location directive for absolute placement.

Using the @ operator or the #pragma location directive, you can place individual global and static variables at absolute addresses. Note that it is not possible to use this notation for absolute placement of individual functions. For more information, see *Data placement at an absolute location*, page 227.

• The @ operator and the #pragma location directive for section placement.

Using the @ operator or the #pragma location directive, you can place individual functions, variables, and constants in named sections. The placement of these sections can then be controlled by linker directives. For more information, see *Data and function placement in sections*, page 228.

• The @ operator and the #pragma location directive for register placement

Use the @ operator or the #pragma location directive to place individual global and static variables in registers. The variables must be declared \_\_no\_init. This is useful for individual data objects that must be located in a specific register.

• Using the --section option, you can set the default segment for functions, variables, and constants in a particular module. For more information, see *--section*, page 298.

#### DATA PLACEMENT AT AN ABSOLUTE LOCATION

The @ operator, alternatively the #pragma location directive, can be used for placing global and static variables at absolute addresses.

To place a variable at an absolute address, the argument to the @ operator and the #pragma location directive should be a literal number, representing the actual address. The absolute location must fulfill the alignment requirement for the variable that should be located.

**Note:** All declarations of \_\_no\_init variables placed at an absolute address are *tentative definitions*. Tentatively defined variables are only kept in the output from the compiler if they are needed in the module being compiled. Such variables will be defined in all modules in which they are used, which will work as long as they are defined in the same way. The recommendation is to place all such declarations in header files that are included in all modules that use the variables.

Other variables placed at an absolute address use the normal distinction between declaration and definition. For these variables, you must provide the definition in only one module, normally with an initializer. Other modules can refer to the variable by using an extern declaration, with or without an explicit address.

#### Examples

In this example, a <u>\_\_no\_init</u> declared variable is placed at an absolute address. This is useful for interfacing between multiple processes, applications, etc:

\_\_no\_init volatile char alpha @ 0xFF2000;/\* OK \*/

The next example contains two const declared objects. The first one is not initialized, and the second one is initialized to a specific value. Both objects are placed in ROM. This is useful for configuration parameters, which are accessible from an external

interface. Note that in the second case, the compiler is not obliged to actually read from the variable, because the value is known.

```
#pragma location=0xFF2002
__no_init const int beta; /* OK */
const int gamma @ 0xFF2004 = 3; /* OK */
```

In the first case, the value is not initialized by the compiler; the value must be set by other means. The typical use is for configurations where the values are loaded to ROM separately, or for special function registers that are read-only.

\_\_no\_init int epsilon @ 0xFF2007; /\* Error, misaligned. \*/

#### C++ considerations

In C++, module scoped const variables are static (module local), whereas in C they are global. This means that each module that declares a certain const variable will contain a separate variable with this name. If you link an application with several such modules all containing (via a header file), for instance, the declaration:

volatile const \_\_no\_init int x @ 0x100; /\* Bad in C++ \*/

the linker will report that more than one variable is located at address 0x100.

To avoid this problem and make the process the same in C and C++, you should declare these variables extern, for example:

/\* The extern keyword makes x public. \*/
extern volatile const \_\_no\_init int x @ 0x100;

**Note:** C++ static member variables can be placed at an absolute address just like any other static variable.

#### DATA AND FUNCTION PLACEMENT IN SECTIONS

The following method can be used for placing data or functions in named sections other than default:

- The @ operator, alternatively the #pragma location directive, can be used for placing individual variables or individual functions in named sections. The named section can either be a predefined section, or a user-defined section.
- The --section option can be used for placing variables and functions, which are parts of the whole compilation unit, in named sections.

C++ static member variables can be placed in named sections just like any other static variable.

If you use your own sections, in addition to the predefined sections, the sections must also be defined in the linker configuration file. **Note:** Take care when explicitly placing a variable or function in a predefined section other than the one used by default. This is useful in some situations, but incorrect placement can result in anything from error messages during compilation and linking to a malfunctioning application. Carefully consider the circumstances; there might be strict requirements on the declaration and use of the function or variable.

The location of the sections can be controlled from the linker configuration file.

For more information about sections, see the chapter Section reference.

#### Examples of placing variables in named sections

In the following examples, a data object is placed in a user-defined section. Note that you must as always ensure that the section is placed in the appropriate memory area when linking.

```
__no_init int alpha @ "MY_NOINIT"; /* OK */
#pragma location="MY_CONSTANTS"
const int beta = 42; /* OK */
const int gamma @ "MY_CONSTANTS" = 17;/* OK */
int theta @ "MY_ZEROS"; /* OK */
int phi @ "MY_INITED" = 4711; /* OK */
```

The linker will normally arrange for the correct type of initialization for each variable. If you want to control or suppress automatic initialization, you can use the initialize and do not initialize directives in the linker configuration file.

#### Examples of placing functions in named sections

```
void f(void) @ "MY_FUNCTIONS";
void g(void) @ "MY_FUNCTIONS"
{
}
#pragma location="MY_FUNCTIONS"
void h(void);
```

#### DATA PLACEMENT IN REGISTERS

The @ operator, alternatively the #pragma location directive, can be used for placing global and static variables in a register.

To place a variable in a register, the argument to the @ operator and the #pragma location directive should be an identifier that corresponds to an Arm core register in

the range R4-R11 (R9 cannot be specified in combination with the --rwpi command line option).

A variable can be placed in a register only if it is declared as \_\_no\_init, has file scope, and its size is four bytes. A variable placed in a register does not have a memory address, so the address operator & cannot be used.

Within a module where a variable is placed in a register, the specified register will only be used for accessing that variable. The value of the variable is preserved across function calls to other modules because the registers R4–R11 are callee saved, and as such they are restored when execution returns. However, the value of a variable placed in a register is not always preserved as expected:

- In an exception handler or library callback routine (such as the comparator function
  passed to qsort) the value might not be preserved. The value will be preserved if
  the command line option --lock\_regs is used for locking the register in all
  modules of the application, including library modules.
- In a fast interrupt handler, the value of a variable in R8-R11 is not preserved from outside the handler, because these registers are banked.
- The longjmp function and C++ exceptions might restore variables placed in registers to old values, unlike other variables with static storage duration which are not restored.

The linker does not prevent modules from placing different variables in the same register. Variables in different modules can be placed in the same register, and another module could use the register for other purposes.

**Note:** A variable placed in a register should be defined in an include file, to be included in every module that uses the variable. An unused definition in a module will cause the register to not be used in that module.

#### **Controlling compiler optimizations**

The compiler performs many transformations on your application to generate the best possible code. Examples of such transformations are storing values in registers instead of memory, removing superfluous code, reordering computations in a more efficient order, and replacing arithmetic operations by cheaper operations.

The linker should also be considered an integral part of the compilation system, because some optimizations are performed by the linker. For instance, all unused functions and variables are removed and not included in the final output.

#### SCOPE FOR PERFORMED OPTIMIZATIONS

You can decide whether optimizations should be performed on your whole application or on individual files. By default, the same types of optimizations are used for an entire project, but you should consider using different optimization settings for individual files. For example, put code that must execute very quickly into a separate file and compile it for minimal execution time, and the rest of the code for minimal code size. This will give a small program, which is still fast enough where it matters.

You can also exclude individual functions from the performed optimizations. The #pragma optimize directive allows you to either lower the optimization level, or specify another type of optimization to be performed. See *optimize*, page 393, for information about the pragma directive.

#### **MULTI-FILE COMPILATION UNITS**

In addition to applying different optimizations to different source files or even functions, you can also decide what a compilation unit consists of—one or several source code files.

By default, a compilation unit consists of one source file, but you can also use multi-file compilation to make several source files in a compilation unit. The advantage is that interprocedural optimizations such as inlining and cross jump have more source code to work on. Ideally, the whole application should be compiled as one compilation unit. However, for large applications this is not practical because of resource restrictions on the host computer. For more information, see *--mfc*, page 281.

**Note:** Only one object file is generated, and thus all symbols will be part of that object file.

If the whole application is compiled as one compilation unit, it is very useful to make the compiler also discard unused public functions and variables before the interprocedural optimizations are performed. Doing this limits the scope of the optimizations to functions and variables that are actually used. For more information, see *--discard\_unused\_publics*, page 272.

#### **OPTIMIZATION LEVELS**

The compiler supports different levels of optimizations. This table lists optimizations that are typically performed on each level:

Optimization level	Description
None (Best debug support)	Variables live through their entire scope
Low	Same as above but variables only live for as long as they are needed, not necessarily through their entire scope
Medium	Same as above, and: Live-dead analysis and optimization Dead code elimination Redundant label elimination Redundant branch elimination Code hoisting Peephole optimization Some register content analysis and optimization Common subexpression elimination Code motion Static clustering
High (Balanced)	Same as above, and: Instruction scheduling Cross jumping Advanced register content analysis and optimization Loop unrolling Function inlining Type-based alias analysis

Table 21: Compiler optimization levels

**Note:** Some of the performed optimizations can be individually enabled or disabled. For more information about these, see *Fine-tuning enabled transformations*, page 233.

A high level of optimization might result in increased compile time, and will most likely also make debugging more difficult, because it is less clear how the generated code relates to the source code. For example, at the low, medium, and high optimization levels, variables do not live through their entire scope, which means processor registers used for storing variables can be reused immediately after they were last used. Due to this, the C-SPY **Watch** window might not be able to display the value of the variable throughout its scope, or even occasionally display an incorrect value. At any time, if you experience difficulties when debugging your code, try lowering the optimization level.

#### SPEED VERSUS SIZE

At the high optimization level, the compiler balances between size and speed optimizations. However, it is possible to fine-tune the optimizations explicitly for either size or speed. They only differ in what thresholds that are used; speed will trade size for speed, whereas size will trade speed for size. Note that one optimization sometimes enables other optimizations to be performed, and an application might in some cases become smaller even when optimizing for speed rather than size.

If you use the optimization level High speed, the --no\_size\_constraints compiler option relaxes the normal restrictions for code size expansion and enables more aggressive optimizations.

You can choose an optimization goal for each module, or even individual functions, using command line options and pragma directives (see -*O*, page 291 and *optimize*, page 393). For a small embedded application, this makes it possible to achieve acceptable speed performance while minimizing the code size: Typically, only a few places in the application need to be fast, such as the most frequently executed inner loops, or the interrupt handlers.

Rather than compiling the whole application with High (Balanced) optimization, you can use High (Size) in general, but override this to get High (Speed) optimization only for those functions where the application needs to be fast.

Because of the unpredictable way in which different optimizations interact, where one optimization can enable other optimizations, sometimes a function becomes smaller when compiled with High (Speed) optimization than if High (Size) is used. Also, using multi-file compilation (see *--mfc*, page 281) can enable many optimizations to improve both speed and size performance. It is recommended that you experiment with different optimization settings so that you can pick the best ones for your project.

#### FINE-TUNING ENABLED TRANSFORMATIONS

At each optimization level you can disable some of the transformations individually. To disable a transformation, use either the appropriate option, for instance the command line option --no\_inline, alternatively its equivalent in the IDE **Function inlining**, or the #pragma optimize directive. These transformations can be disabled individually:

- Common subexpression elimination
- Loop unrolling
- Function inlining
- Code motion
- Type-based alias analysis
- Static clustering
- Instruction scheduling.

#### **Common subexpression elimination**

Redundant re-evaluation of common subexpressions is by default eliminated at optimization levels Medium and High. This optimization normally reduces both code size and execution time. However, the resulting code might be difficult to debug.

Note: This option has no effect at optimization levels None and Low.

For more information about the command line option, see --no\_cse, page 283.

#### Loop unrolling

Loop unrolling means that the code body of a loop, whose number of iterations can be determined at compile time, is duplicated. Loop unrolling reduces the loop overhead by amortizing it over several iterations.

This optimization is most efficient for smaller loops, where the loop overhead can be a substantial part of the total loop body.

Loop unrolling, which can be performed at optimization level High, normally reduces execution time, but increases code size. The resulting code might also be difficult to debug.

The compiler heuristically decides which loops to unroll. Only relatively small loops where the loop overhead reduction is noticeable will be unrolled. Different heuristics are used when optimizing for speed, size, or when balancing between size and speed.

Note: This option has no effect at optimization levels None, Low, and Medium.

To disable loop unrolling, use the command line option --no\_unroll, see --no\_unroll, page 289.

#### **Function inlining**

Function inlining means that a function, whose definition is known at compile time, is integrated into the body of its caller to eliminate the overhead of the call. This optimization normally reduces execution time, but might increase the code size.

For more information, see Inlining functions, page 84.

#### Code motion

Evaluation of loop-invariant expressions and common subexpressions are moved to avoid redundant re-evaluation. This optimization, which is performed at optimization level Medium and above, normally reduces code size and execution time. The resulting code might however be difficult to debug.

Note: This option has no effect at optimization levels below Medium.

For more information about the command line option, see --no\_code\_motion, page 282.

#### Type-based alias analysis

When two or more pointers reference the same memory location, these pointers are said to be *aliases* for each other. The existence of aliases makes optimization more difficult because it is not necessarily known at compile time whether a particular value is being changed.

Type-based alias analysis optimization assumes that all accesses to an object are performed using its declared type or as a char type. This assumption lets the compiler detect whether pointers can reference the same memory location or not.

Type-based alias analysis is performed at optimization level High. For application code conforming to standard C or C++ application code, this optimization can reduce code size and execution time. However, non-standard C or C++ code might result in the compiler producing code that leads to unexpected behavior. Therefore, it is possible to turn this optimization off.

Note: This option has no effect at optimization levels None, Low, and Medium.

For more information about the command line option, see --no\_tbaa, page 288.

#### Example

```
short F(short *p1, long *p2)
{
    *p2 = 0;
    *p1 = 1;
    return *p2;
}
```

With type-based alias analysis, it is assumed that a write access to the short pointed to by p1 cannot affect the long value that p2 points to. Thus, it is known at compile time that this function returns 0. However, in non-standard-conforming C or C++ code these pointers could overlap each other by being part of the same union. If you use explicit casts, you can also force pointers of different pointer types to point to the same memory location.

#### Static clustering

When static clustering is enabled, static and global variables that are defined within the same module are arranged so that variables that are accessed in the same function are stored close to each other. This makes it possible for the compiler to use the same base pointer for several accesses.

Note: This option has no effect at optimization levels None and Low.

For more information about the command line option, see --no clustering, page 282.

#### Instruction scheduling

The compiler features an instruction scheduler to increase the performance of the generated code. To achieve that goal, the scheduler rearranges the instructions to minimize the number of pipeline stalls emanating from resource conflicts within the microprocessor.

For more information about the command line option, see --no\_scheduling, page 286.

#### Facilitating good code generation

This section contains hints on how to help the compiler generate good code:

- Writing optimization-friendly source code, page 236
- Saving stack space and RAM memory, page 237
- Function prototypes, page 237
- Integer types and bit negation, page 238
- Protecting simultaneously accessed variables, page 238
- Accessing special function registers, page 239
- Passing values between C and assembler objects, page 240
- Non-initialized variables, page 240

#### WRITING OPTIMIZATION-FRIENDLY SOURCE CODE

The following is a list of programming techniques that will, when followed, enable the compiler to better optimize the application.

- Local variables—auto variables and parameters—are preferred over static or global variables. The reason is that the optimizer must assume, for example, that called functions can modify non-local variables. When the life spans for local variables end, the previously occupied memory can then be reused. Globally declared variables will occupy data memory during the whole program execution.
- Avoid taking the address of local variables using the & operator. This is inefficient for two main reasons. First, the variable must be placed in memory, and thus cannot be placed in a processor register. This results in larger and slower code. Second, the optimizer can no longer assume that the local variable is unaffected over function calls.
- Module-local variables—variables that are declared static—are preferred over global variables (non-static). Also avoid taking the address of frequently accessed static variables.
- The compiler is capable of inlining functions, see *Function inlining*, page 234. To maximize the effect of the inlining transformation, it is good practice to place the

definitions of small functions called from more than one module in the header file rather than in the implementation file. Alternatively, you can use multi-file compilation. For more information, see *Multi-file compilation units*, page 231.

• Avoid using inline assembler without operands and clobbered resources. Instead, use SFRs or intrinsic functions if available. Otherwise, use inline assembler *with* operands and clobbered resources or write a separate module in assembler language. For more information, see *Mixing C and assembler*, page 159.

#### SAVING STACK SPACE AND RAM MEMORY

The following is a list of programming techniques that save memory and stack space:

- If stack space is limited, avoid long call chains and recursive functions.
- Avoid using large non-scalar types, such as structures, as parameters or return type. To save stack space, you should instead pass them as pointers or, in C++, as references.

#### FUNCTION PROTOTYPES

It is possible to declare and define functions using one of two different styles:

- Prototyped
- Kernighan & Ritchie C (K&R C)

Both styles are valid C, however it is strongly recommended to use the prototyped style, and provide a prototype declaration for each public function in a header that is included both in the compilation unit defining the function and in all compilation units using it.

The compiler will not perform type checking on parameters passed to functions declared using K&R style. Using prototype declarations will also result in more efficient code in some cases, as there is no need for type promotion for these functions.

To make the compiler require that all function definitions use the prototyped style, and that all public functions have been declared before being defined, use the **Project>Options>C/C++ Compiler>Language 1>Require prototypes** compiler

option (--require\_prototypes).

#### **Prototyped style**

In prototyped function declarations, the type for each parameter must be specified.

```
int Test(char, int); /* Declaration */
int Test(char ch, int i) /* Definition */
{
  return i + ch;
}
```

#### Kernighan & Ritchie style

In K&R style—pre-Standard C—it is not possible to declare a function prototyped. Instead, an empty parameter list is used in the function declaration. Also, the definition looks different.

For example:

```
int Test(); /* Declaration */
int Test(ch, i) /* Definition */
char ch;
int i;
{
    return i + ch;
}
```

#### **INTEGER TYPES AND BIT NEGATION**

In some situations, the rules for integer types and their conversion lead to possibly confusing behavior. Things to look out for are assignments or conditionals (test expressions) involving types with different size, and logical operations, especially bit negation. Here, *types* also includes types of constants.

In some cases there might be warnings (for example, for constant conditional or pointless comparison), in others just a different result than what is expected. Under certain circumstances the compiler might warn only at higher optimizations, for example, if the compiler relies on optimizations to identify some instances of constant conditionals. In this example an 8-bit character, a 32-bit integer, and two's complement is assumed:

```
void F1(unsigned char c1)
{
    if (c1 == ~0x80)
    ;
}
```

Here, the test is always false. On the right hand side,  $0 \times 80$  is  $0 \times 00000080$ , and  $\sim 0 \times 00000080$  becomes  $0 \times FFFFF7F$ . On the left hand side, c1 is an 8-bit unsigned character, so it cannot be larger than 255. It also cannot be negative, which means that the integral promoted value can never have the topmost 24 bits set.

#### PROTECTING SIMULTANEOUSLY ACCESSED VARIABLES

Variables that are accessed asynchronously, for example by interrupt routines or by code executing in separate threads, must be properly marked and have adequate protection. The only exception to this is a variable that is always *read-only*.

To mark a variable properly, use the volatile keyword. This informs the compiler, among other things, that the variable can be changed from other threads. The compiler will then avoid optimizing on the variable (for example, keeping track of the variable in registers), will not delay writes to it, and be careful accessing the variable only the number of times given in the source code.

For more information about the volatile type qualifier and the rules for accessing volatile objects, see *Declaring objects volatile*, page 355.

#### **ACCESSING SPECIAL FUNCTION REGISTERS**

Specific header files for several Arm devices are included in the IAR product installation. The header files are named *iodevice*.h and define the processor-specific special function registers (SFRs).

**Note:** Each header file contains one section used by the compiler, and one section used by the assembler.

SFRs with bitfields are declared in the header file. This example is from ioks32c5000a.h:

```
__no_init volatile union
{
    unsigned short mwctl2;
    struct
    {
        unsigned short edr: 1;
        unsigned short edw: 1;
        unsigned short lee: 2;
        unsigned short lemd: 2;
        unsigned short lemd: 2;
        unsigned short lepl: 2;
    } mwctl2bit;
} @ 0x1000;
```

```
/* By including the appropriate include file in your code,
 * it is possible to access either the whole register or any
 * individual bit (or bitfields) from C code as follows.
 */
void Test()
{
   /* Whole register access */
   mwctl2 = 0x1234;
   /* Bitfield accesses */
   mwctl2bit.edw = 1;
   mwctl2bit.lepl = 3;
}
```

You can also use the header files as templates when you create new header files for other Arm devices.

#### PASSING VALUES BETWEEN C AND ASSEMBLER OBJECTS

The following example shows how you in your C source code can use inline assembler to set and get values from a special purpose register:

```
static unsigned long get_APSR( void )
{
    unsigned long value;
    asm volatile( "MRS %0, APSR" : "=r"(value) );
    return value;
}
static void set_APSR( unsigned long value)
{
    asm volatile( "MSR APSR, %0" :: "r"(value) );
}
```

The general purpose register is used for getting and setting the value of the special purpose register APSR. The same method can be used also for accessing other special purpose registers and specific instructions.

To read more about inline assembler, see Inline assembler, page 160.

#### NON-INITIALIZED VARIABLES

Normally, the runtime environment will initialize all global and static variables when the application is started.

The compiler supports the declaration of variables that will not be initialized, using the \_\_no\_init type modifier. They can be specified either as a keyword or using the

#pragma object\_attribute directive. The compiler places such variables in a separate section.

For \_\_no\_init, the const keyword implies that an object is read-only, rather than that the object is stored in read-only memory. It is not possible to give a \_\_no\_init object an initial value.

Variables declared using the \_\_no\_init keyword could, for example, be large input buffers or mapped to special RAM that keeps its content even when the application is turned off.


For more information, see <u>no</u> *init*, page 368. Note that to use this keyword, language extensions must be enabled; see *-e*, page 274. For more information, see also *object attribute*, page 392.


Facilitating good code generation

# Part 2. Reference information

This part of the IAR C/C++ Development Guide for Arm contains these chapters:

- External interface details
- Compiler options
- Linker options
- Data representation
- Extended keywords
- Pragma directives
- Intrinsic functions
- The preprocessor
- C/C++ standard library functions
- The linker configuration file
- Section reference
- The stack usage control file
- IAR utilities
- Implementation-defined behavior for Standard C
- Implementation-defined behavior for C89.





## **External interface details**

- Invocation syntax
- Include file search procedure
- Compiler output
- ILINK output
- Text encodings
- Diagnostics

#### **Invocation syntax**

You can use the compiler and linker either from the IDE or from the command line. See the *IDE Project Management and Building Guide for Arm* for information about using the build tools from the IDE.

#### **COMPILER INVOCATION SYNTAX**

The invocation syntax for the compiler is:

iccarm [options] [sourcefile] [options]

For example, when compiling the source file prog.c, use this command to generate an object file with debug information:

iccarm prog.c --debug

The source file can be a C or C++ file, typically with the filename extension c or cpp, respectively. If no filename extension is specified, the file to be compiled must have the extension c.

Generally, the order of options on the command line, both relative to each other and to the source filename, is not significant. There is, however, one exception: when you use the -I option, the directories are searched in the same order as they are specified on the command line.

If you run the compiler from the command line without any arguments, the compiler version number and all available options including brief descriptions are directed to stdout and displayed on the screen.

#### ILINK INVOCATION SYNTAX

The invocation syntax for ILINK is:

ilinkarm [arguments]

Each argument is either a command-line option, an object file, or a library.

For example, when linking the object file prog.o, use this command:

ilinkarm prog.o --config configfile

If no filename extension is specified for the linker configuration file, the configuration file must have the extension icf.

Generally, the order of arguments on the command line is not significant. There is, however, one exception: when you supply several libraries, the libraries are searched in the same order that they are specified on the command line. The default libraries are always searched last.

The output executable image will be placed in a file named a.out, unless the -o option is used.

If you run ILINK from the command line without any arguments, the ILINK version number and all available options including brief descriptions are directed to stdout and displayed on the screen.

#### **PASSING OPTIONS**

There are three different ways of passing options to the compiler and to ILINK:

Directly from the command line

Specify the options on the command line after the iccarm or ilinkarm commands; see *Invocation syntax*, page 245.

Via environment variables

The compiler and linker automatically append the value of the environment variables to every command line; see *Environment variables*, page 247.

• Via a text file, using the -f option; see -f, page 276.

For general guidelines for the option syntax, an options summary, and a detailed description of each option, see the chapter *Compiler options*.

#### **ENVIRONMENT VARIABLES**

These environment variables can be used with the compiler:

Environment variable	Description
C_INCLUDE	Specifies directories to search for include files; for example:
	C_INCLUDE=c:\program files\iar systems\embedded
	<pre>workbench 8.n\arm\inc;c:\headers</pre>
QCCARM	<b>Specifies command line options; for example:</b> QCCARM=-1A asm.lst

Table 22: Compiler environment variables

This environment variable can be used with ILINK:

Environment variable	Description
ILINKARM_CMD_LINE	Specifies command line options; for example:
	ILINKARM_CMD_LINE=config full.icf
	silent

Table 23: ILINK environment variables

#### Include file search procedure

This is a detailed description of the compiler's #include file search procedure:

- If the name of the #include file is an absolute path specified in angle brackets or double quotes, that file is opened.
- If the compiler encounters the name of an #include file in angle brackets, such as: #include <stdio.h>

it searches these directories for the file to include:

- 1 The directories specified with the -I option, in the order that they were specified, see -*I*, page 278.
- 2 The directories specified using the C\_INCLUDE environment variable, if any; see *Environment variables*, page 247.
- 3 The automatically set up library system include directories. See --*dlib\_config*, page 272.
- If the compiler encounters the name of an #include file in double quotes, for example:

#include "vars.h"

it searches the directory of the source file in which the #include statement occurs, and then performs the same sequence as for angle-bracketed filenames.

If there are nested #include files, the compiler starts searching the directory of the file that was last included, iterating upwards for each included file, searching the source file directory last. For example:

```
src.c in directory dir\src
    #include "src.h"
    ...
src.h in directory dir\include
    #include "config.h"
    ...
```

When dir\exe is the current directory, use this command for compilation:

iccarm ..\src\src.c -I..\include -I..\debugconfig

Then the following directories are searched in the order listed below for the file config.h, which in this example is located in the dir\debugconfig directory:

dir\include	Current file is src.h.
dir\src	File including current file (src.c).
dir\include	As specified with the first -I option.
dir\debugconfig	As specified with the second $-I$ option.

Use angle brackets for standard header files, like stdio.h, and double quotes for files that are part of your application.

**Note:** Both  $\setminus$  and / can be used as directory delimiters.

For more information, see Overview of the preprocessor, page 451.

#### **Compiler output**

The compiler can produce the following output:

• A linkable object file

The object files produced by the compiler use the industry-standard format ELF. By default, the object file has the filename extension o.

• Optional list files

Various kinds of list files can be specified using the compiler option -1, see -*l*, page 278. By default, these files will have the filename extension lst.

Optional preprocessor output files

A preprocessor output file is produced when you use the --preprocess option; by default, the file will have the filename extension i.

• Diagnostic messages

Diagnostic messages are directed to the standard error stream and displayed on the screen, and printed in an optional list file. For more information about diagnostic messages, see *Diagnostics*, page 252.

• Error return codes

These codes provide status information to the operating system which can be tested in a batch file, see *Error return codes*, page 249.

• Size information

Information about the generated amount of bytes for functions and data for each memory is directed to the standard output stream and displayed on the screen. Some of the bytes might be reported as *shared*.

Shared objects are functions or data objects that are shared between modules. If any of these occur in more than one module, only one copy is retained. For example, in some cases inline functions are not inlined, which means that they are marked as shared, because only one instance of each function will be included in the final application. This mechanism is sometimes also used for compiler-generated code or data not directly associated with a particular function or variable, and when only one instance is required in the final application.

#### **ERROR RETURN CODES**

The compiler and linker return status information to the operating system that can be tested in a batch file.

These command line error codes are supported:

Code	Description
0	Compilation or linking successful, but there might have been warnings.
I	Warnings were produced and the optionwarnings_affect_exit_code was used.
2	Errors occurred.
3	Fatal errors occurred, making the tool abort.
4	Internal errors occurred, making the tool abort.

Table 24: Error return codes

### **ILINK** output

ILINK can produce the following output:

• An absolute executable image

The final output produced by the IAR ILINK Linker is an absolute object file containing the executable image that can be put into an EPROM, downloaded to a hardware emulator, or executed on your PC using the IAR C-SPY Debugger Simulator. By default, the file has the filename extension out. The output format is always in ELF, which optionally includes debug information in the DWARF format.

• Optional logging information

During operation, ILINK logs its decisions on stdout, and optionally to a file. For example, if a library is searched, whether a required symbol is found in a library module, or whether a module will be part of the output. Timing information for each ILINK subsystem is also logged.

• Optional map files

A linker map file—containing summaries of linkage, runtime attributes, memory, and placement, as well as an entry list— can be generated by the ILINK option --map, see --map, page 326. By default, the map file has the filename extension map.

Diagnostic messages

Diagnostic messages are directed to stderr and displayed on the screen, as well as printed in the optional map file. For more information about diagnostic messages, see *Diagnostics*, page 252.

• Error return codes

ILINK returns status information to the operating system which can be tested in a batch file, see *Error return codes*, page 249.

• Size information about used memory and amount of time

Information about the generated amount of bytes for functions and data for each memory is directed to stdout and displayed on the screen.

An import library for use when building a non-secure image, a relocatable ELF object module containing symbols and their addresses. See the linker option --import\_cmse\_lib\_out, page 323.

#### **Text encodings**

Text files read or written by IAR tools can use a variety of text encodings:

• Raw

This is a backward-compatibility mode for C/C++ source files. Only 7-bit ASCII characters can be used in symbol names. Other characters can only be used in comments, literals, etc.

This is the default source file encoding if there is no Byte Order Mark (BOM).

• The system default locale

The locale that you have configured your Windows OS to use.

• UTF-8

Unicode encoded as a sequence of 8-bit bytes, with or without a Byte Order Mark.

• UTF-16

Unicode encoded as a sequence of 16-bit words using a big-endian or little-endian representation. These files always start with a Byte Order Mark.

In any encoding other than Raw, you can use Unicode characters of the appropriate kind (alphabetic, numeric, etc) in the names of symbols.

When an IAR tool reads a text file with a Byte Order Mark, it will use the appropriate Unicode encoding, regardless of the any options set for input file encoding.

For source files without a Byte Order Mark, the compiler will use the Raw encoding, unless you specify the compiler option --source\_encoding. See --source\_encoding, page 299.

For source files without a Byte Order Mark, the assembler will use the Raw encoding unless you specify the assembler option --source\_encoding.

For other text input files, like the extended command line (.xcl files), without a Byte Order Mark, the IAR tools will use the system default locale unless you specify the compiler option --utf8\_text\_in, in which case UTF-8 will be used. See --utf8 text in, page 302.

For compiler list files and preprocessor output, the same encoding as the main source file will be used by default. Other tools that generate text output will use the UTF-8 encoding by default. You can change this by using the compiler options --text\_out and --no\_bom. See --text\_out, page 300 and --no\_bom, page 281.

#### **CHARACTERS AND STRING LITERALS**

When you compile source code, characters (*x*) and string literals (*xx*) will be handled as follows:

' <i>x</i> ', " <i>xx</i> "	Characters in untyped character and string literals are copied verbatim, using the same encoding as in the source file.
u8" <i>xx</i> "	Characters in UTF-8 string literals are converted to UTF-8.
u'x',u"xx"	Characters in UTF-16 character and string literals are converted to UTF-16.
U'x',U"xx"	Characters in UTF-32 character and string literals are converted to UTF-32.
L'x',L"xx"	Characters in wide character and string literals are converted to UTF-32.

#### **Diagnostics**

This section describes the format of the diagnostic messages and explains how diagnostic messages are divided into different levels of severity.

#### **MESSAGE FORMAT FOR THE COMPILER**

All diagnostic messages are issued as complete, self-explanatory messages. A typical diagnostic message from the compiler is produced in the form:

filename,linenumber level[tag]: message

with these elements:

filename	The name of the source file in which the issue was encountered
linenumber	The line number at which the compiler detected the issue
level	The level of seriousness of the issue
tag	A unique tag that identifies the diagnostic message
message	An explanation, possibly several lines long

Diagnostic messages are displayed on the screen, as well as printed in the optional list file.

Use the option --diagnostics\_tables to list all possible compiler diagnostic messages.

#### **MESSAGE FORMAT FOR THE LINKER**

All diagnostic messages are issued as complete, self-explanatory messages. A typical diagnostic message from ILINK is produced in the form:

level[tag]: message

with these elements:

level	The level of seriousness of the issue
tag	A unique tag that identifies the diagnostic message
message	An explanation, possibly several lines long

Diagnostic messages are displayed on the screen, as well as printed in the optional map file.

Use the option --diagnostics\_tables to list all possible linker diagnostic messages.

#### SEVERITY LEVELS

The diagnostic messages are divided into different levels of severity:

#### Remark

A diagnostic message that is produced when the compiler or linker finds a construct that can possibly lead to erroneous behavior in the generated code. Remarks are by default not issued, but can be enabled, see *--remarks*, page 295.

#### Warning

A diagnostic message that is produced when the compiler or linker finds a potential problem which is of concern, but which does not prevent completion of the compilation or linking. Warnings can be disabled by use of the command line option --no\_warnings, see --no warnings, page 290.

#### Error

A diagnostic message that is produced when the compiler or linker finds a serious error. An error will produce a non-zero exit code.

#### **Fatal error**

A diagnostic message that is produced when the compiler finds a condition that not only prevents code generation, but which makes further processing pointless. After the message is issued, compilation terminates. A fatal error will produce a non-zero exit code.

#### SETTING THE SEVERITY LEVEL

The diagnostic messages can be suppressed or the severity level can be changed for all diagnostics messages, except for fatal errors and some of the regular errors.

See the chapter *Compiler options*, for information about the compiler options that are available for setting severity levels.

For the compiler see also the chapter *Pragma directives*, for information about the pragma directives that are available for setting severity levels.

#### **INTERNAL ERROR**

An internal error is a diagnostic message that signals that there was a serious and unexpected failure due to a fault in the compiler or linker. It is produced using this form:

Internal error: message

where *message* is an explanatory message. If internal errors occur, they should be reported to your software distributor or IAR Systems Technical Support. Include enough information to reproduce the problem, typically:

- The product name
- The version number of the compiler or of ILINK, which can be seen in the header of the list or map files generated by the compiler or by ILINK, respectively
- Your license number
- The exact internal error message text
- The files involved of the application that generated the internal error
- A list of the options that were used when the internal error occurred.

# **Compiler options**

- Options syntax
- Summary of compiler options
- Descriptions of compiler options

# **Options syntax**

Compiler options are parameters you can specify to change the default behavior of the compiler. You can specify options from the command line—which is described in more detail in this section—and from within the IDE.



See the online help system for information about the compiler options available in the IDE and how to set them.

#### TYPES OF OPTIONS

There are two *types of names* for command line options, *short* names and *long* names. Some options have both.

- A short option name consists of one character, and it can have parameters. You specify it with a single dash, for example -e
- A long option name consists of one or several words joined by underscores, and it can have parameters. You specify it with double dashes, for example --char\_is\_signed.

For information about the different methods for passing options, see *Passing options*, page 246.

#### **RULES FOR SPECIFYING PARAMETERS**

There are some general syntax rules for specifying option parameters. First, the rules depending on whether the parameter is *optional* or *mandatory*, and whether the option has a short or a long name, are described. Then, the rules for specifying filenames and directories are listed. Finally, the remaining rules are listed.

#### **Rules for optional parameters**

For options with a short name and an optional parameter, any parameter should be specified without a preceding space, for example:

-0 or -0h

For options with a long name and an optional parameter, any parameter should be specified with a preceding equal sign (=), for example:

--misrac2004=n

#### **Rules for mandatory parameters**

For options with a short name and a mandatory parameter, the parameter can be specified either with or without a preceding space, for example:

-I..\src or -I ..\src\

For options with a long name and a mandatory parameter, the parameter can be specified either with a preceding equal sign (=) or with a preceding space, for example:

--diagnostics\_tables=MyDiagnostics.lst

or

--diagnostics\_tables MyDiagnostics.lst

#### Rules for options with both optional and mandatory parameters

For options taking both optional and mandatory parameters, the rules for specifying the parameters are:

- For short options, optional parameters are specified without a preceding space
- For long options, optional parameters are specified with a preceding equal sign (=)
- For short and long options, mandatory parameters are specified with a preceding space.

For example, a short option with an optional parameter followed by a mandatory parameter:

-lA MyList.lst

For example, a long option with an optional parameter followed by a mandatory parameter:

--preprocess=n PreprocOutput.lst

#### Rules for specifying a filename or directory as parameters

These rules apply for options taking a filename or directory as parameters:

• Options that take a filename as a parameter can optionally take a file path. The path can be relative or absolute. For example, to generate a listing to the file List.lst in the directory ..\listings\:

iccarm prog.c -l ...listings\List.lst

• For options that take a filename as the destination for output, the parameter can be specified as a path without a specified filename. The compiler stores the output in that directory, in a file with an extension according to the option. The filename will be the same as the name of the compiled source file, unless a different name was specified with the option -0, in which case that name is used. For example:

iccarm prog.c -l ..\listings\

The produced list file will have the default name ... \listings\prog.lst

• The current directory is specified with a period (.). For example:

iccarm prog.c -1 .

- / can be used instead of  $\setminus$  as the directory delimiter.
- By specifying –, input files and output files can be redirected to the standard input and output stream, respectively. For example:

iccarm prog.c -1 -

#### Additional rules

These rules also apply:

• When an option takes a parameter, the parameter cannot start with a dash (-) followed by another character. Instead, you can prefix the parameter with two dashes; this example will create a list file called -r:

iccarm prog.c -1 ---r

• For options that accept multiple arguments of the same type, the arguments can be provided as a comma-separated list (without a space), for example:

--diag\_warning=Be0001,Be0002

Alternatively, the option can be repeated for each argument, for example:

--diag\_warning=Be0001 --diag\_warning=Be0002

## Summary of compiler options

This table summarizes the compiler command line options:

Command line option	Description
aapcs	Specifies the calling convention
aeabi	Enables AEABI-compliant code generation
align_sp_on_irq	Generates code to align SP on entry to <code>irq</code> functions
arm	Sets the default function mode to Arm

Table 25: Compiler options summary

Command line option	Description
c89	Specifies the C89 dialect
char_is_signed	Treats char as signed
char_is_unsigned	Treats char as unsigned
cmse	Enables CMSE secure object generation
cpu	Specifies a processor variant
cpu_mode	Specifies the default CPU mode for functions
C++	Specifies Standard C++
-D	Defines preprocessor symbols
debug	Generates debug information
dependencies	Lists file dependencies
deprecated_feature_warnings	Enables/disables warnings for deprecated features
diag_error	Treats these as errors
diag_remark	Treats these as remarks
diag_suppress	Suppresses these diagnostics
diag_warning	Treats these as warnings
diagnostics_tables	Lists all diagnostic messages
discard_unused_publics	Discards unused public symbols
dlib_config	Uses the system include files for the DLIB library and determines which configuration of the library to use
do_explicit_zero_opt_in_nam	For user-named sections, treats explicit
ed_sections	initializations to zero as zero initializations
-е	Enables language extensions
enable_hardware_workaround	Enables a specific hardware workaround
enable_restrict	Enables the Standard C keyword restrict
endian	Specifies the byte order of the generated code and data
enum_is_int	Sets the minimum size on enumeration types
error_limit	Specifies the allowed number of errors before compilation stops
-f	Extends the command line
fpu	Selects the type of floating-point unit

Command line option	Description
generate_entries_without_bo unds	Generates extra functions for use from non-instrumented code. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
guard_calls	Enables guards for function static variable initialization
header_context	Lists all referred source files and header files
-I	Specifies include file path
ignore_uninstrumented_point ers	Disables checking of accesses via pointers from non-instrumented code. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
-1	Creates a list file
lock_regs	Prevents the compiler from using specified registers
macro_positions_in _diagnostics	Obtains positions inside macros in diagnostic messages
make_all_definitions_weak	Turns all variable and function definitions into weak definitions.
max_cost_constexpr_call	Specifies the limit for constexpr evaluation cost
max_depth_constexpr_call	Specifies the limit for constexpr recursion depth
mfc	Enables multi-file compilation
misrac	Enables error messages specific to MISRA-C:1998. This option is a synonym ofmisrac1998 and is only available for backwards compatibility.
misrac1998	Enables error messages specific to MISRA-C:1998. See the IAR Embedded Workbench® MISRA C:1998 Reference Guide.
misrac2004	Enables error messages specific to MISRA-C:2004. See the IAR Embedded Workbench® MISRA C:2004 Reference Guide.
misrac_verbose	IAR Embedded Workbench® MISRA C:1998 Reference Guide or the IAR Embedded Workbench® MISRA C:2004 Reference Guide.

Command line option	Description
no_alignment_reduction	Disables alignment reduction for simple Thumb functions
no_bom	Omits the Byte Order Mark for UTF-8 output files
no_clustering	Disables static clustering optimizations
no_code_motion	Disables code motion optimization
no_const_align	Disables the alignment optimization for constants.
no_cse	Disables common subexpression elimination
no_dwarf_cfi	Suppresses generation of DWARF3 call frame information instructions
no_exceptions	Disables C++ exception support
no_fragments	Disables section fragment handling
no_inline	Disables function inlining
no_literal_pool	Generates code that should run from a memory region where it is not allowed to read data, only to execute code
no_loop_align	Disables the alignment of labels in loops
no_mem_idioms	Makes the compiler not optimize certain memory access patterns
no_path_in_file_macros	Removes the path from the return value of the symbolsFILE andBASE_FILE
no_rtti	Disables C++ RTTI support
no_rw_dynamic_init	Disables runtime initialization of static C variables.
no_scheduling	Disables the instruction scheduler
no_size_constraints	Relaxes the normal restrictions for code size expansion when optimizing for speed.
no_static_destruction	Disables destruction of C++ static variables at program exit
no_system_include	Disables the automatic search for system include files
no_tbaa	Disables type-based alias analysis
no_typedefs_in_diagnostics	Disables the use of typedef names in diagnostics
no_unaligned_access	Avoids unaligned accesses
no_uniform_attribute_syntax	Specifies the default syntax rules for IAR type attributes

Command line option	Description
no_unroll	Disables loop unrolling
no_var_align	Aligns variable objects based on the alignment of their type.
no_warnings	Disables all warnings
no_wrap_diagnostics	Disables wrapping of diagnostic messages
-0	Sets the optimization level
-0	Sets the object filename. Alias foroutput.
only_stdout	Uses standard output only
output	Sets the object filename
pending_instantiations	Sets the maximum number of instantiations of a given C++ template.
predef_macros	Lists the predefined symbols.
preinclude	Includes an include file before reading the source file
preprocess	Generates preprocessor output
public_equ	Defines a global named assembler label
-r	Generates debug information. Alias fordebug
relaxed_fp	Relaxes the rules for optimizing floating-point expressions
remarks	Enables remarks
require_prototypes	Verifies that functions are declared before they are defined
ropi	Generates code that uses PC-relative references to address code and read-only data.
ropi_cb	Makes all accesses to constant data, base-addressed relative to the register ${\tt R8}$
runtime_checking	Enables runtime error checking. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
rwpi	Generates code that uses an offset from the station base register to address-writable data.
rwpi_near	Generates code that uses an offset from the station base register to address-writable data. Addresses max 64 Kbytes of memory.

Command line option	Description
section	Changes a section name
silent	Sets silent operation
source_encoding	Specifies the encoding for source files
stack_protection	Enables stack protection
strict	Checks for strict compliance with Standard C/C++
system_include_dir	Specifies the path for system include files
text_out	Specifies the encoding for text output files
thumb	Sets default function mode to Thumb
uniform_attribute_syntax	Specifies the same syntax rules for IAR type attributes as for const and volatile
use_c++_inline	Uses C++ inline semantics in C99
use_unix_directory_	Uses / as directory separator in paths
separators	
utf8_text_in	Uses the UTF-8 encoding for text input files
vectorize	Enables generation of NEON vector instructions
version	Sends compiler output to the console and then exits.
vla	Enables C99 VLA support
warn_about_c_style_casts	Makes the compiler warn when C-style casts are used in C++ source code
warnings_affect_exit_code	Warnings affect exit code
warnings_are_errors	Warnings are treated as errors

# **Descriptions of compiler options**

A

The following section gives detailed reference information about each compiler option.

Note that if you use the options page **Extra Options** to specify specific command line options, the IDE does not perform an instant check for consistency problems like conflicting options, duplication of options, or use of irrelevant options.

### --aapcs

Syntax	aapcs={std vfp}	
Parameters	std	Processor registers are used for floating-point parameters and return values in function calls according to standard AAPCS. std is the default when the software FPU is selected.
	vfp	VFP registers are used for floating-point parameters and return values. The generated code is not compatible with AEABI code. vfp is the default when a VFP unit is used.
Description	Use this option to specif	fy the floating-point calling convention.
	To set this option, use <b>P</b>	roject>Options>C/C++ Compiler>Extra Options.

## --aeabi

Syntax	aeabi
Description	Use this option to generate AEABI-compliant object code. Note that this option must be used together with theguard_calls option.
	<b>Note:</b> This option cannot be used together with C++ header files.
See also	AEABI compliance, page 215 andguard_calls, page 277.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

# --align\_sp\_on\_irq

Syntax	align_sp_on_irq
Description	Use this option to align the stack pointer (SP) on entry to $\_\_irq$ declared functions.
	This is especially useful for nested interrupts, where the interrupted code uses the same SP as the interrupt handler. This means that the stack might only have 4-byte alignment, instead of the 8-byte alignment required by AEABI (and some instructions generated by the compiler for some cores).
See also	<i>irq</i> , page 366.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

#### --arm

Syntax	arm
Description	Use this option to set default function mode to Arm.
	Note: This option has the same effect as thecpu_mode=arm option.
	Project>Options>C/C++ Compiler>Code>Processor mode>Arm

#### --c89

Syntax	c89
Description	Use this option to enable the C89 C dialect instead of Standard C. <b>Note:</b> This option is mandatory when the MISRA C checking is enabled.
See also	<i>C language overview</i> , page 183. <b>Project&gt;Options&gt;C/C++ Compiler&gt;Language 1&gt;C dialect&gt;C89</b>

## --char\_is\_signed

Syntax	char_is_signed
Description	By default, the compiler interprets the plain char type as unsigned. Use this option to make the compiler interpret the plain char type as signed instead. This can be useful when you, for example, want to maintain compatibility with another compiler.
	<b>Note:</b> The runtime library is compiled without thechar_is_signed option and cannot be used with code that is compiled with this option.
IIË	Project>Options>C/C++ Compiler>Language 2>Plain 'char' is

# --char\_is\_unsigned

	Syntax	char_is_unsigned	
	Description	Use this option to make the compiler interpret the plain char type as unsigned. This is the default interpretation of the plain char type.	
		Project>Options>C/C++ Compiler>Language 2>Plain 'char' is	
cm	se		
	Syntax	cmse	
	Description	This option enables language extensions for TrustZone for Armv8-M. Use this option for object files that are to be linked in a secure image. The option allows the use of instructions, keywords, and types that are not available for non-secure code:	
		• The function attributes _cmse_nonsecure_call and _cmse_nonsecure_entry.	
		• The functions for CMSE have names with the prefix cmse_, and are defined in the header file arm_cmse.h.	
		<b>Note:</b> To use this option, you must first select the option <b>Project&gt;Options&gt;General</b> <b>Options&gt;Target&gt;TrustZone</b> .	
	See also	Arm TrustZone <sup>®</sup> , page 218 and ARMv8-M Security Extensions: Requirements on Development Tools (ARM-ECM-0359818)	
		To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .	

#### --cpu

Syntax	cpu= <i>core</i>  list	
Parameters	<i>core</i> list	Specifies a specific processor variant Lists all supported values for the optioncpu
Description	Use this option to select the architecture or processor variant for which the code is to be generated. The default core is Cortex-M3.	

Some of the supported values for the --cpu option are:

б-М	7-A	7e-m
7-M	7-R	7-S
8-A.AArch32	8-M.baseline	8-M.mainline
8-R.AArch32	Cortex-A5	Cortex-A7
Cortex-A8	Cortex-A9	Cortex-A12
Cortex-A15	Cortex-A17	Cortex-M0
Cortex-M0+	Cortex-M23	Cortex-M23.no_se
		(core without support for TrustZone)
Cortex-M3	Cortex-M33	Cortex-M33.no_dsp
		(core without integer DSP extension)
Cortex-M33.fp	Cortex-M33.no_se	Cortex-M4
(floating-point unit with support for single precision)	(core without support for TrustZone)	
Cortex-M4F	Cortex-M7	Cortex-R4
Cortex-R5	Cortex-R52	Cortex-R52.no_neon
Cortex-R7	Cortex-M7.fp.dp	Cortex-M7.fp.sp
	(floating-point unit with support for double precision)	(floating-point unit with support for single precision)

See also

Processor variant, page 68

Project>Options>General Options>Target>Processor configuration

IË

cpu_mode			
Syntax	cpu_mode={arm a	cpu_mode={arm a thumb t}	
Parameters	arm, a( <b>default)</b> thumb, t	Selects the arm mode as the default mode for functions Selects the thumb mode as the default mode for functions	
Description	I I	Use this option to select the default mode for functions. Project>Options>General Options>Target>Processor mode	

--c++

-D

9	Syntax	C++
I	Description	By default, the language supported by the compiler is C. If you use Standard C++, you must use this option to set the language the compiler uses to C++.
9	See also	Using C++, page 191.
		Project>Options>C/C++ Compiler>Language 1>C++
		and
		Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++

Syntax	-D symbol[=va	alue]
Parameters		
	symbol	The name of the preprocessor symbol
	value	The value of the preprocessor symbol
Description	1	o define a preprocessor symbol. If no value is specified, 1 is used. This ed one or more times on the command line.
	The option –D ha	is the same effect as a #define statement at the top of the source file:
	-Dsymbol	

is equivalent to:
#define symbol 1
To get the equivalence of:
#define FOO
specify the = sign but nothing after, for example:
-DFOO=
Project>Options>C/C++ Compiler>Preprocessor>Defined symbols

## --debug, -r

Syntax	debug -r
Description	Use thedebug or -r option to make the compiler include information in the object modules required by the IAR C-SPY® Debugger and other symbolic debuggers.
	Note: Including debug information will make the object files larger than otherwise.
IIË	Project>Options>C/C++ Compiler>Output>Generate debug information

#### --dependencies

Syntax	dependencie	dependencies[=[i m n][s]] {filename directory +}	
Parameters	i (default)	Lists only the names of files	
	m	Lists in makefile style (multiple rules)	
	n	Lists in makefile style (one rule)	
	S	Suppresses system files	
	+	Gives the same output as $-0$ , but with the filename extension d	
	See also Rules fo	See also Rules for specifying a filename or directory as parameters, page 256.	
Description		Use this option to make the compiler list the names of all source and header files opened for input into a file with the default filename extension <i>i</i> .	

ExampleIf --dependencies or --dependencies=i is used, the name of each opened input<br/>file, including the full path, if available, is output on a separate line. For example:

```
c:\iar\product\include\stdio.h
d:\myproject\include\foo.h
```

If --dependencies=m is used, the output is in makefile style. For each input file, one line containing a makefile dependency rule is produced. Each line consists of the name of the object file, a colon, a space, and the name of an input file. For example:

```
foo.o: c:\iar\product\include\stdio.h
foo.o: d:\myproject\include\foo.h
```

An example of using --dependencies with a popular make utility, such as gmake (GNU make):

Set up the rule for compiling files to be something like:

```
%.0 : %.C
    $(ICC) $(ICCFLAGS) $< --dependencies=m $*.d</pre>
```

That is, in addition to producing an object file, the command also produces a dependency file in makefile style (in this example, using the extension .d).

**2** Include all the dependency files in the makefile using, for example:

-include \$(sources:.c=.d)

Because of the dash (-) it works the first time, when the .d files do not yet exist.



This option is not available in the IDE.

## --deprecated\_feature\_warnings

Syntax	deprecated_fe	deprecated_feature_warnings=[+ -]feature[,[+ -]feature,]	
Parameters	feature	A feature can be attribute_syntax or segment_pragmas.	
Description	Use this option to d deprecated features	lisable or enable warnings for the use of a deprecated feature. The are:	
	<ul> <li>attribute_sy</li> </ul>	ntax	
	· _	ttribute_syntax, page 301,no_uniform_attribute_syntax, page for type attributes used on data objects, page 360.	

#### • segment\_pragmas

ΠË

See the pragma directives dataseg, constseg, and memory. Use the #pragma location and #pragma default\_variable\_attributes directives instead.

Because the deprecated features will be removed in a future version of the IAR C/C++ compiler, it is prudent to remove the use of them in your source code. To do this, enable warnings for a deprecated feature. For each warning, rewrite your code so that the deprecated feature is no longer used.

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

# --diag\_error

Syntax	diag_error= <i>tag</i> [	<pre>diag_error=tag[,tag,]</pre>	
Parameters	tag	The number of a diagnostic message, for example the message number Pe117	
Description	Use this option to reclassify certain diagnostic messages as errors. An error indicates a violation of the C or C++ language rules, of such severity that object code will not be generated. The exit code will be non-zero. This option may be used more than once on the command line.		
	Project>Options>C/C	C++ Compiler>Diagnostics>Treat these as errors	

diag_remark		
Syntax	<pre>diag_remark=tag[,tag,]</pre>	
Parameters	tag	The number of a diagnostic message, for example the message number Pe177
Description	Use this option to reclassify certain diagnostic messages as remarks. A remark is the least severe type of diagnostic message and indicates a source code construction that may cause strange behavior in the generated code. This option may be used more than once on the command line.	
	Note: By default, remark	s are not displayed; use theremarks option to display them.



# --diag\_suppress

Syntax	diag_suppress=tag[,tag,]	
Parameters	tag	The number of a diagnostic message, for example the message number Pe117
Description	1 11	ess certain diagnostic messages. These messages will not be ay be used more than once on the command line.
ΠË	Project>Options>C/C++ Compiler>Diagnostics>Suppress these diagnostics	

diag_warning			
Syntax	diag_	<pre>diag_warning=tag[,tag,]</pre>	
Parameters	tag	The number of a diagnostic message, for example the message number Pe826	
Description	indicates to stop be	Use this option to reclassify certain diagnostic messages as warnings. A warning indicates an error or omission that is of concern, but which will not cause the compiler to stop before compilation is completed. This option may be used more than once on the command line.	
	Project>	Options>C/C++ Compiler>Diagnostics>Treat these as warnings	

# --diagnostics\_tables

Syntax	diagnostics_tables {filename directory}
Parameters	See Rules for specifying a filename or directory as parameters, page 256.

Description	Use this option to list all possible diagnostic messages to a named file. This can be convenient, for example, if you have used a pragma directive to suppress or change the severity level of any diagnostic messages, but forgot to document why.
	Typically, this option cannot be given together with other options.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

# --discard\_unused\_publics

Syntax	discard_unused_publics	
Description	Use this option to discard unused public functions and variables when compiling with the $mfc$ compiler option.	
	<b>Note:</b> Do not use this option only on parts of the application, as necessary symbols might be removed from the generated output. Use the object attribute $\root$ to keep symbols that are used from outside the compilation unit, for example interrupt handlers. If the symbol does not have the $\root$ attribute and is defined in the library, the library definition will be used instead.	
See also	mfc, page 281 and Multi-file compilation units, page 231.	
IIË	Project>Options>C/C++ Compiler>Discard unused publics	

## --dlib\_config

Syntax	dlib_config filename.h config	
Parameters	filename	A DLIB configuration header file, see <i>Rules for specifying a filename or directory as parameters</i> , page 256.
	config	The default configuration file for the specified configuration will be used. Choose between:
		none, no configuration will be used
		normal, the normal library configuration will be used (default)

full, the full library configuration will be used.

Description Use this option to specify which library configuration to use, either by specifying an explicit file or by specifying a library configuration—in which case the default file for that library configuration will be used. Make sure that you specify a configuration that corresponds to the library you are using. If you do not specify this option, the default library configuration file will be used.

All prebuilt runtime libraries are delivered with corresponding configuration files. You can find the library object files and the library configuration files in the directory arm\lib. For examples and information about prebuilt runtime libraries, see *Prebuilt runtime libraries*, page 132.

If you build your own customized runtime library, you should also create a corresponding customized library configuration file, which must be specified to the compiler. For more information, see *Customizing and building your own runtime library*, page 129.



To set related options, choose:

Project>Options>General Options>Library Configuration

## --do\_explicit\_zero\_opt\_in\_named\_sections

Syntax	do_explicit_zero_opt_in	n_named_sections
Description	By default, the compiler treats static initialization of variables explicitly and implicitly initialized to zero the same, except for variables which are to be placed in user-named sections. For these variables, an explicit zero initialization is treated as a copy initialization, that is the same way as variables statically initialized to something other than zero.	
	1	ception for variables in user-named sections, and thus ro as zero initializations, not copy initializations.
Example	<pre>int var2 = 0; int var3 = 7; int var4 @ "MYDATA"; int var5 @ "MYDATA" = 0; int var6 @ "MYDATA" = 7;</pre>	<pre>// Implicit zero init -&gt; zero inited // Explicit zero init -&gt; zero inited // Not zero init -&gt; copy inited // Implicit zero init -&gt; zero inited // Explicit zero init -&gt; copy inited // If option specified, then zero inited // Not zero init -&gt; copy inited Options&gt;C/C++ Compiler&gt;Extra Options.</pre>

-	e
	-

Syntax	-e
Description	In the command line version of the compiler, language extensions are disabled by default. If you use language extensions such as extended keywords and anonymous structs and unions in your source code, you must use this option to enable them. <b>Note:</b> The -e option and thestrict option cannot be used at the same time.
See also	<i>Enabling language extensions</i> , page 185. <b>Project&gt;Options&gt;C/C++ Compiler&gt;Language 1&gt;Standard with IAR extensions</b> <b>Note:</b> By default, this option is selected in the IDE.

## --enable\_hardware\_workaround

Syntax	enable_hardware_workaround=waid[,waid]	
Parameters	waid	The ID number of the workaround to enable. For a list of available workarounds to enable, see the release notes.
Description	Use this option to make the compiler generate a workaround for a specific hardware problem.	
See also	The release notes for the compiler for a list of available parameters.	
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options.</b>	

## --enable\_restrict

Syntax	enable_restrict
Description	Enables the Standard C keyword restrict in C89 and C++. By default, restrict is recognized in Standard C andrestrict is always recognized.
	This option can be useful for improving analysis precision during optimization.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra options</b>

# --endian

Syntax	endian=	
Parameters	big, b little, l(default)	Specifies big-endian as the default byte order Specifies little-endian as the default byte order
Description	1 1	y the byte order of the generated code and data. By default, the in little-endian byte order.
See also	Byte order, page 344.	
IIË	Project>Options>Gene	eral Options>Target>Endian mode

# --enum\_is\_int

Syntax	enum_is_int
Description	Use this option to force the size of all enumeration types to be at least 4 bytes.
	<b>Note:</b> This option will not consider the fact that an enum type can be larger than an integer type.
See also	The enum type, page 346.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

# --error\_limit

Syntax	error_limit=n	
Parameters	п	The number of errors before the compiler stops the compilation. <i>n</i> must be a positive integer; 0 indicates no limit.
Description		imit option to specify the number of errors allowed before the ompilation. By default, 100 errors are allowed.



This option is not available in the IDE.

	r
-	T.

Syntax	-f filename
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option to make the compiler read command line options from the named file, with the default filename extension $xcl$ .
	In the command file, you format the items exactly as if they were on the command line itself, except that you may use multiple lines, because the newline character acts just as a space or tab character.
	Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.
IIË	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

# --fpu

Syntax	fpu={name list none}	
Parameters	<i>name</i> list none ( <b>default</b> )	The target FPU architecture. Lists all supported values for thefpu option. No FPU.
Description	Point Unit (FPU). By se	ate code that performs floating-point operations using a Floating electing an FPU, you will override the use of the software r all supported floating-point operations.
	The name of a target FI	PU is constructed in one of these ways:
	• none: No FPU (defa	ult)
	• fp-architecture	Base variant of the specified architecture
	• fp-architecture	-SP: Single-precision variant
	• fp-architecture	_D16: Variant with 16 D registers

• *fp\_architecture\_*Fp16: Variant with half-precision extensions

The available combinations include:

- {VFPv2 |VFPv3 | VFPv4 | VFPv5 }
- {VFPv3 | FPv4 | FPv5 }\_D16
- {FPv4 | FPv5 }-SP
- VFPv3\_Fp16

ΠĤ

• VFPv3\_D16\_Fp16

See also

*VFP and floating-point arithmetic*, page 68.

Project>Options>General Options>Target>FPU

guard_calls	
Syntax	guard_calls
Description	Use this option to enable guards for function static variable initialization. This option should be used in a threaded C++ environment.
See also	Managing a multithreaded environment, page 156. To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

## --header\_context

Syntax		header_context
Description		Occasionally, to find the cause of a problem it is necessary to know which header file that was included from which source line. Use this option to list, for each diagnostic message, not only the source position of the problem, but also the entire include stack at that point.
	∎Ë	This option is not available in the IDE.

#### -1

Syntax	-I path	
Parameters	path	The search path for #include files
Description	Use this option to specify the search paths for #include files. This option can be used more than once on the command line.	
See also	Include file search procedure, page 247.	
ΠË	Project>Options>C/C+	+ Compiler>Preprocessor>Additional include directories

-1

Syntax

Parameters

-l[a|A|b|B|c|C|D][N][H] {filename|directory}

a	(default)	Assembler list file
A		Assembler list file with C or C++ source as comments
b		Basic assembler list file. This file has the same contents as a list file produced with -la, except that no extra compiler-generated information (runtime model attributes, call frame information, frame size information) is included *
В		Basic assembler list file. This file has the same contents as a list file produced with -1A, except that no extra compiler generated information (runtime model attributes, call frame information, frame size information) is included *
С		C or C++ list file
С	(default)	C or C++ list file with assembler source as comments
D		C or C++ list file with assembler source as comments, but without instruction offsets and hexadecimal byte values
Ν		No diagnostics in file
Η		Include source lines from header files in output. Without this option, only source lines from the primary source file are included

\* This makes the list file less useful as input to the assembler, but more useful for reading by a human.

See also Rules for specifying a filename or directory as parameters, page 256.

**Description** Use this option to generate an assembler or C/C++ listing to a file. Note that this option can be used one or more times on the command line.

To set related options, choose:

Project>Options>C/C++ Compiler>List

#### --lock\_regs

Syntax	lock_regs= <i>regis</i>	lock_regs= <i>register</i>	
Parameters	registers	A comma-separated list of register names and register intervals to be locked, in the range R4-R11.	
Description	Use this option to preve registers.	ent the compiler from generating code that uses the specified	
Example	lock_regs=R4 lock_regs=R8-R1 lock_regs=R4,R8-		
	To set this option, use l	Project>Options>C/C++ Compiler>Extra Options.	

## --macro\_positions\_in\_diagnostics

	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .
Description	Use this option to obtain position references inside macros in diagnostic messages. This is useful for detecting incorrect source code constructs in macros.
Syntax	macro_positions_in_diagnostics

## --make\_all\_definitions\_weak

Syntax		make_all_definitions_weak
Description		Turns all variable and function definitions in the compilation unit into weak definitions.
		<b>Note:</b> Normally, it is better to use extended keywords or pragma directives to turn individual variable and function definitions into weak definitions.
See also		<i>weak</i> , page 374.
	∎Ë	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

#### --max\_cost\_constexpr\_call

Syntax	max_cost_co	nstexpr_call=limit	
Parameters	limit	The number of calls and loop iterations. The default is 2000000.	
Description	call (function or c	Use this option to specify an upper limit for the <i>cost</i> for folding a top-level constexpr call (function or constructor). The cost is a combination of the number of calls interpreted and the number of loop iterations preformed during the interpretation of a top-level call.	
	To set this option	, use Project>Options>C/C++ Compiler>Extra Options.	

## --max\_depth\_constexpr\_call

Syntax	max_dept	h_constexpr_call=limit
Parameters	limit	The depth of recursion. The default is 1000.
Description	1	on to specify the maximum depth of recursion for folding a top-level all (function or constructor).
	To set this op	tion, use Project>Options>C/C++ Compiler>Extra Options.

# --mfc

Syntax	mfc
Description	Use this option to enable <i>multi-file compilation</i> . This means that the compiler compiles one or several source files specified on the command line as one unit, which enhances interprocedural optimizations.
	<b>Note:</b> The compiler will generate one object file per input source code file, where the first object file contains all relevant data and the other ones are empty. If you want only the first file to be produced, use the $-\circ$ compiler option and specify a certain output file.
Example	<pre>iccarm myfile1.c myfile2.c myfile3.cmfc</pre>
See also	discard_unused_publics, page 272,output, -o, page 292, and Multi-file compilation units, page 231.
IIË	Project>Options>C/C++ Compiler>Multi-file compilation

# --no\_alignment\_reduction

Syntax	no_alignment_reduction
Description	Some simple Thumb/Thumb2 functions can be 2-byte aligned. Use this option to keep those functions 4-byte aligned.
	This option has no effect when compiling for Arm mode.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

## --no\_bom

Syntax	no_bom
Description	Use this option to omit the Byte Order Mark (BOM) when generating a UTF-8 output file.
See also	text_out, page 300 and Text encodings, page 251.
	Project>Options>C/C++ Compiler>Encodings>Text output file encoding

## --no\_clustering

	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Static clustering
See also	Static clustering, page 235.
Description	Use this option to disable static clustering optimizations. <b>Note:</b> This option has no effect at optimization levels below Medium.
Syntax	no_clustering

#### --no\_code\_motion

	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Code motion
See also	Code motion, page 234.
Description	Use this option to disable code motion optimizations. <b>Note:</b> This option has no effect at optimization levels below Medium.
Syntax	no_code_motion

# --no\_const\_align

Syntax	no_const_align
Description	By default, the compiler uses alignment 4 for objects with a size of 4 bytes or more. Use this option to make the compiler align const objects based on the alignment of their type.
	For example, a string literal will get alignment 1, because it is an array with elements of the type const char which has alignment 1. Using this option might save ROM space, possibly at the expense of processing speed.
See also	Alignment, page 343.
ĪË	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

#### --no\_cse

Syntax	no_cse
Description	Use this option to disable common subexpression elimination.
	<b>Note:</b> This option has no effect at optimization levels below Medium.
See also	Common subexpression elimination, page 234.
ШË	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Common subexpression elimination

# --no\_dwarf3\_cfi

Syntax	no_dwarf3_cfi
Description	Use this option to suppress the generation of DWARF3 call frame information instructions. Note that this can affect the quality of the call frame information.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

# --no\_exceptions

Syntax	no_exceptions
Description	Use this option to disable exception support in the C++ language. Exception statements like throw and $try$ -catch, and exception specifications on function definitions will generate an error message. Exception specifications on function declarations are ignored. The option is only valid when used together with thec++ compiler option.
	If exceptions are not used in your application, it is recommended to disable support for them by using this option, because exceptions cause a rather large increase in code size.
See also	<i>Exception handling</i> , page 192 and <i>EXCEPTIONS</i> , page 458.
ΠË	Project>Options>C/C++ Compiler>Language 1>C++
	and
	Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++>With exceptions

no_fragments		
Syntax	no_fragments	
Description	Use this option to disable section fragment handling. Normally, the toolset uses IAR proprietary information for transferring section fragment information to the linker. The linker uses this information to remove unused code and data, and thus further minimize the size of the executable image. When you use this option, this information is not output in the object files.	
See also	Keeping symbols and sections, page 109.	
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b>	

# --no\_inline

	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Function inlining
See also	Inlining functions, page 84.
Description	Use this option to disable function inlining.
Syntax	no_inline

# --no\_literal\_pool

Syntax	no_literal_pool
Description	Use this option to generate code that should run from a memory region where it is not allowed to read data, only to execute code.
	When this option is used, the compiler will construct addresses and large constants with the MOV32 pseudo instruction instead of using a literal pool: switch statements are no longer translated using tables, and constant data is placed in the .rodata section.
	This option also affects the automatic library selection performed by the linker. An IAR-specific ELF attribute is used for determining whether libraries compiled with this option should be used.
	This option is only allowed for Armv6-M and Armv7 cores, and can be combined with the optionsropi orrwpi only for Armv7 cores.

See also

--no\_literal\_pool, page 330.

Project>Options>C/C++ Compiler>Code>No data reads in code memory

## --no\_loop\_align

Syntax	no_loop_align
Description	Use this option to disable the 4-byte alignment of labels in loops. This option is only useful in Thumb2 mode.
	In Arm/Thumb1 mode, this option is enabled but does not perform anything.
See also	Alignment, page 343
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options.</b>

# --no\_mem\_idioms

Syntax	no_mem_idioms
Description	Use this option to make the compiler not optimize code sequences that clear, set, or copy a memory region. These memory access patterns (idioms) can otherwise be aggressively optimized, in some cases using calls to the runtime library. In principle, the transformation can involve more than a library call.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options.</b>

## --no\_path\_in\_file\_macros

Syntax		no_path_in_file_macros
Description		Use this option to exclude the path from the return value of the predefined preprocessor symbolsFILE andBASE_FILE
See also		Description of predefined preprocessor symbols, page 452.
	IĤ	This option is not available in the IDE.

#### --no\_rtti

Syntax		no_rtti
Description		Use this option to disable the runtime type information (RTTI) support in the C++ language. RTTI statements like dynamic_cast and typeid will generate an error message. This option is only valid when used together with thec++ compiler option.
See also		<i>Using</i> C++, page 191 and <i>RTTI</i> , page 460.
	Ī	Project>Options>C/C++ Compiler>Language 1>C++
		and
		Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++>With RTTI

#### --no\_rw\_dynamic\_init

Syntax	no_rw_dynamic_init
Description	Use this option to disable runtime initialization of static C variables.
	C source code that is compiled withropi orrwpi cannot have static pointer variables and constants initialized to addresses of objects that do not have a known address at link time. To solve this for writable static variables, the compiler generates code that performs the initialization at program startup (in the same way as dynamic initialization in C++).
See also	<i>ropi</i> , page 296 and <i>rwpi</i> , page 297.
ĪË	Project>Options>C/C++ Compiler>Code>No dynamic read/write/initialization

#### --no\_scheduling

Syntax	no_scheduling
Description	Use this option to disable the instruction scheduler.
See also	<b>Note:</b> This option has no effect at optimization levels below High. <i>Instruction scheduling</i> , page 236.
	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Instruction scheduling
	transformations>Instruction scheduling

# --no\_size\_constraints

Syntax	no_size_constraints
Description	Use this option to relax the normal restrictions for code size expansion when optimizing for high speed.
	Note: This option has no effect unless used with -Ohs.
See also	Speed versus size, page 233.
	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>No size constraints

# --no\_static\_destruction

Syntax	no_static_destruction
Description	Normally, the compiler emits code to destroy C++ static variables that require destruction at program exit. Sometimes, such destruction is not needed.
	Use this option to suppress the emission of such code.
See also	Setting up the atexit limit, page 110.
TË	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

# --no\_system\_include

Syntax		no_system_include
Description		By default, the compiler automatically locates the system include files. Use this option to disable the automatic search for system include files. In this case, you might need to set up the search path by using the $-I$ compiler option.
See also		dlib_config, page 272, andsystem_include_dir, page 300.
	Ë	Project>Options>C/C++ Compiler>Preprocessor>Ignore standard include directories

#### --no\_tbaa

	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Type-based alias analysis
See also	Type-based alias analysis, page 235.
Description	Use this option to disable type-based alias analysis. <b>Note:</b> This option has no effect at optimization levels below High.
Syntax	no_tbaa

#### --no\_typedefs\_in\_diagnostics

Syntax	no_typedefs_in_diagnostics
Description	Use this option to disable the use of typedef names in diagnostics. Normally, when a type is mentioned in a message from the compiler, most commonly in a diagnostic message of some kind, the typedef names that were used in the original declaration are used whenever they make the resulting text shorter.
Example	typedef int (*MyPtr)(char const *); MyPtr p = "My text string";
	will give an error message like this:
	Error[Pe144]: a value of type "char *" cannot be used to initialize an entity of type "MyPtr"
	If the $no\_typedefs\_in\_diagnostics$ option is used, the error message will be like this:
	Error[Pe144]: a value of type "char *" cannot be used to initialize an entity of type "int (*)(char const *)"
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

#### --no\_unaligned\_access

Syntax

--no\_unaligned\_access

Description

Use this option to make the compiler avoid unaligned accesses. Data accesses are usually performed aligned for improved performance. However, some accesses, most

notably when reading from or writing to packed data structures, might be unaligned. When using this option, all such accesses will be performed using a smaller data size to avoid any unaligned accesses. This option is only useful for Armv6 architectures and higher.

For the architectures Armv7-M and Armv8-M.mainline, the hardware support for unaligned access can be controlled by software. There are variants of library routines for these architectures that are faster when unaligned access is supported in hardware (symbols with the prefix \_\_iar\_unaligned\_). The IAR linker will not use these variants if any of the input modules does not allow unaligned access.

See also	Alignment, page 343.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options.</b>

#### --no\_uniform\_attribute\_syntax

Syntax	no_uniform_attribute_syntax
Description	Use this option to apply the default syntax rules to IAR type attributes specified before a type specifier.
See also	uniform_attribute_syntax, page 301 and Syntax for type attributes used on data objects, page 360
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

#### --no\_unroll

Syntax	no_unroll
Description	Use this option to disable loop unrolling. <b>Note:</b> This option has no effect at optimization levels below High.
See also	Loop unrolling, page 234.
	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Loop unrolling

no_var_align	
Syntax	no_var_align
Description	By default, the compiler uses alignment 4 for variable objects with a size of 4 bytes or more. Use this option to make the compiler align variable objects based on the alignment of their type.
	For example, a char array will get alignment 1, because its elements of the type char have alignment 1. Using this option might save RAM space, possibly at the expense of processing speed.
See also	Alignment, page 343 andno_const_align, page 282.
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options.</b>

#### --no\_warnings

Syntax		no_warnings
Description		By default, the compiler issues warning messages. Use this option to disable all warning messages.
	Ē	This option is not available in the IDE.

#### --no\_wrap\_diagnostics

Syntax --no\_wrap\_diagnostics

Description

By default, long lines in diagnostic messages are broken into several lines to make the message easier to read. Use this option to disable line wrapping of diagnostic messages.



This option is not available in the IDE.

# --nonportable\_path\_warnings

Syntax	nonportable_path_warnings
Description	Use this option to make the compiler generate a warning when characters in the path used for opening a source file or header file are lower case instead of upper case, or vice versa, compared with the path in the file system. This option is not available in the IDE.

#### -0

Syntax	-0[n l m h hs	-O[n 1 m h hs hz]	
Parameters	n	None* (Best debug support)	
	1 (default)	Low*	
	m	Medium	
	h	High, balanced	
	hs	High, favoring speed	
	hz	High, favoring size	
	1	tant difference between None and Low is that at None, all non-static e during their entire scope.	
Description	the code. If no opt	set the optimization level to be used by the compiler when optimizing imization option is specified, the optimization level is used by default. without any parameter, the optimization level High balanced is used.	
	•	timization makes it relatively easy to follow the program flow in the onversely, a high level of optimization makes it relatively hard.	
	At high optimization levels, when favoring speed or size (-Ohs or -Ohz), the compiler will emit AEABI attributes indicating the requested optimization goal. This information can be used by the linker to select smaller or faster variants of DLIB library functions.		
		ferencing a function is compiled with -Ohs, and the DLIB library variant, that variant is used.	
		referencing a function are compiled with -Ohz, and the DLIB library all variant, that variant is used.	

For example, using -Ohz for Cortex-M0 will result in the use of a smaller AEABI library routine for integer division.

See also	Controlling compiler optimizations, page 230.	
	Project>Options>C/C++ Compiler>Optimizations	;
only_stdout		
Syntax	only_stdout	
Description	Use this option to make the compiler use the standard messages that are normally directed to the error output	

This option is not available in the IDE.

output, -o	
Syntax	output {filename directory} -o {filename directory}
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	By default, the object code output produced by the compiler is located in a file with the same name as the source file, but with the extension o. Use this option to explicitly specify a different output filename for the object code output.
	This option is not available in the IDE.

#### --pending\_instantiations

ΠË

Syntax	pending_instantiations number		
Parameters	number	An integer that specifies the limit, where 64 is default. If 0 is used, there is no limit.	

Description Use this option to specify the maximum number of instantiations of a given C++ template that is allowed to be in process of being instantiated at a given time. This is used for detecting recursive instantiations.



#### Project>Options>C/C++ Compiler>Extra Options

#### --predef\_macros

Syntax	predef_macros {filename directory}	
Parameters	See Rules for specifying a filename or directory as parameters, page 256.	
Description	Use this option to list the predefined symbols. When using this option, make sure to also use the same options as for the rest of your project.	
	If a filename is specified, the compiler stores the output in that file. If a directory is specified, the compiler stores the output in that directory, in a file with the predef filename extension.	
	Note that this option requires that you specify a source file on the command line.	
ШË	This option is not available in the IDE.	

#### --preinclude

Syntax	preinclude includefile
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option to make the compiler read the specified include file before it starts to read the source file. This is useful if you want to change something in the source code for the entire application, for instance if you want to define a new symbol.
	Project>Options>C/C++ Compiler>Preprocessor>Preinclude file

preprocess			
Syntax	prepro	preprocess[=[c][n][s]] {filename directory}	
Parameters			
	С	Include comments	
	n	Preprocess only	
	S	Suppress #line directives	
	See also R	See also Rules for specifying a filename or directory as parameters, page 256.	
Description	Use this op	Use this option to generate preprocessed output to a named file. <b>Project&gt;Options&gt;C/C++ Compiler&gt;Preprocessor&gt;Preprocessor output to file</b>	
	Project>C		

•	- •			
	Syntax	public_equ symbol[=value]		
	Parameters			
		symbol	The name of the assembler symbol to be defined	
		value	An optional value of the defined assembler symbol	
	Description	This option is equivalent to defining a label in assembler language using the EQU directive and exporting it using the PUBLIC directive. This option can be used more than once on the command line.		
	Π	This option is not availa	able in the IDE.	
rel	axed_fp			
	Syntax	relaxed_fp		
	Description	aggressive optimization	the compiler to relax the language rules and perform more of floating-point expressions. This option improves g-point expressions that fulfill these conditions:	

• The expression consists of both single- and double-precision values

--public\_equ

- The double-precision values can be converted to single precision without loss of accuracy
- The result of the expression is converted to single precision.

Note that performing the calculation in single precision instead of double precision might cause a loss of accuracy.

Example float F(float a, float b)
{
return a + b \* 3.0;
}
The Concentration

TF

The C standard states that 3.0 in this example has the type double and therefore the whole expression should be evaluated in double precision. However, when the --relaxed\_fp option is used, 3.0 will be converted to float and the whole expression can be evaluated in float precision.

To set related options, choose:

Project>Options>C/C++ Compiler>Language 2>Floating-point semantics

remarks	
Syntax	remarks
Description	The least severe diagnostic messages are called remarks. A remark indicates a source code construct that may cause strange behavior in the generated code. By default, the compiler does not generate remarks. Use this option to make the compiler generate remarks.
See also	Severity levels, page 253. Project>Options>C/C++ Compiler>Diagnostics>Enable remarks

#### --require\_prototypes

Syntax

--r


--require\_prototypes

Description

Use this option to force the compiler to verify that all functions have proper prototypes. Using this option means that code containing any of the following will generate an error:

• A function call of a function with no declaration, or with a Kernighan & Ritchie C declaration

- A function definition of a public function with no previous prototype declaration
- An indirect function call through a function pointer with a type that does not include a prototype.



rop	<b>i</b>		
	Syntax	ropi	
	Description	Use this option to make the compiler generate code that uses PC-relative references to address code and read-only data.	
		When this option is used, these limitations apply:	
		• C++ constructions cannot be used	
		• The object attributeramfunc cannot be used	
		• Pointer constants cannot be initialized with the address of another constant, a string literal, or a function. However, writable variables can be initialized to constant addresses at runtime.	
	See also	no_rw_dynamic_init, page 286, and Description of predefined preprocessor symbols, page 452.	
		Project>Options>C/C++ Compiler>Code>Code and read-only data (ropi)	
rop	oi_cb		
	Syntax	ropi_cb	
	Description	Use this option to make all accesses to constant data, base-addressed relative to the register $R8$ .	
		Useropi_cb together withropi to activate a variant of ROPI that uses the Arm core register R8 as the base address for read-only data, instead of using the PC. This is useful, for example, when using ROPI in code that runs from execute-only memory, which is enabled if you compile and link withno_literal_pool.	

#### Note:

• The use of --ropi\_cb is not AEABI-compliant.

• There is no provided setup of the register R8. This must be handled by your application.

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.



rwpi	
Syntax	rwpi
Description	Use this option to make the compiler generate code that uses the offset from the static base register (R9) to address-writable data.
	When this option is used, these limitations apply:
	• The object attributeramfunc cannot be used
	• Pointer constants cannot be initialized with the address of a writable variable. However, static writable variables can be initialized to writable addresses at runtime.
See also	no_rw_dynamic_init, page 286, and Description of predefined preprocessor symbols, page 452.
ΠË	Project>Options>C/C++ Compiler>Code>Read/write data (rwpi)
rwpi_near	
Summer (	wini noor

Syntax	rwpi_near
Description	Use this option to make the compiler generate code that uses the offset from the static base register (R9) to address-writable data.
	When this option is used, these limitations apply
	• The object attributeramfunc cannot be used.
	• Pointer constants cannot be initialized with the address of a writable variable. However, static writable variables can be initialized to writable addresses at runtime.
	• A maximum of 64 Kbytes of read/write memory can be addressed.
See also	no_rw_dynamic_init, page 286 and Description of predefined preprocessor symbols, page 452.



To set this option, use Project>Options>C/C++ Compiler>Extra Options.

section		
Syntax	section OldName=NewName	
Description	The compiler places functions and data objects into named sections which are referred to by the IAR ILINK Linker. Use this option to change the name of the section <i>OldName</i> to <i>NewName</i> .	
	This is useful if you want to place your code or data in different address ranges and you find the @ notation, alternatively the #pragma location directive, insufficient. Note that any changes to the section names require corresponding modifications in the linker configuration file.	
Example	To place functions in the section MyText, use: section .text=MyText	
See also	Controlling data and function placement in memory, page 226. Project>Options>C/C++ Compiler>Output>Code section name	
L		

#### --silent

Syntax	silent
Description	By default, the compiler issues introductory messages and a final statistics report. Use this option to make the compiler operate without sending these messages to the standard output stream (normally the screen).
	This option does not affect the display of error and warning messages.
	This option is not available in the IDE.

# --source\_encoding

Syntax	source_encoding	{locale utf8}
Parameters	locale utf8	The default source encoding is the system locale encoding. The default source encoding is the UTF-8 encoding.
Description	When reading a source file with no Byte Order Mark (BOM), use this option to specify the encoding. If this option is not specified and the source file does not have a BOM, the Raw encoding will be used.	
See also	<i>Text encodings</i> , page 2 <b>Project&gt;Options&gt;C/O</b>	51 C++ Compiler>Encodings>Default source file encoding

# --stack\_protection

Syntax	stack_protection
Description	Use this option to enable stack protection for the functions that are considered needing it.
See also	Stack protection, page 85. To set this option, use Project>Options>C/C ++ Compiler>Extra Options.

# --strict

Syntax	strict
Description	By default, the compiler accepts a relaxed superset of Standard C and C++. Use this option to ensure that the source code of your application instead conforms to strict Standard C and C++.
	Note: The -e option and thestrict option cannot be used at the same time.
See also	Enabling language extensions, page 185.



#### --system\_include\_dir

Syntax	system_include_dir path	
Parameters	path	The path to the system include files, see <i>Rules for specifying</i> a filename or directory as parameters, page 256.
Description	By default, the compiler automatically locates the system include files. Use this option to explicitly specify a different path to the system include files. This might be useful if you have not installed IAR Embedded Workbench in the default location.	
See also	dlib_config, page 272, andno_system_include, page 287.	
	This option is not availa	able in the IDE.

#### --text\_out

Syntax	text_out {utf8 utf161e utf16be locale}	
Parameters		
	utf8	Uses the UTF-8 encoding
	utf16le	Uses the UTF-16 little-endian encoding
	utf16be	Uses the UTF-16 big-endian encoding
	locale	Uses the system locale encoding
Description	Use this option to spec	ify the encoding to be used when generating a text output file.
		piler list files is to use the same encoding as the main source file. For text files is UTF-8 with a Byte Order Mark (BOM).
	If you want text output	in UTF-8 encoding without a BOM, use the optionno_bom.
See also	<i>no_bom</i> , page 281 ar	nd Text encodings, page 251
	Project>Options>C/C	C++ Compiler>Encodings>Text output file encoding

# --thumb

Syntax	thumb
Description	Use this option to set default function mode to Thumb.
	Note: This option has the same effect as thecpu_mode=thumb option.
	Project>Options>C/C++ Compiler>Code>Processor mode>Thumb

# --uniform\_attribute\_syntax

Syntax	uniform_attribute_syntax
Description	By default, an IAR type attribute specified before the type specifier applies to the object or typedef itself, and not to the type specifier, as const and volatile do. If you specify this option, IAR type attributes obey the same syntax rules as const and volatile.
	The default for IAR type attributes is to <i>not</i> use uniform attribute syntax.
See also	no_uniform_attribute_syntax, page 289 and Syntax for type attributes used on data objects, page 360
	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .

#### --use\_c++\_inline

	Project>Options>C/C++ Compiler>Language 1>C dialect>C99>C++ inline semantics
See also	Inlining functions, page 84
Description	Standard C uses slightly different semantics for the inline keyword than C++ does. Use this option if you want C++ semantics when you are using C.
Syntax	use_c++_inline

#### --use\_unix\_directory\_separators

Syntax		use_unix_directory_separators	
Description		Use this option to make DWARF debug information use / (instead of $\)$ as directory separators in file paths.	
		This option can be useful if you have a debugger that requires directory separators in UNIX style.	
	ĪË	To set this option, use <b>Project&gt;Options&gt;C/C++ Compiler&gt;Extra Options</b> .	
utf8_text_in			
Syntax		utf8_text_in	

text input file with no Byte Order Mark (BOM). **Note:** This option does not apply to source files.

Text encodings, page 251

ΠĤ

Use this option to specify that the compiler shall use UTF-8 encoding when reading a

Project>Options>C/C++ Compiler>Encodings>Default input file encoding

--vectorize

See also

Description

Syntax		vectorize
Description		Use this option to enable generation of NEON vector instructions.
		Loops will only be vectorized if the target processor has NEON capability and the optimization level is -Ohs.
	∎Ë	Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Vectorize

vei	rsion	
	Syntax	version
	Description	Use this option to make the compiler send version information to the console and then exit.
	ĪĒ	This option is not available in the IDE.
vla		
	Syntax	vla
	Description	Use this option to enable support for C99 variable length arrays. Such arrays are located on the heap. This option requires Standard C and cannot be used together with the $c89$ compiler option.
		<b>Note:</b> vla should not be used together with the longjmp library function, as that can lead to memory leakages.
	See also	C language overview, page 183.
	IIË	Project>Options>C/C++ Compiler>Language 1>C dialect>Allow VLA

# --warn\_about\_c\_style\_casts

Syntax		warn_about_c_style_casts
Description		Use this option to make the compiler warn when C-style casts are used in C++ source code.
	∎Ë	This option is not available in the IDE.

# --warnings\_affect\_exit\_code

Syntax	warnings_affect_exit_code
Description	By default, the exit code is not affected by warnings, because only errors produce a non-zero exit code. With this option, warnings will also generate a non-zero exit code.



This option is not available in the IDE.

#### --warnings\_are\_errors

Syntax	warnings_are_errors
Description	Use this option to make the compiler treat all warnings as errors. If the compiler encounters an error, no object code is generated. Warnings that have been changed into remarks are not treated as errors.
	Note: Any diagnostic messages that have been reclassified as warnings by the optiondiag_warning or the #pragma diag_warning directive will also be treated as errors whenwarnings_are_errors is used.
See also	diag_warning, page 271.
ШË	Project>Options>C/C++ Compiler>Diagnostics>Treat all warnings as errors

# **Linker options**

- Summary of linker options
- Descriptions of linker options

For general syntax rules, see Options syntax, page 255.

# Summary of linker options

This table summarizes the linker options:

Command line option	Description	
advanced_heap	Uses an advanced heap	
basic_heap	Uses a basic heap	
BE8	Uses the big-endian format BE8	
BE32	Uses the big-endian format BE32	
bounds_table_size	Specifies the size of the global bounds table. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.	
call_graph	Produces a call graph file in XML format	
config	Specifies the linker configuration file to be used by the linker	
config_def	Defines symbols for the configuration file	
config_search	Specifies more directories to search for linker configuration files	
cpp_init_routine	Specifies a user-defined C++ dynamic initialization routine	
cpu	Specifies a processor variant	
debug_heap	Uses the checked heap. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.	
default_to_complex_ranges	Makes complex ranges the default decompressor in initialize directives	
define_symbol	Defines symbols that can be used by the application	

Table 26: Linker options summary

Command line option	Description
dependencies	Lists file dependencies
diag_error	Treats these message tags as errors
diag_remark	Treats these message tags as remarks
diag_suppress	Suppresses these diagnostic messages
diag_warning	Treats these message tags as warnings
diagnostics_tables	Lists all diagnostic messages
do_segment_pad	Pads each ELF segment to n-byte alignment
enable_hardware_workaround	Enables specified hardware workaround
enable_stack_usage	Enables stack usage analysis
entry	Treats the symbol as a root symbol and as the start of the application
error_limit	Specifies the allowed number of errors before linking stops
exception_tables	Generates exception tables for C code
export_builtin_config	Produces an ${\tt icf}$ file for the default configuration
extra_init	Specifies an extra initialization routine that will be called if it is defined.
-f	Extends the command line
force_exceptions	Always includes exception runtime code
force_output	Produces an output file even if errors occurred
fpu	Selects the FPU to link your application for
ignore_uninstrumented_point ers	Disables checking of accessing via pointers in memory for which no bounds have been set. See the C-RUN documentation in the <i>C-SPY®</i> Debugging Guide for Arm.
image_input	Puts an image file in a section
import_cmse_lib_in	Reads previous version of import library for building a non-secure image
import_cmse_lib_out	Produces an import library, for building a non-secure image
inline	Inlines small routines
keep	Forces a symbol to be included in the application
-L	Specifies more directories to search for object and library files. Alias forsearch.

Command line option	Description
log	Enables log output for selected topics
log_file	Directs the log to a file
mangled_names_in_messages	Adds mangled names in messages
manual_dynamic_initializati on	Suppresses automatic initialization during system startup
map	Produces a map file
merge_duplicate_sections	Merges equivalent read-only sections
misrac	Enables error messages specific to MISRA-C:1998. This option is a synonym tomisrac1998 and is only available for backwards compatibility.
misrac1998	Enables error messages specific to MISRA-C: 1998. See the IAR Embedded Workbench® MISRA C: 1998 Reference Guide.
misrac2004	Enables error messages specific to MISRA-C:2004. See the IAR Embedded Workbench® MISRA C:2004 Reference Guide.
misrac_verbose	Enables verbose logging of MISRA C checking. See the IAR Embedded Workbench® MISRA C: 1998 Reference Guide and the IAR Embedded Workbench® MISRA C:2004 Reference Guid.
no_bom	Omits the Byte Order Mark from UTF-8 output files
no_dynamic_rtti_elimination	Includes dynamic runtime type information even when it is not needed.
no_entry	Sets the entry point to zero
no_exceptions	Generates an error if exceptions are used
no_fragments	Disables section fragment handling
no_free_heap	Uses the smallest possible heap implementation
no_inline	Excludes functions from small function inlining
no_library_search	Disables automatic runtime library search
no_literal_pool	Generates code that should run from a memory region where it is not allowed to read data, only to execute code
no_locals	Removes local symbols from the ELF executable image.

no_removeDisatno_vfeDisatno_warningsDisatno_warp_diagnosticsDoes-oSets-oSetsoutputSetspi_veneersGeneplace_holderResettool,ielfpreconfigReadredirectRedirremarksEnablesearchSpeciseilentSets	les range reservations for absolute symbols les removal of unused sections les Virtual Function Elimination les generation of warnings not wrap long lines in diagnostic messages he object filename. Alias foroutput. standard output only he object filename rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker quration file
no_vfe Disat no_warnings Disat no_warnings Disat no_wrap_diagnostics Does -o Sets 1 only_stdout Uses output Sets 1 pi_veneers Gene place_holder Reset tool, ielt preconfig Read config printf_multibytes Make redirect Redin symb remarks Enabl scanf_multibytes Make search Speci librar set inosting Links silent Sets 1	les Virtual Function Elimination les generation of warnings not wrap long lines in diagnostic messages he object filename. Alias foroutput. standard output only he object filename rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker guration file s the printf formatter support multibytes
no_warnings Disat no_wrap_diagnostics Does -o Sets f only_stdout Uses output Sets f pi_veneers Gene place_holder Reset tool, ielf preconfig Read config printf_multibytes Make redirect Redir symb remarks Enable scanf_multibytes Make semihosting Links silent Sets s	les generation of warnings not wrap long lines in diagnostic messages he object filename. Alias foroutput. standard output only he object filename rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker guration file s the printf formatter support multibytes
no_wrap_diagnostics Does -o Sets only_stdout Uses output Sets pi_veneers Gene place_holder Reset tool, preconfig Read config printf_multibytes Make redirect Redir symb remarks Enabl scanf_multibytes Make search Speci librar semihosting Links	not wrap long lines in diagnostic messages he object filename. Alias foroutput. standard output only he object filename rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker guration file s the printf formatter support multibytes
-oSets aonly_stdoutUsesoutputSets api_veneersGeneplace_holderReseatool,ielfpreconfigReadprintf_multibytesMakeredirectRedirsymbremarkssearchSpeciibrarsemihostingsilentSets a	he object filename. Alias foroutput. standard output only he object filename rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker guration file s the printf formatter support multibytes
only_stdout Uses output Sets a pi_veneers Gene place_holder Reset tool, ielf preconfig Read config printf_multibytes Make redirect Redir symb remarks Enabl scanf_multibytes Make search Speci librar semihosting Links	standard output only he object filename rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker guration file s the printf formatter support multibytes
output Sets a pi_veneers Gene place_holder Reserved tool, ielt preconfig Read config printf_multibytes Make redirect Redirved symb remarks Enable scanf_multibytes Make search Special set Set Set Set Set Set Set Set Set Set S	he object filename rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker guration file s the printf formatter support multibytes
pi_veneers Gene place_holder Reserved tool, ielf preconfig Read config printf_multibytes Make redirect Redir symb remarks Enable scanf_multibytes Make search Special ibrar semihosting Links silent Sets a	rates position independent veneers. ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker juration file s the printf formatter support multibytes
place_holder Reserved tool, ielf preconfig Read config printf_multibytes Make redirect Redir symb remarks Enabl scanf_multibytes Make search Speci librar semihosting Links silent Sets	ve a place in ROM to be filled by some other for example a checksum calculated by tool. the specified file before reading the linker guration file s the printf formatter support multibytes
tool, ielt preconfig Read config printf_multibytes Make redirect Redir symb remarks Enabl scanf_multibytes Make search Speci librar semihosting Links silent Sets	for example a checksum calculated by tool. In the specified file before reading the linker suration file In the printf formatter support multibytes
config printf_multibytes Make redirect Redir symb remarks Enable scanf_multibytes Make search Speci librar semihosting Links silent Sets	uration file s the printf formatter support multibytes
redirect Redir symb remarks Enabl scanf_multibytes Make search Speci librar semihosting Links silent Sets	
symb remarks Enabl scanf_multibytes Make search Speci librar semihosting Links silent Sets :	acts a reference to a symbol to enother
scanf_multibytes Make search Speci librar semihosting Links silent Sets	ects a reference to a symbol to another bl
search Speci librar semihosting Links silent Sets	es remarks
semihosting Links silent Sets	s the scanf formatter support multibytes
silent Sets	ies more directories to search for object and y files
	with debug interface
stack_usage_control Speci	ilent operation
	ies a stack usage control file
strip Remo	ves debug information from the executable
text_out Speci	ies the encoding for text output files
threaded_lib Conf threa	gures the runtime library for use with ds
	es the time zone and daylight savings time onality in the library
treat_rvct_modules_as_softf Treat	
use_full_std_template_names Enabl	ard (non-VFP) calling convention

Command line option	Description
utf8_text_in	Uses the UTF-8 encoding for text input files
version	Sends version information to the console and then exits
vfe	Controls Virtual Function Elimination
warnings_affect_exit_code	Warnings affects exit code
warnings_are_errors	Warnings are treated as errors
whole_archive	Treats every object file in the archive as if it was specified on the command line.

# **Descriptions of linker options**

The following section gives detailed reference information about each linker option.

Note that if you use the options page **Extra Options** to specify specific command line options, the IDE does not perform an instant check for consistency problems like conflicting options, duplication of options, or use of irrelevant options.

### --advanced\_heap

	Project>Options>General Options>Library options 2>Heap selection
See also	Advanced, basic, and no-free heap, page 203
Description	Use this option to use an advanced heap.
Syntax	advanced_heap

#### --basic\_heap

	Project>Options>General Options>Library options 2>Heap selection
See also	Advanced, basic, and no-free heap, page 203
Description	Use this option to use the basic heap handler.
Syntax	basic_heap

#### --BE8

Syntax	BE8
Description	Use this option to specify the Byte Invariant Addressing mode.
	This means that the linker reverses the byte order of the instructions, resulting in little-endian code and big-endian data. This is the default byte addressing mode for Armv6 big-endian images. This is the only mode available for Arm v6M and Arm v7 with big-endian images.
	Byte Invariant Addressing mode is only available on Arm processors that support Armv6, Arm v6M, and Arm v7.
See also	Byte order, page 68, Byte order, page 344,BE32, page 310, andendian, page 275.
ΠË	Project>Options>General Options>Target>Endian mode

# --BE32

Syntax	BE32
Description	Use this option to specify the legacy big-endian mode.
	This produces big-endian code and data. This is the only byte-addressing mode for all big-endian images prior to Armv6. This mode is also available for Arm v6 with big-endian, but not for Arm v6M or Arm v7.
See also	Byte order, page 68, Byte order, page 344,BE8, page 310, andendian, page 275.
ШË	Project>Options>General Options>Target>Endian mode

#### --call\_graph

Syntax	call_graph {filename directory}	
Parameters	See Rules for specifying a filename or directory as parameters, page 256.	
Description	Use this option to produce a call graph file. If no filename extension is specified, the extension $cgx$ is used. This option can only be used once on the command line.	
	Using this option enables stack usage analysis in the linker.	

See also

Stack usage analysis, page 96

Project

Project>Options>Linker>Advanced>Call graph output (XML)

#### --config

Syntax	config filename
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option to specify the configuration file to be used by the linker (the default filename extension is icf). If no configuration file is specified, a default configuration is used. This option can only be used once on the command line.
See also	The chapter The linker configuration file.
IË	Project>Options>Linker>Config>Linker configuration file

# --config\_def

Syntax	config_def symbol=constant_value	
Parameters	symbol constant_value	The name of the symbol to be used in the configuration file. The constant value of the configuration symbol.
Description	Use this option to define a constant configuration symbol to be used in the configuration file. This option has the same effect as the define symbol directive in the linker configuration file. This option can be used more than once on the command line.	
See also	<i>define_symbol</i> , page 313 and <i>Interaction between ILINK and the application</i> , page 114.	
ĪË	Project>Options>Linker>Config>Defined symbols for configuration file	

# --config\_search

Syntax	config_search path	
Parameters	path	A path to a directory where the linker should search for linker configuration include files.
Description	Use this option to specify more directories to search for files when processing an include directive in a linker configuration file.	
	•	arches for configuration include files only in the system To specify more than one search directory, use this option for
See also <i>include directive</i> , page 509.		09.
	To set this option, use <b>P</b>	roject>Options>Linker>Extra Options.

# --cpp\_init\_routine

Syntax	cpp_init_routine	cpp_init_routine routine	
Parameters	routine	A user-defined C++ dynamic initialization routine.	
Description	-	When using the IAR C/C++ compiler and the standard library, C++ dynamic initialization is handled automatically. In other cases you might need to use this option.	
	If any sections with the section type INIT_ARRAY or PREINIT_ARRAY are include your application, the C++ dynamic initialization routine is considered to be needed default, this routine is namediar_cstart_call_ctors and is called by the sta code in the standard library. Use this option if you require another routine to handle initialization, for instance if you are not using the standard library.		
	To set this option, use <b>P</b>	roject>Options>Linker>Extra Options.	

#### --cpu

Syntax	cpu= <i>core</i>	
Parameters	core	Specifies a specific processor variant
Description	Use this option to select the processor variant to link your application for. The default is to use a processor or architecture compatible with the object file attributes.	
See also	<i>cpu</i> , page 265	
ĪË	Project>Options>Genera	ll Options>Target>Processor configuration

# --default\_to\_complex\_ranges

Syntax	default_to_complex_ranges
Description	Normally, if initialize directives in a linker configuration file do not specify simple ranges or complex ranges, the linker uses simple ranges if the associated section placement directives use single range regions.
	Use this option to make the linker always use complex ranges by default. This was the behavior of the linker before the introduction of simple ranges and complex ranges.
See also	initialize directive, page 492.
IIË	Project>Options>Linker>Extra Options

define_symbol		
Syntax	define_symbol s	ymbol=constant_value
Parameters	symbol	The name of the constant symbol that can be used by the application.
	constant_value	The constant value of the symbol.

Description	Use this option to define a constant symbol, that is a label, that can be used by your application. This option can be used more than once on the command line. Note that his option is different from the define symbol directive.
See also	config_def, page 311 and Interaction between ILINK and the application, page 114. Project>Options>Linker>#define>Defined symbols

dependencies		
Syntax	dependencies[=[i m]] {filename directory}	
Parameters	i (default) Lists only the names of files	
	m Lists in makefile style	
	See also Rules for specifying a filename or directory as parameters, page 256.	
Description	Use this option to make the linker list the names of the linker configuration, object, and library files opened for input into a file with the default filename extension i.	
Example	Ifdependencies ordependencies=i is used, the name of each opened input file, including the full path, if available, is output on a separate line. For example:	
	c:\myproject\foo.o d:\myproject\bar.o	
	Ifdependencies=m is used, the output is in makefile style. For each input file, one line containing a makefile dependency rule is produced. Each line consists of the name of the output file, a colon, a space, and the name of an input file. For example:	
	a.out: c:\myproject\foo.o a.out: d:\myproject\bar.o	
	This option is not available in the IDE.	

# --diag\_error

Syntax	<pre>diag_error=tag[,tag,]</pre>	
Parameters	tag	The number of a diagnostic message, for example the message number Pe117
Description	Use this option to reclassify certain diagnostic messages as errors. An error indicates a problem of such severity that an executable image will not be generated. The exit code will be non-zero. This option may be used more than once on the command line.	
	Project>Options>Lin	ker>Diagnostics>Treat these as errors

# --diag\_remark

Syntax	<pre>diag_remark=tag[,tag,]</pre>	
Parameters	tag	The number of a diagnostic message, for example the message number Go109
Description	Use this option to reclassify certain diagnostic messages as remarks. A remark is the least severe type of diagnostic message and indicates a construction that may cause strange behavior in the executable image. Note that not all diagnostic messages can be reclassified. This option may be used more than once on the command line.	
	Note: By default, remarks are not displayed; use theremarks option to display them.	
ШË	Project>Options>Linker>Diagnostics>Treat these as remarks	

# --diag\_suppress

Syntax	diag_suppress=tag[,tag,]	
Parameters	tag	The number of a diagnostic message, for example the message number Pa180

Description Use this option to suppress certain diagnostic messages. These messages will not be displayed. Note that not all diagnostic messages can be reclassified. This option may be used more than once on the command line.



#### Project>Options>Linker>Diagnostics>Suppress these diagnostics

diag_warning			
Syntax		<pre>diag_warning=tag[,tag,]</pre>	
Parameters		tag	The number of a diagnostic message, for example the message number Li004
Description		Use this option to reclassify certain diagnostic messages as warnings. A warning indicates an error or omission that is of concern, but which will not cause the linker to stop before linking is completed. Note that not all diagnostic messages can be reclassified. This option may be used more than once on the command line.	
	∎Ë	Project>Option	s>Linker>Diagnostics>Treat these as warnings

#### --diagnostics\_tables

Syntax	diagnostics_tables {filename directory}
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option to list all possible diagnostic messages in a named file. This can be convenient, for example, if you have used a pragma directive to suppress or change the severity level of any diagnostic messages, but forgot to document why.
	This option cannot be given together with other options.
	This option is not available in the IDE.

# syntax --do\_segment\_pad Description Use this option to extend each ELF segment in the executable file with content, to make it an even multiple of 4 bytes long (if possible). Some runtime library routines might access memory in units of 4 bytes, and might, if the right data object is placed last in an ELF segment, access memory outside the strict bounds of the segment. If you are executing in an environment where this is a problem, you can use this option to extend the ELF segments appropriately so that this is not a problem. This option is not available in the IDE.

#### --enable\_hardware\_workaround

Syntax	<pre>enable_hardware_workaround=waid[waid[]]</pre>	
Parameters	waid	The ID number of the workaround that you want to enable. For a list of available workarounds, see the release notes available in the Information Center.
Description	Use this option to make the linker generate a workaround for a specific hardware problem.	
See also	The release notes for the linker for a list of available parameters.	
	To set this option, use Project>Options>Linker>Extra Options.	

#### --enable\_stack\_usage

Syntax	enable_stack_usage
Description	Use this option to enable stack usage analysis. If a linker map file is produced, a stack usage chapter is included in the map file.
	<b>Note:</b> If you use at least one of thestack_usage_control orcall_graph options, stack usage analysis is automatically enabled.
See also	Stack usage analysis, page 96

--е



Project>Options>Linker>Advanced>Enable stack usage analysis

entry		
Syntax	entry <i>symbol</i>	
Parameters	symbol	The name of the symbol to be treated as a root symbol and start label
Description	Use this option to make a symbol be treated as a root symbol and the start label of the application. This is useful for loaders. If this option is not used, the default start symbol isiar_program_start. A root symbol is kept whether or not it is referenced from the rest of the application, provided its module is included. A module in an object file is always included but a module part of a library is only included if needed.	
		to must be available in your application. You must also make refers to the new start label (for exampleredirect t=_myStartLabel).
ĪË	Project>Options>Link	er>Library>Override default program entry

# --error\_limit

Syntax	error_limit=n	
Parameters	п	The number of errors before the linker stops linking. $n$ must be a positive integer; 0 indicates no limit.
Description		it option to specify the number of errors allowed before the . By default, 100 errors are allowed.
	This option is not avail	able in the IDE.

# --exception\_tables

Syntax	exception_tables	exception_tables={nocreate unwind cantunwind}	
Parameters	nocreate (default)	Does not generate entries. Uses the least amount of memory, but the result is undefined if an exception is propagated through a function without exception information.	
	unwind	Generates unwind entries that enable an exception to be correctly propagated through functions without exception information.	
	cantunwind	Generates no-unwind entries so that any attempt to propagate an exception through the function will result in a call to terminate.	
Description	•	nine what the linker should do with functions that do not have ut which do have correct call frame information.	
	-	at C functions get correct call frame information. For functions guage you need to use assembler directives to generate call	
See also	Using C++, page 191.		
III	To set this option, use <b>P</b>	roject>Options>Linker>Extra Options.	

# --export\_builtin\_config

Syntax		export_builtin_config filename
Parameters		See Rules for specifying a filename or directory as parameters, page 256.
Description		Exports the configuration used by default to a file.
	ШË	This option is not available in the IDE.

#### --extra\_init

Syntax	extra_init routine	
Parameters	routine	A user-defined initialization routine.
Description	Use this option to make the linker add an entry for the specified routine at the end of the initialization table. The routine will be called during system startup, after other initialization routines have been called and before main is called. Note that the routine must preserve the value passed to it in register R0. No entry is added if the routine is not defined.	
	To set this option, u	se Project>Options>Linker>Extra Options.

-f

Syntax	-f filename
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option to make the linker read command line options from the named file, with the default filename extension xcl.
	In the command file, you format the items exactly as if they were on the command line itself, except that you may use multiple lines, because the newline character acts just as a space or tab character.
	Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.
	To set this option, use <b>Project&gt;Options&gt;Linker&gt;Extra Options</b> .

#### --force\_exceptions

Syntax	force_exceptions
Description	Use this option to make the linker include exception tables and exception code even when the linker heuristics indicate that exceptions are not used.
	The linker considers exceptions to be used if there is a throw expression that is not a rethrow in the included code. If there is no such throw expression in the rest of the

•

code, the linker arranges for operator new, dynamic\_cast, and typeid to call abort instead of throwing an exception on failure. If you need to catch exceptions from these constructs but your code contains no other throws, you might need to use this option.

See also



*Using C*++, page 191.

Project>Options>Linker>Optimizations>C++ Exceptions>Allow>Always include

#### --force\_output

Syntax	force_output
Description	Use this option to produce an output executable image regardless of any linking errors.
	To set this option, use <b>Project&gt;Options&gt;Linker&gt;Extra Options</b>

fpu			
Syntax		fpu= <i>name</i>  none	
Parameters		<i>name</i> none	The target FPU architecture.
Description	1	FPU compatible with th	the FPU to link your application for. The default is to use an e object file attribute.
See also		<i>fpu</i> , page 276	
	ШË	Project>Options>Gene	eral Options>Target>FPU

mage_input		
Syntax	image_input filer	name [,symbol,[section[,alignment]]]
Parameters	filename	The pure binary file containing the raw image you want to link
	symbol	The symbol which the binary data can be referenced with.
	section	The section where the binary data will be placed; default is .text.
	alignment	The alignment of the section; default is 1.
Description		re binary files in addition to the ordinary input files. The file's l in the section, which means it can only contain pure binary
	image_input option a symbol in the option ar option), or you can speci	s from object files, sections created by using the are not included unless actually needed. You can either specify and reference this symbol in your application (or use a $-keep$ fy a section name and use the keep directive in a linker are that the section is included.
Example	image_input boots	strap.abs,Bootstrap,CSTARTUPCODE,4
	CSTARTUPCODE. The sec	binary file bootstrap.abs are placed in the section tion where the contents are placed is 4-byte aligned and will application (or the command line optionkeep) includes a Bootstrap.
See also	keep, page 324.	
	Project>Options>Linke	er>Input>Raw binary image

# --image\_input

#### --import\_cmse\_lib\_in

Syntax	import_cmse_lib_in <i>filename</i>
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Reads a previous version of the import library and creates gateway veneers with the same address as given in the import library. Use this option to create a secure image

where each entry function that exists in the provided import library is placed at the same address in the output import library.

 See also
 --cmse, page 265, --import\_cmse\_lib\_out, page 323, and

 To set this option, use Project>Options>Linker>Extra Options.

#### --import\_cmse\_lib\_out

Syntax	import_cmse_lib_out filename directory
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option when building a secure image to automatically create an import library for use in a corresponding non-secure image. The import library consists of a relocatable ELF object module that contains only a symbol table. Each symbol specifies an absolute address of a secure gateway for an entry in the section Veneer\$\$CMSE.
See also	cmse, page 265 andimport_cmse_lib_in, page 322
	To set this option, use Project>Options>Linker>Extra Options.

#### --inline

Syntax	inline
Description	Some routines are so small that they can fit in the space of the instruction that calls the routine. Use this option to make the linker replace the call of a routine with the body of the routine, where applicable.
See also	Small function inlining, page 119
	Project>Options>Linker>Optimizations>Inline small routines

keep				
Syntax		keep <i>symb</i>	01	
Parameters		symbol	The name of the symbol to be treated as a root symbol	
Description		Normally, the linker keeps a symbol only if it is needed by your application. Use this option to make a symbol always be included in the final application.		
	∎Ë	Project>Optio	ons>Linker>Input>Keep symbols	

# --log

Syntax	log topic[,topic,]			
Parameters	topic can be one of:			
	call_graph	Lists the call graph as seen by stack usage analysis.		
	initialization	Lists copy batches and the compression selected for each batch.		
	libraries	Lists all decisions made by the automatic library selector. This might include extra symbols needed (keep), redirections (redirect), as well as which runtime libraries that were selected.		
	modules	Lists each module that is selected for inclusion in the application, and which symbol that caused it to be included.		
	redirects	Lists redirected symbols.		
	sections	Lists each symbol and section fragment that is selected for inclusion in the application, and the dependence that caused it to be included.		
	veneers	Lists some veneer creation and usage statistics.		
	unused_fragments	Lists those section fragments that were not included in the application.		
Description	Use this option to make the linker log information to stdout. The log information can be useful for understanding why an executable image became the way it is.			

See also

--log\_file, page 325.

Proje

Project>Options>Linker>List>Generate log

# --log\_file

Syntax		log_file filename
Parameters		See Rules for specifying a filename or directory as parameters, page 256.
Description		Use this option to direct the log output to the specified file.
See also		<i>log</i> , page 324.
	IË	Project>Options>Linker>List>Generate log

# --mangled\_names\_in\_messages

Syntax		mangled_names_in_messages
Description		Use this option to produce both mangled and unmangled names for C/C++ symbols in messages. Mangling is a technique used for mapping a complex C name or a C++ name (for example, for overloading) into a simple name. For example, void h(int, char) becomes _z1hic.
	∎Ë	This option is not available in the IDE.

# --manual\_dynamic\_initialization

Syntax	manual_dynamic_initialization
Description	Normally, dynamic initialization (typically initialization of C++ objects with static storage duration) is performed automatically during application startup. If you usemanual_dynamic_initialization, you must calliar_dynamic_initialization at some later point for this initialization to be done.
	The functioniar_dynamic_initialization is declared in the header file iar_dynamic_init.h.



To set this option use Project>Options>Linker>Extra Options.

)

Syntax

Description

--map {filename|directory}

Use this option to produce a linker memory map file. The map file has the default filename extension map. The map file contains:

- Linking summary in the map file header which lists the version of the linker, the current date and time, and the command line that was used.
- Runtime attribute summary which lists runtime attributes.
- Placement summary which lists each section/block in address order, sorted by
  placement directives.
- Initialization table layout which lists the data ranges, packing methods, and compression ratios.
- Module summary which lists contributions from each module to the image, sorted by directory and library.
- Entry list which lists all public and some local symbols in alphabetical order, indicating which module they came from.
- Some of the bytes might be reported as *shared*.

Shared objects are functions or data objects that are shared between modules. If any of these occur in more than one module, only one copy is retained. For example, in some cases inline functions are not inlined, which means that they are marked as shared, because only one instance of each function will be included in the final application. This mechanism is sometimes also used for compiler-generated code or data not directly associated with a particular function or variable, and when only one instance is required in the final application.

This option can only be used once on the command line.



Project>Options>Linker>List>Generate linker map file

### --merge\_duplicate\_sections

Syntax

--merge\_duplicate\_sections

Description

Use this option to keep only one copy of equivalent read-only sections. Note that this can cause different functions or constants to have the same address, so an application

that depends on the addresses being different will not work correctly with this option enabled.

See also Duplicate section merging, page 119

ШË

Project>Options>Linker>Optimizations>Merge duplicate sections

### --no\_bom

Syntax	no_bom
Description	Use this option to omit the Byte Order Mark (BOM) when generating a UTF-8 output file.
See also	text_out, page 337 and Text encodings, page 251
	Project>Options>Linker>Encodings>Text output file encoding

# --no\_dynamic\_rtti\_elimination

Syntax	no_dynamic_rtti_elimination		
Description	Use this option to make the linker include dynamic (polymorphic) runtime type information (RTTI) data in the application image even when the linker heuristics indicate that it is not needed.		
	The linker considers dynamic runtime type information to be needed if there is a typeid or dynamic_cast expression for a polymorphic type in the included code. By default, if the linker detects no such expression, RTTI data will not be included just to make dynamic RTTI requests work.		
	<b>Note:</b> A typeid expression for a <i>non</i> -polymorphic type results in a direct reference to a particular RTTI object and will not cause the linker to include any potentially unneeded objects.		
See also	Using C++, page 191.		
IIË	To set this option, use Project>Options>Linker>Extra Options.		

### --no\_entry

Syntax	no_entry
Description	Use this option to set the entry point field to zero for produced ELF files.
	Project>Options>Linker>Library>Override default program entry

no_exceptions			
Syntax	no_exceptions		
Description	Use this option to make the linker generate an error if there is a throw in the included code. This option is useful for making sure that your application does not use exceptions.		
See also	Using C++, page 191.		
ΠË	To set related options, choose:		
L	Project>Options>Linker>Advanced>Allow C++ exceptions		

# --no\_fragments

Syntax	no_fragments
Description	Use this option to disable section fragment handling. Normally, the toolset uses IAR proprietary information for transferring section fragment information to the linker. The linker uses this information to remove unused code and data, and thus further minimize the size of the executable image. Use this option to disable the removal of fragments of sections, instead including or not including each section in its entirety, usually resulting in a larger application.
See also	Keeping symbols and sections, page 109. To set this option, use Project>Options>Linker>Extra Options

# --no\_free\_heap

Syntax	no_free_heap
Description	Use this option to use the smallest possible heap implementation. Because this heap does not support free or realloc, it is only suitable for applications that in the startup phase allocate heap memory for various buffers, etc, and for applications that never deallocate memory.
See also	advanced_heap, page 309 andbasic_heap, page 309.
IIË	Project>Options>General Options>Library Options 2>Heap selection

# --no\_inline

Syntax		no_inline func[,func]	
Parameters		func	The name of a function symbol
Description		Use this option to exclude some functions from small function inlining.	
See also	ĪĒ	<i>inline</i> , page 323 To set this option, use	Project>Options>Linker>Extra Options.

# --no\_library\_search

Syntax	no_library_search
Description	Use this option to disable the automatic runtime library search. This option turns off the automatic inclusion of the correct standard libraries. This is useful, for example, if the application needs a user-built standard library, etc.
	Note that the option disables all steps of the automatic library selection, some of which might need to be reproduced if you are using the standard libraries. Use thelog libraries linker option together with automatic library selection enabled to determine which the steps are.
	Project>Options>Linker>Library>Automatic runtime library selection

no_literal_pool				
Syntax	no_literal_pool			
Description	Use this option for code that should run from a memory region where it is not allowed to read data, only to execute code.			
	When this option is used, the linker will use the MOV32 pseudo instruction in a mode-changing veneer, to avoid using the data bus to load the destination address. The option also means that libraries compiled with this option will be used.			
	The optionno_literal_pool is only allowed for Armv6-M and Armv7-M cores.			
See also	no_literal_pool, page 284.			
	To set this option, use <b>Project&gt;Options&gt;Linker&gt;Extra Options</b> .			

## --no\_locals

IIË	Project>Options>Linker>Output
	<b>Note:</b> This option does not remove any local symbols from the DWARF information in the executable image.
Description	Use this option to remove local symbols from the ELF executable image.
Syntax	no_locals

# --no\_range\_reservations

Syntax	no_range_reservations
Description	Normally, the linker reserves any ranges used by absolute symbols with a non-zero size, excluding them from consideration for place in commands.
	When this option is used, these reservations are disabled, and the linker is free to place sections in such a way as to overlap the extent of absolute symbols.
	To set this option, use Project>Options>Linker>Extra Options.

no_	_remove	
	Syntax	no_remove
	Description	When this option is used, unused sections are not removed. In other words, each module that is included in the executable image contains all its original sections.
	See also	Keeping symbols and sections, page 109.
		To set this option, use Project>Options>Linker>Extra Options.
no_	_vfe	
	Syntax	no_vfe
	Description	Use this option to disable the Virtual Function Elimination optimization. All virtual functions in all classes with at least one instance will be kept, and Runtime Type Information data will be kept for all polymorphic classes. Also, no warning message will be issued for modules that lack VFE information.
	See also	vfe, page 339 and Virtual function elimination, page 119.
		To set related options, choose:
		Project>Options>Linker>Optimizations>PerformC++ Virtual Function Elimination

	•	
no	_warnings	
110	_wai migs	
	- 0	

Syntax

--no\_warnings

Description

By default, the linker issues warning messages. Use this option to disable all warning messages.



This option is not available in the IDE.

# --no\_wrap\_diagnostics

Syntax		no_wrap_diagnostics	
Description		By default, long lines in diagnostic messages are broken into several lines to make the message easier to read. Use this option to disable line wrapping of diagnostic messages.	
	∎Ë	This option is not available in the IDE.	
only_stdout			
Syntax		only_stdout	
Description		Use this option to make the linker use the standard output stream (stdout) also for messages that are normally directed to the error output stream (stderr).	
	ĪË	This option is not available in the IDE.	

Syntax	output {filename directory} -o {filename directory}
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	By default, the object executable image produced by the linker is located in a file with the name a.out. Use this option to explicitly specify a different output filename, which by default will have the filename extension out.
	Project>Options>Linker>Output>Output file

pi_veneers			
Syntax	pi_veneers		
Description	Use this option to make the linker generate position-independent veneers. Note that this type of veneer is larger and slower than normal veneers.		
See also	Veneers, page 115.		

--output, -o




To set this option, use Project>Options>Linker>Extra Options.

# --place\_holder

	Syntax	<pre>place_holder symbol[,size[,section[,alignment]]]</pre>	
	Parameters		
		symbol	The name of the symbol to create
		size	Size in ROM; by default 4 bytes
		section	Section name to use; by default .text
		alignment	Alignment of section; by default 1
	Description	Use this option to reserve a place in ROM to be filled by some other tool, for example a checksum calculated by ielftool. Each use of this linker option results in a section with the specified name, size, and alignment. The symbol can be used by your application to refer to the section. <b>Note:</b> Like any other section, sections created by theplace_holder option will only be included in your application if the section appears to be needed. Thekeep linker option, or the keep linker directive can be used for forcing such section to be included.	
	See also	IAR utilities, page 525.	
	ΠË	To set this option, use Project>Options>Linker>Extra Options	
pro	econfig		
	Syntax	preconfig filename	
	Parameters	See Rules for specifying a filename or directory as parameters, page 256.	
	Description	Use this option to make the linker read the specified file before reading the linker configuration file.	

To set this option, use **Project>Options>Linker>Extra Options**.

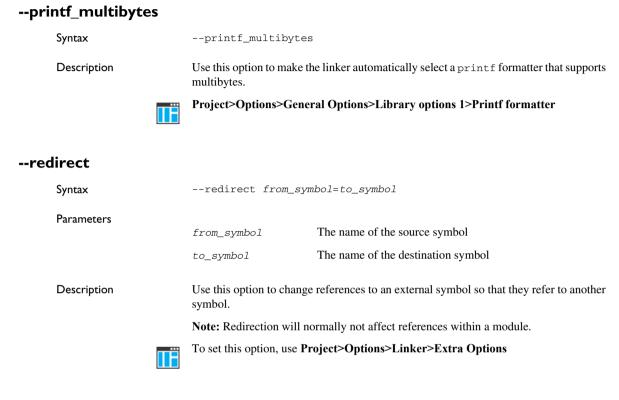

remarks
---------

Syntax	remarks
Description	The least severe diagnostic messages are called remarks. A remark indicates a source code construct that may cause strange behavior in the generated code. By default, the linker does not generate remarks. Use this option to make the linker generate remarks.
See also	Severity levels, page 253.
IIË	Project>Options>Linker>Diagnostics>Enable remarks

scanf_multibytes				
Syntax	scanf_multibytes	scanf_multibytes		
Description	Use this option to make multibytes.	Use this option to make the linker automatically select a scanf formatter that supports multibytes.		
	Project>Options>Gene	Project>Options>General Options>Library options 1>Scanf formatter		
search, -L				
Syntax	search path	search path		
	-L path			
Parameters	path	A path to a directory where the linker should search for object and library files.		
Description	Use this option to specify files in.	Use this option to specify more directories for the linker to search for object and library files in.		
	By default, the linker searches for object and library files only in the working directory. Each use of this option on the command line adds another search directory.			
See also	The linking process in detail, page 89.			
	This option is not available in the IDE.			
semihosting				
Syntax	semihosting[=iar_breakpoint]			

Syntax		Dreakpoint]
Parameters	iar_breakpoint	The IAR-specific mechanism can be used when debugging applications that use SWI/SVC extensively.
Description	Use this option to include the debug interface—breakpoint mechanism—in the output image. If no parameter is specified, the SWI/SVC mechanism is included for Arm7/9/11, and the BKPT mechanism is included for Cortex-M.	

 See also
 The semihosting mechanism, page 139.

 Project>Options>General Options>Library Configuration>Semihosted

 --silent
 --silent

 Syntax
 --silent

 Description
 By default, the linker issues introductory messages and a final statistics report. Use this option to make the linker operate without sending these messages to the standard output stream (normally the screen).

 This option does not affect the display of error and warning messages.
 This option is not available in the IDE.

### --stack\_usage\_control

Syntax	stack_usage_control=filename
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option to specify a stack usage control file. This file controls stack usage analysis, or provides more stack usage information for modules or functions. You can use this option multiple times to specify multiple stack usage control files. If no filename extension is specified, the extension suc is used. Using this option enables stack usage analysis in the linker.
See also	Stack usage analysis, page 96
	Project>Options>Linker>Advanced>Control file

### --strip

Syntax

--strip

Description By default, the linker retains the debug information from the input object files in the output executable image. Use this option to remove that information.



To set related options, choose:

Project>Options>Linker>Output>Include debug information in output

#### --text\_out

Syntax	text_out{utf8 u	tf16le utf16be locale}
Parameters		
	utf8	Uses the UTF-8 encoding
	utf16le	Uses the UTF-16 little-endian encoding
	utf16be	Uses the UTF-16 big-endian encoding
	locale	Uses the system locale encoding
Description	Use this option to specify the encoding to be used when generating a text output file. The default for the linker list files is to use the same encoding as the main source file. The default for all other text files is UTF-8 with a Byte Order Mark (BOM).	
	If you want text outputno_bom as well.	in UTF-8 encoding without BOM, you can use the option
See also	<i>no_bom</i> , page 327 an	d Text encodings, page 251
III	Project>Options>Lin	ker>Encodings>Text output file encoding

# --threaded\_lib

Syntax

--threaded\_lib

IË

Description

Use this option to automatically configure the runtime library for use with threads.

Project>Options>General Options>Library Configuration>Enable thread support in library

timezone_lib	
Syntax	timezone_lib
Description	Use this option to enable the time zone and daylight savings time functionality in the DLIB library.
	Note: You need to implement the time zone functionality.
See also	getzone, page 149
	To set this option, use <b>Project&gt;Option&gt;Linker&gt;Extra Options</b> .

### --treat\_rvct\_modules\_as\_softfp

Syntax		treat_rvct_modules_as_softfp
Description		Use this option to treat all modules generated by RVCT as using the standard (non-VFP) calling convention.
	IË	To set this option, use Project>Options>Linker>Extra Options.

### --use\_full\_std\_template\_names

Syntax	use_full_std_template_names
Description	<pre>In the unmangled names of C++ entities, the linker by default uses shorter names for some classes. For example, "std::string" instead of "std::basic_string<char, std::char_traits<char>,std::allocator<char>&gt;". Use this option to make the linker instead use the full, unabbreviated names.</char></char></char, </pre>
	This option is not available in the IDE.

utf8_text_in	
Syntax	utf8_text_in
Description	Use this option to specify that the linker shall use the UTF-8 encoding when reading a text input file with no Byte Order Mark (BOM).

Note: This option does not apply to source files.

See also

Text encodings, page 251



Project>Options>Linker>Encodings>Default input file encoding

## --version

Syntax	version
Description	Use this option to make the linker send version information to the console and then exit.
	This option is not available in th IDE.

--vfe

Syntax	vfe=[forced]	
Parameters	forced	Performs Virtual Function Elimination even if one or more modules lack the needed virtual function elimination information.
Description	By default, Virtual Function Elimination is always performed but requires that all object files contain the necessary virtual function elimination information. Usevfe=forced to perform Virtual Function Elimination even if one or more modules do not have the necessary information.	
	C	al Function Elimination can be unsafe if some of the modules rmation perform virtual function calls or use dynamic Runtime
See also	no_vfe, page 331 and	Virtual function elimination, page 119.
IË	To set related options, choose:	
	Project>Options>Link Elimination	er>Optimizations>Perform C++ Virtual Function

# --warnings\_affect\_exit\_code

Syntax		warnings_affect_exit_code
Description		By default, the exit code is not affected by warnings, because only errors produce a non-zero exit code. With this option, warnings will also generate a non-zero exit code.
	ĪË	This option is not available in the IDE.

### --warnings\_are\_errors

Syntax	warnings_are_errors
Description	Use this option to make the linker treat all warnings as errors. If the linker encounters an error, no executable image is generated. Warnings that have been changed into remarks are not treated as errors.
	<b>Note:</b> Any diagnostic messages that have been reclassified as warnings by the optiondiag_warning will also be treated as errors whenwarnings_are_errors is used.
See also	diag_warning, page 271 anddiag_warning, page 316.
TË	Project>Options>Linker>Diagnostics>Treat all warnings as errors

# --whole\_archive

Syntax	whole_archive filename
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
Description	Use this option to make the linker treat every object file in the archive as if it was specified on the command line. This is useful when an archive contains root content that is always included from an object file (filename extension $\circ$ ), but only included from an archive if some entry from the module is referred to.
Example	If archive.a contains the object files file1.o, file2.o, and file3.o, usingwhole_archive archive.a is equivalent to specifying file1.o file2.o file3.o.
See also	Keeping modules, page 109



To set this option, use Project>Options>Linker>Extra Options

Descriptions of linker options

# **Data representation**

- Alignment
- Byte order
- Basic data types—integer types
- Basic data types—floating-point types
- Pointer types
- Structure types
- Type qualifiers
- Data types in C++

See the chapter *Efficient coding for embedded applications* for information about which data types provide the most efficient code for your application.

# Alignment

Every C data object has an alignment that controls how the object can be stored in memory. Should an object have an alignment of, for example, 4, it must be stored on an address that is divisible by 4.

The reason for the concept of alignment is that some processors have hardware limitations for how the memory can be accessed.

Assume that a processor can read 4 bytes of memory using one instruction, but only when the memory read is placed on an address divisible by 4. Then, 4-byte objects, such as long integers, will have alignment 4.

Another processor might only be able to read 2 bytes at a time; in that environment, the alignment for a 4-byte long integer might be 2.

A structure type will have the same alignment as the structure member with the most strict alignment. To decrease the alignment requirements on the structure and its members, use #pragma pack or the \_\_packed data type attribute.

All data types must have a size that is a multiple of their alignment. Otherwise, only the first element of an array would be guaranteed to be placed in accordance with the alignment requirements. This means that the compiler might add pad bytes at the end of the structure. For more information about pad bytes, see *Packed structure types*, page 354.

Note that with the #pragma data\_alignment directive you can increase the alignment demands on specific variables.

See also the C11 file stdalign.h.

#### ALIGNMENT ON THE ARM CORE

The alignment of a data object controls how it can be stored in memory. The reason for using alignment is that the Arm core can access 4-byte objects more efficiently when the object is stored at an address divisible by 4.

Objects with alignment 4 must be stored at an address divisible by 4, while objects with alignment 2 must be stored at addresses divisible by 2.

The compiler ensures this by assigning an alignment to every data type, ensuring that the Arm core will be able to read the data.

For related information, see *--align\_sp\_on\_irq*, page 263 and *--no\_const\_align*, page 282.

# **Byte order**

In the little-endian byte order, which is default, the *least* significant byte is stored at the lowest address in memory. The *most* significant byte is stored at the highest address.

In the big-endian byte order, the *most* significant byte is stored at the lowest address in memory. The *least* significant byte is stored at the highest address. If you use the big-endian byte order, it might be necessary to use the

#pragma bitfields=reversed directive to be compatible with code for other compilers and I/O register definitions of some devices, see *Bitfields*, page 346.

**Note:** There are two variants of the big-endian mode, BE8 and BE32, which you specify at link time. In BE8 data is big-endian and code is little-endian. In BE32 both data and code are big-endian. In architectures before v6, the BE32 endian mode is used, and after v6 the BE8 mode is used. In the v6 (Arm11) architecture, both big-endian modes are supported.

# **Basic data types—integer types**

The compiler supports both all Standard C basic data types and some additional types.

These topics are covered:

- Integer types—an overview
- Bool
- The enum type
- The char type
- The wchar\_t type
- The char16\_t type
- The char32\_t type
- Bitfields

#### INTEGER TYPES—AN OVERVIEW

This table gives the size and range of each integer data type:

Data type	Size	Range	Alignment
bool	8 bits	0 to 1	I
char	8 bits	0 to 255	I
signed char	8 bits	-128 to 127	I
unsigned char	8 bits	0 to 255	I
signed short	16 bits	-32768 to 32767	2
unsigned short	16 bits	0 to 65535	2
signed int	32 bits	-2 <sup>31</sup> to 2 <sup>31</sup> -1	4
unsigned int	32 bits	0 to 2 <sup>32</sup> -1	4
signed long	32 bits	-2 <sup>31</sup> to 2 <sup>31</sup> -1	4
unsigned long	32 bits	0 to 2 <sup>32</sup> -1	4
signed long long	64 bits	-2 <sup>63</sup> to 2 <sup>63</sup> -1	8
unsigned long long	64 bits	0 to 2 <sup>64</sup> -1	8

Table 27: Integer types

Signed variables are represented using the two's complement form.

#### BOOL

The bool data type is supported by default in the C++ language. If you have enabled language extensions, the bool type can also be used in C source code if you include the file stdbool.h. This will also enable the boolean values false and true.

#### THE ENUM TYPE

The compiler will use the smallest type required to hold enum constants, preferring signed rather than unsigned.

When IAR Systems language extensions are enabled, and in C++, the enum constants and types can also be of the type long, unsigned long, long long, or unsigned long long.

To make the compiler use a larger type than it would automatically use, define an enum constant with a large enough value. For example:

See also the C++ enum struct syntax.

For related information, see --enum is int, page 275.

#### THE CHAR TYPE

The char type is by default unsigned in the compiler, but the --char\_is\_signed compiler option allows you to make it signed. Note, however, that the library is compiled with the char type as unsigned.

#### THE WCHAR\_T TYPE

The wchar\_t data type is 4 bytes and the encoding used for it is UTF-32.

#### THE CHARI6\_T TYPE

The char16\_t data type is 2 bytes and the encoding used for it is UTF-16.

#### THE CHAR32\_T TYPE

The char32\_t data type is 4 bytes and the encoding used for it is UTF-32.

#### BITFIELDS

In Standard C, int, signed int, and unsigned int can be used as the base type for integer bitfields. In standard C++, and in C when language extensions are enabled in the compiler, any integer or enumeration type can be used as the base type. It is implementation defined whether a plain integer type (char, short, int, etc) results in a signed or unsigned bitfield.

In the IAR C/C++ Compiler for Arm, plain integer types are treated as unsigned.

Bitfields in expressions are treated as int if int can represent all values of the bitfield. Otherwise, they are treated as the bitfield base type.

Each bitfield is placed in the next suitably aligned container of its base type that has enough available bits to accommodate the bitfield. Within each container, the bitfield is placed in the first available byte or bytes, taking the byte order into account. Note that containers can overlap if needed, as long as they are suitably aligned for their type.

In addition, the compiler supports an alternative bitfield allocation strategy (disjoint types), where bitfield containers of different types are not allowed to overlap. Using this allocation strategy, each bitfield is placed in a new container if its type is different from that of the previous bitfield, or if the bitfield does not fit in the same container as the previous bitfield. Within each container, the bitfield is placed from the least significant bit to the most significant bit (disjoint types) or from the most significant bit to the least significant bit (reverse disjoint types). This allocation strategy will never use less space than the default allocation strategy (joined types), and can use significantly more space when mixing bitfield types.

Use the #pragma bitfields directive to choose which bitfield allocation strategy to use, see *bitfields*, page 380.

Assume this example:

```
struct BitfieldExample
{
    uint32_t a : 12;
    uint16_t b : 3;
    uint16_t c : 7;
    uint8_t d;
};
```

#### The example in the joined types bitfield allocation strategy


To place the first bitfield, a, the compiler allocates a 32-bit container at offset 0 and puts a into the first and second bytes of the container.

For the second bitfield, b, a 16-bit container is needed and because there are still four bits free at offset 0, the bitfield is placed there.


For the third bitfield, c, as there is now only one bit left in the first 16-bit container, a new container is allocated at offset 2, and c is placed in the first byte of this container.

The fourth member, d, can be placed in the next available full byte, which is the byte at offset 3.

In little-endian mode, each bitfield is allocated starting from the least significant free bit of its container to ensure that it is placed into bytes from left to right.

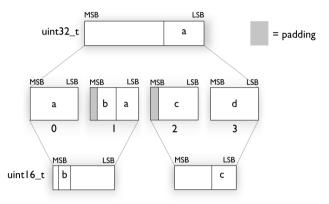

In big-endian mode, each bitfield is allocated starting from the most significant free bit of its container to ensure that it is placed into bytes from left to right.

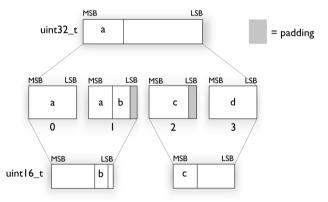

#### The example in the disjoint types bitfield allocation strategy


To place the first bitfield, a, the compiler allocates a 32-bit container at offset 0 and puts a into the least significant 12 bits of the container.

To place the second bitfield, b, a new container is allocated at offset 4, because the type of the bitfield is not the same as that of the previous one. b is placed into the least significant three bits of this container.


The third bitfield, c, has the same type as b and fits into the same container.

The fourth member, d, is allocated into the byte at offset 6. d cannot be placed into the same container as b and c because it is not a bitfield, it is not of the same type, and it would not fit.

When using reverse order (reverse disjoint types), each bitfield is instead placed starting from the most significant bit of its container.

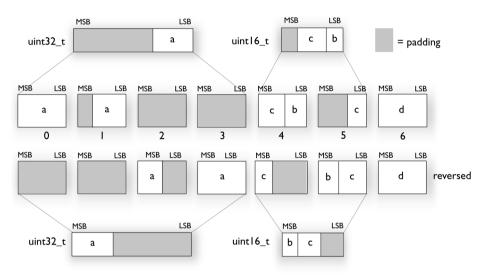

This is the layout of bitfield\_example in little-endian mode:

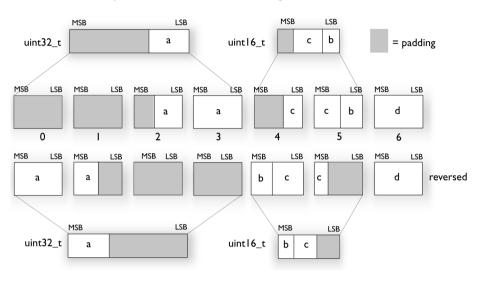

This is the layout of bitfield\_example in big-endian mode:

# Basic data types—floating-point types

In the IAR C/C++ Compiler for Arm, floating-point values are represented in standard IEEE 754 format. The sizes for the different floating-point types are:

Туре	Size	Range (+/-)	Decimals	Exponent	Mantissa	Alignment
fp16	16 bits	±2E-14 to 65504	3	5 bits	II bits	2
float	32 bits	±1.18E-38 to ±3.40E+38	7	8 bits	23 bits	4
double	64 bits	±2.23E-308 to ±1.79E+308	15	II bits	52 bits	8
long double	64 bits	±2.23E-308 to ±1.79E+308	15	II bits	52 bits	8

Table 28: Floating-point types

For Cortex-M0 and Cortex-M1, the compiler does not support subnormal numbers. All operations that should produce subnormal numbers will instead generate zero. For information about the representation of subnormal numbers for other cores, see *Representation of special floating-point numbers*, page 352.

The \_\_fp16 floating-point type is only a storage type. All numerical operations will operate on values promoted to float.

#### **FLOATING-POINT ENVIRONMENT**

Exception flags for floating-point values are supported for devices with a VFP unit, and they are defined in the fenv.h file. For devices without a VFP unit, the functions defined in the fenv.h file exist but have no functionality.

The feraiseexcept function does not raise an inexact floating-point exception when called with FE\_OVERFLOW or FE\_UNDERFLOW.

#### 32-BIT FLOATING-POINT FORMAT

The representation of a 32-bit floating-point number as an integer is:

31	30	23	22	0
s	Exponent		Mantissa	

The exponent is 8 bits, and the mantissa is 23 bits.

The value of the number is:

(-1)<sup>S</sup> \* 2<sup>(Exponent-127)</sup> \* 1.Mantissa

The range of the number is at least:

±1.18E-38 to ±3.39E+38

The precision of the float operators (+, -, \*, and /) is approximately 7 decimal digits.

#### **64-BIT FLOATING-POINT FORMAT**

The representation of a 64-bit floating-point number as an integer is:



The exponent is 11 bits, and the mantissa is 52 bits.

The value of the number is:

(-1)<sup>S</sup> \* 2<sup>(Exponent-1023)</sup> \* 1.Mantissa

The range of the number is at least:

±2.23E-308 to ±1.79E+308

The precision of the float operators (+, -, \*, and /) is approximately 15 decimal digits.

#### **REPRESENTATION OF SPECIAL FLOATING-POINT NUMBERS**

This list describes the representation of special floating-point numbers:

- Zero is represented by zero mantissa and exponent. The sign bit signifies positive or negative zero.
- Infinity is represented by setting the exponent to the highest value and the mantissa to zero. The sign bit signifies positive or negative infinity.
- Not a number (NaN) is represented by setting the exponent to the highest positive value and the most significant bit in the mantissa to 1. The value of the sign bit is ignored.
- Subnormal numbers are used for representing values smaller than what can be represented by normal values. The drawback is that the precision will decrease with smaller values. The exponent is set to 0 to signify that the number is subnormal, even though the number is treated as if the exponent was 1. Unlike normal numbers, subnormal numbers do not have an implicit 1 as the most significant bit (the MSB) of the mantissa. The value of a subnormal number is:

(-1)<sup>S</sup> \* 2<sup>(1-BIAS)</sup> \* 0.Mantissa

where BIAS is 127 and 1023 for 32-bit and 64-bit floating-point values, respectively.

# **Pointer types**

The compiler has two basic types of pointers: function pointers and data pointers.

#### **FUNCTION POINTERS**

The size of function pointers is always 32 bits, and the range is 0x0-0xFFFFFFFF.

When function pointer types are declared, attributes are inserted before the \* sign, for example:

typedef void (\_\_thumb \* IntHandler) (void);

This can be rewritten using #pragma directives:

#pragma type\_attribute=\_\_thumb
typedef void IntHandler\_function(void);
typedef IntHandler\_function \*IntHandler;

#### **DATA POINTERS**

#### CASTING

Casts between pointers have these characteristics:

- Casting a *value* of an integer type to a pointer of a smaller type is performed by truncation
- Casting a pointer type to a smaller integer type is performed by truncation
- Casting a *pointer type* to a larger integer type is performed by zero extension
- Casting a *data pointer* to a function pointer and vice versa is illegal
- Casting a *function pointer* to an integer type gives an undefined result
- Casting a value of an unsigned integer type to a pointer of a larger type is performed by zero extension

#### size\_t

size\_t is the unsigned integer type of the result of the sizeof operator. In the IAR C/C++ Compiler for Arm, the type used for size\_t is unsigned int.

#### ptrdiff\_t

ptrdiff\_t is the signed integer type of the result of subtracting two pointers. In the IAR C/C++ Compiler for Arm, the type used for ptrdiff\_t is the signed integer variant of the size\_t type.

#### intptr\_t

 $intptr_t$  is a signed integer type large enough to contain a void \*. In the IAR C/C++ Compiler for Arm, the type used for intptr\_t is signed long int.

#### uintptr\_t

uintptr\_t is equivalent to intptr\_t, with the exception that it is unsigned.

# Structure types

The members of a struct are stored sequentially in the order in which they are declared: the first member has the lowest memory address.

#### ALIGNMENT OF STRUCTURE TYPES

The struct and union types have the same alignment as the member with the highest alignment requirement. Note that this alignment requirement also applies to a member that is a structure. To allow arrays of aligned structure objects, the size of a struct is adjusted to an even multiple of the alignment.

#### **GENERAL LAYOUT**

Members of a struct are always allocated in the order specified in the declaration. Each member is placed in the struct according to the specified alignment (offsets).

```
struct First
{
    char c;
    short s;
} s;
```

This diagram shows the layout in memory:

с	pad	s	
0		2	3

The alignment of the structure is 2 bytes, and a pad byte must be inserted to give short s the correct alignment.

#### PACKED STRUCTURE TYPES

The is used for relaxing the alignment requirements of the members of a structure. This changes the layout of the structure. The members are placed in the same order as when declared, but there might be less pad space between members.

Note that accessing an object that is not correctly aligned requires code that is both larger and slower. If such structure members are accessed many times, it is usually better to construct the correct values in a struct that is not packed, and access this struct instead.

Special care is also needed when creating and using pointers to misaligned members. For direct access to misaligned members in a packed struct, the compiler will emit the correct (but slower and larger) code when needed. However, when a misaligned member is accessed through a pointer to the member, the normal (smaller and faster) code is used. In the general case, this will not work, because the normal code might depend on the alignment being correct.

This example declares a packed structure:

```
#pragma pack(1)
struct S
{
    char c;
    short s;
};
#pragma pack()
```

The structure S has this memory layout:



The next example declares a new non-packed structure, S2, that contains the structure s declared in the previous example:

```
struct S2
{
   struct S s;
   long l;
};
```

The structure S2 has this memory layout

с	s		pad		1		
0		2	3	4	5	6	7

The structure s will use the memory layout, size, and alignment described in the previous example. The alignment of the member 1 is 4, which means that alignment of the structure  $s_2$  will become 4.

For more information, see Alignment of elements in a structure, page 224.

# **Type qualifiers**

According to the C standard, volatile and const are type qualifiers.

#### **DECLARING OBJECTS VOLATILE**

By declaring an object volatile, the compiler is informed that the value of the object can change beyond the compiler's control. The compiler must also assume that any accesses can have side effects—thus all accesses to the volatile object must be preserved.

There are three main reasons for declaring an object volatile:

- Shared access; the object is shared between several tasks in a multitasking environment
- Trigger access; as for a memory-mapped SFR where the fact that an access occurs has an effect

• Modified access; where the contents of the object can change in ways not known to the compiler.

#### Definition of access to volatile objects

The C standard defines an abstract machine, which governs the behavior of accesses to volatile declared objects. In general and in accordance to the abstract machine:

- The compiler considers each read and write access to an object declared volatile as an access
- The unit for the access is either the entire object or, for accesses to an element in a composite object—such as an array, struct, class, or union—the element. For example:

- An access to a bitfield is treated as an access to the underlying type
- Adding a const qualifier to a volatile object will make write accesses to the object impossible. However, the object will be placed in RAM as specified by the C standard.

However, these rules are not detailed enough to handle the hardware-related requirements. The rules specific to the IAR C/C++ Compiler for Arm are described below.

#### **Rules for accesses**

In the IAR C/C++ Compiler for Arm, accesses to volatile declared objects are subject to these rules:

- All accesses are preserved
- All accesses are complete, that is, the whole object is accessed
- All accesses are performed in the same order as given in the abstract machine
- All accesses are atomic, that is, they cannot be interrupted.

The compiler adheres to these rules for accesses to all 8-, 16-, and 32-bit scalar types, except for accesses to unaligned 16- and 32-bit fields in packed structures.

For all combinations of object types not listed, only the rule that states that all accesses are preserved applies.

#### DECLARING OBJECTS VOLATILE AND CONST

If you declare a volatile object const, it will be write-protected but it will still be stored in RAM memory as the C standard specifies.

To store the object in read-only memory instead, but still make it possible to access it as a const volatile object, declare it with the \_\_ro\_placement attribute. See \_\_ro\_placement, page 371.

To store the object in read-only memory instead, but still make it possible to access it as a const volatile object, define the variable like this:

const volatile int x @ "FLASH";

The compiler will generate the read/write section FLASH. That section should be placed in ROM and is used for manually initializing the variables when the application starts up.

Thereafter, the initializers can be reflashed with other values at any time.

#### **DECLARING OBJECTS CONST**

The const type qualifier is used for indicating that a data object, accessed directly or via a pointer, is non-writable. A pointer to const declared data can point to both constant and non-constant objects. It is good programming practice to use const declared pointers whenever possible because this improves the compiler's possibilities to optimize the generated code and reduces the risk of application failure due to erroneously modified data.

Static and global objects declared const are allocated in ROM.

In C++, objects that require runtime initialization cannot be placed in ROM.

### Data types in C++

In C++, all plain C data types are represented in the same way as described earlier in this chapter. However, if any C++ features are used for a type, no assumptions can be made concerning the data representation. This means, for example, that it is not supported to write assembler code that accesses class members.

Data types in C++

# **Extended keywords**

- General syntax rules for extended keywords
- Summary of extended keywords
- Descriptions of extended keywords
- Supported GCC attributes

### General syntax rules for extended keywords

The compiler provides a set of attributes that can be used on functions or data objects to support specific features of the Arm core. There are two types of attributes—*type attributes* and *object attributes*:

- Type attributes affect the *external functionality* of the data object or function
- Object attributes affect the *internal functionality* of the data object or function.

The syntax for the keywords differs slightly depending on whether it is a type attribute or an object attribute, and whether it is applied to a data object or a function.

For more information about each attribute, see *Descriptions of extended keywords*, page 363.

**Note:** The extended keywords are only available when language extensions are enabled in the compiler.



In the IDE, language extensions are enabled by default.



Use the -e compiler option to enable language extensions. See -e, page 274.

#### **TYPE ATTRIBUTES**

Type attributes define how a function is called, or how a data object is accessed. This means that if you use a type attribute, it must be specified both when a function or data object is defined and when it is declared.

You can either place the type attributes explicitly in your declarations, or use the pragma directive #pragma type\_attribute.

Type attributes can be further divided into *memory type attributes* and *general type attributes*. Memory type attributes are referred to as simply *memory attributes* in the rest of the documentation.

#### **General type attributes**

Available *function type attributes* (affect how the function should be called):

\_\_arm, \_\_cmse\_nonsecure\_call, \_\_fiq, \_\_interwork, \_\_irq, \_\_swi, \_\_task, \_\_thumb

Available data type attributes:

\_\_big\_endian, \_\_little\_endian\_\_packed

You can specify as many type attributes as required for each level of pointer indirection.

#### Syntax for type attributes used on data objects

If you select the *uniform attribute syntax*, data type attributes use the same syntax rules as the type qualifiers const and volatile.

If not, data type attributes use almost the same syntax rules as the type qualifiers const and volatile. For example:

\_\_little\_endian int i; int \_\_little\_endian j;

Both i and j will be accessed with little-endian byte order.

Unlike const and volatile, when a type attribute is used before the type specifier in a derived type, the type attribute applies to the object, or typedef itself, except in structure member declarations.

The third case is interpreted differently when uniform attribute syntax is selected. If so, it is equivalent to the first case, just as would be the case if const or volatile were used correspondingly.

Using a type definition can sometimes make the code clearer:

typedef \_\_packed int packed\_int; packed\_int \*q1;

packed\_int is a typedef for packed integers. The variable q1 can point to such integers.

You can also use the #pragma type\_attributes directive to specify type attributes for a declaration. The type attributes specified in the pragma directive are applied to the data object or typedef being declared.

#pragma type\_attribute=\_\_packed
int \* q2;

The variable q2 is packed.

For more information about the uniform attribute syntax, see *--uniform attribute syntax*, page 301 and *--no uniform attribute syntax*, page 289.

#### Syntax for type attributes used on functions

The syntax for using type attributes on functions differs slightly from the syntax of type attributes on data objects. For functions, the attribute must be placed either in front of the return type, or inside the parentheses for function pointers, for example:

```
__irq __arm void my_handler(void);
or
void (__irq __arm * my_fp)(void);
```

You can also use #pragma type\_attribute to specify the function type attributes:

#pragma type\_attribute=\_\_irq \_\_arm
void my\_handler(void);

#pragma type attribute=\_\_irq \_\_arm
typedef void my\_fun\_t(void);
my\_fun\_t \* my\_fp;

#### **OBJECT ATTRIBUTES**

Normally, object attributes affect the internal functionality of functions and data objects, but not directly how the function is called or how the data is accessed. This means that an object attribute does not normally need to be present in the declaration of an object.

These object attributes are available:

• Object attributes that can be used for variables:

```
__absolute, __no_alloc, __no_alloc16, __no_alloc_str, __no_alloc_str16, __no_init, __ro_placement
```

• Object attributes that can be used for functions and variables:

location, @, \_\_root, \_\_weak

• Object attributes that can be used for functions:

```
__cmse_nonsecure_entry, __intrinsic, __nested, __noreturn,
__ramfunc, __stackless
```

You can specify as many object attributes as required for a specific function or data object.

For more information about location and @, see *Controlling data and function placement in memory*, page 226.

#### Syntax for object attributes

The object attribute must be placed in front of the type. For example, to place myarray in memory that is not initialized at startup:

\_\_no\_init int myarray[10];

The #pragma object\_attribute directive can also be used. This declaration is equivalent to the previous one:

```
#pragma object_attribute=__no_init
int myarray[10];
```

Note: Object attributes cannot be used in combination with the typedef keyword.

# Summary of extended keywords

This table summarizes the extended keywords:

Extended keyword	Description
absolute	Makes references to the object use absolute addressing
arm	Makes a function execute in Arm mode
big_endian	Declares a variable to use the big-endian byte order
cmse_nonsecure_call	Declares a function pointer to call non-secure code
cmse_nonsecure_entry	Makes a function callable from a non-secure image
fiq	Declares a fast interrupt function
interwork	Declares a function to be callable from both Arm and Thumb mode
intrinsic	Reserved for compiler internal use only
irq	Declares an interrupt function
little_endian	Declares a variable to use the little-endian byte order
nested	Allows an $\_\_irq$ declared interrupt function to be nested, that is, interruptible by the same type of interrupt
no_alloc, no_alloc16	Makes a constant available in the execution file
no_alloc_str, no_alloc_str16	Makes a string literal available in the execution file
no_init	Places a data object in non-volatile memory
noreturn	Informs the compiler that the function will not return
packed	Decreases data type alignment to I

Table 29: Extended keywords summary

Extended keyword	Description
pcrel	Used internally by the compiler for constant data when theropi compiler option is used
ramfunc	Makes a function execute in RAM
ro_placement	Places const volatile data in read-only memory.
root	Ensures that a function or variable is included in the object code even if unused
sbrel	Used internally by the compiler for constant data when the $rwpi$ compiler option is used
stackless	Makes a function callable without a working stack
swi	Declares a software interrupt function
task	Relaxes the rules for preserving registers
thumb	Makes a function execute in Thumb mode
weak	Declares a symbol to be externally weakly linked

Table 29: Extended keywords summary (Continued)

# **Descriptions of extended keywords**

This section gives detailed information about each extended keyword.

absolute	
Syntax	See Syntax for object attributes, page 362.
Description	Theabsolute keyword makes references to the object use absolute addressing.
	The following limitations apply:
	• Only available when theropi orrwpi compiler option is used
	• Can only be used on external declarations.
Example	<pre>externabsolute char otherBuffer[100];</pre>
arm	

Syntax	See Syntax for type attributes used on functions, page 361.
Description	Thearm keyword makes a function execute in Arm mode.

	A function declaredarm cannot be declaredthumb.
Example	<pre>arm int func1(void);</pre>
big_endian	
Syntax	See Syntax for type attributes used on data objects, page 360.
Description	Thebig_endian keyword is used for accessing a variable that is stored in the big-endian byte order regardless of what byte order the rest of the application uses. Thebig_endian keyword is available when you compile for Armv6 or higher.
	Note that this keyword cannot be used on pointers. Also, this attribute cannot be used on arrays.
Example	<pre>big_endian long my_variable;</pre>
See also	little_endian, page 366.

#### \_\_cmse\_nonsecure\_call

Syntax	See Syntax for type attributes used on functions, page 361.
Description	The keywordcmse_nonsecure_call can be used on a function pointer, and indicates that a call via the pointer will enter non-secure state. The execution state will be cleared up before such a call, to avoid leaking sensitive data to the non-secure state.
	Thecmse_nonsecure_call keyword can only be used with a function pointer, and it is only allowed when compiling withcmse.
	The keywordcmse_nonsecure_call is not supported for variadic functions, for functions with parameters or return values that do not fit in registers, or for functions with parameters or return values in floating-point registers.
Example	<pre>#include <arm_cmse.h> typedefcmse_nonsecure_call void (*fp_ns_t)(void); static fp_ns_t callback_ns = 0;cmse_nonsecure_entry void set_callback_ns(fp_ns_t func_ns) {    callback_ns = cmse_nsfptr_create(func_ns); }</arm_cmse.h></pre>
See also	<i>cmse</i> , page 265

#### \_\_cmse\_nonsecure\_entry

Sy	intax	See Syntax for object attributes, page 362.
D	escription	Thecmse_nonsecure_entry keyword declares an entry function that can be called from the non-secure state. The execution state will be cleared before returning to the caller, to avoid leaking sensitive data to the non-secure state.
		The keywordcmse_nonsecure_entry is not supported for variadic functions or functions with parameters or return values that do not fit in registers.
		The keywordcmse_nonsecure_entry is only allowed when compiling withcmse.
Ex	cample	<pre>#include <arm_cmse.h>cmse_nonsecure_entry int secure_add(int a, int b) {   return cmse_nonsecure_caller() ? a + b : 0; }</arm_cmse.h></pre>
Se	ee also	<i>cmse</i> , page 265
fiq		
Sy	intax	See Syntax for type attributes used on functions, page 361.
D	escription	Thefiq keyword declares a fast interrupt function. All interrupt functions must be compiled in Arm mode. A function declaredfiq does not accept parameters and does not have a return value. This keyword is not available when you compile for

Example \_\_\_\_fiq \_\_\_arm void interrupt\_function(void);

Cortex-M devices.

# \_\_\_interwork

Syntax	See Syntax for type attributes used on functions, page 361.
Description	A function declaredinterwork can be called from functions executing in either Arm or Thumb mode.
	Note: All functions are interwork. The keyword exists for compatibility reasons.
Example	<pre>typedef void (thumbinterwork *IntHandler)(void);</pre>

# \_\_intrinsic

Description	Theintrinsic keyword is reserved for compiler internal use only.
irq	
Syntax	See Syntax for type attributes used on functions, page 361.
Description	Theirq keyword declares an interrupt function. All interrupt functions must be compiled in Arm mode. A function declaredirq does not accept parameters and does not have a return value. This keyword is not available when you compile for Cortex-M devices.
Example	<pre>irqarm void interrupt_function(void);</pre>
See also	align_sp_on_irq, page 263

# \_\_little\_endian

Syntax	See Syntax for type attributes used on data objects, page 360.
Description	Thelittle_endian keyword is used for accessing a variable that is stored in the little-endian byte order regardless of what byte order the rest of the application uses. Thelittle_endian keyword is available when you compile for Armv6 or higher.
	Note that this keyword cannot be used on pointers. Also, this attribute cannot be used on arrays.
Example	<pre>little_endian long my_variable;</pre>
See also	<i>big_endian</i> , page 364.

# \_\_nested

Syntax	See Syntax for object attributes, page 362.
Description	Thenested keyword modifies the enter and exit code of an interrupt function to allow for nested interrupts. This allows interrupts to be enabled, which means new interrupts can be served inside an interrupt function, without overwriting the SPSR and return address in R14. Nested interrupts are only supported forirq declared functions.

	<b>Note:</b> Thenested keyword requires the processor mode to be in either User or System mode.
Example	<pre>irqnestedarm void interrupt_handler(void);</pre>
See also	Nested interrupts, page 81 andalign_sp_on_irq, page 263.

# \_\_no\_alloc, \_\_no\_alloc16

Syntax	See Syntax for object attributes, page 362.
Description Use theno_alloc orno_alloc16 object attribute on a constant available in the executable file without occupying any space i application.	
	You cannot access the contents of such a constant from your application. You can take its address, which is an integer offset to the section of the constant. The type of the offset is unsigned long whenno_alloc is used, and unsigned short whenno_alloc16 is used.
Example	<pre>no_alloc const struct MyData my_data @ "XXX" = {};</pre>
See also	no_alloc_str;no_alloc_str16, page 367.

#### \_\_no\_alloc\_str, \_\_no\_alloc\_str16

Syntax	no_alloc_str( <i>str</i>	ing_literal @ section)
	and	
	no_alloc_str16( <i>st</i>	tring_literal @ section)
	where	
	string_literal	The string literal that you want to make available in the executable file.
	section	The name of the section to place the string literal in.
Description		tr orno_alloc_str16 operators to make string literals le file without occupying any space in the linked application.

	The value of the expression is the offset of the string literal in the section. Forno_alloc_str, the type of the offset is unsigned long. Forno_alloc_str16, the type of the offset is unsigned short.
Example	#define MYSEG "YYY" #define X(str)no_alloc_str(str @ MYSEG)
	<pre>extern void dbg_printf(unsigned long fmt,)</pre>
	<pre>#define DEGPRINTF(fmt,) dbg_printf(X(fmt),VA_ARGS)</pre>
	<pre>void foo(int i, double d) {     DBGPRINTF("The value of i is: %d, the value of d is: %f",i,d); }</pre>
	Depending on your debugger and the runtime support, this could produce trace output on the host computer. Note that there is no such runtime support in C-SPY, unless you use an external plugin module.
See also	no_alloc,no_alloc16, page 367.
no_init	
Syntax	See Syntax for object attributes, page 362.
Description	Use theno_init keyword to place a data object in non-volatile memory. This means that the initialization of the variable, for example at system startup, is suppressed.
Example	<pre>no_init int myarray[10];</pre>
See also	Non-initialized variables, page 240 and do not initialize directive, page 495.
noreturn	
Syntax	See Syntax for object attributes, page 362.
Description	Thenoreturn keyword can be used on a function to inform the compiler that the function will not return. If you use this keyword on such functions, the compiler can optimize more efficiently. Examples of functions that do not return are abort and exit.

	<b>Note:</b> At optimization levels Medium or High, the <u>noreturn</u> keyword might cause incorrect call stack debug information at any point where it can be determined that the current function cannot return.
	Note: The extended keywordnoreturn has the same meaning as the Standard C keyword _Noreturn or the macro noreturn (if stdnoreturn.h has been included) and as the Standard C++ attribute [[noreturn]].
Example	<pre>noreturn void terminate(void);</pre>
packed	
Syntax	See <i>Syntax for type attributes used on data objects</i> , page 360. An exception is when the keyword is used for modifying the structure type in a struct or union declarations, see below.
Description	Use thepacked keyword to specify a data alignment of 1 for a data typepacked can be used in two ways:
	• When used before the struct or union keyword in a structure definition, the maximum alignment of each member in the structure is set to 1, eliminating the need for gaps between the members.
	You can also use thepacked keyword with structure declarations, but it is illegal to refer to a structure type defined without thepacked keyword using a structure declaration with thepacked keyword.
	• When used in any other position, it follows the syntax rules for type attributes, and affects a type in its entirety. A type with thepacked type attribute is the same as the type attribute without thepacked type attribute, except that it has a data alignment of 1. Types that already have an alignment of 1 are not affected by thepacked type attribute.
	A normal pointer can be implicitly converted to a pointer topacked, but the reverse conversion requires a cast.
	<b>Note:</b> Accessing data types at other alignments than their natural alignment can result in code that is significantly larger and slower.
	Use eitherpacked or #pragma pack to relax the alignment restrictions for a type and the objects defined using that type. Mixingpacked and #pragma pack might lead to unexpected behavior.

Example	<pre>/* No pad bytes in X: */ packed struct X { char ch; int i; }; /*packed is optional here: */ struct X * xp; /* NOTE: nopacked: */ struct Y { char ch; int i; }; /* ERROR: Y not defined withpacked: */ packed struct Y * yp ; /* Member 'i' has alignment 1: */ struct Z { char ch;packed int i; };</pre>
	<pre>void Foo(struct X * xp) {     /* Error:"intpacked *" -&gt; "int *" not allowed: */     int * p1 = &amp;xp-&gt;1;     /* OK: */     intpacked * p2 = &amp;xp-&gt;i;     /* OK, char not affected */     char * p3 = &amp;xp-&gt;ch; }</pre>
See also	<i>pack</i> , page 394.
ramfunc	
<b>ramfunc</b> Syntax	See Syntax for object attributes, page 362.
	See Syntax for object attributes, page 362. Theramfunc keyword makes a function execute in RAM. Two code sections will be created: one for the RAM execution (.textrw), and one for the ROM initialization (.textrw_init).
 Syntax	Theramfunc keyword makes a function execute in RAM. Two code sections will be created: one for the RAM execution (.textrw), and one for the ROM initialization
 Syntax	Theramfunc keyword makes a function execute in RAM. Two code sections will be created: one for the RAM execution (.textrw), and one for the ROM initialization (.textrw_init). If a function declaredramfunc tries to access ROM, the compiler will issue a warning. This behavior is intended to simplify the creation of <i>upgrade</i> routines, for instance, rewriting parts of flash memory. If this is not why you have declared the
 Syntax	Theramfunc keyword makes a function execute in RAM. Two code sections will be created: one for the RAM execution (.textrw), and one for the ROM initialization (.textrw_init). If a function declaredramfunc tries to access ROM, the compiler will issue a warning. This behavior is intended to simplify the creation of <i>upgrade</i> routines, for instance, rewriting parts of flash memory. If this is not why you have declared the functionramfunc, you can safely ignore or disable these warnings.

# \_\_ro\_placement

Syntax	See Syntax for object attributes, page 362.
Description	The <u>ro_placement</u> attribute specifies that a data object should be placed in read-only memory. There are two cases where you might want to use this object attribute:
	• Data objects declared const volatile are by default placed in read-write memory. Use thero_placement object attribute to place the data object in read-only memory instead.
	• In C++, a data object declared const and that needs dynamic initialization is placed in read-write memory and initialized at system startup. If you use the ro_placement object attribute, the compiler will give an error message if the data object needs dynamic initialization.
	You can only use thero_placement object attribute on const objects.
	You can use thero_placement attribute with C++ objects if the compiler can optimize the C++ dynamic initialization of the data objects into static initialization. This is possible only for relatively simple constructors that have been defined in the header files of the relevant class definitions, so that they are visible to the compiler. If the compiler cannot find the constructor, or if the constructor is too complex, an error message will be issued (Error[Go023]) and the compilation will fail.
Example	<pre>ro_placement const volatile int x = 10;</pre>
root	
Syntax	See Syntax for object attributes, page 362.
Description	A function or variable with theroot attribute is kept whether or not it is referenced from the rest of the application, provided its module is included. Program modules are always included and library modules are only included if needed.
Example	<pre>root int myarray[10];</pre>
See also	For more information about root symbols and how they are kept, see <i>Keeping symbols and sections</i> , page 109.

stackless		
Syntax	See Syntax for object attributes, page 362.	
Description	Thestackless keyword declares a function that can be called without a working stack.	
<b>A</b>	A function declaredstackless violates the calling convention in such a way that it is not possible to return from it. However, the compiler cannot reliably detect if the function returns and will not issue an error if it does.	
Example	<pre>stackless void start_application(void);</pre>	
swi		
Syntax	See Syntax for type attributes used on functions, page 361.	
Description	Theswi declares a software interrupt function. It inserts an SVC (formerly SWI) instruction and the specified software interrupt number to make a proper function call. A function declaredswi accepts arguments and returns values. Theswi keyword makes the compiler generate the correct return sequence for a specific software interrupt function. Software interrupt functions follow the same calling convention regarding parameters and return values as an ordinary function, except for the stack usage.	
	Theswi keyword also expects a software interrupt number which is specified with the #pragma swi_number=number directive. The swi_number is used as an argument to the generated assembler SVC instruction, and can be used by the SVC interrupt handler, for example SWI_Handler, to select one software interrupt function in a system containing several such functions. Note that the software interrupt number should only be specified in the function declaration—typically, in a header file that you include in the source code file that calls the interrupt function—not in the function definition.	
	<b>Note:</b> All interrupt functions must be compiled in Arm mode, except for Cortex-M. Use either thearm keyword or the #pragma type_attribute=arm directive to alter the default behavior if needed.	
Example	To declare your software interrupt function, typically in a header file, write for example like this:	
	<pre>#pragma swi_number=0x23swi int swi0x23_function(int a, int b);</pre>	

To call the function:

Somewhere in your application source code, you define your software interrupt function:

```
...
__swi __arm int the_actual_swi0x23_function(int a, int b)
{
    ...
    return 42;
}
```

Software interrupts, page 82 and Calling convention, page 171.

See also

#### \_\_task

Syntax	See Syntax for type attributes used on functions, page 361.
Description	This keyword allows functions to relax the rules for preserving registers. Typically, the keyword is used on the start function for a task in an RTOS.
	By default, functions save the contents of used preserved registers on the stack upon entry, and restore them at exit. Functions that are declaredtask do not save all registers, and therefore require less stack space.
	Because a function declaredtask can corrupt registers that are needed by the calling function, you should only usetask on functions that do not return or call such a function from assembler code.
	The function main can be declaredtask, unless it is explicitly called from the application. In real-time applications with more than one task, the root function of each task can be declaredtask.
Example	<pre>task void my_handler(void);</pre>

\_\_\_thumb

Syntax	See Syntax for type attributes used on functions, page 361.
Description	Thethumb keyword makes a function execute in Thumb mode.
Example	A function declaredthumb cannot be declaredarm. thumb int func2(void);
weak	
<b>weak</b> Syntax	See Syntax for object attributes, page 362.
Description	Using theweak object attribute on an external declaration of a symbol makes all references to that symbol in the module weak.
	Using theweak object attribute on a public definition of a symbol makes that definition a weak definition.
	The linker will not include a module from a library solely to satisfy weak references to a symbol, nor will the lack of a definition for a weak reference result in an error. If no definition is included, the address of the object will be zero.
	When linking, a symbol can have any number of weak definitions, and at most one non-weak definition. If the symbol is needed, and there is a non-weak definition, this definition will be used. If there is no non-weak definition, one of the weak definitions will be used.
Example	externweak int foo; /* A weak reference. */
	weak void bar(void) /* A weak definition. */ {
	<pre>/* Increment foo if it was included. */ if (&amp;foo != 0)</pre>
	++foo; }

# Supported GCC attributes

In extended language mode, the IAR C/C++ Compiler also supports a limited selection of GCC-style attributes. Use the \_\_attribute\_\_ ((attribute-list)) syntax for these attributes.

The following attributes are supported in part or in whole. For more information, see the GCC documentation.

- alias
- aligned
- always\_inline
- cmse\_nonsecure\_call
- cmse\_nonsecure\_entry
- constructor
- deprecated
- noinline
- noreturn
- packed
- pcs (for IAR type attributes used on functions)
- section
- target (for IAR object attributes used on functions)
- transparent\_union
- unused
- used
- volatile
- weak

Supported GCC attributes

# **Pragma directives**

- Summary of pragma directives
- Descriptions of pragma directives

# Summary of pragma directives

The #pragma directive is defined by Standard C and is a mechanism for using vendor-specific extensions in a controlled way to make sure that the source code is still portable.

The pragma directives control the behavior of the compiler, for example how it allocates memory for variables and functions, whether it allows extended keywords, and whether it outputs warning messages.

The pragma directives are always enabled in the compiler.

This table lists the pragma directives of the compiler that can be used either with the #pragma preprocessor directive or the \_Pragma() preprocessor operator:

Pragma directive	Description
bitfields	Controls the order of bitfield members.
calls	Lists possible called functions for indirect calls.
call_graph_root	Specifies that the function is a call graph root.
cstat_disable	See the C-STAT® Static Analysis Guide.
cstat_enable	See the C-STAT® Static Analysis Guide.
cstat_restore	See the C-STAT® Static Analysis Guide.
cstat_suppress	See the C-STAT® Static Analysis Guide.
data_alignment	Gives a variable a higher (more strict) alignment.
default_function_attributes	Sets default type and object attributes for declarations and definitions of functions.
default_no_bounds	Applies #pragma no_bounds to a whole set of functions. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
default_variable_attributes	Sets default type and object attributes for declarations and definitions of variables.

Table 30: Pragma directives summary

Pragma directive	Description
define_with_bounds	Instruments a function to track pointer bounds. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
define_without_bounds	Defines the version of a function that does not have extra bounds information. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
deprecated	Marks an entity as deprecated.
diag_default	Changes the severity level of diagnostic messages.
diag_error	Changes the severity level of diagnostic messages.
diag_remark	Changes the severity level of diagnostic messages.
diag_suppress	Suppresses diagnostic messages.
diag_warning	Changes the severity level of diagnostic messages.
disable_check	Specifies that the immediately following function does not check accesses against bounds. See the C-RUN documentation in the <i>C-SPY® Debugging</i> <i>Guide for Arm</i> .
error	Signals an error while parsing.
function_category	Declares function categories for stack usage analysis.
generate_entry_without_boun ds	Enables generation of an extra entry without bounds for the immediately following function. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
include_alias	Specifies an alias for an include file.
inline	Controls inlining of a function.
language	Controls the IAR Systems language extensions.
location	Specifies the absolute address of a variable, places a variable in a register, or places groups of functions or variables in named sections.
message	Prints a message.
no_arith_checks	Specifies that no C-RUN arithmetic checks will be performed in the following function. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.

Table 30: Pragma directives summary (Continued)

Pragma directive	Description
no_bounds	Specifies that the immediately following function is not instrumented for bounds checking. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
no_stack_protect	Disables stack protection for the following function.
object_attribute	Adds object attributes to the declaration or definition of a variable or function.
optimize	Specifies the type and level of an optimization.
pack	Specifies the alignment of structures and union members.
printf_args	Verifies that a function with a printf-style format string is called with the correct arguments.
public_equ	Defines a public assembler label and gives it a value.
required	Ensures that a symbol that is needed by another symbol is included in the linked output.
rtmodel	Adds a runtime model attribute to the module.
scanf_args	Verifies that a function with a scanf-style format string is called with the correct arguments.
section	Declares a section name to be used by intrinsic functions.
segment	This directive is an alias for #pragma section.
stack_protect	Forces stack protection for the function that follows.
STDC CX_LIMITED_RANGE	Specifies whether the compiler can use normal complex mathematical formulas or not.
STDC FENV_ACCESS	Specifies whether your source code accesses the floating-point environment or not.
STDC FP_CONTRACT	Specifies whether the compiler is allowed to contract floating-point expressions or not.
swi_number	Sets the interrupt number of a software interrupt.
unroll	Unrolls loops.
vectorize	Enables or disables generation of NEON vector instructions for a loop.
weak	Makes a definition a weak definition, or creates a weak alias for a function or a variable.

Table 30: Pragma directives summary (Continued)

Pragma directive	Description
type_attribute	Adds type attributes to a declaration or to
	definitions.

 Table 30: Pragma directives summary (Continued)

**Note:** For portability reasons, see also *Recognized pragma directives (6.10.6)*, page 579.

# **Descriptions of pragma directives**

This section gives detailed information about each pragma directive.

Syntax	<pre>#pragma bitfields=disjoint_types joined_types </pre>	
Parameters	disjoint_types	Bitfield members are placed from the least significant bit to the most significant bit in the container type. Storage containers of bitfields with different base types will not overlap.
	joined_types	Bitfield members are placed depending on the byte order. Storage containers of bitfields will overlap other structure members. For more information, see <i>Bitfields</i> , page 346.
	reversed_disjoint_types	Bitfield members are placed from the most significant bit to the least significant bit in the container type. Storage containers of bitfields with different base types will not overlap.
	reversed	This is an alias for reversed_disjoint_types.
	default	Restores the default layout of bitfield members. The default behavior for the compiler is joined_types.
Description	Use this pragma directive to co	ontrol the layout of bitfield members.

```
Example #pragma bitfields=disjoint_types
/* Structure that uses disjoint bitfield types. */
struct S
{
    unsigned char error : 1;
    unsigned char size : 4;
    unsigned short code : 10;
    };
    #pragma bitfields=default /* Restores to default setting. */
See also Bitfields, page 346.
```

#### calls

Syntax	<pre>#pragma calls=arg[, arg]</pre>	
Parameters	arg can be one of these:	
	function	A declared function
	category	A string that represents the name of a function category
Description	following statement. Th You can specify individ	we to specify all functions that can be indirectly called in the is information can be used for stack usage analysis in the linker. ual functions or function categories. Specifying a category is all included functions in that category.
Example	-	*fp)(void))
See also	function_category, page	388 and Stack usage analysis, page 96.

# call\_graph\_root

Syntax	<pre>#pragma call_graph_root[=category]</pre>	
Parameters	category	A string that identifies an optional call graph root category
Description	Use this pragma directive to specify that, for stack usage analysis purposes, the immediately following function is a call graph root. You can also specify an optional category. The compiler will usually automatically assign a call graph root category to interrupt and task functions. If you use the #pragma call_graph_root directive on such a function you will override the default category. You can specify any string as a category.	
Example	<pre>#pragma call_graph</pre>	_root="interrupt"
See also	Stack usage analysis, pa	ge 96

# data\_alignment

Syntax	<pre>#pragma data_alignment=expression</pre>		
Parameters	<i>expression</i> A constant which must be a power of two (1, 2, 4, etc.).		
Description	Use this pragma directive to give the immediately following variable a higher (more strict) alignment of the start address than it would otherwise have. This directive can be used on variables with static and automatic storage duration.		
	When you use this directive on variables with automatic storage duration, there is an upper limit on the allowed alignment for each function, determined by the calling convention used.		
	Note: Normally, the size of a variable is a multiple of its alignment. The data_alignment directive only affects the alignment of the variable's start address, and not its size, and can thus be used for creating situations where the size is not a multiple of the alignment.		
	<b>Note:</b> To comply with the ISO C11 standard and later, it is recommended to use the alignment specifier_Alignas for C code. To comply with the C++11 standard and later, it is recommended to use the alignment specifier alignas for C++ code.		

# default\_function\_attributes

Syntax	<pre>#pragma default_function_attributes=[ attribute]</pre>	
	where attribute can be:	
	type_attribute object_attribute @ section_name	
Parameters		
	type_attribute	See Type attributes, page 359.
	object_attribute	See Object attributes, page 361.
	@ section_name	See Data and function placement in sections, page 228.
Description	Use this pragma directive to set default section placement, type attributes, and object attributes for function declarations and definitions. The default settings are only used for declarations and definitions that do not specify type or object attributes or location in some other way.	
		nction_attributes pragma directive with no attributes, ere no such defaults have been applied to function S.
Example	<pre>/* Place following functions in section MYSEC" */ #pragma default_function_attributes = @ "MYSEC" int fun1(int x) { return x + 1; } int fun2(int x) { return x - 1; /* Stop placing functions into MYSEC */ #pragma default_function_attributes = has the same effect as:</pre>	
		YSEC" { return x + 1; } YSEC" { return x - 1; }
See also	location, page 390	
	object_attribute, page 392	
	type_attribute, page 400	

# default\_variable\_attributes

Syntax	<pre>#pragma default_variable_attributes=[ attribute]</pre>	
	where attribute can be:	
	type_attribute object_attribute @ section_name	
Parameters		
	type_attribute	See <i>Type attributes</i> , page 359.
	object_attributes	See Object attributes, page 361.
	@ section_name	See Data and function placement in sections, page 228.
Description	Use this pragma directive to set default section placement, type attributes, and object attributes for declarations and definitions of variables with static storage duration. The default settings are only used for declarations and definitions that do not specify type or object attributes or location in some other way.	
		riable_attributes pragma directive with no attributes o such defaults being applied to variables with static storage
	attribute and in a structure to default_variable_attri	wordpacked can be used in two ways: as a normal type type definition. The pragma directive ributes only affects the use ofpacked as a type ons are not affected by this pragma directive. Seepacked,
Example		
	has the same effect as:	
	int var1 @ "MYSEC" = int var2 @ "MYSEC" =	
See also	location, page 390	
	<i>object_attribute</i> , page 392	
	type_attribute, page 400	

# deprecated

Syntax	<pre>#pragma deprecated=</pre>	entity
Description		rective immediately before the declaration of a type, variable, , any use of that type, variable, function, field, or constant will
	The deprecated pragma [[deprecated]], but is	directive has the same effect as the C++ attribute available in C as well.
Example	<pre>#pragma deprecated typedef int * intp_t</pre>	t; // typedef intp_t is deprecated
	<pre>#pragma deprecated extern int fun(void)</pre>	); // function fun is deprecated
	<pre>#pragma deprecated struct xx {     int x; };</pre>	// struct xx is deprecated
	<pre>struct yy { #pragma deprecated     int y; };</pre>	// field y is deprecated
	intp_t fun(void) {	// Warning here
	struct xx ax; struct yy ay;	-
	<pre>fun();   return ay.y; }</pre>	// Warning here // Warning here
See also	Annex K (Bounds-checkin	ag interfaces) of the C standard.
diag_default		
Syntax	#pragma diag_default	t=tag[,tag,]
Parameters		The number of a diagnostic message, for example the message number Pe177.

	Description	severity level defined on diag_remark,di	te to change the severity level back to the default, or to the a the command line by any of the optionsdiag_error, ag_suppress, ordiag_warnings, for the diagnostic the tags. This level remains in effect until changed by another directive.
	See also	Diagnostics, page 252.	
diag	_error		
	Syntax	#pragma diag_error	=tag[,tag,]
	Parameters	tag	The number of a diagnostic message, for example the message number Pe177.
	Description		te to change the severity level to error for the specified emains in effect until changed by another diagnostic-level
	See also	Diagnostics, page 252.	
diag	_remark		
	Syntax	#pragma diag_remar	k=tag[,tag,]
	Parameters	tag	The number of a diagnostic message, for example the message number Pe177.
	Description		te to change the severity level to remark for the specified is level remains in effect until changed by another directive.
	See also	Diagnostics, page 252.	

# diag\_suppress

Syntax	<pre>#pragma diag_suppress=tag[,tag,]</pre>	
Parameters	tag	The number of a diagnostic message, for example the message number Pe117.
Description		ve to suppress the specified diagnostic messages. This level changed by another diagnostic-level pragma directive.
See also	Diagnostics, page 252.	
diag_warning		
Syntax	<pre>#pragma diag_warning=tag[,tag,]</pre>	
Parameters	tag	The number of a diagnostic message, for example the message number Pe826.
Description	1 0	ve to change the severity level to warning for the specified his level remains in effect until changed by another

diagnostic-level pragma directive.

See also Diagnostics, page 252.

#### error

Syntax	#pragma error message	
Parameters	message	A string that represents the error message.
Description	Use this pragma directive to cause an error message when it is parsed. This mechanism is different from the preprocessor directive #error, because the #pragma error directive can be included in a preprocessor macro using the _Pragma form of the directive and only causes an error if the macro is used.	

Example	<pre>#if FOO_AVAILABLE #define FOO #else #define FOO _Pragma("error\"Foo is not available\"") #endif</pre>
	If FOO_AVAILABLE is zero, an error will be signaled if the FOO macro is used in actual source code.

### function\_category

Syntax	<pre>#pragma function_category=category[, category]</pre>	
Parameters	category A	A string that represents the name of a function category.
Description	Use this pragma directive to specify one or more function categories that the immediately following function belongs to. When used together with #pragma calls, the function_category directive specifies the destination for indirect calls for stack usage analysis purposes.	
Example	<pre>#pragma function_category="Cat1"</pre>	
See also	calls, page 381 and Stack usa	ge analysis, page 96.

### include\_alias

Syntax	<pre>#pragma include_alias ("orig_header" , "subst_header") #pragma include_alias (<orig_header> , <subst_header>)</subst_header></orig_header></pre>	
Parameters	orig_header The name of a header file for which you want to create an alias.	
	subst_header	The alias for the original header file.
Description	Use this pragma directive to provide an alias for a header file. This is useful for substituting one header file with another, and for specifying an absolute path to a relative file. This pragma directive must appear before the corresponding #include directives and subst_header must match its corresponding #include directive exactly.	

	Example	<pre>#pragma include_alias (<stdio.h> , <c:\myheaders\stdio.h>) #include <stdio.h></stdio.h></c:\myheaders\stdio.h></stdio.h></pre>	
		This example will subst according to the specific	itute the relative file stdio.h with a counterpart located ed path.
	See also	Include file search procedure, page 247.	
inlin	e		
	Syntax	<pre>#pragma inline[=forced =never]</pre>	
	Parameters		
		No parameter	Has the same effect as the inline keyword.
		forced	Disables the compiler's heuristics and forces inlining.
		never	Disables the compiler's heuristics and makes sure that the function will not be inlined.
	Description		o advise the compiler that the function defined immediately after inlined according to C++ inline semantics.
			nline=forced will always inline the defined function. If the the function for some reason, for example due to recursion, a tted.
			formed only on the High optimization level. Specifying ced will inline the function or result in an error due to recursion
	See also	Inlining functions, page 84.	
lang	uage		
	Syntax	<pre>#pragma language={extended default save restore}</pre>	
	Parameters		
		extended	Enables the IAR Systems language extensions from the first use of the pragma directive and onward.

	default	From the first use of the pragma directive and onward, restores the settings for the IAR Systems language extensions to whatever that was specified by compiler options.
	save restore	Saves and restores, respectively, the IAR Systems language extensions setting around a piece of source code.
		Each use of save must be followed by a matching restore in the same file without any intervening #include directive.
Description	Use this pragma directi	ve to control the use of language extensions.
Example	At the top of a file that needs to be compiled with IAR Systems extensions enabled:	
	<pre>#pragma language= /* The rest of the</pre>	
	extensions enabled, but	t of the source code that needs to be compiled with IAR Systems where the state before the sequence cannot be assumed to be the by the compiler options in use:
	#pragma language=; #pragma language=; /* Part of source #pragma language=;	extended code. */
See also	<i>-e</i> , page 274 and <i>stric</i>	<i>t</i> , page 299.
location		
Syntax	#pragma location=	{address register NAME}

Parameters

register

NAME

address	The absolute address of the global or static variable or

registers R4-R11.

function for which you want an absolute location. An identifier that corresponds to one of the Arm core

A user-defined section name; cannot be a section name predefined for use by the compiler and linker.

Description	Use this pragma directive to specify:	
	• The location—the absolute address—of the global or static variable whose declaration follows the pragma directive. The variables must be declaredno_init.	
	• An identifier specifying a register. The variable defined after the pragma directive is placed in the register. The variable must be declared asno_init and have file scope.	
	A string specifying a section for placing either a variable or function whose declaration follows the pragma directive. Do not place variables that would normally be in different sections (for example, variables declared asno_init and variables declared as const) in the same named section.	
Example	<pre>#pragma location=0xFFFF0400no_init volatile char PORT1; /* PORT1 is located at address 0xFFFF0400 */</pre>	
	<pre>#pragma location=R8no_init int TASK; /* TASK is placed in R8 */</pre>	
	<pre>#pragma location="FLASH" char PORT2; /* PORT2 is located in section FLASH */</pre>	
	<pre>/* A better way is to use a corresponding mechanism */ #define FLASH _Pragma("location=\"FLASH\"") /* */ FLASH int i; /* i is placed in the FLASH section */</pre>	
See also	Controlling data and function placement in memory, page 226 and Declare and place your own sections, page 108.	

#### message

Syntax	<pre>#pragma message(message)</pre>	
Parameters	message	The message that you want to direct to the standard output stream.
Description	Use this pragma directive to make the compiler print a message to the standard output stream when the file is compiled.	

Example	#ifdef TESTING
	<pre>#pragma message("Testing")</pre>
	#endif

# no\_stack\_protect

Syntax	<pre>#pragma no_stack_protect</pre>
Description	Use this pragma directive to disable stack protection for the defined function that follows.
	This pragma directive only has effect if the compiler optionstack_protection has been used.
See also	Stack protection, page 85.

# object\_attribute

Syntax	<pre>#pragma object_attribute=object_attribute[ object_attribute]</pre>
Parameters	For information about object attributes that can be used with this pragma directive, see <i>Object attributes</i> , page 361.
Description	Use this pragma directive to add one or more IAR-specific object attributes to the declaration or definition of a variable or function. Object attributes affect the actual variable or function and not its type. When you define a variable or function, the union of the object attributes from all declarations including the definition, is used.
Example	<pre>#pragma object_attribute=no_init char bar; is equivalent to:no_init char bar;</pre>
See also	General syntax rules for extended keywords, page 359.

# optimize

Syntax	<pre>#pragma optimize=[goal][level][no_optimization]</pre>	
Parameters		
	goal	Choose between:
		size, optimizes for size
		balanced, optimizes balanced between speed and size
		speed, optimizes for speed.
		no_size_constraints, optimizes for speed, but relaxes the normal restrictions for code size expansion.
	level	Specifies the level of optimization; choose between none, low, medium, or high.
	no_optimization	Disables one or several optimizations; choose between:
		no_code_motion, disables code motion
		no_cse, disables common subexpression elimination
		no_inline, disables function inlining
		no_tbaa, disables type-based alias analysis
		no_unroll, disables loop unrolling
		no_vectorize, disables generation of NEON vector instructions
		no_scheduling, disables instruction scheduling.
		vectorize, enables generation of NEON vector instructions
Description	Use this pragma directive to decrease the optimization level, or to turn off some specific optimizations. This pragma directive only affects the function that follows immediately after the directive. The parameters size, balanced, speed, and no_size_constraints only have effect on the high optimization level and only one of them can be used as it is not possible to optimize for speed and size at the same time. It is also not possible to use preprocessor macros embedded in this pragma directive. Any such macro will not be expanded by the preprocessor.	

**Note:** If you use the #pragma optimize directive to specify an optimization level that is higher than the optimization level you specify using a compiler option, the pragma directive is ignored.

```
Example  #pragma optimize=speed
int SmallAndUsedOften()
{
    /* Do something here. */
}
    #pragma optimize=size
int BigAndSeldomUsed()
{
    /* Do something here. */
}
```

See also

Fine-tuning enabled transformations, page 233.

#### pack

Syntax	<pre>#pragma pack(n) #pragma pack() #pragma pack({push pop}[,name] [,n])</pre>		
Parameters	п	Sets an optional structure alignment; one of: 1, 2, 4, 8, or 16	
	Empty list	Restores the structure alignment to default	
	push	Sets a temporary structure alignment	
	pop	Restores the structure alignment from a temporarily pushed alignment	
	name	An optional pushed or popped alignment label	
Description	Use this pragma directive to specify the maximum alignment of struct and members.		
	The #pragma pack directive affects declarations of structures following the pragma directive to the next #pragma pack or the end of the compilation unit.		
	<b>Note:</b> This can result in significantly larger and slower code when accessing members of the structure.		

	Use eitherpacked or #pragma pack to relax the alignment restrictions for a type and the objects defined using that type. Mixingpacked and #pragma pack might lead to unexpected behavior.		
See also	Structure types, page 353.		
_printf_args			
Syntax	<pre>#pragmaprintf_args</pre>		
Description	Use this pragma directive on a function with a printf-style format string. For any call to that function, the compiler verifies that the argument to each conversion specifier (for example %d) is syntactically correct.		
	You cannot use this pragma directive on functions that are members of an overload set with more than one member.		
Example	<pre>#pragmaprintf_args int printf(char const *,);</pre>		
	<pre>void PrintNumbers(unsigned short x) {     printf("%d", x); /* Compiler checks that x is an integer */ }</pre>		

# public\_equ

Syntax	<pre>#pragma public_equ="symbol",value</pre>	
Parameters	symbol value	The name of the assembler symbol to be defined (string). The value of the defined assembler symbol (integer constant expression).
Description	Use this pragma directive to define a public assembler label and give it a value.	
Example	<pre>#pragma public_equ="MY_SYMBOL",0x123456</pre>	
See also	public_equ, page 294.	

# required

Syntax	<pre>#pragma required=symbol</pre>			
Parameters	symbol	Any statically linked function or variable.		
Description	Use this pragma directive to ensure that a symbol which is needed by a second symbol is included in the linked output. The directive must be placed immediately before the second symbol.			
	Use the directive if the requirement for a symbol is not otherwise visible in the application, for example if a variable is only referenced indirectly through the section it resides in.			
Example	<pre>const char copyright[] = "Copyright by me"; #pragma required=copyright int main() {     /* Do something here. */ } Even if the copyright string is not used by the application, it will still be included by the linker and available in the output.</pre>			

# rtmodel

Syntax	<pre>#pragma rtmodel="key","value"</pre>	
Parameters	"key"	A text string that specifies the runtime model attribute.
	"value"	A text string that specifies the value of the runtime model attribute. Using the special value * is equivalent to not defining the attribute at all.
Description	1 6	ve to add a runtime model attribute to a module, which can be eck consistency between modules.
	This pragma directive is useful for enforcing consistency between modules. All modules that are linked together and define the same runtime attribute key must have the same value for the corresponding key, or the special value *. It can, however, be useful to state explicitly that the module can handle any runtime model.	

A module can have several runtime model definitions.
<b>Note:</b> The predefined compiler runtime model attributes start with a double underscore. To avoid confusion, this style must not be used in the user-defined attributes.
<pre>#pragma rtmodel="I2C", "ENABLED"</pre>
The linker will generate an error if a module that contains this definition is linked with a module that does not have the corresponding runtime model attributes defined.
Checking module consistency, page 117.
<pre>#pragmascanf_args</pre>
Use this pragma directive on a function with a scanf-style format string. For any call to that function, the compiler verifies that the argument to each conversion specifier (for example %d) is syntactically correct.
You cannot use this pragma directive on functions that are members of an overload set with more than one member.
<pre>#pragmascanf_args int scanf(char const *,);</pre>
<pre>int GetNumber() {     int nr;     scanf("%d", &amp;nr); /* Compiler checks that         the argument is a         pointer to an integer */</pre>
return nr; }
#pragma section="NAME"
alias
#pragma segment="NAME"

Parameters	NAME	The name of the section.
Description	operatorssection_k	e to define a section name that can be used by the section begin,section_end, andsection_size. All section ic section must have the same memory type attribute and
	<b>Note:</b> To place variables directive or the @ operate	or functions in a specific section, use the #pragma location or.
Example	#pragma section="M	YSECTION"
See also	Dedicated section opera	tors, page 186 and the chapter Linking your application.

#### stack\_protect

Syntax	<pre>#pragma stack_protect</pre>
Description	Use this pragma directive to force stack protection for the defined function that follows.
See also	Stack protection, page 85.

#### STDC CX\_LIMITED\_RANGE

Syntax	#pragma STDC CX_L	IMITED_RANGE {ON OFF DEFAULT}
Parameters	on off default	Normal complex mathematic formulas can be used. Normal complex mathematic formulas cannot be used. Sets the default behavior, that is OFF.
Description	Use this pragma directi mathematic formulas formulas	ve to specify that the compiler can use the normal complex or * (multiplication), / (division), and abs. required by Standard C. The directive is recognized but has no

### STDC FENV\_ACCESS

Syntax	#pragma STDC FENV	_ACCESS {ON OFF DEFAULT}
Parameters	ON	Source code accesses the floating-point environment. Note that this argument is not supported by the compiler.
	OFF	Source code does not access the floating-point environment.
	DEFAULT	Sets the default behavior, that is OFF.
Description	Use this pragma directive to specify whether your source code accesses the floating-point environment or not.	
	Note: This directive is required by Standard C.	

### STDC FP\_CONTRACT

	Syntax	<pre>#pragma STDC FP_CONTRACT {ON OFF DEFAULT}</pre>	
	Parameters	ON	The compiler is allowed to contract floating-point expressions.
		OFF	The compiler is not allowed to contract floating-point expressions. Note that this argument is not supported by the compiler.
		DEFAULT	Sets the default behavior, that is ON.
	Description		ve to specify whether the compiler is allowed to contract ons or not. This directive is required by Standard C.
	Example	#pragma STDC FP_CC	DNTRACT=ON
swi_	number		
	Syntax	#pragma swi_number	=number
	Parameters	number	The software interrupt number

Description	Use this pragma directive together with theswi extended keyword. It is used as an argument to the generated SVC assembler instruction, and is used for selecting one software interrupt function in a system containing several such functions.
Example	<pre>#pragma swi_number=17</pre>
See also	Software interrupts, page 82.

### type\_attribute

Syntax	<pre>#pragma type_attribute=type_attr[ type_attr]</pre>
Parameters	For information about type attributes that can be used with this pragma directive, see <i>Type attributes</i> , page 359.
Description	Use this pragma directive to specify IAR-specific <i>type attributes</i> , which are not part of Standard C. Note however, that a given type attribute might not be applicable to all kind of objects.
	This directive affects the declaration of the identifier, the next variable, or the next function that follows immediately after the pragma directive.
Example	In this example, thumb-mode code is generated for the function foo:
	<pre>#pragma type_attribute=thumb void foo(void) { }</pre>
	This declaration, which uses extended keywords, is equivalent:
	thumb void foo(void) { }
See also	The chapter Extended keywords.

#### unroll

Syntax	#pragma unroll=n	#pragma unroll=n		
Parameters	п	The number of loop bodies in the unrolled loop, a constant integer. #pragma unroll = 1 will prevent the unrolling of a loop.		
Description	directive should be un body. The pragma dire	Use this pragma directive to specify that the loop following immediately after the directive should be unrolled and that the unrolled loop should have <i>n</i> copies of the loop body. The pragma directive can only be placed immediately before a for, do, or while loop, whose number of iterations can be determined at compile time.		
	unrolling larger loops optimizations between	Normally, unrolling is most effective for relatively small loops. However, in some cases, unrolling larger loops can be beneficial if it exposes opportunities for further optimizations between the unrolled loop iterations, for example common subexpression elimination or dead code elimination.		
	unrolling heuristics are	1 directive can be used to force a loop to be unrolled if the e not aggressive enough. The pragma directive can also be used to ness of the unrolling heuristics.		
Example	<pre>#pragma unroll=4 for (i = 0; i &lt; 6 {     foo(i * k, (i + }</pre>			
See also	Loop unrolling, page 234			
vectorize				
Syntax	#pragma vectorize	e [= never]		
Parameters	No parameter never	Enables generation of NEON vector instructions. Disables generation of NEON vector instructions.		
Description	Use this pragma directive to enable or disable generation of NEON vector instructions for the loop that follows immediately after the pragma directive. This pragma directive can only be placed immediately before a for, do, or while loop. If the optimization			

level is lower than High, the pragma directive has no effect.

Example	#pragma vectorize
-	for $(i = 0; i < 1024; ++i)$
	{
	a[i] = b[i] * c[i];]
	}

#### weak

Syntax	<pre>#pragma weak symbol1[=symbol2]</pre>	
Parameters	symboll symbol2	A function or variable with external linkage. A defined function or variable.
Description	This pragma directive of	can be used in one of two ways:
		ion of a function or variable with external linkage a weak eak attribute can also be used for this purpose.
	• To create a weak alianalias for the same further the same further same for the sa	as for another function or variable. You can make more than one unction or variable.
Example	To make the definition	of foo a weak definition, write:
	#pragma weak foo	
	To make NMI_Handle	r a weak alias for Default_Handler, write:
	#pragma weak NMI_1	Handler=Default_Handler
	—	defined elsewhere in the program, all references to per to Default_Handler.
See also	<i>weak</i> , page 374.	

# **Intrinsic functions**

- Summary of intrinsic functions
- Descriptions of IAR Systems intrinsic functions

### Summary of intrinsic functions

The IAR C/C++ Compiler for Arm can be used with several different sets of intrinsic functions.

To use the IAR Systems intrinsic functions in an application, include the header file intrinsics.h.

To use the ACLE (*Arm C Language Extensions*) intrinsic functions in an application, include the header file arm\_acle.h. For more information, see *Intrinsic functions for ACLE*, page 403.

To use the Neon intrinsic functions in an application, include the header file arm\_neon.h. For more information, see *Intrinsic functions for Neon instructions*, page 403.

To use the CMSIS intrinsic functions in an application, include the main CMSIS header file for your device or core. Note that the CMSIS header files should not be included in the same module as intrinsics.h. For more information, see *CMSIS integration*, page 217.

Note that the intrinsic function names start with double underscores, for example:

\_\_disable\_interrupt

#### INTRINSIC FUNCTIONS FOR ACLE

ACLE (Arm C Language Extensions) specifies a number of intrinsic functions. These are not documented here. Instead, see the Arm C Language Extensions (IHI 0053D).

To use the intrinsic functions for ACLE in an application, include the header file arm\_acle.h.

#### INTRINSIC FUNCTIONS FOR NEON INSTRUCTIONS

The Neon co-processor implements the Advanced SIMD instruction set extension, as defined by the Arm architecture. To use Neon intrinsic functions in an application,

include the header file arm\_neon.h. The functions use vector types that are named according to this pattern:

<type><size>x<number\_of\_lanes>\_t

where:

- type is int, unsigned int, float, or poly
- size is 8, 16, 32, or 64
- number\_of\_lanes is 1, 2, 4, 8, or 16.

The total bit width of a vector type is *size* times *number\_of\_lanes*, and should fit in a D register (64 bits) or a Q register (128 bits).

For example:

\_\_intrinsic float32x2\_t vsub\_f32(float32x2\_t, float32x2\_t);

The intrinsic function vsub\_f32 inserts a VSUB.F32 instruction that operates on two 64-bit vectors (D registers), each with two elements (lanes) of 32-bit floating-point type.

Some functions use an array of vector types. As an example, the definition of an array type with four elements of type float32x2\_t is:

```
typedef struct
{
  float32x2_t val[4];
}
float32x2x4_t;
```

#### **Descriptions of IAR Systems intrinsic functions**

This section gives reference information about each IAR Systems intrinsic function.

#### \_\_arm\_cdp

#### \_\_arm\_cdp2

Syntax	<pre>voidarm_cdp(cpid coproc,cpopcw opc1,cpreg CRd,cpreg CRn,cpreg CRm,cpopc opc2);</pre>
	<pre>voidarm_cdp2(cpid ,cpopw coprocopc1,cpreg CRd,cpreg CRn,cpreg CRm,cpopc opc2);</pre>
Parameters	<i>coproc</i> The coprocessor number 015.

	opc1, opc2	Coprocessor-specific operation codes.
	CRd, CRn, CRm	Coprocessor registers.
Description	will be encoded in the	-specific data operation instruction CDP or CDP2. The parameters instruction and must therefore be constants.
	(ACLE).	is all defined according to the firm C Language Extensions
See also	<i>CDP</i> , page 410 and	<i>CDP2</i> , page 410
arm_ldc		
arm_ldcl		
arm_ldc2		
arm_ldc2l		
Syntax	voidarm_ldcl(_ voidarm_ldc2(_	cpid coproc,cpreg CRd, const void* p); _cpid coproc,cpreg CRd, const void* p); _cpid coproc,cpreg CRd, const void* p); cpid coproc,cpreg CRd, const void* p);
Parameters		
	coproc	The coprocessor number 015.
	CRd	A coprocessor register.
	g	Pointer to memory that the coprocessor will read from.
Description	Inserts the coprocessor load instruction LDC (or one of its variants), which means that a value will be loaded into a coprocessor register. The parameters <i>coproc</i> , and <i>CRd</i> will be encoded in the instruction and must therefore be constants.	
	These intrinsic function (ACLE).	ns are defined according to the Arm C Language Extensions
See also	<i>LDC</i> , page 418, <i>I</i>	<i>LDCL</i> , page 418, <i>LDC2</i> , page 418, and <i>LDC2L</i> , page 418

#### \_\_arm\_mcr

#### \_\_arm\_mcr2

\_\_arm\_mcrr

#### \_\_arm\_mcrr2

Syntax	CRn,cpreg C. voidarm_mcr CRn,cpreg C. voidarm_mcr src,cpreg C.	r2(cpid <i>coproc</i> ,cpopc <i>opc1</i> , unsigned long long
Parameters	coproc	The coprocessor number 015.
	opc1, opc2	Coprocessor-specific operation code.
	src	The value to be written to the coprocessor.
	CRn, CRm	The coprocessor register to read from.
Description	•	or write instruction, MCR, MCR2, MCRR, or MCRR2. The parameters <i>c2</i> , <i>CRn</i> , and <i>CRm</i> will be encoded in the instruction and must nts.
	These intrinsic fund (ACLE).	ctions are defined according to the Arm C Language Extensions
See also	<i>MCR</i> , page 420,	<i>MCR2</i> , page 420, <i>MCRR</i> , page 421, and <i>MCRR2</i> , page 421

\_\_arm\_mrc

#### \_\_arm\_mrc2

#### \_\_arm\_mrrc

#### \_\_arm\_mrrc2

Syntax	<pre>unsigned intarm_mrc(cpid coproc,cpopc opc1,cpreg CRn, cpreg CRm,cpopc opc2); unsigned intarm_mrc2(cpid coproc,cpopc opc1,cpreg CRn, cpreg CRm,cpopc opc2); unsigned long longarm_mrrc(cpid coproc,cpopc opc1, cpreg CRm); unsigned long longarm_mrrc2(cpid coproc,cpopc opc1, cpreg CRm);</pre>
Parameters	<i>coproc</i> The coprocessor number 015.
	opc1, opc2 Coprocessor-specific operation code.
	CRn, CRm The coprocessor register to read from.
Description	Inserts a coprocessor read instruction, MRC, MRC2, MRRC, or MRRC2. Returns the value of the specified coprocessor register. The parameters <i>coproc</i> , <i>opc1</i> , <i>opc2</i> , <i>CRn</i> , and <i>CRm</i> will be encoded in the instruction and must therefore be constants.
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).
See also	<i>MRC</i> , page 422, <i>MRC2</i> , page 422, <i>MRRC</i> , page 422, and <i>MRRC2</i> , page 422
arm_rsr	
arm_rsr64	

#### \_\_arm\_rsrp

Syntax

unsigned int \_\_arm\_rsr(sys\_reg special\_register); unsigned long long \_\_arm\_rsr64(\_\_sys\_reg special\_register);

	<pre>void *arm_rsrp(sys_reg special_register);</pre>
Parameters	
	special_register A string literal specifying a register.
Description	Reads a system register. Use a string literal to specify which register to read. Forarm_rsr andarm_rsrp, the string literal can specify the name of a system register accepted in an MRS or VMRS instruction for the architecture specified by the compiler optioncpu.
	Forarm_rsr andarm_rsrp, the string literal can also specify a 32-bit coprocessor register, using this format:
	coprocessor : opc1 :c CRn :c CRm : opc2
	Forarm_rsr64, the string literal can specify a 64-bit coprocessor register using this format:
	coprocessor : opc1 :c CRm
	where, for both formats
	• <i>coprocessor</i> is a number, c0c15 or cp0cp15
	• <i>opc1</i> and <i>opc2</i> are coprocessor-specific operation codes, 07
	• <i>CRn</i> and <i>CRm</i> are coprocessor registers 015
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).
arm_stc	
arm_stcl	
arm_stc2	
arm_stc2l	
Syntax	<pre>voidarm_stc(cpid coproc,cpreg CRd, const void* p); voidarm_stcl(cpid coproc,cpreg CRd, const void* p); voidarm_stc2(cpid coproc,cpreg CRd, const void* p); voidarm_stc21(cpid coproc,cpreg CRd, const void* p);</pre>

Parameters		
	coproc	The coprocessor number 015.
	CRd	A coprocessor register.
	p	Pointer to memory that the coprocessor will write to.
Description	•	ore instruction STC (or one of its variants). The parameters be encoded in the instruction and must therefore be constants.
	These intrinsic functions (ACLE).	are defined according to the Arm C Language Extensions
See also	<i>STC</i> , page 438, <i>STC</i>	<i>L</i> , page 438, <i>STC2</i> , page 438, and <i>STC2L</i> , page 438
arm_wsr		
arm_wsr64		
arm_wsrp		
Syntax	voidarm_wsr64(co	t char * <i>special_reg</i> , _uint32_t <i>value</i> ); nst char * <i>special_reg</i> , uint64_t <i>value</i> ); st char * <i>special_reg</i> , const void * <i>value</i> );
Parameters		
	special_reg	A string literal specifying a system register.
	value	The value to write to the system register.
Description	Writes to a system register. Use a string literal to specify which register to write to. Forarm_wsr andarm_wsrp, the string literal can specify the name of a system register accepted in an MSR or VMSR instruction for the architecture specified by the compiler optioncpu.	
	Forarm_wsr anda coprocessor register, usin	rm_wsrp, the string literal can also specify a 32-bit g this format:
	coprocessor : opc1	:c CRn :c CRm : opc2
	Forarm_wsr64, the st format:	ring literal can specify a 64-bit coprocessor register using this
	coprocessor : opc1	:c CRm

where, for both formats

- *coprocessor* is the coprocessor number, cp0..cp15 or p0..p15
- opc1 and opc2 are coprocessor-specific operation codes, 0...7
- CRn and CRm are coprocessor registers, 0..15

These intrinsic functions are defined according to ACLE (Arm C Language Extensions).

CDP	
CDP2	
Syntax	<pre>voidCDP(cpid coproc,cpopcw opc1,cpreg CRd,cpreg CRn,cpreg CRm,cpopc opc2); voidCDP2(cpid coproc,cpopcw opc1,cpreg CRd,cpreg CRn,cpreg CRm,cpopc opc2);</pre>
Parameters	<i>coproc</i> The coprocessor number 015.
	opc1, opc2 Coprocessor-specific operation codes.
	CRd, CRn, CRm Coprocessor registers.
Description	Inserts the coprocessor-specific data operation instruction CDP or CDP2.
	The parameters will be encoded in the instruction and must therefore be constants.
	The intrinsic functionsCDP andCDP2 require an Armv5 architecture or higher for Arm mode, or Armv6 or higher for Thumb mode.
See also	
See also <b>CLREX</b>	Arm mode, or Armv6 or higher for Thumb mode.
	Arm mode, or Armv6 or higher for Thumb mode.
CLREX	Arm mode, or Armv6 or higher for Thumb mode. <i>arm_cdp</i> , page 404 and <i>arm_cdp2</i> , page 404

AVRv7 for Thumb mode.

### \_\_CLZ

Syntax	unsigned intCLZ(unsigned int);
Description	Inserts a CLZ instruction. If the CLZ instruction is not available, a separate sequence of instructions is inserted to achieve the same result.
See also	The Arm C Language Extensions (ACLE) intrinsic functionsclz,clzl, andclzll.
crc32b	
crc32h	
crc32w	
crc32d	
Syntax	<pre>unsigned intcrc32b(unsigned int crc, unsigned char data); unsigned intcrc32h(unsigned int crc, unsigned short data); unsigned intcrc32w(unsigned int crc, unsigned int data); unsigned intcrc32d(unsigned int crc, unsigned long long data);</pre>
Description	Calculates a CRC32 checksum from a checksum (or initial value) crc and one item of data. Note that the 32-bit Arm/Thumb instructions do not include CRC32X, socrc32d is implemented as two calls tocrc32w.
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).

crc32cb	
crc32ch	
crc32cw	
crc32cd	
Syntax	<pre>unsigned intcrc32cb(unsigned int crc, unsigned char data); unsigned intcrc32ch(unsigned int crc, unsigned short data); unsigned intcrc32cw(unsigned int crc, unsigned int data); unsigned intcrc32cd(unsigned int crc, unsigned long long data);</pre>
Description	Calculates a CRC32C checksum from a checksum (or initial value) crc and one item of data. Note that the 32-bit Arm/Thumb instructions do not include CRC32CX, socrc32cd is implemented as two calls tocrc32cw.
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).
disable_fiq	
Syntax	<pre>voiddisable_fiq(void);</pre>
Description	Disables fast interrupt requests (fiq).
	This intrinsic function can only be used in privileged mode and is not available for Cortex-M devices.
disable_interrupt	
Syntax	<pre>voiddisable_interrupt(void);</pre>
Description	Disables interrupts. For Cortex-M devices, it raises the execution priority level to 0 by setting the priority mask bit, PRIMASK. For other devices, it disables interrupt requests (irq) and fast interrupt requests (fiq).
	This intrinsic function can only be used in privileged mode.

### \_\_disable\_irq

Syntax	<pre>voiddisable_irq(void);</pre>
Description	Disables interrupt requests (irq).
	This intrinsic function can only be used in privileged mode and is not available for Cortex-M devices.

#### \_\_DMB

Syntax	<pre>voidDMB(void);</pre>
Description	Inserts a DMB instruction. This intrinsic function requires an Armv6M architecture, or an Armv7 architecture or higher.
See also	The Arm C Language Extensions (ACLE) intrinsic functiondmb.

#### \_\_DSB

Syntax	<pre>voidDSB(void);</pre>
Description	Inserts a DSB instruction. This intrinsic function requires an Armv6M architecture, or an Armv7 architecture or higher.
See also	The Arm C Language Extensions (ACLE) intrinsic functiondsb.

### \_\_enable\_fiq

Syntax	<pre>voidenable_fiq(void);</pre>
Description	Enables fast interrupt requests (fiq).
	This intrinsic function can only be used in privileged mode, and it is not available for Cortex-M devices.

### \_\_enable\_interrupt

Syntax	<pre>voidenable_interrupt(void);</pre>
Description	Enables interrupts. For Cortex-M devices, it resets the execution priority level to default by clearing the priority mask bit, PRIMASK. For other devices, it enables interrupt requests (irq) and fast interrupt requests (fiq).
	This intrinsic function can only be used in privileged mode.
enable_irq	
Syntax	<pre>voidenable_irq(void);</pre>
Description	Enables interrupt requests (irq).
	This intrinsic function can only be used in privileged mode, and it is not available for Cortex-M devices.

#### \_\_fma

### \_\_\_fmaf

Syntax	<pre>doublefma(double x, double y, double z); floatfmaf(float x, float y, float z);</pre>
Description	Fused floating-point multiply-accumulate computes $x*y+z$ without intermediate rounding, which corresponds either to the intrinsic callVFMA_F64(z, x, y) for double precision, orVFMA_F32(z, x, y) for single precision.
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).

### \_\_get\_BASEPRI

Syntax	<pre>unsigned intget_BASEPRI(void);</pre>
Description	Returns the value of the BASEPRI register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.
See also	<i>arm_rsr</i> , page 407

### \_\_get\_CONTROL

Syntax	<pre>unsigned intget_CONTROL(void);</pre>
Description	Returns the value of the CONTROL register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device.
See also	<i>arm_rsr</i> , page 407
get_CPSR	
Syntax	unsigned intget_CPSR(void);
Description	Returns the value of the Arm CPSR (Current Program Status Register). This intrinsic function can only be used in privileged mode, is not available for Cortex-M devices, and it requires Arm mode.
See also	<i>arm_rsr</i> , page 407

#### \_\_get\_FAULTMASK

Syntax	<pre>unsigned intget_FAULTMASK(void);</pre>
Description	Returns the value of the FAULTMASK register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.
See also	<i>arm_rsr</i> , page 407

#### \_\_get\_FPSCR

Syntax	<pre>unsigned intget_FPSCR(void);</pre>
Description	Returns the value of FPSCR (floating-point status and control register). This intrinsic function is only available for devices with a VFP coprocessor.

See also \_\_\_*arm\_rsr*, page 407

### \_\_get\_interrupt\_state

Syntax	x	<pre>istate_tget_interrupt_state(void);</pre>
Descr	iption	Returns the global interrupt state. The return value can be used as an argument to theset_interrupt_state intrinsic function, which will restore the interrupt state.
		This intrinsic function can only be used in privileged mode, and cannot be used when using theaeabi compiler option.
Examp	ple	#include "intrinsics.h"
		<pre>void CriticalFn() {    istate_t s =get_interrupt_state();    disable_interrupt();     /* Do something here. */    set_interrupt_state(s); } The advantage of using this sequence of code compared to usingdisable_interrupt andenable_interrupt is that the code in this example</pre>
		will not enable any interrupts disabled before the call of <u>get_interrupt_state</u> .
get_IP	SR	
Syntax	x	<pre>unsigned intget_IPSR(void);</pre>

Syntax	unsigned intget_iPsk(void);
Description	Returns the value of the IPSR register (Interrupt Program Status Register). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.

See also

\_\_arm\_rsr, page 407

### \_\_get\_LR

Syntax	unsigned intget_LR(void);
Description	Returns the value of the link register (R14).

# \_\_get\_MSP

Syntax	<pre>unsigned intget_MSP(void);</pre>
Description	Returns the value of the MSP register (Main Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.
See also	<i>arm_rsr</i> , page 407

### \_\_get\_PRIMASK

Syntax	<pre>unsigned intget_PRIMASK(void);</pre>
Description	Returns the value of the PRIMASK register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device.
See also	<i>arm_rsr</i> , page 407

# \_\_get\_PSP

Syntax	<pre>unsigned intget_PSP(void);</pre>
Description	Returns the value of the PSP register (Process Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.
See also	<i>arm_rsr</i> , page 407

### \_\_get\_PSR

Syntax	<pre>unsigned intget_PSR(void);</pre>
Description	Returns the value of the PSR register (combined Program Status Register). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.
See also	<i>arm_rsr</i> , page 407

\_\_get\_SB

Syntax	unsigned int	get_SB(void);
Description	Returns the value of	the static base register (R9).
get_SP		
Syntax	unsigned int	<pre>get_SP(void);</pre>
Description	Returns the value of	the stack pointer register (R13).
ISB		
Syntax	voidISB(void)	;
Description	Inserts an ISB instru an Armv7 architectu	ction. This intrinsic function requires an Armv6M architecture, or re or higher.
See also	The Arm C Languag	e Extensions (ACLE) intrinsic functionisb.
LDC		
LDCL		
LDC2		
LDC2L		
Syntax	voidLDCxxx(	_ul coproc,ul CRn,ul const *src);
Parameters	coproc	The coprocessor number 015.
	CRn	The coprocessor register to load.

A pointer to the data to load.

src

Description	a value will be loade	for load instruction LDC—or one of its variants—which means that d into a coprocessor register. The parameters <i>coproc</i> and <i>CRn</i> will struction and must therefore be constants.
		nsLDC andLDCL require architecture Armv4 or higher for w6T2 or higher for Thumb mode.
		nsLDC2 andLDC2L require architecture Armv5 or higher for work or higher for Thumb mode.
See also	<i>arm_ldc</i> , page 405 page 405	5, <i>arm_ldcl</i> , page 405, <i>arm_ldc2</i> , page 405, and <i>arm_ldc2l</i> ,
LDC_noidx		
LDCL_noidx		
LDC2_noidx		
LDC2L_noidx		
Syntax	<pre>voidLDCxxx_n( option);</pre>	<pre>pidx(ul coproc,ul CRn,ul const *src,ul</pre>
Parameters		
	coproc	The coprocessor number 015.
	CRn	The coprocessor register to load.
	src	A pointer to the data to load.
	option	Additional coprocessor option 0255.

Description Inserts the coprocessor load instruction LDC, or one of its variants. A value will be loaded into a coprocessor register. The parameters *coproc*, *CRn*, and *option* will be encoded in the instruction and must therefore be constants.

The intrinsic functions \_\_LDC\_noidx and \_\_LDCL\_noidx require architecture Armv4 or higher for Arm mode, and Armv6T2 or higher for Thumb mode.

The intrinsic functions \_\_LDC2\_noidx and \_\_LDC2L\_noidx require architecture Armv5 or higher for Arm mode, and Armv6T2 or higher for Thumb mode.

LDREX		
LDREXB		
LDREXD		
LDREXH		
Syntax	unsigned char unsigned long	LDREX(unsigned int *); LDREXB(unsigned char *); longLDREXD(unsigned long long *); tLDREXH(unsigned short *);
Description	Inserts the specifi	ed instruction.
		rinsic function requires architecture Armv6 or higher for Arm mode, baseline Armv8-M for Thumb mode.
		nd theLDREXH intrinsic functions require architecture Armv6K or node, and Armv7 or baseline Armv8-M for Thumb mode.
		ntrinsic function requires architecture Armv6K or Armv7 for Arm 7 but not Armv7-M for Thumb mode.
MCR		
MCR2		
Syntax	<pre>voidMCR(ul coproc,ul opcode_1,ul src,ul CRn,ul CRm,ul opcode_2); voidMCR2(ul coproc,ul opcode_1,ul src,ul CRn,ul CRm,ul opcode_2);</pre>	
Parameters		
	coproc	The coprocessor number 015.
	opcode_1	Coprocessor-specific operation code.
	STC	The value to be written to the coprocessor.
	CRn	The coprocessor register to write to.
	CRm	Additional coprocessor register; set to zero if not used.

	opcode_2	Additional coprocessor-specific operation code; set to zero if not used.
Description	1	sor write instruction (MCR or MCR2). The parameters <i>coproc</i> , <i>CRm</i> , and <i>opcode_2</i> will be encoded in the instruction and must ants.
	The intrinsic funct Thumb mode.	tionMCR requires either Arm mode, or an Armv6T2 or higher for
		tionMCR2 requires an Armv5T architecture or higher for Arm 2 or higher for Thumb mode.
See also	<i>arm_mcr</i> , page	406 and <i>arm_mcr2</i> , page 406

#### 

#### \_\_MCRR2

Syntax	cpreg <i>CRm</i> ) voidMCRR2	<pre>voidMCRR(cpid coproc,cpopc opc1, unsigned long long src, cpreg CRm); voidMCRR2(cpid coproc,cpopc opc1, unsigned long long src, cpreg CRm);</pre>	
Parameters	coproc	The coprocessor number 015.	
	opc1	Coprocessor-specific operation code.	
	STC	The value to be written to the coprocessor.	
	CRm	The coprocessor register to read from.	
Description	-	Inserts a coprocessor write instruction, MCRR or MCRR2. The parameters <i>coproc</i> , <i>op</i> and <i>CRm</i> will be encoded in the instruction and must therefore be constants.	
		actionsMCRR andMCRR2 require an Armv6 architecture or higher or Armv6T2 or higher for Thumb mode.	
See also	<i>arm_mcrr</i> , pa	ge 406 and <i>arm_mcrr2</i> , page 406	

### \_\_MRC

Syntax	CRm,ul ope	MRC2(ul coproc,ul opcode_1,ul CRn,ul
Parameters	coproc	The coprocessor number 015.
	opcode_1	Coprocessor-specific operation code.
	CRn	The coprocessor register to write to.
	CRm	Additional coprocessor register; set to zero if not used.
	opcode_2	Additional coprocessor-specific operation code; set to zero if not used.
Description	coprocessor regis	essor read instruction (MRC or MRC2). Returns the value of the specified ster. The parameters <i>coproc</i> , <i>opcode_1</i> , <i>CRn</i> , <i>CRm</i> , and <i>opcode_2</i> will e instruction and must therefore be constants.
	The intrinsic fun Thumb mode.	ctionMRC requires either Arm mode, or an Armv6T2 or higher for
		ctionMRC2 requires an Armv5T architecture or higher for Arm T2 or higher for Thumb mode.
<b>A</b> 1	<i>arm_mrc</i> , pag	e 407 and <i>arm_mrc2</i> , page 407
See also		

### \_\_MRRC2

Syntax	unsigned long lon <i>CRm</i> );	gMRRC(cpid <i>coproc</i> ,cpopc <i>opc1</i> ,cpreg
	unsigned long lon CRm);	gMRRC2(cpid <i>coproc</i> ,cpopc <i>opc1</i> ,cpreg
Parameters	coproc	The coprocessor number 015.

	opc1	Coprocessor-specific operation code.
	CRm	The coprocessor register to read from.
		read instruction, MRRC or MRRC2. Returns the value of the specified The parameters <i>coproc</i> , <i>opc1</i> , and <i>CRm</i> will be encoded in the herefore be constants.
		sMRRC andMRRC2 require an Armv6 architecture or higher nV6T2 or higher for Thumb mode.
See also	arm_mrrc, page 40	7 and <i>arm_mrrc2</i> , page 407
no_operation		
Syntax	voidno_operat	ion(void);

Description	Inserts a NOP instruction.
	This intrinsic function is equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionnop.

\_\_РКНВТ

Syntax	unsigned int int <i>count</i> );	PKHBT(unsigned int $x$ , unsigned int $y$ , unsigned
Parameters	x	First operand.
	У	Second operand, optionally shifted left.
	count	Shift count 0–31, where 0 means no shift.
Description	Inserts a PKHBT instruction, with an optionally shifted operand (LSL) for co range 1–31.	
		on requires an Arm v6 architecture or higher for Arm mode, and , or Armv7E-M for Thumb mode.

#### \_\_РКНТВ

Syntax	unsigned intPKHTB(unsigned int $x$ , unsigned int $y$ , unsigned int $count$ );	
Parameters	x	First operand.
	У	Second operand, optionally shifted right (arithmetic shift).
	count	Shift count 0-32, where 0 means no shift.
Description	Inserts a PKHTB instruction, with an optionally shifted operand (ASR) for count in the range 1–32. This intrinsic function requires an Arm v6 architecture or higher for Arm mode, and Armv7-A, Armv7-R, or Arm v7E-M for Thumb mode.	

### \_\_PLD

#### \_\_PLDW

Syntax	<pre>voidPLD(void const *); voidPLDW(void const *);</pre>
Description	Inserts a preload data instruction (PLD or PLDW).
	The intrinsic functionPLD requires an Armv7 architecturePLDW requires an Armv7 architecture with MP extensions (for example Cortex-A5).
See also	The Arm C Language Extensions (ACLE) intrinsic functionspld.

### \_\_PLI

Syntax	<pre>voidPLI(void const *);</pre>
Description	Inserts a PLI instruction.
	This intrinsic function requires an Arm v7 architecture.
See also	The Arm C Language Extensions (ACLE) intrinsic functionpli.

# \_\_QADD

### \_\_QDADD

### \_\_QDSUB

# \_\_QSUB

Syntax	<pre>signed intQxxx(signed int, signed int);</pre>
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv5E or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
	These intrinsic functions are equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionsqadd andqsub.
QADD8	
QADD16	
QASX	
QSAX	
QSUB8	

# \_\_QSUB16

Syntax	unsigned intQxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

	These intrinsic functions are equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionsqadd8,qadd16,qasx,qsax,qsub8, andqsub16.
QCFlag	
Syntax	<pre>unsigned intQCFlag(void);</pre>
Description	Returns the value of the cumulative saturation flag QC of the FPSCR register (Floating-point Status and Control Register). This intrinsic function is only available for devices with Neon (Advanced SIMD).
Syntax	<pre>signed intQDOUBLE(signed int);</pre>
Description	Inserts an instruction <code>QADD Rd</code> , <code>Rs</code> , <code>Rs</code> for a source register <code>Rs</code> , and a destination register <code>Rd</code> .
	This intrinsic function requires architecture Armv5E or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
QFlag	
Syntax	<pre>intQFlag(void);</pre>
Description	Returns the Q flag that indicates if overflow/saturation has occurred.
	This intrinsic function requires architecture Armv5E or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
RBIT	
Syntax	unsigned intRBIT(unsigned int);
Description	Inserts an RBIT instruction, which reverses the bit order in a 32-bit register. If the RBIT instruction is not available, a separate sequence of instructions is inserted to achieve the same result.
	This intrinsic function is equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionrbit.

#### \_\_reset\_Q\_flag

Syntax	<pre>voidreset_Q_flag(void);</pre>
Description	Clears the Q flag that indicates if overflow/saturation has occurred.
	This intrinsic function requires an Arm v5E architecture or higher for Arm mode, and Arm v7A, Arm v7R, or Arm v7E-M for Thumb mode.

#### \_\_reset\_QC\_flag

Syntax	<pre>voidreset_QC_flag(void);</pre>
Description	Clears the value of the cumulative saturation flag QC of the FPSCR register (Floating-point Status and Control Register). This intrinsic function is only available for devices with Neon (Advanced SIMD).

#### \_\_REV

#### \_\_REV16

### \_\_REVSH

Syntax	<pre>unsigned intREV(unsigned int); unsigned intREV16(unsigned int); signed intREVSH(short);</pre>
Description	Inserts the specified instruction. If the instruction is not available, a separate sequence of instructions is inserted to achieve the same result.
	These intrinsic functions are equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionsrev,rev16, andrevsh.

#### \_\_\_rintn

#### \_\_\_rintnf

Syntax

double \_\_rintn(double x);
float \_\_rintnf(float x);

Description	Rounds a number x to the nearest integer number (with ties to even), which corresponds either to the intrinsic callVRINTN_F64 (x) for double precision, or VRINTN_F32 (x) for single precision.
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).
ROR	
Syntax	unsigned intROR(unsigned int);
Description	Inserts an ROR instruction.
	This intrinsic function is equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionror.
RRX	
Syntax	<pre>unsigned intRRX(unsigned int);</pre>
Description	Inserts an RRX instruction.
SADD8	
SADD16	
SASX	
SSAX	
SSUB8	
SSUB16	
Syntax	unsigned intSxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

These intrinsic functions are equivalent to the *Arm C Language Extensions* (ACLE) intrinsic functions \_\_sadd8, \_\_sadd16, \_\_sasx, \_\_ssub8, and \_\_ssub16.

Syntax	unsigned intSEL(unsigned int, unsigned int);
Description	Inserts an SEL instruction.
	This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

#### \_\_set\_BASEPRI

SEL

Syntax	<pre>voidset_BASEPRI(unsigned int);</pre>
Description	Sets the value of the BASEPRI register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.
See also	<i>arm_wsr</i> , page 409

#### \_\_set\_CONTROL

Syntax	<pre>voidset_CONTROL(unsigned int);</pre>
Description	Sets the value of the CONTROL register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device.
See also	<i>arm_wsr</i> , page 409

#### \_\_\_set\_CPSR

Syntax	<pre>voidset_CPSR(unsigned int);</pre>
Description	Sets the value of the Arm CPSR (Current Program Status Register). Only the control field is changed (bits 0-7). This intrinsic function can only be used in privileged mode, is not available for Cortex-M devices, and it requires Arm mode.

See also \_\_arm\_wsr, page 409

#### \_\_set\_FAULTMASK

Syntax	<pre>voidset_FAULTMASK(unsigned int);</pre>
Description	Sets the value of the FAULTMASK register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.
See also	<i>arm_wsr</i> , page 409

#### \_\_\_set\_FPSCR

Syntax	<pre>voidset_FPSCR(unsigned int);</pre>
Description	Sets the value of FPSCR (floating-point status and control register)
	This intrinsic function is only available for devices with a VFP coprocessor.
See also	<i>arm_wsr</i> , page 409

### \_\_set\_interrupt\_state

Syntax	<pre>voidset_interrupt_state(istate_t);</pre>
Description	Restores the interrupt state to a value previously returned by theget_interrupt_state function.
	For information about theistate_t type, seeget_interrupt_state, page 416.

### \_\_set\_LR

Syntax	<pre>voidset_LR(unsigned int);</pre>
Description	Assigns a new address to the link register (R14).

### \_\_\_set\_MSP

Syntax	<pre>voidset_MSP(unsigned int);</pre>
Description	Sets the value of the MSP register (Main Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.
See also	<i>arm_wsr</i> , page 409

#### \_\_set\_PRIMASK

Syntax	<pre>voidset_PRIMASK(unsigned int);</pre>
Description	Sets the value of the PRIMASK register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device.
See also	<i>arm_wsr</i> , page 409

#### \_\_\_set\_PSP

Syntax	<pre>voidset_PSP(unsigned int);</pre>
Description	Sets the value of the PSP register (Process Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.
See also	<i>arm_wsr</i> , page 409

#### \_\_\_set\_SB

Syntax	<pre>voidset_SB(unsigned int);</pre>
Description	Assigns a new address to the static base register (R9).

#### \_\_set\_SP

Syntax	<pre>voidset_SP(unsigned int);</pre>
Description	Assigns a new address to the stack pointer register (R13).

SEV	
Syntax	<pre>voidSEV(void);</pre>
Description	Inserts an SEV instruction.
	This intrinsic function requires architecture Armv7 for Arm mode, and Armv6-M or Armv7 for Thumb mode.
	This intrinsic function is equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionsev.
SHADD8	
SHADD16	
SHASX	
SHSAX	
SHSUB8	
SHSUB16	
Syntax	unsigned intSHxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
	These intrinsic functions are equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionsshadd8,shadd16,shasx,shsax,shsub8, andshsub16.

## \_\_SMLABT

## \_\_SMLATB

#### \_\_SMLATT

#### \_\_SMLAWB

#### \_\_SMLAWT

Syntax	unsigned intSMLAxxx(unsigned int, unsigned int, unsigned int);		
Description	Inserts the specified instruction.		
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.		
SMLAD			
SMLADX			
SMLSD			
SMLSDX			
Syntax	unsigned intSMLxxx(unsigned int, unsigned int, unsigned int);		
Description	Inserts the specified instruction.		
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.		
	These intrinsic functions are equivalent to the Arm C Language Extensions (ACLE)		

These intrinsic functions are equivalent to the *Arm C Language Extensions* (ACLE) intrinsic functions \_\_smlad, \_\_smladx, \_\_smlsd, and \_\_smlsdx.

#### \_\_SMLALBB

#### \_\_SMLALBT

#### \_\_SMLALTB

#### \_SMLALTT

 Syntax
 unsigned long long \_\_SMLALxxx(unsigned int, unsigned int, unsigned long long);

 Description
 Inserts the specified instruction.

 These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

#### \_\_SMLALD

#### \_\_SMLALDX

#### \_\_SMLSLD

#### \_\_SMLSLDX

 Syntax
 unsigned long long \_\_SMLxxx(unsigned int, unsigned int, unsigned long long);

 Description
 Inserts the specified instruction.

 These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

 These intrinsic functions are equivalent to the Arm C Language Extensions (ACLE) intrinsic functions \_\_smlald, \_\_smlaldx, \_\_smlald, and \_\_smlaldx.

## \_\_SMMLA

## \_\_\_SMMLAR

## \_\_SMMLS

## \_\_\_SMMLSR

Syntax	unsigned intSMMLxxx(unsigned int, unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

## 

## \_\_\_SMMULR

Syntax	unsigned intSMMULxxx(unsigned int, unsigned int);	
Description	Inserts the specified instruction.	
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.	

#### \_\_SMUAD

#### \_\_SMUADX

## \_\_SMUSD

## \_\_\_SMUSDX

Syntax	unsigned intSMUxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.

	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
SMUL	
Syntax	signed intSMUL(signed short, signed short);
Description	Inserts a signed 16-bit multiplication.
	This intrinsic function requires architecture Armv5-E or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
SMULBB	
SMULBT	
SMULTB	
SMULTT	
SMULWB	
SMULWT	
Syntax	unsigned intSMULxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
sqrt	
sqrtf	
Syntax	<pre>doublesqrt(double x); floatgqrtf(float x);</pre>

double \_\_sqrt(double x); float \_\_sqrtf(float x);

Description	Computes the square root of the operand x, which corresponds either to the intrinsic call $\VSQRT_F64(x)$ for double precision, or $\VSQRT_F32(x)$ for single precision.	
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).	
SSAT		
Syntax	<pre>signed intSSAT(signed int, unsigned int);</pre>	
Description	Inserts an SSAT instruction.	
	The compiler will incorporate a shift instruction into the operand when possible. For example, $\_\_$ SSAT(x << 3,11) compiles to SSAT Rd, #11, Rn, LSL #3, where the value of x has been placed in register Rn and the return value of $\_\_$ SSAT will be placed in register Rd.	
	This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7-M for Thumb mode.	
	This intrinsic function is equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionssat.	
SSAT16		
Syntax	unsigned intSSAT16(unsigned int, unsigned int);	

Description	Inserts an SSAT16 instruction.
	This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Arm v7E-M for Thumb mode.
	This intrinsic function is equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionssat16.

STC		
STCL		
STC2		
STC2L		
Syntax	voidSTCxxx(_	_ul coproc,ul CRn,ul const *dst);
Parameters	coproc	The coprocessor number 015.
	CRn	The coprocessor register to load.
	dst	A pointer to the destination.
Description	Inserts the coprocessor store instruction STC—or one of its variants—which means that the value of the specified coprocessor register will be written to a memory location. The parameters <i>coproc</i> and <i>CRn</i> will be encoded in the instruction and must therefore be constants.	
	The intrinsic functionsSTC andSTCL require architecture Armv4 or higher for Arm mode, and Arm v6T2 or higher for Thumb mode.	
		onsSTC2 andSTC2L require architecture Armv5 or higher for nv6-T2 or higher for Thumb mode.
See also	<i>arm_stc</i> , page 40 page 408	8,arm_stcl, page 408,arm_stc2, page 408, andarm_stc2l,

#### \_\_STC\_noidx

#### \_\_STCL\_noidx

#### \_\_STC2\_noidx

#### \_STC2L\_noidx

Syntax

void \_\_STCxxx\_noidx(\_\_ul coproc, \_\_ul CRn, \_\_ul const \*dst, \_\_ul
option);

#### Parameters

coproc	The coprocessor number 015.
CRn	The coprocessor register to load.
dst	A pointer to the destination.
option	Additional coprocessor option 0255.

**Description** Inserts the coprocessor store instruction STC—or one of its variants—which means that the value of the specified coprocessor register will be written to a memory location. The parameters *coproc*, *CRn*, and *option* will be encoded in the instruction and must therefore be constants.

The intrinsic functions \_\_STC\_noidx and \_\_STCL\_noidx require architecture Armv4 or higher for Arm mode, and Armv6-T2 or higher for Thumb mode.

The intrinsic functions \_\_STC2\_noidx and \_\_STC2L\_noidx require architecture Armv5 or higher for Arm mode, and Armv6-T2 or higher for Thumb mode.

## \_\_STREX

#### \_\_STREXB

#### \_\_STREXD

## \_\_STREXH

Syntax	<pre>unsigned intSTREX(unsigned int, unsigned int *); unsigned intSTREXB(unsigned char, unsigned char *); unsigned intSTREXD(unsigned long long, unsigned long long*); unsigned intSTREXH(unsigned short, unsigned short *);</pre>
Description	Inserts the specified instruction.
	TheSTREX intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv6-T2 or baseline Armv8-M for Thumb mode.
	TheSTREXB and theSTREXH intrinsic functions require architecture Armv6K or Armv7 for Arm mode, and Armv7 or baseline Armv8-M for Thumb mode.
	TheSTREXD intrinsic function requires architecture Armv6K or Armv7 for Arm mode, and Armv7 except for Armv7-M for Thumb mode.
SWP	
SWPB	
Syntax	unsigned intSWP(unsigned int, unsigned int *); charSWPB(unsigned char, unsigned char *);
Description	Inserts the specified instruction.

These intrinsic functions require Arm mode.

## \_\_SXTAB

## \_\_SXTAB16

## \_\_SXTAH

## \_\_SXTB16

Syntax	unsigned intSXTxxx(unsigned int, unsigned int);	
Description	Inserts the specified instruction.	
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.	

## \_\_ТТ

## \_\_TTT

## \_\_TTA

## \_\_TTAT

Syntax	<pre>unsigned intTT(unsigned int); unsigned intTTT(unsugned int); unsigned intTTA(unsigned int); unsigned intTTAT(unsigned int);</pre>
Description	Inserts the specified instruction. Avoid using these intrinsic functions directly. Instead use the functions cmse_TT, cmse_TTT, cmse_TT_fptr, and cmse_TTT_fptr, which are defined in the header file arm_cmse.h. These intrinsic functions require architecture Armv8-M with security extensions.
See also	<i>cmse</i> , page 265

UADD8	
UADD16	
UASX	
USAX	
USUB8	
USUB16	
Syntax	unsigned intUxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
	These intrinsic functions are equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionsuadd8,uadd16,uasx,usux,usub8, andusub16.
UHADD8	
UHADD16	
UHASX	
UHSAX	
UHSUB8	
UHSUB16	
Syntax	<pre>unsigned intUHxxx(unsigned int, unsigned int);</pre>

Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
	These intrinsic functions are equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionsuhadd8,uhadd16,uhasx,uhsax,uhsub8, anduhsub16.
UMAAL	
Syntax	unsigned long longUMAAL(unsigned int, unsigned int, unsigned int, insigned int);
Description	Inserts an UMAAL instruction.
	This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
UQADD8	
UQADD16	
UQASX	
UQSAX	
UQSUB8	
UQSUB16	
Syntax	unsigned intUQxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

These intrinsic functions are equivalent to the *Arm C Language Extensions* (ACLE) intrinsic functions \_\_uqadd8, \_\_uqadd16, \_\_uqasx, \_\_uqsax, \_\_uqsub8, and \_\_uqsub16.

#### \_USAD8

USADA8	
Syntax	<pre>unsigned intUSADxxx(unsigned int, unsigned int);</pre>
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
USAT	
Syntax	unsigned intUSAT(signed int, unsigned int);
Description	Inserts a USAT instruction.
	The compiler will incorporate a shift instruction into the operand when possible. For example,USAT( $x << 3,11$ ) compiles to USAT Rd, #11, Rn, LSL #3, where the value of x has been placed in register Rn and the return value ofUSAT will be placed in register Rd.
	This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7-M for Thumb mode.
	This intrinsic function is equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionusat.
USAT16	
Syntax	unsigned intUSAT16(unsigned int, unsigned int);
Description	Inserts a USAT16 instruction.
	This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
	This intrinsic function is equivalent to the Arm C Language Extensions (ACLE) intrinsic functionusat16.

## \_\_UXTAB

## \_\_UXTABI6

## \_\_UXTAH

## \_\_UXTBI6

Syntax	unsigned intUXTxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

\_\_VFMA\_F64

\_\_VFMS\_F64

\_\_VFNMA\_F64

\_\_VFNMS\_F64

\_\_VFMA\_F32

\_\_\_VFMS\_F32

\_\_VFNMA\_F32

#### \_\_VFNMS\_F32

Syntax	<pre>doubleVFMA_F64(double a, double x, double y); doubleVFMS_F64(double a, double x, double y); doubleVFNMA_F64(double a, double x, double y); doubleVFNMS_F64(double a, double x, double y); floatVFMA_f32(float a, float x, float y); floatVFMS_f32(float a, float x, float y); floatVFNMA_F32(float a, float x, float y); floatVFNMS_F32(float a, float x, float y);</pre>
Description	Inserts a fused floating-point multiply-accumulate instruction VFMA, VFMS, VFNMA, or VFNMS.

## \_\_VMINNM\_F64

## \_\_VMAXNM\_F64

#### \_\_VMINNM\_F32

## \_\_VMAXNM\_F32

Syntax

doubl	eVMINNM_F64(double x, double y);	
doubl	eVMAXNM_F64(double x, double y);	
float	VMINNM_F32(float x, float y);	
float	VMAXNM_F32(float x, float y);	

\_\_VRINTA\_F64

\_\_VRINTM\_F64

\_\_VRINTN\_F64

\_\_VRINTP\_F64

\_\_VRINTX\_F64

\_\_VRINTR\_F64

\_\_VRINTZ\_F64

\_\_VRINTA\_F32

\_\_VRINTM\_F32

\_\_VRINTN\_F32

\_\_VRINTP\_F32

\_\_VRINTX\_F32

## \_\_VRINTR\_F32

#### \_\_VRINTZ\_F32

Syntax

double	VRINTA_F64(double x);
double	VRINTM_F64(double x);
double	VRINTN_F64(double x);
double	VRINTP_F64(double x);
double	VRINTX_F64(double x);
double	VRINTR_F64(double x);

	doubleVRINTZ_F64(double x);
	<pre>floatVRINTA_F32(float x);</pre>
	<pre>floatVRINTM_F32(float x);</pre>
	<pre>floatVRINTN_F32(float x);</pre>
	<pre>floatVRINTP_F32(float x);</pre>
	<pre>floatVRINTX_F32(float x);</pre>
	<pre>floatVRINTR_F32(float x);</pre>
	<pre>floatVRINTZ_F32(float x);</pre>
Description	Performs a directed rounding and inserts the corresponding instruction:
	• VRINTA: Rounds floating-point to integer to Nearest with Ties to Away
	• VRINTM: Rounds floating-point to integer towards -Infinity
	• VRINTN: Rounds floating-point to integer to Nearest
	• VRINTP: Rounds floating-point to integer towards +Infinity
	• VRINTR: Rounds floating-point to integer (using rounding mode in FPSCR)
	• VRINTX: rounds floating-point to integer inexact (using rounding mode in FPSCR)
	• VRINTZ: Rounds floating-point to integer towards Zero
	If the result of for exampleVRINTA_F64 is converted to int, the instruction VCVTA.S32.F64 is used instead. For conversion to unsigned int, the instruction VCVTA.U32.F64 is used instead. Similarly, VRINTM, VRINTN, VRINTP, and VRINTR use corresponding instructions VCVTM, VCVTN, VCVTP, and VCVTR for integer conversion.
VSQRT_F64	
VSQRT_F32	

Syntax	doubleVSQRT_F64(double x)	;
	<pre>floatVSQRT_F32(float x);</pre>	

**Description** Inserts the square root instruction VSQRT.

## \_\_WFE

\_\_WFI

## \_\_YIELD

Syntax	<pre>void intxxx(void);</pre>
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv7 for Arm mode, and Armv6-M, or Armv7 for Thumb mode.
	These intrinsic functions are equivalent to the <i>Arm C Language Extensions</i> (ACLE) intrinsic functionswfe,wfi, andyield.

## The preprocessor

- Overview of the preprocessor
- Description of predefined preprocessor symbols
- Descriptions of miscellaneous preprocessor extensions

#### **Overview of the preprocessor**

The preprocessor of the IAR C/C++ Compiler for Arm adheres to Standard C. The compiler also makes these preprocessor-related features available to you:

• Predefined preprocessor symbols

These symbols allow you to inspect the compile-time environment, for example the time and date of compilation. For more information, see *Description of predefined preprocessor symbols*, page 452.

• User-defined preprocessor symbols defined using a compiler option

In addition to defining your own preprocessor symbols using the #define directive, you can also use the option -D, see -D, page 267.

Preprocessor extensions

There are several preprocessor extensions, for example many pragma directives; for more information, see the chapter *Pragma directives*. For information about the corresponding \_Pragma operator and the other extensions related to the preprocessor, see *Descriptions of miscellaneous preprocessor extensions*, page 462.

Preprocessor output

Use the option --preprocess to direct preprocessor output to a named file, see --preprocess, page 294.

To specify a path for an include file, use forward slashes:

#include "mydirectory/myfile"

In source code, use forward slashes:

file = fopen("mydirectory/myfile","rt");

Note that backslashes can also be used. In this case, use one in include file paths and two in source code strings.

## **Description of predefined preprocessor symbols**

This section lists and describes the preprocessor symbols.

**Note:** To list the predefined preprocessor symbols, use the compiler option --predef\_macros. See --predef\_macros, page 293.

Description	An integer that is set based on the compiler optionaapcs. The symbol is set to 1 i the AAPCS base standard is the selected calling convention (aapcs=std). The symbol is undefined for other calling conventions.
	This preprocessor symbol is equivalent to the ACLE ( <i>Arm C Language Extensions</i> ) macroARM_PCS.
See also	<i>aapcs</i> , page 263.
APCS_VFP	
Description	An integer that is set based on the compiler optionaapcs. The symbol is set to 1 i the VFP variant of AAPCS is the selected calling convention (aapcs=vfp). The symbol is undefined for other calling conventions.
	This preprocessor symbol is equivalent to the ACLE ( <i>Arm C Language Extensions</i> ) macroARM_PCS_VFP.
See also	<i>aapcs</i> , page 263.

#### \_\_ARM\_ADVANCED\_SIMD\_\_

 Description
 An integer that is set based on the compiler option --cpu. The symbol is set to 1 if the selected processor architecture has the Advanced SIMD architecture extension. The symbol is undefined for other cores.

 This preprocessor symbol is equivalent to the ACLE (Arm C Language Extensions) macro \_\_ARM\_NEON.

See also

--cpu, page 265.

## \_\_ARM\_ARCH

Description	This symbol is defined according to ACLE (Arm C Language Extensions).
See also	Arm C Language Extensions (IHI 0053D)

#### \_\_\_ARM\_ARCH\_ISA\_ARM

Description	This symbol is defined according to ACLE (Arm C Language Extensions)
See also	Arm C Language Extensions (IHI 0053D)

#### \_\_ARM\_ARCH\_ISA\_THUMB

Description	This symbol is defined according to ACLE (Arm C Language Extensions).
See also	Arm C Language Extensions (IHI 0053D)

#### \_\_ARM\_ARCH\_PROFILE

Description	This symbol is defined according to ACLE (Arm C Language Extensions).
See also	Arm C Language Extensions (IHI 0053D)

#### \_\_ARM\_BIG\_ENDIAN

Description	This symbol is defined according to ACLE (Arm C Language Extensions).
See also	Arm C Language Extensions (IHI 0053D)

#### \_\_ARM\_FEATURE\_CMSE

Description	An integer that is set based on the compiler optionscpu andcmse. The symbol is set to 3 if the selected processor architecture has CMSE (Cortex-M security extensions) and the compiler optioncmse is specified.
	The symbol is set to 1 if the selected processor architecture has CMSE and the compiler optioncmse is not specified.
	The same all is an defined for some with some CMSE

See also

--cmse, page 265 and --cpu, page 265

#### \_\_ARM\_FEATURE\_CRC32

Description This symbol is defined to 1 if the CRC32 instructions are supported (optional in Armv8-A/R).

This symbol is defined according to ACLE (Arm C Language Extensions).

#### \_\_ARM\_FEATURE\_CRYPTO

 Description
 This symbol is defined to 1 if the crypto instructions are supported (implies Armv8-A/R with Neon).

 This symbol is defined according to ACLE (Arm C Language Extensions).

#### \_\_ARM\_FEATURE\_DIRECTED\_ROUNDING

Description This symbol is defined to 1 if the directed rounding and conversion instructions are supported.

This symbol is defined according to ACLE (Arm C Language Extensions).

#### \_\_ARM\_FEATURE\_DSP

Description	This symbol is defined according to ACLE (Arm C Language Extensions).
See also	Arm C Language Extensions (IHI 0053D)

#### \_\_ARM\_FEATURE\_FMA

Description	This symbol is defined to 1 if the FPU supports fused floating-point multiply-accumulate.
	This symbol is defined according to ACLE (Arm C Language Extensions).

#### \_\_ARM\_FEATURE\_IDIV

Description	This symbol is defined according to ACLE (Arm C Language Extensions).
See also	Arm C Language Extensions (IHI 0053D)

#### \_\_ARM\_FEATURE\_NUMERIC\_MAXMIN

Description This symbol is defined to 1 if the floating-point maximum and minimum instructions are supported.

This symbol is defined according to ACLE (Arm C Language Extensions).

#### \_\_ARM\_FEATURE\_UNALIGNED

Description This symbol is defined only if the target supports unaligned access, and unaligned access is allowed. The compiler option --no\_unaligned\_access can be used to disallow unaligned access.

This symbol is defined according to ACLE (Arm C Language Extensions).

#### \_ARM\_FP

Description	This symbol is defined according to ACLE (Arm C Language Extensions).
See also	Arm C Language Extensions (IHI 0053D)

## \_\_ARM\_MEDIA\_\_

DescriptionAn integer that is set based on the compiler option --cpu. The symbol is set to 1 if the<br/>selected processor architecture has the Armv6 SIMD extensions for multimedia. The<br/>symbol is undefined for other cores.This preprocessor symbol is equivalent to the ACLE (Arm C Language Extensions)<br/>macro \_\_ARM\_FEATURE\_SIMD32.

See also

*--cpu*, page 265.

## \_\_ARM\_NEON

**Description** This symbol is defined according to ACLE (*Arm C Language Extensions*).

#### \_ARM\_NEON\_FP

**Description** This symbol is defined according to ACLE (*Arm C Language Extensions*).

ARM_PROFILE_M_	_
Description	An integer that is set based on the compiler optioncpu. The symbol is set to 1 if the selected processor architecture is a profile M core. The symbol is undefined for other cores.
	This preprocessor symbol is related to the ACLE ( <i>Arm C Language Extensions</i> ) macroARM_ARCH_PROFILE.
See also	<i>cpu</i> , page 265.
ARMVFP	
Description	An integer that reflects thefpu option and is defined toARMVFPV2, ARMVFPV3, orARMVFPV4 These symbolic names can be used when testing theARMVFP symbol. If VFP code generation is disabled (default), the symbol will be undefined.
See also	<i>fpu</i> , page 276.
ARMVFP_D16	
Description	An integer that is set based on the compiler optionfpu. The symbol is set to 1 if the selected FPU is a VFPv3 or VFPv4 unit with only 16 D registers. Otherwise, the symbol is undefined.
See also	<i>fpu</i> , page 276.
ARMVFP_SP	
Description	An integer that is set based on the compiler optionfpu. The symbol is set to 1 if the selected FPU only supports 32-bit single-precision. Otherwise, the symbol is undefined.
	This preprocessor symbol is related to the ACLE ( <i>Arm C Language Extensions</i> ) macroARM_FP.
See also	<i>fpu</i> , page 276.

## \_\_BASE\_FILE\_\_

Description	A string that identifies the name of the base source file (that is, not the header file), being compiled.
See also	FILE, page 458, andno_path_in_file_macros, page 285.

#### \_\_BUILD\_NUMBER\_\_

Description A unique	integer that identifies the build number	of the compiler currently in use.
----------------------	--	-----------------------------------

## \_\_CORE\_\_

Description	An integer that identifies the chip core in use. The value reflects the setting of thecpu
	option and is defined toARM4TM,ARM5,ARM5E,ARM6,
	ARM6M,ARM6SM,ARM7M,ARM7EM,ARM7A,ARM7R,
	ARM8A,ARM8M_BASELINE,ARM8M_MAINLINE,ARM8R, or
	ARM8EM_MAINLINE These symbolic names can be used when testing the
	CORE symbol.
	This preprocessor symbol is related to the ACLE ( <i>Arm C Language Extensions</i> ) macroARM_ARCH.

## \_\_COUNTER\_\_

Description	A macro that expands to a new integer each time it is expanded, starting at zero (0) and
	counting up.

## \_\_cplusplus

Description

An integer which is defined when the compiler runs in any of the C++ modes, otherwise it is undefined. When defined, its value is 201402L. This symbol can be used with #ifdef to detect whether the compiler accepts C++ code. It is particularly useful when creating header files that are to be shared by C and C++ code.

This symbol is required by Standard C.

CPU_MODE	
Description	An integer that reflects the selected CPU mode and is defined to 1 for Thumb and 2 for Arm.
DATE	
Description	A string that identifies the date of compilation, which is returned in the form "Mmm dd yyyy", for example "Oct 30 2014"
	This symbol is required by Standard C.
EXCEPTIONS	
Description	A symbol that is defined when exceptions are supported in C++.
See also	no_exceptions, page 283
FILE	
Description	A string that identifies the name of the file being compiled, which can be both the base source file and any included header file.
	This symbol is required by Standard C.
See also	BASE_FILE, page 457, andno_path_in_file_macros, page 285.
func	
Description	A predefined string identifier that is initialized with the name of the function in which the symbol is used. This is useful for assertions and other trace utilities. The symbol requires that language extensions are enabled.
	This symbol is required by Standard C.
See also	-e, page 274 andPRETTY_FUNCTION, page 459.

FUNCTION	
Description	A predefined string identifier that is initialized with the name of the function in which the symbol is used. This is useful for assertions and other trace utilities. The symbol requires that language extensions are enabled.
See also	-e, page 274 andPRETTY_FUNCTION, page 459.
IAR_SYSTEMS_IC	c
Description	An integer that identifies the IAR compiler platform. The current value is 9. Note that the number could be higher in a future version of the product. This symbol can be tested with #ifdef to detect whether the code was compiled by a compiler from IAR Systems.
ICCARM	
Description	An integer that is set to 1 when the code is compiled with the IAR C/C++ Compiler for Arm.
LINE	
Description	An integer that identifies the current source line number of the file being compiled, which can be both the base source file and any included header file.
	This symbol is required by Standard C.
LITTLE_ENDIAN_	
Description	An integer that reflects the setting of the compiler optionendian and is defined to 1

when the byte order is little-endian. The symbol is defined to 0 when the byte order is big-endian.

This preprocessor symbol is related to the ACLE (*Arm C Language Extensions*) macro \_\_\_ARM\_BIG\_ENDIAN.

#### PRETTY\_FUNCTION\_\_

Description

A predefined string identifier that is initialized with the function name, including parameter types and return type, of the function in which the symbol is used, for

	example "void func(char)". This symbol is useful for assertions and other trace utilities. The symbol requires that language extensions are enabled.
See also	<i>-e</i> , page 274 and <i>func</i> , page 458.
ROPI	
Description	An integer that is defined when the compiler optionropi is used.
	This preprocessor symbol is equivalent to the ACLE ( <i>Arm C Language Extensions</i> ) macroARM_ROPI.
See also	<i>ropi</i> , page 296.
RTTI	
Description	A symbol that is defined when runtime type information (RTTI) is supported in C++.
See also	<i>no_rtti</i> , page 286
RWPI	
Description	An integer that is defined when the compiler optionrwpi is used.
	This preprocessor symbol is equivalent to the ACLE ( <i>Arm C Language Extensions</i> ) macroARM_RWPI.
See also	<i>rwpi</i> , page 297.
STDC	
Description	An integer that is set to 1, which means the compiler adheres to Standard C. This symbol can be tested with $\#ifdef$ to detect whether the compiler in use adheres to Standard C.*
	This symbol is required by Standard C.
STDC_LIB_EXTI_	_
Description	An integer that is set to 201112L and that signals that Annex K, <i>Bounds-checking interfaces</i> , of the C standard is supported.

See also STDC WANT LIB EXT1 , page 462

#### \_\_STDC\_NO\_ATOMICS\_\_

**Description** Set to 1 if the compiler does not support atomic types nor stdatomic.h.

#### \_\_STDC\_NO\_THREADS\_\_

Description Set to 1 to indicate that the implementation does not support threads.

#### \_\_STDC\_NO\_VLA\_\_

Description	Set to 1 to indicate that C variable length arrays, VLAs, are not enabled.
See also	<i>vla</i> , page 303

#### \_\_STDC\_UTF16\_\_

Description	Set to 1 to indicate that the values of type char16_t are UTF-16 encoded.
-------------	---

#### \_\_STDC\_UTF32\_\_

**Description** Set to 1 to indicate that the values of type char32\_t are UTF-32 encoded.

## \_STDC\_VERSION\_\_

Description

An integer that identifies the version of the C standard in use. The symbol expands to 201112L, unless the --c89 compiler option is used, in which case the symbol expands to 199409L.

This symbol is required by Standard C.

#### \_\_TIME\_\_

**Description** A string that identifies the time of compilation in the form "hh:mm:ss".

This symbol is required by Standard C.



Description

A string constant that identifies the date and time of the last modification of the current source file. The format of the string is the same as that used by the asctime standard function (in other words, "Tue Sep 16 13:03:52 2014").

\_VER\_\_

Description

An integer that identifies the version number of the IAR compiler in use. For example, version 5.11.3 is returned as 5011003.

#### Descriptions of miscellaneous preprocessor extensions

This section gives reference information about the preprocessor extensions that are available in addition to the predefined symbols, pragma directives, and Standard C directives.

#### NDEBUG

Description

This preprocessor symbol determines whether any assert macros you have written in your application shall be included or not in the built application.

If this symbol is not defined, all assert macros are evaluated. If the symbol is defined, all assert macros are excluded from the compilation. In other words, if the symbol is:

- defined, the assert code will not be included
- not defined, the assert code will be included

This means that if you write any assert code and build your application, you should define this symbol to exclude the assert code from the final application.

Note that the assert macro is defined in the assert.h standard include file.

In the IDE, the NDEBUG symbol is automatically defined if you build your application in the Release build configuration.

See also

aeabi assert, page 146.

#### \_STDC\_WANT\_LIB\_EXTI\_\_

Description

If this symbol is defined to 1 prior to any inclusions of system header files, it will enable the use of functions from Annex K, *Bounds-checking interfaces*, of the C standard.

See also

Bounds checking functionality, page 131

## #warning message

Syntax	#warning message
	where <i>message</i> can be any string.
Description	Use this preprocessor directive to produce messages. Typically, this is useful for assertions and other trace utilities, similar to the way the Standard C #error directive is used. This directive is not recognized when thestrict compiler option is used.

Descriptions of miscellaneous preprocessor extensions

# C/C++ standard library functions

- C/C++ standard library overview
- DLIB runtime environment—implementation details

For detailed reference information about the library functions, see the online help system.

#### C/C++ standard library overview

**The IAR DLIB Runtime Environment** is a complete implementation of the C/C++ standard library, compliant with Standard C and C++. This library also supports floating-point numbers in IEEE 754 format and it can be configured to include different levels of support for locale, file descriptors, multibyte characters, etc.

For more information about customization, see the chapter *The DLIB runtime environment*.

For detailed information about the library functions, see the online documentation supplied with the product. There is also keyword reference information for the DLIB library functions. To obtain reference information for a function, select the function name in the editor window and press F1.

For more information about library functions, see the chapter *Implementation-defined* behavior for Standard C in this guide.

#### **HEADER FILES**

Your application program gains access to library definitions through header files, which it incorporates using the #include directive. The definitions are divided into several different header files, each covering a particular functional area, letting you include just those that are required.

It is essential to include the appropriate header file before making any reference to its definitions. Failure to do so can cause the call to fail during execution, or generate error or warning messages at compile time or link time.

#### LIBRARY OBJECT FILES

Most of the library definitions can be used without modification, that is, directly from the library object files that are supplied with the product. For information about how to set up a runtime library, see *Setting up the runtime environment*, page 125. The linker will include only those routines that are required—directly or indirectly—by your application.

See also *Overriding library modules*, page 128 for information about how you can override library modules with your own versions.

#### ALTERNATIVE MORE ACCURATE LIBRARY FUNCTIONS

The default implementation of cos, sin, tan, and pow is designed to be fast and small. As an alternative, there are versions designed to provide better accuracy. They are named \_\_iar\_xxx\_accuratef for float variants of the functions and \_\_iar\_xxx\_accuratel for long double variants of the functions, and where xxx is cos, sin, etc.

To use any of these more accurate versions, use the --redirect linker option.

#### REENTRANCY

A function that can be simultaneously invoked in the main application and in any number of interrupts is reentrant. A library function that uses statically allocated data is therefore not reentrant.

Most parts of the DLIB runtime environment are reentrant, but the following functions and parts are not reentrant because they need static data:

- Heap functions—malloc, free, realloc, calloc, etc. and the C++ operators new and delete
- Locale functions—localeconv, setlocale
- Multibyte functions—mblen, mbrlen, mbrtowc, mbsrtowc, mbtowc, wcrtomb, wcsrtomb, wctomb
- Rand functions—rand, srand
- Time functions—asctime, localtime, gmtime, mktime
- The miscellaneous functions atexit, perror, strerror, strtok
- Functions that use files or the heap in some way. This includes scanf, sscanf, getchar, getwchar, putchar, and putwchar. In addition, if you are using the options --enable\_multibyte and --dlib\_config=Full, the printf and sprintf functions (or any variants) can also use the heap.

Functions that can set errno are not reentrant, because an errno value resulting from one of these functions can be destroyed by a subsequent use of the function before it is read. This applies to math and string conversion functions, among others.

Remedies for this are:

- Do not use non-reentrant functions in interrupt service routines
- Guard calls to a non-reentrant function by a mutex, or a secure region, etc.

#### THE LONGJMP FUNCTION

A longjmp is in effect a jump to a previously defined setjmp. Any variable length arrays or C++ objects residing on the stack during stack unwinding will not be destroyed. This can lead to resource leaks or incorrect application behavior.

#### **DLIB** runtime environment—implementation details

These topics are covered:

- Briefly about the DLIB runtime environment
- C header files
- C++ header files
- Library functions as intrinsic functions
- Not supported C/C++ functionality
- Atomic operations
- Added C functionality
- Non-standard implementations
- Symbols used internally by the library

#### **BRIEFLY ABOUT THE DLIB RUNTIME ENVIRONMENT**

The DLIB runtime environment provides most of the important C and C++ standard library definitions that apply to embedded systems. These are of the following types:

- Adherence to a free-standing implementation of Standard C. The library supports most of the hosted functionality, but you must implement some of its base functionality. For additional information, see the chapter *Implementation-defined behavior for Standard C* in this guide.
- Standard C library definitions, for user programs.
- C++ library definitions, for user programs.
- CSTARTUP, the module containing the start-up code, see the chapter *The DLIB runtime environment* in this guide.

- Runtime support libraries; for example low-level floating-point routines.
- Intrinsic functions, allowing low-level use of Arm features. See the chapter *Intrinsic functions* for more information.

In addition, the DLIB runtime environment includes some added C functionality, see *Added C functionality*, page 473.

#### **C HEADER FILES**

This section lists the C header files specific to the DLIB runtime environment. Header files may additionally contain target-specific definitions; these are documented in the chapter *Using C*.

This table lists the C header files:

Header file	Usage
assert.h	Enforcing assertions when functions execute
complex.h	Computing common complex mathematical functions
ctype.h	Classifying characters
errno.h	Testing error codes reported by library functions
fenv.h	Floating-point exception flags
float.h	Testing floating-point type properties
inttypes.h	Defining formatters for all types defined in stdint.h
iso646.h	Alternative spellings
limits.h	Testing integer type properties
locale.h	Adapting to different cultural conventions
math.h	Computing common mathematical functions
setjmp.h	Executing non-local goto statements
signal.h	Controlling various exceptional conditions
stdalign.h	Handling alignment on data objects
stdarg.h	Accessing a varying number of arguments
stdatomic.h	Adding support for atomic operations.
	Atomic operations are available in cores where the instruction set supports them.
stdbool.h	Adds support for the bool data type in C.
stddef.h	Defining several useful types and macros
stdint.h	Providing integer characteristics
stdio.h	Performing input and output

Table 31: Traditional Standard C header files—DLIB

Header file	Usage
stdlib.h	Performing a variety of operations
stdnoreturn.h	Adding support for non-returning functions
string.h	Manipulating several kinds of strings
tgmath.h	Type-generic mathematical functions
threads.h	Adding support for multiple threads of execution This functionality is not supported.
time.h	Converting between various time and date formats
uchar.h	Unicode functionality
wchar.h	Support for wide characters
wctype.h	Classifying wide characters

 Table 31: Traditional Standard C header files—DLIB (Continued)

## **C++ HEADER FILES**

This section lists the C++ header files:

• The C++ library header files

The header files that constitute the Standard C++ library.

• The C++ C header files

The C++ header files that provide the resources from the C library.

## The C++ library header files

This table lists the header files that can be used in C++:

Header file	Usage
algorithm	Defines several common operations on containers and other sequences
array	Adding support for the array sequencer container
atomic	Adding support for atomic operations Atomic operations are available in cores where the instruction set supports them.
bitset	Defining a container with fixed-sized sequences of bits
chrono	Adding support for time utilities
codecvt	Adding support for conversions between encodings
complex	Defining a class that supports complex arithmetic

Table 32: C++ header files

Header file	Usage
condition_variable	Adding support for thread condition variables.
	This functionality is not supported.
deque	A deque sequence container
exception	Defining several functions that control exception handling
forward_list	Adding support for the forward list sequence container
fstream	Defining several I/O stream classes that manipulate external files
functional	Defines several function objects
future	Adding support for passing function information between threads This functionality is not supported.
hash_map	A map associative container, based on a hash algorithm
hash_set	A set associative container, based on a hash algorithm
initializer_list	Adding support for the initializer_list class
iomanip	Declaring several I/O stream manipulators that take an argument
ios	Defining the class that serves as the base for many I/O streams classes
iosfwd	Declaring several I/O stream classes before they are necessarily defined
iostream	Declaring the I/O stream objects that manipulate the standard streams
istream	Defining the class that performs extractions
iterator	Defines common iterators, and operations on iterators
limits	Defining numerical values
list	A doubly-linked list sequence container
locale	Adapting to different cultural conventions
map	A map associative container
memory	Defines facilities for managing memory
mutex	Adding support for the data race protection object mutex. This functionality is not supported.
new	Declaring several functions that allocate and free storage
numeric	Performs generalized numeric operations on sequences
ostream	Defining the class that performs insertions
queue	A queue sequence container
random	Adding support for random numbers

 Table 32: C++ header files (Continued)

Header file	Usage	
ratio	Adding support for compile-time rational arithmetic	
regex	Adding support for regular expressions	
scoped_allocator	Adding support for the memory resource scoped_allocator_adaptor	
set	A set associative container	
shared_mutex	Adding support for the data race protection object shared_mutex. This functionality is not supported.	
slist	A singly-linked list sequence container	
sstream	Defining several I/O stream classes that manipulate string containers	
stack	A stack sequence container	
stdexcept	Defining several classes useful for reporting exceptions	
streambuf	Defining classes that buffer I/O stream operations	
string	Defining a class that implements a string container	
strstream	Defining several I/O stream classes that manipulate in-memory character sequences	
system_error	Adding support for global error reporting	
thread	Adding support for multiple threads of execution. This functionality is not supported.	
tuple	Adding support for the tuple class	
typeinfo	Defining type information support	
typeindex	Adding support for type indexes	
typetraits	Adding support for traits on types	
unordered_map	Adding support for the unordered map associative container	
unordered_set	Adding support for the unordered set associative container	
utility	Defines several utility components	
valarray	Defining varying length array container	
vector	A vector sequence container	

Table 32: C++ header files (Continued)

## Using Standard C libraries in C++

The C++ library works in conjunction with some of the header files from the Standard C library, sometimes with small alterations. The header files come in two forms—new and traditional—for example, cassert and assert.h. The former puts all declared

symbols in the global and std namespace, whereas the latter puts them in the global namespace only.

This table shows the new header files:

Header file	Usage
cassert	Enforcing assertions when functions execute
ccomplex	Computing common complex mathematical functions
cctype	Classifying characters
cerrno	Testing error codes reported by library functions
cfenv	Floating-point exception flags
cfloat	Testing floating-point type properties
cinttypes	Defining formatters for all types defined in ${\tt stdint.h}$
ciso646	Alternative spellings
climits	Testing integer type properties
clocale	Adapting to different cultural conventions
cmath	Computing common mathematical functions
csetjmp	Executing non-local goto statements
csignal	Controlling various exceptional conditions
cstdalign	Handling alignment on data objects
cstdarg	Accessing a varying number of arguments
cstdatomic	Adding support for atomic operations
cstdbool	Adds support for the bool data type in C.
cstddef	Defining several useful types and macros
cstdint	Providing integer characteristics
cstdio	Performing input and output
cstdlib	Performing a variety of operations
cstdnoreturn	Adding support for non-returning functions
cstring	Manipulating several kinds of strings
ctgmath	Type-generic mathematical functions
cthreads	Adding support for multiple threads of execution. This functionality is not supported.
ctime	Converting between various time and date formats
cuchar	Unicode functionality
cwchar	Support for wide characters

Table 33: New Standard C header files—DLIB

Header file	Usage
cwctype	Classifying wide characters

Table 33: New Standard C header files—DLIB (Continued)

## LIBRARY FUNCTIONS AS INTRINSIC FUNCTIONS

Certain C library functions will under some circumstances be handled as intrinsic functions and will generate inline code instead of an ordinary function call, for example memcpy, memset, and strcat.

## NOT SUPPORTED C/C++ FUNCTIONALITY

The following files have contents that are not supported by the IAR C/C++ compiler:

• threads.h, condition\_variable, future, mutex, shared\_mutex, thread, cthreads

Some library functions will have the same address. This occurs, most notably, when the library function parameters differ in type but not in size, as for example cos(double) and cosl(long double).

The IAR C/C++ compiler does not support threads as described in the C11 and C++14 standards. However, using DLib\_Threads.h and an RTOS, you can build an application with thread support. For more information, see *Managing a multithreaded environment*, page 156.

## **ATOMIC OPERATIONS**

When you compile for cores with instruction set support for atomic accesses, the standard C and C++ atomic operations are available. If atomic operations are not available, the macro \_\_STDC\_NO\_ATOMICS\_\_ is defined to 1. This is true both in C and C++.

Atomic operations that cannot be handled natively by the hardware are passed on to library functions. The IAR C/C++ Compiler for Arm does not include implementations for these functions. A template implementation can be found in the file srcllblatomiclibatomic.c.

## ADDED C FUNCTIONALITY

The DLIB runtime environment includes some added C functionality:

- C bounds-checking interface
- DLib\_Threads.h
- iar\_dlmalloc.h
- LowLevelIOInterface.h

- stdio.h
- stdlib.h
- string.h
- time.h

## C bounds-checking interface

The C library supports Annex K (*Bounds-checking interfaces*) of the C standard. It adds symbols, types, and functions in the header files errno.h, stddef.h, stdint.h, stdlib.h, string.h, time.h, and wchar.h.

To enable the interface, define the preprocessor extension \_\_STDC\_WANT\_LIB\_EXT1\_\_ to 1 prior to including any system header file. See \_\_*STDC\_WANT\_LIB\_EXT1\_\_*, page 462.

As an added benefit, the compiler will issue warning messages for the use of unsafe functions for which the interface has a more safe version. For example, using strcpy instead of the more safe strcpy\_s will make the compiler issue a warning message.

## DLib\_Threads.h

The DLib\_Threads.h header file contains support for locks and thread-local storage (TLS) variables. This is useful for implementing thread support. For more information, see the header file.

#### iar\_dlmalloc.h

The iar\_dlmalloc.h header file contains support for the advanced (dlmalloc) heap handler. For more information, see *Heap considerations*, page 203.

## LowLevelIOInterface.h

The header file LowLevelInterface.h contains declarations for the low-level I/O functions used by DLIB. See *The DLIB low-level I/O interface*, page 145.

## stdio.h

These functions provide additional I/O functionality:

fdopen	Opens a file based on a low-level file descriptor.
fileno	Gets the low-level file descriptor from the file descriptor (FILE*).
gets	Corresponds to fgets on stdin.
getw	Gets a wchar_t character from stdin.

putw	Puts a wchar_t character to stdout.
ungetchar	Corresponds to ungetc on stdout.
write_array	Corresponds to fwrite on stdout.

## string.h

These are the additional functions defined in string.h:

strdup	Duplicates a string on the heap.
strcasecmp	Compares strings case-insensitive.
strncasecmp	Compares strings case-insensitive and bounded.
strnlen	Bounded string length.

## time.h

There are two interfaces for using time\_t and the associated functions time, ctime, difftime, gmtime, localtime, and mktime:

- The 32-bit interface supports years from 1900 up to 2035 and uses a 32-bit integer for time\_t. The type and function have names like \_\_time32\_t, \_\_time32, etc. This variant is mainly available for backwards compatibility.
- The 64-bit interface supports years from -9999 up to 9999 and uses a signed long long for time\_t. The type and function have names like \_\_time64\_t, \_\_time64, etc.

The interfaces are defined in three header files:

- time32.h defines \_\_time32\_t, time\_t, \_\_time32, time, and associated functions.
- time64.h defines \_\_time64\_t, time\_t, \_\_time64, time, and associated functions.
- time.h includes time32.h or time64.h depending on the definition of \_DLIB\_TIME\_USES\_64.

If \_DLIB\_TIME\_USES\_64 is:

- defined to 1, it will include time64.h.
- defined to 0, it will include time32.h.
- undefined, it will include time32.h.

In both interfaces, time\_t starts at the year 1970.

An application can use either interface, and even mix them by explicitly using the 32or 64-bit variants.

See also, \_\_time32, \_\_time64, page 153.

clock\_t is represented by a 32-bit integer type.

By default, the time library does not support the timezone and daylight saving time functionality. To enable that functionality, use the linker option --timezone\_lib. See --timezone\_lib, page 338.

There are two functions that can be used for loading or force-loading the timezone and daylight saving time information from \_\_getzone:

- int \_ReloadDstRules (void)
- int \_ForceReloadDstRules (void)

Both these functions return 0 for DST rules found and -1 for DST rules not found.

## NON-STANDARD IMPLEMENTATIONS

These functions do not work as specified by the C standard:

• fopen\_s and freopen

These functions will not propagate the u exclusivity attribute to the low-level interface.

towupper and towlower

These functions will only handle  $A, \ldots, Z$  and  $a, \ldots, Z$ .

• iswalnum, ..., iswxdigit

These functions will only handle arguments in the range 0 to 127.

• The collate functions strcoll and strxfrm will not work as intended. The same applies to the C++ equivalent functionality.

## SYMBOLS USED INTERNALLY BY THE LIBRARY

The system header files use intrinsic functions, symbols, pragma directives etc. Some are defined in the library and some in the compiler. These reserved symbols start with \_\_\_\_ and should only be used by the library.

Use the compiler option --predef\_macros to determine the value for any predefined symbols.

The symbols used internally by the library are not listed in this guide.

# The linker configuration file

- Overview
- Defining memories and regions
- Regions
- Section handling
- Section selection
- Using symbols, expressions, and numbers
- Structural configuration

Before you read this chapter you must be familiar with the concept of sections, see *Modules and sections*, page 88.

# **Overview**

To link and locate an application in memory according to your requirements, ILINK needs information about how to handle sections and how to place them into the available memory regions. In other words, ILINK needs a *configuration*, passed to it by means of the *linker configuration file*.

This file consists of a sequence of directives and typically, provides facilities for:

• Defining available addressable memories

giving the linker information about the maximum size of possible addresses and defining the available physical memory, as well as dealing with memories that can be addressed in different ways.

• Defining the regions of the available memories that are populated with ROM or RAM

giving the start and end address for each region.

• Section groups

dealing with how to group sections into blocks and overlays depending on the section requirements.

- Defining how to handle initialization of the application giving information about which sections that are to be initialized, and how that
  - initialization should be made.
- Memory allocation

defining where—in what memory region—each set of sections should be placed.

• Using symbols, expressions, and numbers

expressing addresses and sizes, etc, in the other configuration directives. The symbols can also be used in the application itself.

• Structural configuration

meaning that you can include or exclude directives depending on a condition, and to split the configuration file into several different files.

• Special characters in names

When specifying the name of a symbol or section that uses non-identifier characters, you can enclose the name in back quotes. Example: 'My Name'.

Comments can be written either as C comments (/\*...\*/) or as C++ comments (//...).

# Defining memories and regions

ILINK needs information about the available memory spaces, or more specifically it needs information about:

The maximum size of possible addressable memories

The define memory directive defines a *memory space* with a given size, which is the maximum possible amount of addressable memory, not necessarily physically available. See *define memory directive*, page 479.

• Available physical memory

The define region directive defines a region in the available memories in which specific sections of application code and sections of application data can be placed. See *define region directive*, page 479.

A region consists of one or several memory ranges. A range is a continuous sequence of bytes in a memory and several ranges can be expressed by using region expressions. See *Region expression*, page 483.

This section gives detailed information about each linker directive specific to defining memories and regions.

# define memory directive

Syntax	define memory [ name ]	<pre>define memory [ name ] with size = size_expr [ ,unit-size ];</pre>	
	where unit-size is one of:		
	unitbitsize = <i>bitsize_expr</i> unitbytesize = <i>bytesize_expr</i>		
	and where expr is an expression	on, see expressions, page 506.	
Parameters			
	size_expr	Specifies how many <i>units</i> the memory space contains; always counted from address zero.	
	bitsize_expr	Specifies how many bits each unit contains.	
	bytesize_expr	Specifies how many bytes each unit contains. Each byte contains 8 bits.	
Description	The define memory directive defines a <i>memory space</i> with a given size, which is the maximum possible amount of addressable memory, not necessarily physically available. This sets the limits for the possible addresses to be used in the linker configuration file. For many microcontrollers, one memory space is sufficient. However, some microcontrollers require two or more. For example, a Harvard architecture usually requires two different memory spaces, one for code and one for data. If only one memory is defined, the memory name is optional. If no <i>unit-size</i> is given, the unit contains 8 bits.		
Example	/* Declare the memory s define memory Mem with	pace Mem of four Gigabytes */ size = 4G;	

# define region directive

Syntax	<pre>define region name = region-expr;</pre>	
	where region-expr is a region	n expression, see also Regions, page 481.
Parameters	name	The name of the region.
Description	The define region directive defines a region in which specific sections of code and sections of data can be placed. A region consists of one or several memory ranges, where each memory range consists of a continuous sequence of bytes in a specific memory.	

	Several ranges can be combined by using region expressions. Note that those ranges do not need to be consecutive or even in the same memory.
Example	<pre>/* Define the 0x10000-byte code region ROM located at address     0x10000 in memory Mem */ define region ROM = Mem:[from 0x10000 size 0x10000];</pre>

# logical directive

Syntax	logical range-list = physical range-list		
	where <i>range-list</i> is one of		
		[ region-expr, ]region-expr [ region-expr, ]from address-expr	
Parameters	region-expr	region-expr A region expression, see also Regions, page 481.	
	address-expr	An address expression	
Description	The logical directive maps logical addresses to physical addresses. The physical address is typically used when loading or burning content into memory, while the logical address is the one seen by your application. The physical address is the same as the logical address, if no logical directives are used, or if the address is in a range specified in a logical directive.		
	When generating ELF output, the mapping affects the physical address in program headers. When generating output in the Intel hex or Motorola S-records formats, the physical address is used.		
	Each address in the logical range list, in the order specified, is mapped to the corresponding address in the physical range list, in the order specified.		
	Unless one or both of the range lists end with the from form, the total size of the logical ranges and the physical ranges must be the same. If one side ends with the from form and not the other, the side that ends with the from form will include a final range of a size that makes the total sizes match, if possible. If both sides end with a from form, the ranges will extend to the highest possible address that makes the total sizes match.		
	other content are placed. No co- logical or physical range. Also, ranges has been specified (by n	cal to physical addresses can affect how sections and ntent will be placed to overlap more than one individual any logical range for which no mapping to physical ot being mentioned in a logical directive) is excluded oping from a different logical range to the corresponding	

	All logical directives are applied together. Using one or using several directives to specify the same mapping makes no difference to the result.		
Example	<pre>// Logical range 0x8000-0x8FFF maps to physical 0x10000-0x10FFF. // No content can be placed in the logical range 0x10000-0x10FFF. logical [from 0x8000 size 4K] = physical [from 0x10000 size 4K];</pre>		
	<pre>// Another way to specify the same mapping logical [from 0x8000 size 4K] = physical from 0x10000;</pre>		
	<pre>// Logical range 0x8000-0x8FFF maps to physical 0x10000-0x10FFF. // Logical range 0x10000-0x10FFF maps to physical 0x8000-0x8FFF. // No logical range is excluded from placement because of // this mapping.</pre>		
	<pre>logical [from 0x8000 size 4K] = physical [from 0x10000 size 4K]; logical [from 0x10000 size 4K] = physical [from 0x8000 size 4K];</pre>		
	<pre>// Logical range 0x1000-0x13FF maps to physical 0x8000-0x83FF. // Logical range 0x1400-0x17FF maps to physical 0x9000-0x93FF. // Logical range 0x1800-0x1BFF maps to physical 0x8000-0x83FF. // Logical range 0x1C00-0x1FFF maps to physical 0xB000-0xB3FF. // No content can be placed in the logical ranges 0x8000-0x83FF, // 0x9000-0x9FFF, 0xA000-0xAFFF, or 0xB000-0xBFFF. logical [from 0x1000 size 4K] = physical [from 0x8000 size 1K repeat 4 displacement 4K];</pre>		
	<pre>// Another way to specify the same mapping. logical [from 0x1000 to 0x13FF] = physical [from 0x8000 to 0x83FF];</pre>		
	logical [from 0x1400 to 0x17FF] = physical [from 0x9000 to 0x93FF];		
	<pre>logical [from 0x1800 to 0x1BFF] = physical [from 0xA000 to 0xA3FF];</pre>		
	logical [from 0x1C00 to 0x1FFF] = physical [from 0xB000 to 0xB3FF];		

# Regions

A *region* is s a set of non-overlapping memory ranges. A *region expression* is built up out of *region literals* and set operations (union, intersection, and difference) on regions.

# **Region literal**

Syntax	[ memory-name: ][from expr { to expr   size expr }		
	[ repeat expr [ displacement expr ]]		
	where <i>expr</i> is an expres	ssion, see expressions, page 506.	
Parameters	memory-name	The name of the memory space in which the region literal will be located. If there is only one memory, the name is optional.	
	from <i>expr</i>	expr is the start address of the memory range (inclusive).	
	to <i>expr</i>	expr is the end address of the memory range (inclusive).	
	size <i>expr</i>	<i>expr</i> is the size of the memory range.	
	repeat <i>expr</i>	<i>expr</i> defines several ranges in the same memory for the region literal.	
	displacement <i>expr</i>	<i>expr</i> is the displacement from the previous range start in the repeat sequence. Default displacement is the same value as the range size.	
Description	A region literal consists of one memory range. When you define a range, the memory it resides in, a start address, and a size must be specified. The range size can be stated explicitly by specifying a size, or implicitly by specifying the final address of the range. The final address is included in the range and a zero-sized range will only contain an address. A range can span over the address zero and such a range can even be expressed by unsigned values, because it is known where the memory wraps.		
	The repeat parameter will create a region literal that contains several ranges, one for each repeat. This is useful for <i>banked</i> or <i>far</i> regions.		

```
Example
                      /* The 5-byte size range spans over the address zero */
                      Mem: [from -2 to 2]
                      /* The 512-byte size range spans over zero, in a 64-Kbyte memory
                      */
                      Mem:[from 0xFF00 to 0xFF]
                      /* Defining several ranges in the same memory, a repeating
                         literal */
                      Mem: [from 0 size 0x100 repeat 3 displacement 0x1000]
                      /* Resulting in a region containing:
                         Mem:[from 0 size 0x100]
                         Mem:[from 0x1000 size 0x100]
                         Mem:[from 0x2000 size 0x100]
                      */
See also
                      define region directive, page 479, and Region expression, page 483.
```

# **Region expression**

Syntax	region-operand   region-expr   region-operand   region-expr - region-operand   region-expr & region-operand		
	where region-operand is one of:		
	( region-expr ) region-name region-literal empty-region		
	where region-name is a region, see define region directive, page 479		
	where region-literal is a region literal, see Region literal, page 482		
	and where <i>empty-region</i> is an empty region, see <i>Empty region</i> , page 484.		
Description	Normally, a region consists of one memory range, which means a <i>region literal</i> is sufficient to express it. When a region contains several ranges, possibly in different memories, it is instead necessary to use a <i>region expression</i> to express it. Region expressions are actually set expressions on sets of memory ranges.		

	To create region expressions, three operators are available: union ( ), intersection ( $\&$ ), and difference (-). These operators work as in <i>set theory</i> . For example, if you have the sets A and B, then the result of the operators would be:	
	• A   B: all elements in either set A or set B	
	• A & B: all elements in both set A and B	
	• A - B: all elements in set A but not in B.	
Example	<pre>/* Resulting in a range starting at 1000 and ending at 2FFF, in memory Mem */</pre>	
	Mem:[from 0x1000 to 0x1FFF]   Mem:[from 0x1500 to 0x2FFF]	
	/* Resulting in a range starting at 1500 and ending at 1FFF, in memory Mem */	
	Mem:[from 0x1000 to 0x1FFF] & Mem:[from 0x1500 to 0x2FFF]	
	<pre>/* Resulting in a range starting at 1000 and ending at 14FF, in memory Mem */</pre>	
	Mem:[from 0x1000 to 0x1FFF] - Mem:[from 0x1500 to 0x2FFF]	
	<pre>/* Resulting in two ranges. The first starting at 1000 and ending at 1FFF, the second starting at 2501 and ending at 2FFF. Both located in memory Mem */</pre>	
	Mem:[from 0x1000 to 0x2FFF] - Mem:[from 0x2000 to 0x24FF]	

# **Empty region**

Syntax	[]	
Description	The empty region does not contain any memory ranges. If the empty region is used in a placement directive that actually is used for placing one or more sections, ILINK will issue an error.	
Example	<pre>define region Code = Mem:[from 0 size 0x10000]; if (Banked) { define region Bank = Mem:[from 0x8000 size 0x1000]; } else { define region Bank = []; } define region NonBanked = Code - Bank; /* Depending on the Banked symbol, the NonBanked region is either one range with 0x10000 bytes, or two ranges with 0x8000 and 0x7000 bytes, respectively. */</pre>	

See also

Region expression, page 483.

# Section handling

Section handling describes how ILINK should handle the sections of the execution image, which means:

• Placing sections in regions

The place at and place in directives place sets of sections with similar attributes into previously defined regions. See *place at directive*, page 496 and *place in directive*, page 497.

• Making sets of sections with special requirements

The block directive makes it possible to create empty sections with specific sizes and alignments, sequentially sorted sections of different types, etc.

The overlay directive makes it possible to create an area of memory that can contain several overlay images. See *define block directive*, page 486, and *define overlay directive*, page 491.

• Initializing the application

The directives initialize and do not initialize control how the application should be started. With these directives, the application can initialize global symbols at startup, and copy pieces of code. The initializers can be stored in several ways, for example they can be compressed. See *initialize directive*, page 492 and *do not initialize directive*, page 495.

Keeping removed sections

The keep directive retains sections even though they are not referred to by the rest of the application, which means it is equivalent to the *root* concept in the assembler and compiler. See *keep directive*, page 495.

• Specifying the contents of linker-generated sections

The define section directive can be used for creating specific sections with content and calculations that are only available at link time.

• Additional more specialized directives:

use init table directive

This section gives detailed information about each linker directive specific to section handling.

# define block directive

<pre>Syntax define [ movable ] block name   [ with param, param ]   {     extended-selectors     }     [ except     {         section-selectors         } ];     where param can be one of:         size = expr         maximum size = expr         alignment = expr         fixed order         alphabetical order</pre>
<pre>{     extended-selectors } [ except     {         section-selectors      } ]; where param can be one of:     size = expr     maximum size = expr     alignment = expr     fixed order     alphabetical order</pre>
<pre>extended-selectors } [ except {     section-selectors     } ]; where param can be one of:     size = expr     maximum size = expr     alignment = expr     fixed order     alphabetical order</pre>
<pre>} [ except {     section-selectors     } ]; where param can be one of:     size = expr     maximum size = expr     alignment = expr     fixed order     alphabetical order</pre>
<pre>[ except {     section-selectors     } ]; where param can be one of:     size = expr     maximum size = expr     alignment = expr     fixed order     alphabetical order</pre>
<pre>{     section-selectors     } ];     where param can be one of:     size = expr     maximum size = expr     alignment = expr     fixed order     alphabetical order</pre>
<pre>section-selectors } ]; where param can be one of: size = expr maximum size = expr alignment = expr fixed order alphabetical order</pre>
<pre>} l; where param can be one of: size = expr maximum size = expr alignment = expr fixed order alphabetical order</pre>
size = <i>expr</i> maximum size = <i>expr</i> alignment = <i>expr</i> fixed order alphabetical order
size = <i>expr</i> maximum size = <i>expr</i> alignment = <i>expr</i> fixed order alphabetical order
maximum size = <i>expr</i> alignment = <i>expr</i> fixed order alphabetical order
alignment = <i>expr</i> fixed order alphabetical order
fixed order alphabetical order
-
static base [basename]
and where the rest of the directive selects sections to include in the block, see Section
selection, page 499.
Parameters
<i>name</i> The name of the block to be defined.
size Customizes the size of the block. By default, the size of a
block is the sum of its parts dependent of its contents.
maximum size Specifies an upper limit for the size of the block. An error is
generated if the sections in the block do not fit.
alignment Specifies a minimum alignment for the block. If any section
in the block has a higher alignment than the minimum
alignment, the block will have that alignment.
fixed order Places sections in the specified order. Each

extended-selector is added in a separate nested block,

and these blocks are kept in the specified order.

	alphabetical order	Places sections in alphabetical order by section name. Only <i>section-selector</i> patterns are allowed in alphabetical order blocks (no nested blocks, for example). All sections in a particular alphabetical order block must use the same kind of initialization (read-only, zero-init, copy-init, or no-init, and otherwise equivalent). You cannot usesection_begin, etc on individual sections contained in an alphabetical order block.
	static base [basename]	Specifies that the static base with the name <i>basename</i> will be placed at the start of the block or in the middle of the block, as appropriate for the particular static base. The startup code must ensure that the register that holds the static base is initialized to the correct value. If there is only one static base, the name can be omitted.
Description	The block directive defines a contiguous area of memory that contains a possibly empty set of sections or other blocks. Blocks with no content are useful for allocating space for stacks or heaps. Blocks with content are usually used to group together sections that must to be consecutive.	
	You can access the start, end, and size of a block from an application by using thesection_begin,section_end, orsection_size operators. If there is no block with the specified name, but there are sections with that name, a block will be created by the linker, containing all such sections.	
	movable blocks are for use with read-only and read-write position independence. Making blocks movable enables the linker to validate the application's use of addresses. Movable blocks are located in exactly the same way as other blocks, but the linker will check that the appropriate relocations are used when referring to symbols in movable blocks.	
Example		-byte block for the heap */ with size = 0x1000, alignment = 8 { };
See also	Interaction between the directive, page 491 for a	tools and your application, page 204. See define overlay an Accessing example.

## define section directive

```
Syntax
                       define [ root ] section name
                         [ with alignment = sec-align ]
                       {
                         section-content-item ...
                       };
                       where each section-content-item can be one of:
                       udata8 { data | string };
                       sdata8 data [ ,data ] ...;
                       udata16 data [ ,data ] ...;
                       sdata16 data [ ,data ] ...;
                       udata24 data [, data] ...;
                       sdata24 data [ ,data ] ...;
                       udata32 data [, data] ...;
                       sdata32 data [, data] ...;
                       udata64 data [ ,data ] ...;
                       sdata64 data [, data] ...;
                       pad_to data-align;
                       [ public ] label:
                       if-item;
                       where if-item is:
                       if ( condition ) {
                          section-content-item...
                       [} else if (condition] {
                          section-content-item...]...
                       [} else {
                          section-content-item...]
                       }
Parameters
                                               The name of the section.
                       name
                                               The alignment of the section, an expression.
                       sec-align
                       root
                                               Optional. If root is specified, the section is always
                                               included, even if it is not referenced.
```

udata8	{data string};	If the parameter is an expression $(data)$ , it generates an unsigned one-byte member in the section. The $data$ expression is only evaluated during relocation and only if the value is needed. It causes a relocation error if the value of $data$ is too large to fit in a byte. The possible range of values is 0 to 0xFF.
		If the parameter is a quoted string, it generates one one-byte member in the section for each character in the string.
sdata8	data;	As udata8 <i>data</i> , except that it generates a signed one-byte member.
		The possible range of values is $-0x80$ to $0x7F$ .
udata16	ō data;	As sdata8, except that it generates an unsigned two-byte member. The possible range of values is 0 to $0 \times FFFF$ .
sdata16	ō data;	As sdata8, except that it generates a signed two-byte member. The possible range of values is $-0x8000$ to $0x7FFF$ .
udata24	l data;	As sdata8, except that it generates an unsigned three-byte member. The possible range of values is 0 to $0 \times FFFFFFF$ .
sdata24	l data;	As sdata8, except that it generates a signed three-byte member. The possible range of values is $-0x800000$ to $0x7FFFFFF$ .
udata32	2 data;	As sdata8, except that it generates an unsigned four-byte member. The possible range of values is 0 to 0xFFFFFFFF.
sdata32	2 data;	As sdata8, except that it generates a signed four-byte member.
		The possible range of values is -0x80000000 to 0x7FFFFFFF.
udata64	l data;	As sdata8, except that it generates an unsigned eight-byte member. The possible range of values is 0 to 0xFFFFFFFFFFFFFFFFFF.

	sdata64 <i>data</i> ;	As sdata8, except that it generates a signed eight-byte member. The possible range of values is -0x800000000000000000 to 0x7FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF	
	pad_to <i>data_align</i> ;	Generates pad bytes to make the current offset from the start of the section to be aligned to the expression data-align.	
	[public] label:	Defines a label at the current offset from the start of the section. If public is specified, the label is visible to other program modules. If not, it is only visible to other data expressions in the linker configuration file.	
	<i>if-item</i>	Configuration-time selection of items.	
	condition	An expression.	
	data	An expression that is only evaluated during relocation and only if the value is needed.	
Description	Use the define section directive to create sections with content that is not available from assembler language or C/C++. Examples of this are the results of stack usage analysis, the size of blocks, and arithmetic operations that do not exist as relocations.		
	Unknown identifiers in data expressions are assumed to be labels. Note that only data expressions can use labels, stack usage analysis results, etc. All the other expressions are evaluated immediately when the configuration file is read.		
Example	<pre>define section data {     /* The application entry in a 16-bit word, provided it is less         than 256K and 4-byte aligned. */     udata16iar_program_start &gt;&gt; 2;     /* The maximum stack usage in the program entry category. */     udata16 maxstack("Application entry");     /* The size of the DATA block */     udata32 size(block DATA); };</pre>		

## define overlay directive

```
Syntax
                           define overlay name [ with param, param... ]
                            {
                              extended-selectors;
                            }
                            [ except
                             {
                                section-selectors
                              } ];
                           For information about extended selectors and except clauses, see Section selection, page
                           499.
Parameters
                                                     The name of the overlay.
                           name
                                                     Customizes the size of the overlay. By default, the size of a
                           size
                                                     overlay is the sum of its parts dependent of its contents.
                           maximum size
                                                     Specifies an upper limit for the size of the overlay. An error
                                                     is generated if the sections in the overlay do not fit.
                           alignment
                                                     Specifies a minimum alignment for the overlay. If any
                                                     section in the overlay has a higher alignment than the
                                                     minimum alignment, the overlay will have that alignment.
                           fixed order
                                                     Places sections in fixed order; if not specified, the order of
                                                     the sections will be arbitrary.
                           The overlay directive defines a named set of sections. In contrast to the block
Description
                           directive, the overlay directive can define the same name several times. Each definition
                           will then be grouped in memory at the same place as all other definitions of the same
                           name. This creates an overlaid memory area, which can be useful for an application that
                           has several independent sub-applications.
                           Place each sub-application image in ROM and reserve a RAM overlay area that can hold
                           all sub-applications. To execute a sub-application, first copy it from ROM to the RAM
                           overlay. Note that ILINK does not help you with managing interdependent overlay
                           definitions, apart from generating a diagnostic message for any reference from one
                           overlay to another overlay.
```

The size of an overlay will be the same size as the largest definition of that overlay name and the alignment requirements will be the same as for the definition with the highest alignment requirements. **Note:** Sections that were overlaid must be split into a RAM and a ROM part and you must take care of all the copying needed.

See also *Manual initialization*, page 111.

## initialize directive

```
initialize { by copy | manually }
Syntax
                            [ with param, param... ]
                          {
                            section-selectors
                          }
                          [ except
                           {
                             section-selectors
                           } ];
                          where param can be one of:
                          packing = algorithm
                          simple ranges
                          complex ranges
                          For information about section selectors and except clauses, see Section selection, page
                          499.
Parameters
                                                 Splits the section into sections for initializers and initialized
                          by copy
                                                 data, and handles the initialization at application startup
```

manually

Splits the section into sections for initializers and initialized data. The initialization at application startup is not handled automatically.

automatically.

	algorithm	Specifies how to handle the initializers. Choose between:	
		none - Disables compression of the selected section contents. This is the default method for initialize manually.	
		${\tt zeros}$ – Compresses consecutive bytes with the value zero.	
		packbits - Compresses with the PackBits algorithm. This method generates good results for data with many identical consecutive bytes.	
		<ul><li>1z77 - Compresses with the Lempel-Ziv-77 algorithm.</li><li>This method handles a larger variety of inputs well, but has a slightly larger decompressor.</li></ul>	
		auto - ILINK estimates the resulting size using each packing method (except for auto), and then chooses the packing method that produces the smallest estimated size. Note that the size of the decompressor is also included. This is the default method for initialize by copy.	
		smallest - This is a synonym for auto.	
Description	initializer data and anoth section that holds the spa the section that holds init whether the initialization	ve splits each selected section into one section that holds er section that holds the space for the initialized data. The ce for the initialized data retains the original section name, and tializer data gets the name suffix _init. You can choose at startup should be handled automatically (initialize by ould handle it yourself (initialize manually).	
	When you use the packing method auto (default for initialize by copy will automatically choose an appropriate packing algorithm for the initialize override this, specify a different packing method. Thelog initialize option shows how ILINK decided which packing algorithm to use.		
When initializers are compressed, a decompressor is automatically added		npressed, a decompressor is automatically added to the image.	
	Each decompressor has two variants: one that can only handle a single source and destination range at a time, and one that can handle more complex cases. By default, the linker chooses a decompressor variant based on whether the associated section placement directives specify a single- or multi-range memory region. In general, this is the desired behavior, but you can use the with complex ranges or the with simple ranges modifier on an initialize directive to specify which decompressor variant to use. You can also use the command line optiondefault_to_complex_ranges to make initialize directives by default use complex ranges. The simple ranges decompressors are normally hundreds of bytes smaller than the complex ranges variants.		

	When initializers are compressed, the exact size of the compressed initializers is unknown until the exact content of the uncompressed data is known. If this data contains other addresses, and some of these addresses are dependent on the size of the compressed initializers, the linker fails with error Lp017. To avoid this, place compressed initializers last, or in a memory region together with sections whose addresses do not need to be known.
	Due to an internal dependence, generation of compressed initializers can also fail (with error LP021) if the address of the initialized area depends on the size of its initializers. To avoid this, place the initializers and the initialized area in different parts of the memory (for example, the initializers are placed in ROM and the initialized area in RAM).
	Unless initialize manually is used, ILINK will arrange for initialization to occur during system startup by including an initialization table. Startup code calls an initialization routine that reads this table and performs the necessary initializations.
	Zero-initialized sections are not affected by the initialize directive.
	The initialize directive is normally used for initialized variables, but can be used for copying any sections, for example copying executable code from slow ROM to fast RAM, or for overlays. For another example, see <i>define overlay directive</i> , page 491.
	Sections that are needed for initialization are not affected by the initialize by copy directive. This includes thelow_level_init function and anything it references.
	Anything reachable from the program entry label is considered <i>needed for initialization</i> unless reached via a section fragment with a label starting withiar_init\$\$done. Thelog sections option, in addition to logging the marking of section fragments to be included in the application, also logs the process of determining which sections are needed for initialization.
Example	<pre>/* Copy all read-write sections automatically from ROM to RAM at     program start */ initialize by copy { rw }; place in RAM { rw }; place in ROM { ro };</pre>
See also	Initialization at system startup, page 94, and do not initialize directive, page 495.

# do not initialize directive

Syntax	<pre>do not initialize {     section-selectors } [ except     {     section-selectors     } ]; For information about section selectors and except clauses, see Section selection, page 499.</pre>
Description	Use the do not initialize directive to specify the sections that you do not want to be automatically zero-initialized by the system startup code. The directive can only be used on zeroinit sections. Typically, this is useful if you want to handle zero-initialization in some other way for all or some zeroinit sections.
	This can also be useful if you want to suppress zero-initialization of variables entirely. Normally, this is handled automatically for variables specified asno_init in the source, but if you link with object files produced by older tools from IAR Systems or other tool vendors, you might need to suppress zero-initialization specifically for some sections.
Example	<pre>/* Do not initialize read-write sections whose name ends with     _noinit at program start */ do not initialize { rw section .*_noinit }; place in RAM { rw section .*_noinit };</pre>
See also	Initialization at system startup, page 94, and initialize directive, page 492.

# keep directive

```
keep
{
  [ { section-selectors | block name }
     [ , {section-selectors | block name }... ] ]
}
[ except
  {
    section-selectors
  } ];
```

	For information about selectors and except clauses, see Section selection, page 499.
Description	The keep directive can be used for including blocks, overlays, or sections in the executable image that would otherwise be discarded because no references to them exist in the included parts of the application. Note that only sections from included modules are considered for inclusion.
	The keep directive does not cause any additional <i>modules</i> to be included in the application. To cause modules that define the specified symbols to be included, use the <b>Keep symbols</b> linker option (or the $keep$ command line option).
Example	<pre>keep { section .keep* } except {section .keep};</pre>

# place at directive

Syntax	start of <i>reg</i>	<pre>[ "name": ] place [ noload ] at { address [ memory: ] address       start of region_expr [ with mirroring to mirror_address ]       end of region_expr [ with mirroring to mirror_address ] }</pre>	
	<pre>{     extended-selector } [ except     {         section-selector } ];</pre>		
	For information about extended selectors and except clauses, see <i>Section se</i> 499.		
Parameters	name	Optional. If it is specified, it is used in the map file, in some log messages, and is part of the name of any ELF output sections resulting from the directive.	
	noload	Optional. If it is specified, it prevents the sections in the directive from being loaded to the target system. To use the sections, you must put them into the target system in some other way. noload can only be used when a <i>name</i> is specified.	

	memory: address	A specific address in a specific memory. The address must be available in the supplied memory defined by the define memory directive. The memory specifier is optional if there is only one memory.
	start of <i>region_expr</i>	A region expression that results in a single-internal region. The start of the interval is used.
	end of <i>region_expr</i>	A region expression that results in a single-internal region. The end of the interval is used.
	mirror_address	If with mirroring to is specified, the contents of any sections are assumed to be mirrored to this address, thus debug information and symbols will appear in the mirrored range, but the actual content bytes are placed as if with mirroring to was not specified.
		<b>Note:</b> This functionality is intended to support external (target-specific) mirroring.
Description	The place at directive places sections and blocks either at a specific address or, at the beginning or the end of a region. The same address cannot be used for two different place at directives. It is also not possible to use an empty region in a place at directive. If placed in a region, the sections and blocks will be placed before any other sections or blocks placed in the same region with a place in directive.	
	Note: with mirroring t	to can be used only together with start of and end of.
Example	<pre>/* Place the RO section .startup at the start of code_region */ "START": place at start of ROM { readonly section .startup };</pre>	
See also	place in directive, page 497.	

# place in directive

Syntax

[ "name": ]
place [ noload ] in region-expr
 [ with mirroring to mirror\_address ]
{
 extended-selectors
}
[ except{
 section-selectors
} ];

where *region-expr* is a region expression, see also *Regions*, page 481.

and where the rest of the directive selects sections to include in the block. See *Section* selection, page 499.

Parameters			
	name	Optional. If it is specified, it is used in the map file, in some log messages, and is part of the name of any ELF output sections resulting from the directive.	
	noload	Optional. If it is specified, it prevents the sections in the directive from being loaded to the target system. To use the sections, you must put them into the target system in some other way. noload can only be used when a <i>name</i> is specified.	
	mirror_address	If with mirroring to is specified, the contents of any sections are assumed to be mirrored to this address, thus debug information and symbols will appear in the mirrored range, but the actual content bytes are placed as if with mirroring to was not specified.	
		<b>Note:</b> This functionality is intended to support external (target-specific) mirroring.	
Description	The place in directive places sections and blocks in a specific region. The sections and blocks will be placed in the region in an arbitrary order.		
To specify a specific order, use the block directive. The region		, use the block directive. The region can have several ranges.	
	<b>Note:</b> When with mirroring to is specified, the <i>region-expr</i> must result in a single range.		
Example	/* Place the read-only sections in the code_region */ "ROM": place in ROM { readonly };		
See also	place at directive, page 496.		

## use init table directive

Syntax	<pre>use init table name for {     section-selectors } [ except     {     section-selectors     } ]; For information about section selectors and except clauses, see Section selection, page 499.</pre>		
Parameters	name The name of the init table.		
Description	Normally, all initialization entries are generated into a single initialization table (called Table). Use this directive to cause some of the entries to be put into a separate table. You can then use this initialization table at another time, or under different circumstances, than the normal initialization table.		
	Initialization entries for all variables not mentioned in a use init table directive are put into the normal initialization table. By having multiple use init table directives you can have multiple initialization tables.		
	The start, end, and size of the init table can be accessed in the application program by usingsection_begin,section_end, orsection_size of "Region\$\$name", respectively, or via the symbols Region\$\$name\$\$Base, Region\$\$name\$\$Limit, and Region\$\$name\$\$Length.		
Example	<pre>use init table Core2 for { section *.core2}; /*section_begin("Region\$\$Core2") can be used to get the start   of the Core2 init table. */</pre>		

# **Section selection**

The purpose of *section selection* is to specify—by means of *section selectors* and *except clauses*—the sections that an ILINK directive should be applied to. All sections that match one or more of the section selectors will be selected, and none of the sections selectors in the except clause, if any. Each section selector can match sections on section attributes, section name, and object or library name.

Some directives provide functionality that requires more detailed selection capabilities, for example directives that can be applied on both sections and blocks. In this case, the *extended-selectors* are used.

This section gives detailed information about each linker directive specific to section selection.

# section-selectors

Syntax	[ section-selector [ , section-selector ] ]		
	section-selector is:		
	[ section-attribute ][ section-type ] [ symbol symbol-name ][ section section-name ] [ object module-spec ]		
	section-attribute is:		
	ro [ code   data ]   rw [ code   data ]   zi		
	section-type is:		
	[ preinit_array   init_array ]		
Parameters			
	section-attribute	Only sections with the specified attribute will be selected. section-attribute can consist of:	
		ro readonly, for ROM sections. rw readwrite, for RAM sections.	
		In each category, sections can be further divided into those that contain code and those that contain data, resulting in four main categories:	
		ro code, for normal code ro data, for constants rw code, for code copied to RAM rw data, for variables	
		readwrite data also has a subcategory— zi zeroinit—for sections that are zero-initialized at application startup.	

	section-type	Only sections with that ELF section type will be selected. <i>section-type</i> can be:
		<pre>preinit_array, sections of the ELF section type SHT_PREINIT_ARRAY. init_array, sections of the ELF section type SHT_INIT_ARRAY.</pre>
	symbol <i>symbol-name</i>	Only sections that define at least one public symbol that matches the symbol name pattern will be selected. <i>symbol-name</i> is the symbol name pattern. Two wildcards are allowed:
		<ul><li>? matches any single character.</li><li>* matches zero or more characters.</li></ul>
	section section-name	Only sections whose names match the <i>section-name</i> will be selected. Two wildcards are allowed:
		? matches any single character
		* matches zero or more characters.
	object module-spec	Only sections that originate from library modules or object files that matches <i>module-spec</i> will be selected. <i>module-spec</i> can be in one of two forms:
		<pre>module, a name in the form objectname(libraryname). Sections from object modules where both the object name and the library name match their respective patterns are selected. An empty library name pattern selects only sections from object files. If libraryname is : sys, the pattern will match only sections from the system library. filename, the name of an object file, or an object in a library.</pre>
		Two wildcards are allowed:
		? matches any single character
		* matches zero or more characters.
Description		Il sections that match the section attribute, section type, e, and the name of the module. Up to four of the five

It is also possible to use only  $\{ \ \}$  without any section selectors, which can be useful when defining blocks.

Note that a section selector with narrower scope has higher priority than a more generic section selector. If more than one section selector matches for the same purpose, one of them must be more specific. A section selector is more specific than another one if in priority order:

- It specifies a symbol name with no wildcards and the other one does not.
- It specifies a section name or object name with no wildcards and the other one does not
- It specifies a section type and the other one does not
- There could be sections that match the other selector that also match this one, and the reverse is not true.

Selector I	Selector 2	More specific
ro	ro code	Selector 2
symbol mysym	section foo	Selector 1
ro code section f*	ro section f*	Selector 1
section foo*	section f*	Selector 1
section *x	section f*	Neither
init_array	section f*	Selector 1
section .intvec	ro section .int*	Selector 1
section .intvec	object foo.o	Neither

Table 34: Examples of section selector specifications

 Example
 { rw }
 /\* Selects all read-write sections \*/

 { section .mydata\* }
 /\* Selects only .mydata\* sections \*/

 /\* Selects .mydata\* sections available in the object special.o \*/

 { section .mydata\* object special.o }

 Assuming a section in an object named foo.o in a library named lib.a, any of these selectors will select that section:

```
object foo.o(lib.a)
object f*(lib*)
object foo.o
object lib.a
```

See also

*initialize directive*, page 492, *do not initialize directive*, page 495, and *keep directive*, page 495.

# extended-selectors

Syntax	Syntax [ extended-selector [ , extended-selector]]	
	where extended	-selector is:
	[ first   la	<pre>st   midway ] { section-selector       block name [ inline-block-def ]       overlay name }</pre>
	where inline-b	lock-def is:
	[ block-para	ms ] extended-selectors
Parameters	first	Places the selected sections, block, or overlay first in the containing placement directive, block, or overlay.
	last	Places the selected sections, block or overlay last in the containing placement directive, block, or overlay.
	midway	Places the selected sections, block, or overlay so that they are no further than half the maximum size of the containing block away from either edge of the block. Note that this parameter can only be used inside a block that has a maximum size.
	name	The name of the block or overlay.
Description	<ul> <li>Use extended-selectors to select content for inclusion in a placement directive, block, or overlay. In addition to using section selection patterns, you can also explicitly specify blocks or overlays for inclusion.</li> <li>Using the first or last keyword, you can specify one pattern, block, or overlay that is to be placed first or last in the containing placement directive, block, or overlay. If you need more precise control of the placement order you can instead use a block with fixed order.</li> <li>Blocks can be defined separately, using the define block directive, or inline, as part of an extended-selector.</li> <li>The midway parameter is primarily useful together with a static base that can have both negative and positive offsets.</li> </ul>	

```
Example
                       define block First { ro section .f* }; /* Define a block holding
                                                                      any read-only section*/
                                                                      matching ".f*" */
                       define block Table { first block First, ro section .b };
                                                                   /* Define a block where
                                                                       the block First comes
                                                                       before the sections
                                                                      matching ".b*". */
                       You can also define the block First inline, instead of in a separate define block
                       directive:
                       define block Table { first block First { ro section .f* },
                                               ro section .b* };
See also
                       define block directive, page 486, define overlay directive, page 491, and place at
                       directive, page 496.
```

# Using symbols, expressions, and numbers

In the linker configuration file, you can also:

• Define and export symbols

The define symbol directive defines a symbol with a specified value that can be used in expressions in the configuration file. The symbol can also be exported to be used by the application or the debugger. See *define symbol directive*, page 505, and *export directive*, page 506.

Use expressions and numbers

In the linker configuration file, expressions and numbers are used for specifying addresses, sizes, etc. See *expressions*, page 506.

This section gives detailed information about each linker directive specific to defining symbols, expressions and numbers.

## check that directive

Syntax check that expression;

Parameters

expression

A boolean expression.

Description	You can use the check that directive to compare the results of stack usage analysis against the sizes of blocks and regions. If the expression evaluates to zero, an error is emitted.	
	Three extra operators are avail	able for use only in check that expressions:
	maxstack( <i>category</i> )	The stack depth of the deepest call chain for any call graph root function in the category.
	totalstack( <i>category</i> )	The sum of the stack depths of the deepest call chains for each call graph root function in the category.
	<pre>size(block)</pre>	The size of the block.
Example	check that maxstack("Pr + totalsta + 1K <= size(bloc	ck("interrupt")
See also	Stack usage analysis, page 96.	

### define symbol directive

Syntax	define [ exported ] sym	bol name = expr;
Parameters	exported	Exports the symbol to be usable by the executable image.
	name	The name of the symbol.
	expr	The symbol value.
Description	then be used in expressions in t	defines a symbol with a specified value. The symbol can the configuration file. The symbols defined in this way defined with the optionconfig_def outside of the
	directive define symbol in co	l variant of this directive is a shortcut for using the ombination with the export symbol directive. On the re both aconfig_def option and a cchieve the same effect.
	Note:	
	• A symbol cannot be redefin	ed

	• Symbols that are either prefixed by _x, where x is a capital letter, or that contain (double underscore) are reserved for toolset vendors.
Example	<pre>/* Define the symbol my_symbol with the value 4 */ define symbol my_symbol = 4;</pre>
See also	<i>export directive</i> , page 506 and <i>Interaction between ILINK and the application</i> , page 114.

### export directive

	Syntax	export symbol name;	
	Parameters	name	The name of the symbol.
	Description	-	symbol to be exported, so that it can be used both from global label. The application, or the debugger, can then .
	Example	<pre>/* Define the symbol my_ export symbol my_symbol;</pre>	symbol to be exported */
expr	ressions		
	Syntax	An expression is built up of the	following constituents:
		expression binop express unop expression expression ? expression (expression) number symbol func-operator	
		where <i>binop</i> is one of these bir	ary operators:
		+, -, *, /, %, <<, >>, <, >, ==, !=	=, &, ^,  , &&,
		where unop is one of this unary	operators:

+, -, !, ~

where *number* is a number, see *numbers*, page 507

--config def, page 311 and where *func-operator* is one of these function-like operators: Returns the smallest of the two parameters. minimum(expr, expr) Returns the largest of the two parameters. maximum(expr,expr) isempty(r) Returns True if the region is empty, otherwise False. isdefinedsymbol (expr-symbol Returns True if the expression symbol is defined, otherwise False. ) Returns the lowest address in the region. start(r) end(r)Returns the highest address in the region. Returns the size of the complete region. size(r) where *expr* is an expression, and *r* is a region expression, see *Region expression*, page 483. Description In the linker configuration file, an expression is a 65-bit value with the range -2^64 to 2^64. The expression syntax closely follows C syntax with some minor exceptions. There are no assignments, casts, pre- or post-operations, and no address operations (\*, &, [], ->, and .). Some operations that extract a value from a region expression, etc, use a syntax resembling that of a function call. A boolean expression returns 0 (False) or 1 (True).

where symbol is a defined symbol, see define symbol directive, page 505 and

#### numbers

Syntax	nr [nr-suffix]
	where nr is either a decimal number or a hexadecimal number $(0x or 0x)$ .
	and where <i>nr-suffix</i> is one of:
	K /* Kilo = (1 << 10) 1024 */
	M /* Mega = (1 << 20) 1048576 */
	G /* Giga = (1 << 30) 1073741824 */
	T /* Tera = (1 << 40) 1099511627776 */
	P /* Peta = (1 << 50) 1125899906842624 */
Description	A number can be expressed either by normal C means or by suffixing it with a set of useful suffixes, which provides a compact way of specifying numbers.

Example

1024 is the same as 0x400, which is the same as 1K.

### Structural configuration

The structural directives provide means for creating structure within the configuration, such as:

Conditional inclusion

An if directive includes or excludes other directives depending on a condition, which makes it possible to have directives for several different memory configurations in the same file. See *if directive*, page 508.

• Dividing the linker configuration file into several different files

The include directive makes it possible to divide the configuration file into several logically distinct files. See *include directive*, page 509.

• Signaling an error for unsupported cases

This section gives detailed information about each linker directive specific to structural configuration.

### error directive

Syntax	error <i>string</i>	
Parameters	string	The error message.
Description	An error directive can part of a conditional dir	be used for signaling an error if the directive occurs in the active rective.
Example	error "Unsupported	d configuration"

#### if directive

Syntax

if (expr) {
 directives
[ } else if (expr) {
 directives ]
[ } else {
 directives ]
}

	where <i>expr</i> is an expression, see <i>expressions</i> , page 506.	
Parameters	directives	Any ILINK directive.
Description	makes it possible to have	s or excludes other directives depending on a condition, which re directives for several different memory configurations, for and non-banked memory configuration, in the same file.
	processed regardless of the directives in the par	if part, else if part, or an else part are syntax checked and whether the conditional expression was true or false, but only t where the conditional expression was true, or the else part if were true, will have any effect outside the if directive. The if
Example	See Empty region, page	484.
include directive		
Syntax	include " <i>filename</i> "	;
Parameters	filename	A path where both / and \ can be used as the directory delimiter.
Description	logically distinct parts, e	makes it possible to divide the configuration file into several each in a separate file. For instance, there might be parts that you d parts that you seldom edit.
	-	rches for configuration include files in the system configuration theconfig_search linker option to add more directories to

See also --config\_search, page 312

Structural configuration

# **Section reference**

- Summary of sections
- Descriptions of sections and blocks

For more information about sections, see the chapter *Modules and sections*, page 88.

### Summary of sections

This table lists the ELF sections and blocks that are used by the IAR build tools:

Section	Description
.bss	Holds zero-initialized static and global variables.
CSTACK	Holds the stack used by C or C++ programs.
.data	Holds static and global initialized variables.
.data_init	Holds initial values for . data sections when the linker directive initialize is used.
.exc.text	Holds exception-related code.
HEAP	Holds the heap used for dynamically allocated data.
iar_tls.\$\$DATA	Holds initial values for TLS variables.
.iar.dynexit	Holds the atexit table.
.init_array	Holds a table of dynamic initialization functions.
.intvec	Holds the reset vector table
IRQ_STACK	Holds the stack for interrupt requests, IRQ, and exceptions.
.noinit	Holdsno_init static and global variables.
.preinit_array	Holds a table of dynamic initialization functions.
.prepreinit_array	Holds a table of dynamic initialization functions.
.rodata	Holds constant data.
.text	Holds the program code.
.textrw	Holdsramfunc declared program code.
.textrw_init	Holds initializers for the . ${\tt textrw}$ declared section.
Veneer\$\$CMSE	Holds secure gateway veneers.

Table 35: Section summary

In addition to the ELF sections used for your application, the tools use a number of other ELF sections for a variety of purposes:

- Sections starting with .debug generally contain debug information in the DWARF format
- Sections starting with .iar.debug contain supplemental debug information in an IAR format
- The section .comment contains the tools and command lines used for building the file
- Sections starting with .rel or .rela contain ELF relocation information
- The section . symtab contains the symbol table for a file
- The section .strtab contains the names of the symbol in the symbol table
- The section .shstrtab contains the names of the sections.

### **Descriptions of sections and blocks**

This section gives reference information about each section, where the:

- *Description* describes what type of content the section is holding and, where required, how the section is treated by the linker
- Memory placement describes memory placement restrictions.

For information about how to allocate sections in memory by modifying the linker configuration file, see *Placing code and data—the linker configuration file*, page 91.

#### .bss

Description	Holds zero-initialized static and global variables.
Memory placement	This section can be placed anywhere in memory.

### CSTACK

Description	Block that holds the internal data stack.
Memory placement	This block can be placed anywhere in memory.
See also	Setting up stack memory, page 109.

### .data

Description	Holds static and global initialized variables. In object files, this includes the initial values. When the linker directive initialize is used, a corresponding .data_init section is created for each .data section, holding the possibly compressed initial values.
Memory placement	This section can be placed anywhere in memory.
.data_init	
Description	Holds the possibly compressed initial values for .data sections. This section is created by the linker if the initialize linker directive is used.
Memory placement	This section can be placed anywhere in memory.

### .exc.text

Description	Holds code that is only executed when your application handles an exception.
Memory placement	In the same memory as .text.
See also	Exception handling, page 192.

### HEAP

Description	Holds the heap used for dynamically allocated data in memory, in other words data allocated by malloc and free, and in C++, new and delete.
Memory placement	This section can be placed anywhere in memory.
See also	Setting up heap memory, page 110.

### \_\_iar\_tls.\$\$DATA

Description	Holds initial values for TLS variables. This section is created by the linker if the linker optionthreaded_lib is used.
Memory placement	This section can be placed anywhere in memory.

	See also	Managing a multithreaded environment, page 156
.iar.	dynexit	
	Description	Holds the table of calls to be made at exit.
	Memory placement	This section can be placed anywhere in memory.
	See also	Setting up the atexit limit, page 110.
.init	_array	
	Description	Holds pointers to routines to call for initializing one or more C++ objects with static storage duration.
	Memory placement	This section can be placed anywhere in memory.
.intv	/ec	
	Description	Holds the reset vector table and exception vectors which contain branch instructions to cstartup, interrupt service routines etc.
	Memory placement	This section must be placed at address range 0x00 to 0x3F.
IRQ_STACK		
	Description	Holds the stack which is used when servicing IRQ exceptions. Other stacks may be added as needed for servicing other exception types: FIQ, SVC, ABT, and UND. The cstartup.s file must be modified to initialize the exception stack pointers used.
		Note: This section is not used when compiling for Cortex-M.
	Memory placement	This section can be placed anywhere in memory.
	See also	Exception stack, page 202

### .noinit

Description	Holds static and globalno_init variables.
Memory placement	This section can be placed anywhere in memory.

### .preinit\_array

Description	Like .init_array, but is used by the library to make some C++ initializations happen before the others.
Memory placement	This section can be placed anywhere in memory.
See also	. <i>init_array</i> , page 514.

### .prepreinit\_array

Description	Like .init_array, but is used when C static initialization is rewritten as dynamic initialization. Performed before all C++ dynamic initialization.
Memory placement	This section can be placed anywhere in memory.
See also	.init_array, page 514.

### .rodata

Description	Holds constant data. This can include constant variables, string and aggregate literals,
	etc.

Memory placement	This section can be placed anywhere in memory.

### .text

Description	Holds program code, including the code for system initialization.
Memory placement	This section can be placed anywhere in memory.

#### .textrw

Description	Holdsramfunc declared program code.
Memory placement	This section can be placed anywhere in memory.
See also	<i>ramfunc</i> , page 370.

### .textrw\_init

Description	Holds initializers for the .textrw declared sections.
Memory placement	This section can be placed anywhere in memory.
See also	<i>ramfunc</i> , page 370.

### Veneer\$\$CMSE

Description	This section contains secure gateway veneers created automatically by the linker for each entry function, as determined by the extended keywordcmse_nonsecure_entry.
Memory placement	This section should be placed in an NSC (non-secure callable) memory region. NSC regions can be programmed using an SAU (security attribution unit) or an IDAU (implementation-defined attribute unit). For information about how to program the SAU or IDAU, see the documentation for your Armv8-M core.
See also	Arm TrustZone <sup>®</sup> , page 218,cmse, page 265,cmse_nonsecure_entry, page 365, andimport_cmse_lib_out, page 323

## The stack usage control file

- Overview
- Stack usage control directives
- Syntactic components

Before you read this chapter, see Stack usage analysis, page 96.

### **Overview**

A stack usage control file consists of a sequence of directives that control stack usage analysis. You can use C ("/\*...\*/") and C++ ("//...") comments in these files.

The default filename extension for stack usage control files is suc.

#### C++ NAMES

When you specify the name of a C++ function in a stack usage control file, you must use the name exactly as used by the linker. Both the number and names of parameters, as well as the names of types must match. However, most non-significant white-space differences are accepted. In particular, you must enclose the name in quote marks because all C++ function names include non-identifier characters.

You can also use wildcards in function names. "#\*" matches any sequence of characters, and "#?" matches a single character. This makes it possible to write function names that will match any instantiation of a template function.

Examples:

```
"operator new(unsigned int)"
"std::ostream::flush()"
"operator <<(std::ostream &, char const *)"
"void _Sort<#*>(#*, #*, #*)"
```

### Stack usage control directives

This section gives detailed reference information about each stack usage control directive.

### call graph root directive

Syntax	<pre>call graph root [ category ] : func-spec [, func-spec ];</pre>	
Parameters	category func-spec	See <i>category</i> , page 521 See <i>func-spec</i> , page 521
Description	Specifies that the listed functions are call graph roots. You can optionally specify a call graph root category. Call graph roots are listed under their category in the <i>Stack Usage</i> chapter in the linker map file.	
	The linker will normally issue a not call graph roots and which	warning for functions needed in the application that are do not appear to be called.
Example	<pre>call graph root [task]:</pre>	MyFunc10, MyFunc11;
See also	<i>call_graph_root</i> , page 382.	

### exclude directive

Syntax	<pre>exclude func-spec [, func-spec];</pre>	
Parameters	func-spec	See <i>func-spec</i> , page 521
Description	Excludes the specified function calculations.	ns, and call trees originating with them, from stack usage
Example	exclude MyFunc5, MyFunc	6;
function directive		

Syntax	[ override ] functi [ , call-info ];	on [ category ] func-spec : stack-size
Parameters		
	category	See <i>category</i> , page 521
	func-spec	See <i>func-spec</i> , page 521
	call-info	See call-info, page 522

	stack-size	See stack-size, page 522
Description	Specifies what the maximum sta are called from that function.	ack usage is in a function and which other functions that
	but if you start with override	here already is stack usage information for the function, the error will be suppressed and the information used instead of the previous information.
Example	<pre>function MyFunc1: 32, calls MyFunc2, calls MyFunc3, MyFunc4</pre>	4: 16;
	function [interrupt] My	InterruptHandler: 44;

### max recursion depth directive

Syntax	max recursion depth func-spec : size;	
Parameters	func-spec size	See <i>func-spec</i> , page 521 See <i>size</i> , page 523
Description	Specifies the maximum number of iterations through any of the cycles in the recursion nest of which the function is a member. A recursion nest is a set of cycles in the call graph where each cycle shares at least one node with another cycle in the nest.	
	stack usage of the deepest cycl	its result on the max recursion depth multiplied by the e in the nest. If the nest is not entered on a point along ack usage result will be calculated for such calls.
Example	max recursion depth $MyF$	unc12: 10;

### no calls from directive

Syntax	no calls from <i>module-spe</i>	ec to func-spec [, func-spec];
Parameters	func-spec	See <i>func-spec</i> , page 521

	module-spec	See module-spec, page 521
stack usage information, the linker warns al module but not listed as called. This is prima		information for some functions in a module without iker warns about functions that are referenced from the This is primarily to help avoid problems with C runtime erated by the compiler, beyond user control.
	to selectively suppress the warn warning entirely (diag_sup	ne of these functions, use the no calls from directive ning for the specified functions. You can also disable the press or <b>ignostics&gt;Suppress these diagnostics</b> ).
Example	no calls from [file.o]	to MyFunc13, MyFun14;

### possible calls directive

Syntax	possible calls calling-func : called-func [ , called-func];	
Parameters	calling-func called-func	See <i>func-spec</i> , page 521 See <i>func-spec</i> , page 521
Description	Use this for functions which are exactly which functions that m	ossible destinations for all indirect calls in one function. e known to perform indirect calls and where you know ight be called in this particular application. Consider ctive if the information about which functions that might apiling.
Example	possible calls MyFunc7: When the function does not per possible calls MyFunc8:	form any calls, the list is empty:
See also	calls, page 381.	

## Syntactic components

This section describes the syntactical components that can be used by the stack usage control directives.

### category

	Syntax	[ name ]
	Description	A call graph root category. You can use any name you like. Categories are not case-sensitive.
	Example	category examples:
		[interrupt] [task]
func	с-ѕрес	
	Syntax	[ ? ] name [ module-spec ]
	Description	Specifies the name of a symbol, and for module-local symbols, the name of the module it is defined in. Normally, if <i>func-spec</i> does not match a symbol in the program, a warning is emitted. Prefixing with ? suppresses this warning.
	Example	func-spec examples:
		xFun MyFun [file.o] ?"fun1(int)"
mod	lule-spec	
	Syntax	[name [ (name) ]]
	Description	Specifies the name of a module, and optionally, in parentheses, the name of the library it belongs to. To distinguish between modules with the same name, you can specify:
		• The complete path of the file ("D:\C1\test\file.o")
		• As many path elements as are needed at the end of the path ("test\file.o")
		• Some path elements at the start of the path, followed by "", followed by some path elements at the end ("D:\\file.o").
		Note that when using multi-file compilation (mfc), multiple files are compiled into a

Note that when using multi-file compilation (--mfc), multiple files are compiled into a single module, named after the first file.

Example	module-spec examples:	
	[file.o] [file.o(lib.a)] ["D:\C1\test\file.o"]	

#### name

Description	A name can be either an identifier or a quoted string.
	The first character of an identifier must be either a letter or one of the characters "_", "\$", or ".". The rest of the characters can also be digits.
	A quoted string starts and ends with " and can contain any character. Two consecutive " characters can be used inside a quoted string to represent a single ".
Example	name examples:
	MyFun file.o "file-1.o"

### call-info

Syntax	<pre>calls func-spec [ , func-spec ][ : stack-size ]</pre>
Description	Specifies one or more called functions, and optionally, the stack size at the calls.
Example	call-info examples:
	calls MyFunc1 : stack 16 calls MyFunc2, MyFunc3, MyFunc4

### stack-size

Syntax	[ stack ] <i>size</i> ([ stack ] size)
Description	Specifies the size of a stack frame. A stack may not be specified more than once.
Example	stack-size examples:
	24 stack 28

### size

Description	A decimal integer, or $0 \times$ followed by a hexadecimal integer. Either alternative can optionally be followed by a suffix indicating a power of two (K=2 <sup>10</sup> , M=2 <sup>20</sup> , G=2 <sup>30</sup> , T=2 <sup>40</sup> , P=2 <sup>50</sup> ).
Example	size examples:
	24
	0x18
	2048
	2К

Syntactic components

# **IAR** utilities

- The IAR Archive Tool—iarchive—creates and manipulates a library (an archive) of several ELF object files
- The IAR ELF Tool—ielftool—performs various transformations on an ELF executable image (such as fill, checksum, format conversions, etc)
- The IAR ELF Dumper—ielfdump—creates a text representation of the contents of an ELF relocatable or executable image
- The IAR ELF Object Tool—iobjmanip—is used for performing low-level manipulation of ELF object files
- The IAR Absolute Symbol Exporter—isymexport—exports absolute symbols from a ROM image file, so that they can be used when you link an add-on application.
- The IAR ELF Relocatable Object Creator—iexe2obj—creates a relocatable ELF object file from an executable ELF object file.
- Descriptions of options—detailed reference information about each command line option available for the different utilities.

### The IAR Archive Tool—iarchive

The IAR Archive Tool, iarchive, can create a library (an archive) file from several ELF object files. You can also use iarchive to manipulate ELF libraries.

A library file contains several relocatable ELF object modules, each of which can be independently used by a linker. In contrast with object modules specified directly to the linker, each module in a library is only included if it is needed.

For information about how to build a library in the IDE, see the *IDE Project* Management and Building Guide for Arm.

#### **INVOCATION SYNTAX**

The invocation syntax for the archive builder is:

iarchive parameters

#### **Parameters**

The parameters are:

Parameter	Description
command	Command line options that define an operation to be performed. Such an option must be specified before the name of the library file.
libraryfile	The library file to be operated on.
objectfile1 objectfileN	The object file(s) that the specified command operates on.
options	Command line options that define actions to be performed. These options can be placed anywhere on the command line.

Table 36: iarchive parameters

#### Examples

This example creates a library file called mylibrary. a from the source object files module1.o, module2.o, and module3.o:

iarchive mylibrary.a module1.o module2.o module3.o.

This example lists the contents of mylibrary.a:

iarchive --toc mylibrary.a

This example replaces module3.o in the library with the content in the module3.o file and appends module4.o to mylibrary.a:

iarchive --replace mylibrary.a module3.o module4.o

#### SUMMARY OF IARCHIVE COMMANDS

This table summarizes the iarchive commands:

Command line option	Description
create	Creates a library that contains the listed object files.
delete, -d	Deletes the listed object files from the library.
extract, -x	Extracts the listed object files from the library.
replace, -r	Replaces or appends the listed object files to the library.

Table 37: iarchive commands summary

Command line option	Description
symbols	Lists all symbols defined by files in the library.
toc, -t	Lists all files in the library.

Table 37: iarchive commands summary (Continued)

For more information, see Descriptions of options, page 543.

#### SUMMARY OF IARCHIVE OPTIONS

This table summarizes the iarchive options:

Command line option	Description
-f	Extends the command line.
no_bom	Omits the byte order mark from UTF-8 output files.
output, -o	Specifies the library file.
text_out	Specifies the encoding for text output files.
utf8_text_in	Uses the UTF-8 encoding for text input files.
verbose, -V	Reports all performed operations.
version	Sends tool output to the console and then exits.

Table 38: iarchive options summary

For more information, see Descriptions of options, page 543.

#### **DIAGNOSTIC MESSAGES**

This section lists the messages produced by iarchive:

#### La001: could not open file filename

iarchive failed to open an object file.

#### La002: illegal path pathname

The path *pathname* is not a valid path.

#### La006: too many parameters to cmd command

A list of object modules was specified as parameters to a command that only accepts a single library file.

#### La007: too few parameters to cmd command

A command that takes a list of object modules was issued without the expected modules.

#### La008: lib is not a library file

The library file did not pass a basic syntax check. Most likely the file is not the intended library file.

#### La009: lib has no symbol table

The library file does not contain the expected symbol information. The reason might be that the file is not the intended library file, or that it does not contain any ELF object modules.

#### La010: no library parameter given

The tool could not identify which library file to operate on. The reason might be that a library file has not been specified.

#### La011: file file already exists

The file could not be created because a file with the same name already exists.

#### La013: file confusions, lib given as both library and object

The library file was also mentioned in the list of object modules.

#### La014: module module not present in archive lib

The specified object module could not be found in the archive.

#### La015: internal error

The invocation triggered an unexpected error in iarchive.

#### Ms003: could not open file filename for writing

iarchive failed to open the archive file for writing. Make sure that it is not write protected.

#### Ms004: problem writing to file filename

An error occurred while writing to file *filename*. A possible reason for this is that the volume is full.

#### Ms005: problem closing file filename

An error occurred while closing the file filename.

### The IAR ELF Tool—ielftool

The IAR ELF Tool, ielftool, can generate a checksum on specific ranges of memories. This checksum can be compared with a checksum calculated on your application.

The source code for ielftool and a Microsoft VisualStudio template project are available in the arm\src\elfutils directory. If you have specific requirements for how the checksum should be generated or requirements for format conversion, you can modify the source code accordingly.

#### INVOCATION SYNTAX

The invocation syntax for the IAR ELF Tool is:

ielftool [options] inputfile outputfile [options]

The ielftool tool will first process all the fill options, then it will process all the checksum options (from left to right).

#### **Parameters**

The parameters are:

Parameter	Description
inputfile	An absolute ELF executable image produced by the ILINK linker.
options	Any of the available command line options, see Summary of ielftool options, page 530.
outputfile	An absolute ELF executable image.
Table 20. islues languages	4 oug

Table 39: ielftool parameters

See also Rules for specifying a filename or directory as parameters, page 256.

#### Example

This example fills a memory range with 0xFF and then calculates a checksum on the same range:

#### SUMMARY OF IELFTOOL OPTIONS

This table summarizes the ielftool command line options:

Command line option	Description
bin	Sets the format of the output file to raw binary.
checksum	Generates a checksum.
fill	Specifies fill requirements.
front_headers	Outputs headers in the beginning of the file.
ihex	Sets the format of the output file to 32-bit linear Intel Extended hex.
offset	Adds (or subtracts) an offset to all addresses in the generated output file.
parity	Generates parity bits.
self_reloc	Not for general use.
silent	Sets silent operation.
simple	Sets the format of the output file to Simple-code.
simple-ne	Assimple, but without an entry record.
srec	Sets the format of the output file to Motorola S-records.
srec-len	Restricts the number of data bytes in each S-record.
srec-s3only	Restricts the S-record output to contain only a subset of records.
strip	Removes debug information.
titxt	Sets the format of the output file to Texas Instruments TI-TXT.
verbose, -V	Prints all performed operations.
version	Sends tool output to the console and then exits.

Table 40: ielftool options summary

For more information, see Descriptions of options, page 543.

### The IAR ELF Dumper—ielfdump

The IAR ELF Dumper for Arm, ielfdumparm, can be used for creating a text representation of the contents of a relocatable or absolute ELF file.

ielfdumparm can be used in one of three ways:

• To produce a listing of the general properties of the input file and the ELF segments and ELF sections it contains. This is the default behavior when no command line options are used.

- To also include a textual representation of the contents of each ELF section in the input file. To specify this behavior, use the command line option --all.
- To produce a textual representation of selected ELF sections from the input file. To specify this behavior, use the command line option --section.

#### INVOCATION SYNTAX

The invocation syntax for ielfdumparm is:

ielfdumparm input\_file [output\_file]

**Note:** ielfdumparm is a command line tool which is not primarily intended to be used in the IDE.

#### **Parameters**

The parameters are:

Parameter	Description
input_file	An ELF relocatable or executable file to use as input.
output_file	A file or directory where the output is emitted. If absent and nooutput option is specified, output is directed to the console.

Table 41: ielfdumparm parameters

See also Rules for specifying a filename or directory as parameters, page 256.

#### SUMMARY OF IELFDUMP OPTIONS

This table summarizes the ielfdumparm command line options:

Command line option	Description
a	Generates output for all sections except string table sections.
all	Generates output for all input sections regardless of their names or numbers.
code	Dumps all sections that contain executable code.
disasm_data	Dumps data sections as code sections.
-f	Extends the command line.
output, -o	Specifies an output file.
no_bom	Omits the Byte Order Mark from UTF-8 output files.
no_header	Suppresses production of a list header in the output.
no_rel_section	Suppresses dumping of .rel/.rela sections.
no_strtab	Suppresses dumping of string table sections.

Table 42: ielfdumparm options summary

Command line option	Description
no_utf8_in	Do not assume UTF-8 for non-IAR ELF files.
range	Disassembles only addresses in the specified range.
raw	Uses the generic hexadecimal/ASCII output format for the contents of any selected section, instead of any dedicated output format for that section.
section, -s	Generates output for selected input sections.
segment, -g	Generates output for segments with specified numbers.
source	Includes source with disassembled code in executable files.
text_out	Specifies the encoding for text output files.
use_full_std_t emplate_names	Uses full short full names for some Standard C++ templates.
utf8_text_in	Uses the UTF-8 encoding for text input files.
version	Sends tool output to the console and then exits.

Table 42: ielfdumparm options summary (Continued)

For more information, see Descriptions of options, page 543.

### The IAR ELF Object Tool—iobjmanip

Use the IAR ELF Object Tool, iobjmanip, to perform low-level manipulation of ELF object files.

#### INVOCATION SYNTAX

The invocation syntax for the IAR ELF Object Tool is:

iobjmanip options inputfile outputfile

#### **Parameters**

The parameters are:

Parameter	Description
options	Command line options that define actions to be performed. These
	options can be placed anywhere on the command line. At least one of
	the options must be specified.
inputfile	A relocatable ELF object file.
outputfile	A relocatable ELF object file with all the requested operations applied.

Table 43: iobjmanip parameters

See also Rules for specifying a filename or directory as parameters, page 256.

#### Examples

This example renames the section .example in input.o to .example2 and stores the result in output.o:

iobjmanip --rename\_section .example=.example2 input.o output.o

#### SUMMARY OF IOBJMANIP OPTIONS

This table summarizes the iobjmanip options:

Command line option	Description		
-f	Extends the command line.		
no_bom	Omits the Byte Order Mark from UTF-8 output files.		
remove_file_path	Removes path information from the file symbol.		
remove_section	Removes one or more section.		
rename_section	Renames a section.		
rename_symbol	Renames a symbol.		
silent	Sets silent operation.		
strip	Removes debug information.		
text_out	Specifies the encoding for text output files.		
utf8_text_in	Uses the UTF-8 encoding for text input files.		
version	Sends tool output to the console and then exits.		

Table 44: iobjmanip options summary

For more information, see Descriptions of options, page 543.

#### **DIAGNOSTIC MESSAGES**

This section lists the messages produced by iobjmanip:

#### Lm001: No operation given

None of the command line parameters specified an operation to perform.

#### Lm002: Expected nr parameters but got nr

Too few or too many parameters. Check invocation syntax for iobjmanip and for the used command line options.

#### Lm003: Invalid section/symbol renaming pattern pattern

The pattern does not define a valid renaming operation.

#### Lm004: Could not open file filename

iobjmanip failed to open the input file.

#### Lm005: ELF format error msg

The input file is not a valid ELF object file.

#### Lm006: Unsupported section type nr

The object file contains a section that iobjmanip cannot handle. This section will be ignored when generating the output file.

#### Lm007: Unknown section type nr

iobjmanip encountered an unrecognized section. iobjmanip will try to copy the content as is.

#### Lm008: Symbol symbol has unsupported format

iobjmanip encountered a symbol that cannot be handled. iobjmanip will ignore this symbol when generating the output file.

#### Lm009: Group type nr not supported

iobjmanip only supports groups of type GRP\_COMDAT. If any other group type is encountered, the result is undefined.

#### Lm010: Unsupported ELF feature in file: msg

The input file uses a feature that iobjmanip does not support.

#### Lm011: Unsupported ELF file type

The input file is not a relocatable object file.

#### Lm012: Ambiguous rename for section/symbol name (alt1 and alt2)

An ambiguity was detected while renaming a section or symbol. One of the alternatives will be used.

## Lm013: Section *name* removed due to transitive dependency on *name*

A section was removed as it depends on an explicitly removed section.

#### Lm014: File has no section with index nr

A section index, used as a parameter to --remove\_section or --rename\_section, did not refer to a section in the input file.

#### Ms003: could not open file filename for writing

iobjmanip failed to open the output file for writing. Make sure that it is not write protected.

#### Ms004: problem writing to file filename

An error occurred while writing to file *filename*. A possible reason for this is that the volume is full.

#### Ms005: problem closing file filename

An error occurred while closing the file filename.

### The IAR Absolute Symbol Exporter—isymexport

The IAR Absolute Symbol Exporter, isymexport, can export absolute symbols from a ROM image file, so that they can be used when you link an add-on application.

To keep symbols from your symbols file in your final application, the symbols must be referred to, either from your source code or by using the linker option --keep.

#### INVOCATION SYNTAX

The invocation syntax for the IAR Absolute Symbol Exporter is:

isymexport [options] inputfile outputfile [options]

#### **Parameters**

The parameters are:

Parameter	Description
inputfile	A ROM image in the form of an executable ELF file (output from linking).
options	Any of the available command line options, see Summary of isymexport options, page 537.
outputfile	A relocatable ELF file that can be used as input to linking, and which contains all or a selection of the absolute symbols in the input file. The output file contains only the symbols, not the actual code or data sections. A steering file can be used to control which symbols that are included, and also to rename some of the symbols if that is desired.

Table 45: isymexport parameters

See also Rules for specifying a filename or directory as parameters, page 256.



In the IDE, to add the export of library symbols, choose **Project>Options>Build Actions** and specify your command line in the **Post-build command line** text field, for example like this:

\$TOOLKIT\_DIR\$\bin\isymexport.exe "\$TARGET\_PATH\$"
"\$PROJ\_DIR\$\const\_lib.symbols"

#### SUMMARY OF ISYMEXPORT OPTIONS

This table summarizes the isymexport command line options:

Command line option	Description
edit	Specifies a steering file.
-f	Extends the command line.
generate_vfe_header	Declares that the image does not contain any virtual function calls to potentially discarded functions.
no_bom	Omits the Byte Order Mark from UTF-8 output files.
ram_reserve_ranges	Generates symbols for the areas in RAM that the image uses.
reserve_ranges	Generates symbols to reserve the areas in ROM and RAM that the image uses.
show_entry_as	Exports the entry point of the application with the given name.
text_out	Specifies the encoding for text output files.
utf8_text_in	Uses the UTF-8 encoding for text input files.
version	Sends tool output to the console and then exits.

Table 46: isymexport options summary

For more information, see Descriptions of options, page 543.

#### **STEERING FILES**

A steering file can be used for controlling which symbols that are included, and also to rename some of the symbols if that is desired. In the file, you can use show and hide directives to select which public symbols from the input file that are to be included in the output file. rename directives can be used for changing the names of symbols in the input file.

When you use a steering file, only actively exported symbols will be available in the output file. Thus, a steering file without show directives will generate an output file without symbols.

#### Syntax

The following syntax rules apply:

- Each directive is specified on a separate line.
- C comments (/\*...\*/) and C++ comments (//...) can be used.
- Patterns can contain wildcard characters that match more than one possible character in a symbol name.

- The \* character matches any sequence of zero or more characters in a symbol name.
- The ? character matches any single character in a symbol name.

#### Example

```
rename xxx_* as YYY_* /*Change symbol prefix from xxx_ to YYY_ */
show YYY_* /* Export all symbols from YYY package */
hide *_internal /* But do not export internal symbols */
show zzz? /* Export zzza, but not zzzaaa */
hide zzzx /* But do not export zzzx */
```

### Show directive

Syntax	show pattern		
Parameters	pattern	A pattern to match against a symbol name.	
Description	A symbol with a name that matches the pattern will be included in the output file unless this is overridden by a later hide directive.		
Example	/* Include all public symbols ending in _pub. */ show *_pub		

#### Show-weak directive

Syntax	show-weak pattern	
Parameters	pattern A pattern to match against a symbol name.	
Description	A symbol with a name that matches the pattern will be included in the output file as a weak symbol unless this is overridden by a later hide directive.	
	When linking, no error will be reported if the new code contains a definition for a symbol with the same name as the exported symbol. Note that any internal references in the isymexport input file are already resolved and cannot be affected by the presence of definitions in the new code.	
Example	/* Export myFunc as a weak definition */ show-weak myFunc	

### Hide directive

Syntax	hide pattern	
Parameters	pattern	A pattern to match against a symbol name.
Description	A symbol with a name that matches the pattern will not be included in the output file unless this is overridden by a later show directive.	
Example	/* Do not inclu hide *_sys	de public symbols ending in _sys. */

### **Rename directive**

Syntax	rename pattern1 as pattern2	
Parameters	pattern1	A pattern used for finding symbols to be renamed. The pattern can contain no more than one * or ? wildcard character.
	pattern2	A pattern used for the new name for a symbol. If the pattern contains a wildcard character, it must be of the same kind as in <i>pattern1</i> .
Description	Use this directive to rename symbols from the output file to the input file. No exp symbol is allowed to match more than one rename pattern.	
	rename directives can be placed anywhere in the steering file, but they are executed before any show and hide directives. Thus, if a symbol will be renamed, all show and hide directives in the steering file must refer to the new name.	
	If the name of a symbol matches a <i>pattern1</i> pattern that contains no wildcard characters, the symbol will be renamed <i>pattern2</i> in the output file.	
• –		bol matches a <i>pattern1</i> pattern that contains a wildcard character, enamed <i>pattern2</i> in the output file, with part of the name matching ter preserved.
Example	_	ll be renamed Y_start_X in the output file, l be renamed Y_stop_X in the output file. */ ; Y_*_X

#### **DIAGNOSTIC MESSAGES**

This section lists the messages produced by isymexport:

#### Es001: could not open file filename

isymexport failed to open the specified file.

#### Es002: illegal path pathname

The path *pathname* is not a valid path.

#### Es003: format error: message

A problem occurred while reading the input file.

#### Es004: no input file

No input file was specified.

#### Es005: no output file

An input file, but no output file was specified.

#### Es006: too many input files

More than two files were specified.

#### Es007: input file is not an ELF executable

The input file is not an ELF executable file.

#### Es008: unknown directive: directive

The specified directive in the steering file is not recognized.

#### Es009: unexpected end of file

The steering file ended when more input was required.

#### Es010: unexpected end of line

A line in the steering file ended before the directive was complete.

#### Es011: unexpected text after end of directive

There is more text on the same line after the end of a steering file directive.

#### Es012: expected text

The specified text was not present in the steering file, but must be present for the directive to be correct.

#### Es013: pattern can contain at most one \* or ?

Each pattern in the current directive can contain at most one \* or one ? wildcard character.

#### Es014: rename patterns have different wildcards

Both patterns in the current directive must contain exactly the same kind of wildcard. That is, both must either contain:

- No wildcards
- Exactly one \*
- Exactly one ?

This error occurs if the patterns are not the same in this regard.

# Es015: ambiguous pattern match: *symbol* matches more than one rename pattern

A symbol in the input file matches more than one rename pattern.

#### Es016: the entry point symbol is already exported

The option --show\_entry\_as was used with a name that already exists in the input file.

# The IAR ELF Relocatable Object Creator—iexe2obj

The IAR ELF Relocatable Object Creator, iexe2obj, creates a relocatable ELF object file from an executable ELF object file.

#### INVOCATION SYNTAX

The invocation syntax for iexe2obj is:

iexe2obj options inputfile outputfile

#### **Parameters**

The parameters are:

Parameter	Description	
options	Command line options that define actions to be performed. These options can be placed anywhere on the command line. At least one option must be specified. See <i>Summary of iexe2obj options</i> , page 543	
inputfile	An executable ELF object file.	
outputfile	The name of the resulting relocatable ELF object file with all the requested operations applied.	

Table 47: iexe2obj parameters

See also Rules for specifying a filename or directory as parameters, page 256.

#### **BUILDING THE INPUT FILE**

The input file must be linked with the linker option --no\_entry, using object files compiled with --rwpi, --ropi, and --ropi\_cb. See also --*ropi\_cb*, page 296.

A function symbol FUNC, that should have a wrapper, must be preserved by the linker when it builds the input file. You can achieve this either by using the keyword \_\_root in the declaration of FUNC or by using the linker command line option --keep FUNC.

#### Code and constant data

The input file can contain at most one *non-writable*, *executable* section that will be placed in the output file. To enable placing the executable section in execute-only memory, you must use the option --no\_literal\_pool both when compiling and when linking.

The input file can contain at most one *non-writable*, *non-executable* section that will be placed in the output file. The start address of the section will be used as a constants base address, CB.

#### Writable data

The input file can contain at most one *writable*, *non-executable* section that will be placed in the output file. The start address of the section will be used as a static base address, SB.

The writable data section might need dynamic initialization, in which case iexe2obj will create a function (\_\_sti\_routine) that is called during dynamic initialization of the client application. For this to work, a label \_\_init is needed (as defined in the

library rt7MQx\_t1), and the linker configuration file used for creating your input file must contain:

```
define block INIT with alignment=4, fixed order {
   section .init_start,
   section .init_a,
   section .init_b,
   section .init_end.
};
```

The linker might issue a warning (Lp005) for mixing sections with content and sections without content. If that warning concerns sections .data and .bss, it can be ignored.

#### SUMMARY OF IEXE2OBJ OPTIONS

Command line option	Description	
hide_symbols	Hides all symbols from the input file	
keep_mode_symbols	Copies mode symbols from the input file to the output file	
prefix	Sets a prefix for symbol and section names	
wrap	Generates wrapper functions for function symbols in <i>inputfile</i> that should be callable by clients of <i>outputfile</i> .	

Table 48: iexe2obj options summary

# **Descriptions of options**

This section gives detailed reference information about each command line option available for the different utilities.

Syntax		a	
For use with		ielfdumparm	
Description		Use this option as a shortcut forallno_strtab.	
	ĪĒ	This option is not available in the IDE.	

# --all

Syntax		all
For use with		ielfdumparm
·		Use this option to include the contents of all ELF sections in the output, in addition to the general properties of the input file. Sections are output in index order, except that each relocation section is output immediately after the section it holds relocations for.
By default, no section contents are included in the output.		By default, no section contents are included in the output.
	ĪĒ	This option is not available in the IDE.

# --bin

Syntax	bin[=range]	
Parameters	range	The address range content to include in the output file. The address range can be specified using literals, or by using symbols present in the ELF file. Examples: "0x8000-0x8FFF", "START-END"
For use with	ielftool	
Description	Sets the format of the output file to raw binary, a binary format that includes only the raw bytes, with no address information. If no range is specified, the output file will include all the bytes from the lowest address for which there is content in the ELF file to the highest address for which there is content. If a range is specified, only bytes from that range are included. Note that in both cases, any gaps for which there is no content will be generated as zeros.	
	To set related options, choose:	
	Project>Ontions>Output converter	



# --bin-multi

Syntax	bin-multi[=range[;range]]	
Parameters	range	An address range to produce an output file for. An address range can be specified using literals, or by using symbols present in the ELF file. Examples: "0x8000-0x8FFF", "START-END"
For use with	ielftool	
Description	Use this option to produce one or more raw binary output files. If no ranges are specified, a raw binary output file is generated for each range for which there is content in the ELF file. If ranges are specified, a raw binary output file is generated for each range specified. In each case, the name of each output file will include the start address of its range. For example, if the output file is specified as out.bin and the ranges $0 \times 0 - 0 \times 1F$ and $0 \times 8000 - 0 \times 8147$ are output, there will be two files, named $out - 0 \times 0$ .bin and $out - 0 \times 8000$ .bin. This option is not available in the IDE.	

# --checksum

Syntax	[o][i p]]	$symbol[+offset]   address \}: size, algorithm[:[1 2][a m z][L W][r]$	
Parameters	symbol	The name of the symbol where the checksum value should be stored. Note that it must exist in the symbol table in the input ELF file.	
	offset	An offset to the symbol.	
	address	The absolute address where the checksum value should be stored.	
	size	The number of bytes in the checksum: 1, 2, or 4; must not be larger than the size of the checksum symbol.	

algorithm The checksum algorithm used, one of: • sum, a byte-wise calculated arithmetic sum. The truncated to 8 bits.		The checksum algorithm used, one of:			
		• sum, a byte-wise calculated arithmetic sum. The result is truncated to 8 bits.			
		• sum8wide, a byte-wise calculated arithmetic sum. The result is truncated to the size of the symbol.			
		• sum32, a word-wise (32 bits) calculated arithmetic sum.			
		• crc16, CRC16 (generating polynomial 0x1021); used by default.			
		• crc32, CRC32 (generating polynomial 0x04C11DB7).			
		• crc64iso, CRC64iso (generating polynomial 0x1B).			
		• crc64ecma, CRC64ECMA (generating polynomial 0x42F0E1EBA9EA3693).			
		• crc=n, CRC with a generating polynomial of n.			
	1 2	If specified, can be one of:			
		• 1 - Specifies one's complement.			
		• 2 - Specifies two's complement.			
	a m z	Reverses the order of the bits for the checksum; choose between:			
		a, reverses the input bytes (but nothing else).			
		m, reverses the input bytes and the final checksum.			
		z, reverses the final checksum (but nothing else).			
		Note that using a and $\boldsymbol{z}$ in combination has the same effect as $\boldsymbol{m}.$			
	L W	Specifies the size of the unit for which a checksum should be calculated.			
		Choose between:			
		L, calculates a checksum on 32 bits in every iteration			
		w, calculates a checksum on 16 bits in every iteration.			
		If you do not specify a unit size, 8 bits will be used by default. Using these parameters does not add any additional error detection power to the checksum.			

r	Reverses the byte order of the input data. This has no effect unless the number of bits per iteration has been set using the $L$ or $W$ parameters.
R	Traverses the checksum range(s) in reverse order.
	If the range is for example $0 \times 100 - 0 \times FFF; 0 \times 2000 - 0 \times 2FFF$ , the checksum calculation will normally start on $0 \times 100$ and then calculate every byte up to and including $0 \times FFF$ , followed by calculating the byte on $0 \times 2000$ and continue to $0 \times 2FFF$ .
	Using the R parameter, the calculation instead starts on $0x2FFF$ and continues by calculating every byte down to $0x2000$ , then from $0xFFF$ down to and including $0x100$ .
0	Outputs the Rocksoft model specification for the checksum.
i p	Use either i or p, if the <i>start</i> value is bigger than 0. If specified, can be one of:
	• i - Initializes the checksum value with the start value.
	• p - Prefixes the input data with a word of size <i>size</i> that contains the <i>start</i> value.
start	By default, the initial value of the checksum is 0. If necessary, use <i>start</i> to supply a different initial value. If not 0, then either i or p must be specified.

	range	<i>range</i> is one or more memory ranges for which the checksum will be calculated. Hexadecimal and decimal notation is allowed (for example, $0 \times 8002 - 0 \times 8FFF$ ). The memory range(s) can also be expressed as:
		• Symbols that are present in ELF file can be used in the range description (for example,checksum_beginchecksum_end).
		• One or more block names where each block is placed inside a pair of curly braces, {}, like {MY_BLOCK}. A block that is used in this manner must be specified in the linker configuration file and must contain only read-only content. See <i>define block directive</i> , page 486.
		It is typically advisable to use symbols or blocks if the memory range can change. If you use explicit addresses, for example $0 \times 8000 - 0 \times 8347$ , and the code then changes, you need to update the end address to the new value. If you instead use {CODE} or a symbol located at the end of the code, you do not need to update thechecksum command.
For use with	ielftool	
Description	ranges. If you have CRC implementation match the external d documentation.) The absolute symbol will containing the calcu	alculate a checksum with the specified algorithm for the specified an external definition for the checksum (for example, a hardware n), use the appropriate parameters to thechecksum option to lesign. (In this case, learn more about that design in the hardware e checksum will then replace the original value in <i>symbol</i> . A new Il be generated; with the <i>symbol</i> name suffixed with_value lated checksum. This symbol can be used for accessing the er when needed, for example during debugging.
	evaluated from left t	option is used more than once on the command line, the options are o right. If a checksum is calculated for a <i>symbol</i> that is specified in checksum option, an error is issued.
Example	This example shows address range 0x80	s how to use the crc16 algorithm with the start value 0 over the $00-0x8FFF$ :
		ksum=checksum:2,crc16;0x8000-0x8FFF destinationFile.out
	2 bytes will be store	I from sourceFile.out, and the resulting checksum value of size ad at the symbolchecksum. The modified ELF file is saved as .out leaving sourceFile.out untouched.

In the next example, a symbol is used for specifying the start of the range:

ielftool --checksum=\_\_checksum:2,crc16;\_\_checksum\_begin-0x8FFF
sourceFile.out destinationFile.out

If BLOCK1 occupies 0x4000-0x4337 and BLOCK2 occupies 0x8000-0x87FF, this example will compute the checksum for the bytes on 0x4000 to 0x4337 and from 0x8000 to 0x87FF:

ielftool --checksum \_\_checksum:2,crc16;{BLOCK1};{BLOCK2}
BlxTest.out BlxTest2.out

See also

Checksum calculation for verifying image integrity, page 206

To set related options, choose:

Project>Options>Linker>Checksum

### --code

Syntax	code		
For use with	ielfdumparm		
Description	Use this option to dump all sections that contain executable code (sections with the ELF section attribute SHF_EXECINSTR).		
	This option is not available in the IDE.		

#### --create

Syntax		create library	vfile objectfile1 objectfileN
Parameters	:	libraryfile	The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i> , page 256.
		objectfile1 objectfileN	The object file(s) to build the library from.
For use wit	:h	iarchive	

Description	Use this command to build a new library from a set of object files (modules). The object files are added to the library in the exact order that they are specified on the command line.
	If no command is specified on the command line,create is used by default.
Ι	This option is not available in the IDE.

# --delete, -d

Syntax	delete libraryfile objectfile1 objectfileN -d libraryfile objectfile1 objectfileN	
Parameters	libraryfile	The library file that the command operates on. See <i>Rules for</i> specifying a filename or directory as parameters, page 256.
	objectfile1 objectfileN	The object file(s) that the command operates on.
For use with	iarchive	
Description		to remove object files (modules) from an existing library. All object ed on the command line will be removed from the library.
	This option is not a	vailable in the IDE.

# --disasm\_data Syntax --disasm\_data For use with ielfdumparm Description Use this command to instruct the dumper to dump data sections as if they were code sections. This option is not available in the IDE.

# --edit

Syntax	edit <i>steering_file</i>
For use with	isymexport
Description	Use this option to specify a steering file to control which symbols that are included in the isymexport output file, and also to rename some of the symbols if that is desired.
See also	Steering files, page 537. This option is not available in the IDE.

# --extract, -x

Syntax	extract libraryfile [objectfile1 objectfileN] -x libraryfile [objectfile1 objectfileN]	
Parameters	libraryfile	The library file that the command operates on. See <i>Rules for</i> specifying a filename or directory as parameters, page 256.
	objectfile1 objectfileN	The object file(s) that the command operates on.
For use with	iarchive	
Description	Use this command to extract object files (modules) from an existing library. If a list of object files is specified, only these files are extracted. If a list of object files is not specified, all object files in the library are extracted.	
IIË	This option is not a	vailable in the IDE.

# -f

Syntax	-f filename
Parameters	See Rules for specifying a filename or directory as parameters, page 256.
For use with	iarchive, ielfdumparm, iobjmanip, and isymexport.

Description	Use this option to make the tool read command line options from the named file, with the default filename extension $xcl$ .
	In the command file, you format the items exactly as if they were on the command line itself, except that you can use multiple lines, because the newline character acts just as a space or tab character.
	Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.
	This option is not available in the IDE.

# --fill

Syntax	fill [v;]patt	<pre>cern;range[;range]</pre>
Parameters	v	Generates virtual fill for the fill command. Virtual fill is filler bytes that are included in checksumming, but that are not included in the output file. The primary use for this is certain types of hardware where bytes that are not specified by the image have a known value (typically, $0 \times FF$ or $0 \times 0$ ).
	pattern	A hexadecimal string with the $0 \times \text{prefix}$ (for example, $0 \times \text{EF}$ ) interpreted as a sequence of bytes, where each pair of digits corresponds to one byte (for example $0 \times 123456$ , for the sequence of bytes $0 \times 12$ , $0 \times 34$ , and $0 \times 56$ ). This sequence is repeated over the fill area. If the length of the fill pattern is greater than 1 byte, it is repeated as if it started at address 0.
	range	Specifies the address range for the fill. Hexadecimal and decimal notation is allowed (for example, 0x8002-0x8FFF). Note that each address must be 4-byte aligned.
		Symbols that are present in the ELF file can be used in the range description (for examplechecksum_beginchecksum_end).
For use with	ielftool	
Description	an expression or a h pattern was repeated	Il all gaps in one or more ranges with a pattern, which can be either nexadecimal string. The contents will be calculated as if the fill dly filled from the start address until the end address is passed, and ts will overwrite that pattern.

If the --fill option is used more than once on the command line, the fill ranges cannot overlap each other.



To set related options, choose:

Project>Options>Linker>Checksum

# --front\_headers

Syntax	front_headers
For use with	ielftool
Description	Use this option to output ELF program and section headers in the beginning of the file, instead of at the end.
	This option is not available in the IDE.

# --generate\_vfe\_header

Syntax	generate_vfe_header
For use with	isymexport
Description	Use this option to declare that the image does not contain any virtual function calls to potentially discarded functions.
	When the linker performs virtual function elimination, it discards virtual functions that appear not to be needed. For the optimization to be applied correctly, there must be no virtual function calls in the image that affect the functions that are discarded.
See also	Virtual function elimination, page 119.
TË	To set this options, use:
	Project>Options>Linker>Extra Options

# --hide\_symbols

Syntax

--hide\_symbols

iexe2obj

For use with

 Description
 Use this option to hide all symbols from the input file.

 This option is not available in the IDE.

# --ihex

Syntax	ihex
For use with	ielftool
Description	Sets the format of the output file to 32-bit linear Intel Extended hex, a hexadecimal text format defined by Intel.
	To set related options, choose:
	Project>Options>Linker>Output converter

# --keep\_mode\_symbols

Syntax	keep_mode_symbols
For use with	iexe2obj
Description	Use this option to copy mode symbols from the input file to the output file. This is used, for example, by the disassembler.
	This option is not available in the IDE.

no_bom		
Syntax		no_bom
For use with		iarchive, ielfdumparm, iobjmanip, and isymexport
Description		Use this option to omit the Byte Order Mark (BOM) when generating a UTF-8 output file.
See also		text_out, page 568 and Text encodings, page 251
	ĪË	This option is not available in the IDE.

# --no\_header

Syntax	no_header
For use with	ielfdumparm
Description	By default, a standard list header is added before the actual file content. Use this option to suppress output of the list header. This option is not available in the IDE.

# --no\_rel\_section

Syntax	no_rel_section
For use with	ielfdumparm
Description	By default, whenever the content of a section of a relocatable file is generated as output, the associated section, if any, is also included in the output. Use this option to suppress output of the relocation section.
	This option is not available in the IDE.

# --no\_strtab

Syntax		no_strtab
For use with		ielfdumparm
Description		Use this option to suppress dumping of string table sections (sections of type $SHT\_STRTAB$ ).
	ĪĒ	This option is not available in the IDE.

# --no\_utf8\_in

Syntax

--no\_utf8\_in

For use with

ielfdumparm

Description	The dumper can normally determine whether ELF files produced by IAR tools use the UTF-8 text encoding or not, and produce the correct output. For ELF files produced by non-IAR tools, the dumper will assume UTF-8 encoding unless this option is used, in which case the encoding is assumed to be according to the current system default locale.
	<b>Note:</b> This only makes a difference if any characters beyond 7-bit ASCII are used in paths, symbols, etc.
See also	<i>Text encodings</i> , page 251 This option is not available in the IDE.

# --offset

Syntax		offset [-]offset	
Paramet	ers	offset	The offset will be added (or subtracted if – is specified) to all addresses in the generated output file.
For use	with	ielftool	
Descript	tion	generated output file. The and Simple-Code. The op files (bin contain no a	subtract an offset to the address of each output record in the e option only works on Motorola S-records, Intel Hex, TI-Txt, otion has no effect when generating an ELF file or when binary address information) are generated. No content, including the ed by using this option, only the addresses in the output format.
Example	9	offset 0x30000	
		This will add an offset of at address 0x4000 will b	$0 \times 30000$ to all addresses. As a result, content that was linked e placed at $0 \times 34000$ .
	IIË	This option is not availab	ble in the IDE.
output, -	0		

256.

Syntax	-o {filename directory} output {filename directory}
Parameters	See Rules for specifying a filename or directory as parameters, page

For use with	iarchive and ielfdumparm.	
Description	iarchive	
	By default, iarchive assumes that the first argument after the iarchive command is the name of the destination library. Use this option to explicitly specify a different filename for the library.	
	ielfdumparm	
	By default, output from the dumper is directed to the console. Use this option to direct the output to a file instead. The default name of the output file is the name of the input file with an added id filename extension	
	You can also specify the output file by specifying a file or directory following the name of the input file.	
IIË	This option is not available in the IDE.	

# --parity

Syntax	<pre>parity{symbol[+offset] address}:size,algo:flashbase[:flags];ran ge[;range]</pre>		
Parameters	symbol	The name of the symbol where the parity bytes should be stored. Note that it must exist in the symbol table in the input ELF file.	
	offset	An offset to the symbol. By default, 0.	
	address	The absolute address where the parity bytes should be stored.	
	size	The maximum number of bytes that the parity generation can use. An error will be issued if this value is exceeded. Note that the size must fit in the specified symbol in the ELF file.	
	algo	Choose between: odd, uses odd parity.	
		even, uses even parity.	

	flashbase	The start address of the flash memory. Parity bits will not be generated for the addresses between <i>flashbase</i> and the start address of the range. If <i>flashbase</i> and the start address of the range coincide, parity bits will be generated for all addresses	
	flags	Choose between:	
		<ul> <li>r, reverses the byte order within each word.</li> <li>L, processes 4 bytes at a time.</li> <li>W, processes 2 bytes at a time.</li> <li>B, processes 1 byte at a time.</li> </ul>	
	range	The address range over which the parity bytes should be generated. Hexadecimal and decimal notation are allowed (for example, 0x8002-0x8FFF).	
For use with	ielftool		
Description	to the right and the	Use this option to generate parity bytes over specified ranges. The range is traversed le to the right and the parity bits are generated using the odd or even algorithm. The pari bits are finally stored in the specified symbol where they can be accessed by your application.	
	This option is not a	available in the IDE.	

# --prefix

Syntax	prefix prefix		
Parameters	prefix	A prefix for symbol and section names	
For use with	iexe2obj		
Description	By default, the base name of the output file is used as a prefix for symbol and section names that are defined in wrappers. Use this option to set a custom prefix for these symbols and section names.		
See also	wrap, page 570		

ШË

This option is not available in the IDE.

#### --ram\_reserve\_ranges


	Syntax	<pre>ram_reserve_ranges[=symbol_prefix]</pre>	
	Parameters	symbol_prefix	The prefix of symbols created by this option.
	For use with	isymexport	
	Description	Use this option to generate symbols for the areas in RAM that the image uses. One symbol will be generated for each such area. The name of each symbol is based on the name of the area and is prefixed by the optional parameter <i>symbol_prefix</i> .	
		Generating symbols that cover an area in this way prevents the linker from placing other content at the affected addresses. This can be useful when linking against an existing image. Ifram_reserve_ranges is used together withreserve_ranges, the RAM areas will get their prefix from theram_reserve_ranges option and the non-RAM areas will get their prefix from thereserve_ranges option.	
	See also	reserve_ranges, page 562.	
	ΠË	This option is not available in the IDE.	
rai	nge		
	Syntax	range start-end	
	Parameters	start-end	Disassemble code where the start address is greater than or equal to <i>start</i> , and where the end address is less than <i>end</i> .

For use with ielfdumparm

IË

Description

Use this option to specify a range for which code from an executable will be dumped.



#### --raw

Syntax	raw
For use with	ielfdumparm
Description	By default, many ELF sections will be dumped using a text format specific to a particular kind of section. Use this option to dump each selected ELF section using the generic text format.
	The generic text format dumps each byte in the section in hexadecimal format, and where appropriate, as ASCII text.
	This option is not available in the IDE.

# --remove\_file\_path

Syntax	remove_file_path	
For use with	iobjmanip	
Description	Use this option to make iobjmanip remove information about the directory struct of the project source tree from the generated object file, which means that the file symbol in the ELF object file is modified.	
	This option must be used in combination withremove_section ".comment".	
	This option is not available in the IDE.	

# --remove\_section

Syntax	remove_sect	remove_section { section   number }		
Parameters	section	The section—or sections, if there are more than one section with the same name—to be removed.		
	number	The number of the section to be removed. Section numbers can be obtained from an object dump created using ielfdumparm.		
For use with	iobjmanip			

Description

Use this option to make iobjmanip omit the specified section when generating the output file.



This option is not available in the IDE.

# --rename\_section

Syntax	rename_section { oldname   oldnumber }= newname		
Parameters	oldname	The section—or sections, if there are more than one section with the same name—to be renamed.	
	oldnumber	The number of the section to be renamed. Section numbers can be obtained from an object dump created using ielfdumparm.	
	newname	The new name of the section.	
For use with	iobjmanip		
Description	Use this option to make iobjmanip rename the specified section when generating the output file.		
IË	This option is not available in the IDE.		

# --rename\_symbol

Syntax	rename_symbol	oldname =newname
Parameters	oldname newname	The symbol to be renamed. The new name of the symbol.
For use with	iobjmanip	
Description	Use this option to make iobjmanip rename the specified symbol when generating the output file.	
	This option is not a	vailable in the IDE.

replace, -r	
Syntax	replace libraryfile objectfile1 objectfileN -r libraryfile objectfile1 objectfileN
Parameters	<i>libraryfile</i> The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i> , page 256.
	<pre>objectfile1 The object file(s) that the command operates on. objectfileN</pre>
For use with	iarchive
Description	Use this command to replace or add object files (modules) to an existing library. The object files specified on the command line either replace existing object files in the library (if they have the same name) or are appended to the library.
	This option is not available in the IDE.

Syntax	reserve_ranges[= <i>symbol_prefix</i> ]			
Parameters	symbol_prefix The prefix of symbols created by this option.			
For use with	isymexport			
Description	Use this option to generate symbols for the areas in ROM and RAM that the image uses. One symbol will be generated for each such area. The name of each symbol is based on the name of the area and is prefixed by the optional parameter <i>symbol_prefix</i> .			
	Generating symbols that cover an area in this way prevents the linker from placing other content at the affected addresses. This can be useful when linking against an existing image.			
	Ifreserve_ranges is used together withram_reserve_ranges, the RAM areas will get their prefix from theram_reserve_ranges option and the non-RAM areas will get their prefix from thereserve_ranges option.			
See also	ram_reserve_ranges, page 559.			

--reserve\_ranges



This option is not available in the IDE.

section, -s
-------------

	Syntax	<pre>section section_number section_name[,]s section_number section_name[,]</pre>		
	Parameters	section_number section_name		er of the section to be dumped. of the section to be dumped.
	For use with	ielfdumparm		
	Description	Use this option to dump the contents of a section with the specified number, or any section with the specified name. If a relocation section is associated with a selected section, its contents are output as well.		
		If you use this option, the general properties of the input file will not be included in the output.		
		You can specify multiple section numbers or names by separating them with commas, or by using this option more than once.		
		By default, no section	on contents a	are included in the output.
	Example	-s 3,17 -s .debug_frame	,42	<pre>/* Sections #3 and #17 /* Any sections named .debug_frame and     also section #42 */</pre>
	ĪË	This option is not av	ailable in th	e IDE.
seg	ment, -g			
	Syntax	segment segme	nt_number	[,]
		-g segment_numb	er[,]	
	Parameters			

segmnt\_number

The number of a segment whose contents will be included in the output.

For use with		ielfdumparm
Description		Use this option to select specific segments (parts of an executable image indicated by program headers) for inclusion in the output.
	∎Ë	This option is not available in the IDE.

# --self\_reloc

Syntax	self_reloc
For use with	ielftool
Description	This option is intentionally not documented as it is not intended for general use. This option is not available in the IDE.

show_entry_as		
Syntax	show_entry_as	name
Parameters	name	The name to give to the program entry point in the output file.
For use with	isymexport	
Description	Use this option to expanse.	port the entry point of the application given as input under the name
	This option is not av	ailable in the IDE.

# --silent

Syntax	silent
For use with	iobjmanip and ielftool.
Description	Causes the tool to operate without sending any messages to the standard output stream.

By default, the tool sends various messages via the standard output stream. You can use this option to prevent this. The tool sends error and warning messages to the error output stream, so they are displayed regardless of this setting.



This option is not available in the IDE.

simple			
Syntax		simple	
For use with		ielftool	
Description		Sets the format of the output file to Simple-code, a binary format that includes address information.	
	ΠË	To set related options, choose:	
Pro		Project>Options>Output converter	

simple-ne			
Syntax		simple-ne	
For use with		ielftool	
Description		Sets the format of the output file to Simple code, but no entry record is generated.	
		To set related options, choose:	
		Project>Options>Output converter	

#### --source

Syntax	source
For use with	ielfdumparm
Description	Use this option to make ielftool include source for each statement before the code for that statement, when dumping code from an executable file. To make this work, the executable image must be built with debug information, and the source code must still be accessible in its original location.



This option is not available in the IDE.

srec
------

Syntax	srec
For use with	ielftool
Description	Sets the format of the output file to Motorola S-records, a hexadecimal text format defined by Motorola.
	Note: You can use the ielftool optionssrec-len andsrec-s3only to modify the exact format used.
	To set related options, choose:
	Project>Options>Output converter

srec-len
----------

Syntax	srec-len	srec-len=length		
Parameters	length	The number of data bytes in each S-record.		
For use with	ielftool			
Description		Restricts the number of data bytes in each S-record. This option can be used in combination with thesrec option.		
	This option is	This option is not available in the IDE.		

# --srec-s3only

Syntax	srec-s3only
For use with	ielftool
Description	Restricts the S-record output to contain only a subset of records, that is S0, S3 and S7 records. This option can be used in combination with thesrec option.



This option is not available in the IDE.

# --strip

	Project>Options>Linker>Output>Include debug information in output		
ШË	To set related options, choose:		
	Note that ielftool needs an unstripped input ELF image. If you use thestrip option in the linker, remove it and use thestrip option in ielftool instead.		
Description	Use this option to remove all sections containing debug information before the output file is written.		
For use with	iobjmanip and ielftool.		
Syntax	strip		

# --symbols

Syntax	symbols libraryfile		
Parameters	libraryfile	The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i> , page 256.	
For use with	iarchive		
Description	Use this command to list all external symbols that are defined by any object file (module) in the specified library, together with the name of the object file (module) that defines it.		
	In silent mode (silent), this command performs symbol table-related syntax chec on the library file and displays only errors and warnings. This option is not available in the IDE.		

text_out					
	Syntax		text_out{utf8 utf16le utf16be locale}		
	Parameters				
			utf8	Uses the UTF-8 encoding	
			utf16le	Uses the UTF-16 little-endian encoding	
			utf16be	Uses the UTF-16 big-endian encoding	
			locale	Uses the system locale encoding	
	For use with		iarchive, ielfdumparm, iobjmanip, and isymexport		
	Description		Use this option to specify the encoding to be used when generating a text output file.		
			The default for the list files is to use the same encoding as the main source file. The default for all other text files is UTF-8 with a Byte Order Mark (BOM).		
			If you want text output in UTF-8 encoding without BOM, you can use the optionno_bom as well.		
	See also		no_bom, page 554 and Text encodings, page 251		
			This option is not available in the IDE.		

# --titxt

Syntax	titxt
For use with	ielftool
Description	Sets the format of the output file to Texas Instruments TI–TXT, a hexadecimal text format defined by Texas Instruments.
ΠË	To set related options, choose:
	Project>Options>Output converter

#### --toc, -t

Syntax

--toc libraryfile -t libraryfile

Parameters	libraryfile	The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i> , page 256.		
For use with	iarchive			
Description	Use this command	Use this command to list the names of all object files (modules) in a specified library.		
		In silent mode (silent), this command performs basic syntax checks on the library file, and displays only errors and warnings.		
	This option is not a	vailable in the IDE.		

# --use\_full\_std\_template\_names

Syntax	use_full_std_template_names
For use with	ielfdumparm
Description	Normally, the names of some standard C++ templates are used in the output in an abbreviated form in the unmangled names of symbols (for example, "std::string" instead of "std::basic_string <char, std::char_traits<char="">, std_::allocator<char>&gt;"). Use this option to make ielfdump use the unabbreviated form.</char></char,>
	This option is not available in the IDE.

utf8_text_in		
Syntax	utf8_text_in	
For use with	iarchive, ielfdumparm, iobjmanip, and isymexport	
Description	Use this option to specify that the tool shall use the UTF-8 encoding when reading a text input file with no Byte Order Mark (BOM). <b>Note:</b> This option does not apply to source files.	
See also	Text encodings, page 251	



This option is not available in the IDE.

# --verbose, -V

Syntax	verbose -V (iarchive only)
For use with	iarchive and ielftool.
Description	Use this option to make the tool report which operations it performs, in addition to giving diagnostic messages.
	This option is not available in the IDE because this setting is always enabled.

# --version

Syntax	version
For use with	iarchive, ielfdumparm, ielftool, iobjmanip, isymexport
Description	Use this option to make the tool send version information to the console and then exit.
	This option is not available in the IDE.

wra	ар			
	Syntax		wrap symbol	
	Parameters		symbol	A function symbol that should be callable by clients of the output file of iexe2obj.
	For use with		iexe2obj	
	Description		Use this option to generate a wrapper function for function symbols.	
		∎Ë	This option is not available in the IDE.	

# Implementation-defined behavior for Standard C

• Descriptions of implementation-defined behavior

If you are using C89 instead of Standard C, see Implementation-defined behavior for C89, page 591.

# **Descriptions of implementation-defined behavior**

This section follows the same order as the C standard. Each item includes references to the ISO chapter and section (in parenthesis) that explains the implementation-defined behavior.

**Note:** The IAR Systems implementation adheres to a freestanding implementation of Standard C. This means that parts of a standard library can be excluded in the implementation.

# J.3.1 TRANSLATION

#### Diagnostics (3.10, 5.1.1.3)

Diagnostics are produced in the form:

filename,linenumber level[tag]: message

where filename is the name of the source file in which the error was encountered, linenumber is the line number at which the compiler detected the error, level is the level of seriousness of the message (remark, warning, error, or fatal error), tag is a unique tag that identifies the message, and message is an explanatory message, possibly several lines.

#### White-space characters (5.1.1.2)

At translation phase three, each non-empty sequence of white-space characters is retained.

#### **J.3.2 ENVIRONMENT**

#### The character set (5.1.1.2)

The source character set is the same as the physical source file multibyte character set. By default, the standard ASCII character set is used. However, it can be UTF-8, UTF-16, or the system locale. See *Text encodings*, page 251.

#### Main (5.1.2.1)

The function called at program startup is called main. No prototype is declared for main, and the only definition supported for main is:

```
int main(void)
```

To change this behavior, see Customizing low level init, page 144.

#### The effect of program termination (5.1.2.1)

Terminating the application returns the execution to the startup code (just after the call to main).

#### Alternative ways to define main (5.1.2.2.1)

There is no alternative ways to define the main function.

#### The argv argument to main (5.1.2.2.1)

The argv argument is not supported.

#### Streams as interactive devices (5.1.2.3)

The streams stdin, stdout, and stderr are treated as interactive devices.

#### Multi-threaded environment (5.1.2.4)

By default, the IAR Systems runtime environment does not support more than one thread of execution. With an optional third-party RTOS, it might support several threads of execution.

#### Signals, their semantics, and the default handling (7.14)

In the DLIB runtime environment, the set of supported signals is the same as in Standard C. A raised signal will do nothing, unless the signal function is customized to fit the application.

#### Signal values for computational exceptions (7.14.1.1)

In the DLIB runtime environment, there are no implementation-defined values that correspond to a computational exception.

#### Signals at system startup (7.14.1.1)

In the DLIB runtime environment, there are no implementation-defined signals that are executed at system startup.

#### Environment names (7.22.4.6)

In the DLIB runtime environment, there are no implementation-defined environment names that are used by the getenv function.

#### The system function (7.22.4.8)

The system function is not supported.

#### J.3.3 IDENTIFIERS

#### Multibyte characters in identifiers (6.4.2)

Additional multibyte characters may appear in identifiers depending on the chosen encoding for the source file. The supported multibyte characters must be translatable to one Universal Character Name (UCN).

#### Significant characters in identifiers (5.2.4.1, 6.4.2)

The number of significant initial characters in an identifier with or without external linkage is guaranteed to be no less than 200.

#### J.3.4 CHARACTERS

#### Number of bits in a byte (3.6)

A byte contains 8 bits.

#### Execution character set member values (5.2.1)

The values of the members of the execution character set are the values of the ASCII character set, which can be augmented by the values of the extra characters in the source file character set. The source file character set is determined by the chosen encoding for the source file. See *Text encodings*, page 251.

#### Alphabetic escape sequences (5.2.2)

The standard alphabetic escape sequences have the values a-7, b-8, f-12, n-10, \r-13, \t-9, and \v-11.

#### Characters outside of the basic executive character set (6.2.5)

A character outside of the basic executive character set that is stored in a char is not transformed.

#### Plain char (6.2.5, 6.3.1.1)

A plain char is treated as an unsigned char. See -- char is signed, page 264 and --char is unsigned, page 265.

#### Source and execution character sets (6.4.4.4, 5.1.1.2)

The source character set is the set of legal characters that can appear in source files. It is dependent on the chosen encoding for the source file. See *Text encodings*, page 251. By default, the source character set is Raw.

The execution character set is the set of legal characters that can appear in the execution environment. These are the execution character set for character constants and string literals and their encoding types:

Execution character set	Encoding type
L	UTF-32
u	UTF-16
U	UTF-32
u8	UTF-8
none	The source character set
Table 40: Execution character sets and their anodings	

Table 49: Execution character sets and their encodings

The DLIB runtime environment needs a multibyte character scanner to support a multibyte execution character set. See Locale, page 155.

#### Integer character constants with more than one character (6.4.4.4)

An integer character constant that contains more than one character will be treated as an integer constant. The value will be calculated by treating the leftmost character as the most significant character, and the rightmost character as the least significant character, in an integer constant. A diagnostic message will be issued if the value cannot be represented in an integer constant.

#### Wide character constants with more than one character (6.4.4.4)

A wide character constant that contains more than one multibyte character generates a diagnostic message.

#### Locale used for wide character constants (6.4.4.4)

See Source and execution character sets (6.4.4.4, 5.1.1.2), page 574.

# Concatenating wide string literals with different encoding types (6.4.5)

Wide string literals with different encoding types cannot be concatenated.

#### Locale used for wide string literals (6.4.5)

See Source and execution character sets (6.4.4.4, 5.1.1.2), page 574.

#### Source characters as executive characters (6.4.5)

All source characters can be represented as executive characters.

#### Encoding of wchar\_t, char16\_t, and char32\_t (6.10.8.2)

wchar\_t has the encoding UTF-32, char16\_t has the encoding UTF-16, and char32\_t has the encoding UTF-32.

#### J.3.5 INTEGERS

#### Extended integer types (6.2.5)

There are no extended integer types.

#### Range of integer values (6.2.6.2)

The representation of integer values are in the two's complement form. The most significant bit holds the sign; 1 for negative, 0 for positive and zero.

For information about the ranges for the different integer types, see *Basic data types*—*integer types*, page 345.

#### The rank of extended integer types (6.3.1.1)

There are no extended integer types.

#### Signals when converting to a signed integer type (6.3.1.3)

No signal is raised when an integer is converted to a signed integer type.

#### Signed bitwise operations (6.5)

Bitwise operations on signed integers work the same way as bitwise operations on unsigned integers; in other words, the sign-bit will be treated as any other bit, except for the operator >> which will behave as an arithmetic right shift.

#### J.3.6 FLOATING POINT

#### Accuracy of floating-point operations (5.2.4.2.2)

The accuracy of floating-point operations is unknown.

#### Accuracy of floating-point conversions (5.2.4.2.2)

The accuracy of floating-point conversions is unknown.

#### Rounding behaviors (5.2.4.2.2)

There are no non-standard values of FLT\_ROUNDS.

#### Evaluation methods (5.2.4.2.2)

There are no non-standard values of FLT\_EVAL\_METHOD.

#### Converting integer values to floating-point values (6.3.1.4)

When an integer value is converted to a floating-point value that cannot exactly represent the source value, the round-to-nearest rounding mode is used (FLT\_ROUNDS is defined to 1).

#### Converting floating-point values to floating-point values (6.3.1.5)

When a floating-point value is converted to a floating-point value that cannot exactly represent the source value, the round-to-nearest rounding mode is used (FLT\_ROUNDS is defined to 1).

#### Denoting the value of floating-point constants (6.4.4.2)

The round-to-nearest rounding mode is used (FLT\_ROUNDS is defined to 1).

#### Contraction of floating-point values (6.5)

Floating-point values are contracted. However, there is no loss in precision and because signaling is not supported, this does not matter.

#### Default state of FENV\_ACCESS (7.6.1)

The default state of the pragma directive FENV\_ACCESS is OFF.

#### Additional floating-point mechanisms (7.6, 7.12)

There are no additional floating-point exceptions, rounding-modes, environments, and classifications.

#### Default state of FP\_CONTRACT (7.12.2)

The default state of the pragma directive FP\_CONTRACT is OFF.

#### J.3.7 ARRAYS AND POINTERS

#### Conversion from/to pointers (6.3.2.3)

For information about casting of data pointers and function pointers, see *Casting*, page 353.

#### ptrdiff\_t (6.5.6)

For information about ptrdiff\_t, see *ptrdiff\_t*, page 353.

#### J.3.8 HINTS

#### Honoring the register keyword (6.7.1)

User requests for register variables are not honored.

#### **Inlining functions (6.7.4)**

User requests for inlining functions increases the chance, but does not make it certain, that the function will actually be inlined into another function. See *Inlining functions*, page 84.

### J.3.9 STRUCTURES, UNIONS, ENUMERATIONS, AND BITFIELDS

#### Sign of 'plain' bitfields (6.7.2, 6.7.2.1)

For information about how a 'plain' int bitfield is treated, see *Bitfields*, page 346.

#### Possible types for bitfields (6.7.2.1)

All integer types can be used as bitfields in the compiler's extended mode, see -e, page 274.

#### Atomic types for bitfields (6.7.2.1)

Atomic types cannot be used as bitfields.

#### Bitfields straddling a storage-unit boundary (6.7.2.1)

A bitfield is always placed in one—and one only—storage unit, which means that the bitfield cannot straddle a storage-unit boundary.

#### Allocation order of bitfields within a unit (6.7.2.1)

For information about how bitfields are allocated within a storage unit, see *Bitfields*, page 346.

#### Alignment of non-bitfield structure members (6.7.2.1)

The alignment of non-bitfield members of structures is the same as for the member types, see *Alignment*, page 343.

#### Integer type used for representing enumeration types (6.7.2.2)

The chosen integer type for a specific enumeration type depends on the enumeration constants defined for the enumeration type. The chosen integer type is the smallest possible.

#### J.3.10 QUALIFIERS

#### Access to volatile objects (6.7.3)

Any reference to an object with volatile qualified type is an access, see *Declaring objects volatile*, page 355.

#### J.3.11 PREPROCESSING DIRECTIVES

#### Locations in #pragma for header names (6.4, 6.4.7)

These pragma directives take header names as parameters at the specified positions:

```
#pragma include_alias ("header", "header")
#pragma include_alias (<header>, <header>)
```

#### Mapping of header names (6.4.7)

Sequences in header names are mapped to source file names verbatim. A backslash '\' is not treated as an escape sequence. See *Overview of the preprocessor*, page 451.

#### Character constants in constant expressions (6.10.1)

A character constant in a constant expression that controls conditional inclusion matches the value of the same character constant in the execution character set.

#### The value of a single-character constant (6.10.1)

A single-character constant may only have a negative value if a plain character (char) is treated as a signed character, see *--char\_is\_signed*, page 264.

#### Including bracketed filenames (6.10.2)

For information about the search algorithm used for file specifications in angle brackets <>, see *Include file search procedure*, page 247.

#### Including quoted filenames (6.10.2)

For information about the search algorithm used for file specifications enclosed in quotes, see *Include file search procedure*, page 247.

#### Preprocessing tokens in #include directives (6.10.2)

Preprocessing tokens in an #include directive are combined in the same way as outside an #include directive.

#### Nesting limits for #include directives (6.10.2)

There is no explicit nesting limit for #include processing.

#### # inserts \ in front of \u (6.10.3.2)

# (stringify argument) inserts a  $\$  character in front of a Universal Character Name (UCN) in character constants and string literals.

#### Recognized pragma directives (6.10.6)

In addition to the pragma directives described in the chapter *Pragma directives*, the following directives are recognized and will have an indeterminate effect. If a pragma directive is listed both in the chapter *Pragma directives* and here, the information provided in the chapter *Pragma directives* overrides the information here.

alias\_def alignment alternate\_target\_def baseaddr basic\_template\_matching building\_runtime can\_instantiate codeseg constseg cplusplus\_neutral cspy\_support cstat\_dump dataseq define\_type\_info do\_not\_instantiate early\_dynamic\_initialization exception neutral function function\_category function\_effects hdrstop important\_typedef ident implements\_aspect init\_routines\_only\_for\_needed\_variables initialization\_routine inline\_template instantiate keep\_definition library\_default\_requirements library\_provides library\_requirement\_override memory module\_name no\_pch no\_vtable\_use

once pop\_macro preferred\_typedef push\_macro separate\_init\_routine set\_generate\_entries\_without\_bounds system\_include uses\_aspect vector warnings

#### Default \_\_DATE\_\_ and \_\_TIME\_\_ (6.10.8)

The definitions for \_\_TIME\_\_ and \_\_DATE\_\_ are always available.

#### J.3.12 LIBRARY FUNCTIONS

#### Additional library facilities (5.1.2.1)

Most of the standard library facilities are supported. Some of them—the ones that need an operating system—require a low-level implementation in the application. For more information, see *The DLIB runtime environment*, page 121.

#### Diagnostic printed by the assert function (7.2.1.1)

The assert() function prints:

filename: linenr expression -- assertion failed

when the parameter evaluates to zero.

#### Representation of the floating-point status flags (7.6.2.2)

There is no representation of floating-point status flags.

#### Feraiseexcept raising floating-point exception (7.6.2.3)

For information about the feraiseexcept function raising floating-point exceptions, see *Floating-point environment*, page 351.

#### Strings passed to the setlocale function (7.11.1.1)

For information about strings passed to the setlocale function, see Locale, page 155.

#### Types defined for float\_t and double\_t (7.12)

The FLT\_EVAL\_METHOD macro can only have the value 0.

#### Domain errors (7.12.1)

No function generates other domain errors than what the standard requires.

#### Return values on domain errors (7.12.1)

Mathematic functions return a floating-point NaN (not a number) for domain errors.

#### Underflow errors (7.12.1)

Mathematic functions set errno to the macro ERANGE (a macro in errno.h) and return zero for underflow errors.

#### fmod return value (7.12.10.1)

The fmod function sets errno to a domain error and returns a floating-point NaN when the second argument is zero.

#### remainder return value (7.12.10.2)

The remainder function sets errno to a domain error and returns a floating-point NaN when the second argument is zero.

#### The magnitude of remquo (7.12.10.3)

The magnitude is congruent modulo INT\_MAX.

#### remquo return value (7.12.10.3)

The remquo function sets errno to a domain error and returns a floating-point NaN when the second argument is zero.

#### signal() (7.14.1.1)

The signal part of the library is not supported.

**Note:** The default implementation of signal does not perform anything. Use the template source code to implement application-specific signal handling. See *signal*, page 152 and *raise*, page 150, respectively.

#### NULL macro (7.19)

The NULL macro is defined to 0.

#### Terminating newline character (7.21.2)

Stream functions recognize either newline or end of file (EOF) as the terminating character for a line.

#### Space characters before a newline character (7.21.2)

Space characters written to a stream immediately before a newline character are preserved.

#### Null characters appended to data written to binary streams (7.21.2)

No null characters are appended to data written to binary streams.

#### File position in append mode (7.21.3)

The file position is initially placed at the beginning of the file when it is opened in append-mode.

#### Truncation of files (7.21.3)

Whether a write operation on a text stream causes the associated file to be truncated beyond that point, depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 122.

#### File buffering (7.21.3)

An open file can be either block-buffered, line-buffered, or unbuffered.

#### A zero-length file (7.21.3)

Whether a zero-length file exists depends on the application-specific implementation of the low-level file routines.

#### Legal file names (7.21.3)

The legality of a filename depends on the application-specific implementation of the low-level file routines.

#### Number of times a file can be opened (7.21.3)

Whether a file can be opened more than once depends on the application-specific implementation of the low-level file routines.

#### Multibyte characters in a file (7.21.3)

The encoding of multibyte characters in a file depends on the application-specific implementation of the low-level file routines.

#### remove() (7.21.4.1)

The effect of a remove operation on an open file depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 122.

#### rename() (7.21.4.2)

The effect of renaming a file to an already existing filename depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 122.

#### Removal of open temporary files (7.21.4.3)

Whether an open temporary file is removed depends on the application-specific implementation of the low-level file routines.

#### Mode changing (7.21.5.4)

freopen closes the named stream, then reopens it in the new mode. The streams stdin, stdout, and stderr can be reopened in any new mode.

#### Style for printing infinity or NaN (7.21.6.1, 7.29.2.1)

The style used for printing infinity or NaN for a floating-point constant is inf and nan (INF and NAN for the F conversion specifier), respectively. The n-char-sequence is not used for nan.

#### %p in printf() (7.21.6.1, 7.29.2.1)

The argument to a p conversion specifier, print pointer, to printf() is treated as having the type void \*. The value will be printed as a hexadecimal number, similar to using the x conversion specifier.

#### Reading ranges in scanf (7.21.6.2, 7.29.2.1)

A - (dash) character is always treated as a range symbol.

#### %p in scanf (7.21.6.2, 7.29.2.2)

The p conversion specifier, scan pointer, to scanf() reads a hexadecimal number and converts it into a value with the type void \*.

#### File position errors (7.21.9.1, 7.21.9.3, 7.21.9.4)

On file position errors, the functions fgetpos, ftell, and fsetpos store EFPOS in errno.

#### An n-char-sequence after nan (7.22.1.3, 7.29.4.1.1)

An n-char-sequence after a NaN is read and ignored.

#### errno value at underflow (7.22.1.3, 7.29.4.1.1)

errno is set to ERANGE if an underflow is encountered.

#### Zero-sized heap objects (7.22.3)

A request for a zero-sized heap object will return a valid pointer and not a null pointer.

#### Behavior of abort and exit (7.22.4.1, 7.22.4.5)

A call to abort () or \_Exit() will not flush stream buffers, not close open streams, and not remove temporary files.

#### Termination status (7.22.4.1, 7.22.4.4, 7.22.4.5, 7.22.4.7)

The termination status will be propagated to \_\_exit() as a parameter. exit(), \_Exit(), and quick\_exit use the input parameter, whereas abort uses EXIT\_FAILURE.

#### The system function return value (7.22.4.8)

The system function returns -1 when its argument is not a null pointer.

#### Range and precision of clock\_t and time\_t (7.27)

The range and precision of clock\_t is up to your implementation. The range and precision of time\_t is 19000101 up to 20351231 in tics of a second if the 32-bit time\_t is used. It is -9999 up to 9999 years in tics of a second if the 64-bit time\_t is used. See *time.h*, page 475

#### The time zone (7.27.1)

The local time zone and daylight savings time must be defined by the application. For more information, see *time.h*, page 475.

#### The era for clock() (7.27.2.1)

The era for the clock function is up to your implementation.

#### **TIME\_UTC** epoch (7.27.2.5)

The epoch for TIME\_UTC is up to your implementation.

#### %Z replacement string (7.27.3.5, 7.29.5.1)

By default, ":" is used as a replacement for %Z. Your application should implement the time zone handling. See \_\_time32, \_\_time64, page 153.

#### Math functions rounding mode (F.10)

The functions in math.h honor the rounding direction mode in FLT-ROUNDS.

#### J.3.13 ARCHITECTURE

### Values and expressions assigned to some macros (5.2.4.2, 7.20.2, 7.20.3)

There are always 8 bits in a byte.

MB\_LEN\_MAX is at the most 6 bytes depending on the library configuration that is used.

For information about sizes, ranges, etc for all basic types, see *Data representation*, page 343.

The limit macros for the exact-width, minimum-width, and fastest minimum-width integer types defined in stdint.h have the same ranges as char, short, int, long, and long long.

The floating-point constant  $FLT_ROUNDS$  has the value 1 (to nearest) and the floating-point constant  $FLT_EVAL_METHOD$  has the value 0 (treat as is).

#### Accessing another thread's autos or thread locals (6.2.4)

The IAR Systems runtime environment does not allow multiple threads. With a third-party RTOS, the access will take place and work as intended as long as the accessed item has not gone out of its scope.

#### The number, order, and encoding of bytes (6.2.6.1)

See Data representation, page 343.

#### Extended alignments (6.2.8)

For information about extended alignments, see *data\_alignment*, page 382.

#### Valid alignments (6.2.8)

For information about valid alignments on fundamental types, see the chapter *Data representation*.

#### The value of the result of the size of operator (6.5.3.4)

See Data representation, page 343.

#### J.4 LOCALE

#### Members of the source and execution character set (5.2.1)

By default, the compiler accepts all one-byte characters in the host's default character set. The chapter *Encodings* describes how to change the default encoding for the source character set, and by that the encoding for plain character constants and plain string literals in the execution character set.

#### The meaning of the additional characters (5.2.1.2)

Any multibyte characters in the extended source character set is translated into the following encoding for the execution character set:

Execution character set	Encoding
L typed	UTF-32
u <b>typed</b>	UTF-16
U <b>typed</b>	UTF-32
u8 <b>typed</b>	UTF-8
none typed	The same as the source character set

Table 50: Translation of multibyte characters in the extended source character set

It is up to your application with the support of the library configuration to handle the characters correctly.

#### Shift states for encoding multibyte characters (5.2.1.2)

No shift states are supported.

#### **Direction of successive printing characters (5.2.2)**

The application defines the characteristics of a display device.

#### The decimal point character (7.1.1)

For a library with the configuration Normal or Tiny, the default decimal-point character is a '.'. For a library with the configuration Full, the chosen locale defines what character is used for the decimal point.

#### Printing characters (7.4, 7.30.2)

The set of printing characters is determined by the chosen locale.

#### Control characters (7.4, 7.30.2)

The set of control characters is determined by the chosen locale.

## Characters tested for (7.4.1.2, 7.4.1.3, 7.4.1.7, 7.4.1.9, 7.4.1.10, 7.4.1.11, 7.30.2.1.2, 7.30.5.1.3, 7.30.2.1.7, 7.30.2.1.9, 7.30.2.1.10, 7.30.2.1.11)

The set of characters tested for the character-based functions are determined by the chosen locale. The set of characters tested for the wchar\_t-based functions are the UTF-32 code points 0x0 to 0x7F.

#### The native environment (7.11.1.1)

The native environment is the same as the "C" locale.

### Subject sequences for numeric conversion functions (7.22.1, 7.29.4.1)

There are no additional subject sequences that can be accepted by the numeric conversion functions.

#### The collation of the execution character set (7.24.4.3, 7.29.4.4.2)

Collation is not supported.

#### Message returned by strerror (7.24.6.2)

The messages returned by the strerror function depending on the argument is:

Argument	Message
EZERO	no error
EDOM	domain error
ERANGE	range error
EFPOS	file positioning error
EILSEQ	multi-byte encoding error
<0    >99	unknown error
all others	error nnn

Table 51: Message returned by strerror()—DLIB runtime environment

#### Formats for time and date (7.27.3.5, 7.29.5.1)

Time zone information is as you have implemented it in the low-level function \_\_getzone.

#### Character mappings (7.30.1)

The character mappings supported are tolower and toupper.

#### Character classifications (7.30.1)

The character classifications that are supported are alnum, cntrl, digit, graph, lower, print, punct, space, upper, and xdigit.

Descriptions of implementation-defined behavior

# Implementation-defined behavior for C89

• Descriptions of implementation-defined behavior

If you are using Standard C instead of C89, see Implementation-defined behavior for Standard C, page 571.

#### **Descriptions of implementation-defined behavior**

The descriptions follow the same order as the ISO appendix. Each item covered includes references to the ISO chapter and section (in parenthesis) that explains the implementation-defined behavior.

#### TRANSLATION

#### Diagnostics (5.1.1.3)

Diagnostics are produced in the form:

filename,linenumber level[tag]: message

where filename is the name of the source file in which the error was encountered, linenumber is the line number at which the compiler detected the error, level is the level of seriousness of the message (remark, warning, error, or fatal error), tag is a unique tag that identifies the message, and message is an explanatory message, possibly several lines.

#### **ENVIRONMENT**

#### Arguments to main (5.1.2.2.2.1)

The function called at program startup is called main. No prototype was declared for main, and the only definition supported for main is:

int main(void)

To change this behavior for the DLIB runtime environment, see *Customizing* \_\_*low\_level\_init*, page 144.

#### Interactive devices (5.1.2.3)

The streams stdin and stdout are treated as interactive devices.

#### **IDENTIFIERS**

#### Significant characters without external linkage (6.1.2)

The number of significant initial characters in an identifier without external linkage is 200.

#### Significant characters with external linkage (6.1.2)

The number of significant initial characters in an identifier with external linkage is 200.

#### Case distinctions are significant (6.1.2)

Identifiers with external linkage are treated as case-sensitive.

#### **CHARACTERS**

#### Source and execution character sets (5.2.1)

The source character set is the set of legal characters that can appear in source files. It is dependent on the chosen encoding for the source file. See *Text encodings*, page 251. By default, the source character set is Raw.

The execution character set is the set of legal characters that can appear in the execution environment. These are the execution character set for character constants and string literals and their encoding types:

Execution character set	Encoding type
L	UTF-32
u	UTF-16
U	UTF-32
u8	UTF-8
none	The source character set

Table 52: Execution character sets and their encodings

The DLIB runtime environment needs a multibyte character scanner to support a multibyte execution character set. See *Locale*, page 155.

#### Bits per character in execution character set (5.2.4.2.1)

The number of bits in a character is represented by the manifest constant CHAR\_BIT. The standard include file limits.h defines CHAR\_BIT as 8.

#### Mapping of characters (6.1.3.4)

The mapping of members of the source character set (in character and string literals) to members of the execution character set is made in a one-to-one way. In other words, the same representation value is used for each member in the character sets except for the escape sequences listed in the ISO standard.

#### Unrepresented character constants (6.1.3.4)

The value of an integer character constant that contains a character or escape sequence not represented in the basic execution character set or in the extended character set for a wide character constant generates a diagnostic message, and will be truncated to fit the execution character set.

#### Character constant with more than one character (6.1.3.4)

An integer character constant that contains more than one character will be treated as an integer constant. The value will be calculated by treating the leftmost character as the most significant character, and the rightmost character as the least significant character, in an integer constant. A diagnostic message will be issued if the value cannot be represented in an integer constant.

A wide character constant that contains more than one multibyte character generates a diagnostic message.

#### Converting multibyte characters (6.1.3.4)

See Locale, page 155.

#### Range of 'plain' char (6.2.1.1)

A 'plain' char has the same range as an unsigned char.

#### INTEGERS

#### Range of integer values (6.1.2.5)

The representation of integer values are in the two's complement form. The most significant bit holds the sign; 1 for negative, 0 for positive and zero.

See *Basic data types*—*integer types*, page 345, for information about the ranges for the different integer types.

#### Demotion of integers (6.2.1.2)

Converting an integer to a shorter signed integer is made by truncation. If the value cannot be represented when converting an unsigned integer to a signed integer of equal length, the bit-pattern remains the same. In other words, a large enough value will be converted into a negative value.

#### Signed bitwise operations (6.3)

Bitwise operations on signed integers work the same way as bitwise operations on unsigned integers; in other words, the sign-bit will be treated as any other bit, except for the operator >> which will behave as an arithmetic right shift.

#### Sign of the remainder on integer division (6.3.5)

The sign of the remainder on integer division is the same as the sign of the dividend.

#### Negative valued signed right shifts (6.3.7)

The result of a right-shift of a negative-valued signed integral type preserves the sign-bit. For example, shifting 0xFF00 down one step yields 0xFF80.

#### **FLOATING POINT**

#### Representation of floating-point values (6.1.2.5)

The representation and sets of the various floating-point numbers adheres to IEEE 854–1987. A typical floating-point number is built up of a sign-bit (s), a biased exponent (e), and a mantissa (m).

See *Basic data types—floating-point types*, page 350, for information about the ranges and sizes for the different floating-point types: float and double.

#### Converting integer values to floating-point values (6.2.1.3)

When an integral number is cast to a floating-point value that cannot exactly represent the value, the value is rounded (up or down) to the nearest suitable value.

#### Demoting floating-point values (6.2.1.4)

When a floating-point value is converted to a floating-point value of narrower type that cannot exactly represent the value, the value is rounded (up or down) to the nearest suitable value.

#### **ARRAYS AND POINTERS**

#### size\_t (6.3.3.4, 7.1.1)

See *size\_t*, page 353, for information about size\_t.

#### Conversion from/to pointers (6.3.4)

See *Casting*, page 353, for information about casting of data pointers and function pointers.

#### ptrdiff\_t (6.3.6, 7.1.1)

See *ptrdiff\_t*, page 353, for information about the ptrdiff\_t.

#### REGISTERS

#### Honoring the register keyword (6.5.1)

User requests for register variables are not honored.

#### STRUCTURES, UNIONS, ENUMERATIONS, AND BITFIELDS

#### Improper access to a union (6.3.2.3)

If a union gets its value stored through a member and is then accessed using a member of a different type, the result is solely dependent on the internal storage of the first member.

#### Padding and alignment of structure members (6.5.2.1)

See the section *Basic data types—integer types*, page 345, for information about the alignment requirement for data objects.

#### Sign of 'plain' bitfields (6.5.2.1)

A 'plain' int bitfield is treated as an unsigned int bitfield. All integer types are allowed as bitfields.

#### Allocation order of bitfields within a unit (6.5.2.1)

Bitfields are allocated within an integer from least-significant to most-significant bit.

#### Can bitfields straddle a storage-unit boundary (6.5.2.1)

Bitfields cannot straddle a storage-unit boundary for the chosen bitfield integer type.

#### Integer type chosen to represent enumeration types (6.5.2.2)

The chosen integer type for a specific enumeration type depends on the enumeration constants defined for the enumeration type. The chosen integer type is the smallest possible.

#### **QUALIFIERS**

#### Access to volatile objects (6.5.3)

Any reference to an object with volatile qualified type is an access.

#### DECLARATORS

#### Maximum numbers of declarators (6.5.4)

The number of declarators is not limited. The number is limited only by the available memory.

#### **STATEMENTS**

#### Maximum number of case statements (6.6.4.2)

The number of case statements (case values) in a switch statement is not limited. The number is limited only by the available memory.

#### **PREPROCESSING DIRECTIVES**

#### Character constants and conditional inclusion (6.8.1)

The character set used in the preprocessor directives is the same as the execution character set. The preprocessor recognizes negative character values if a 'plain' character is treated as a signed character.

#### Including bracketed filenames (6.8.2)

For file specifications enclosed in angle brackets, the preprocessor does not search directories of the parent files. A parent file is the file that contains the #include directive. Instead, it begins by searching for the file in the directories specified on the compiler command line.

#### Including quoted filenames (6.8.2)

For file specifications enclosed in quotes, the preprocessor directory search begins with the directories of the parent file, then proceeds through the directories of any grandparent files. Thus, searching begins relative to the directory containing the source

file currently being processed. If there is no grandparent file and the file is not found, the search continues as if the filename was enclosed in angle brackets.

#### Character sequences (6.8.2)

Preprocessor directives use the source character set, except for escape sequences. Thus, to specify a path for an include file, use only one backslash:

#include "mydirectory\myfile"

Within source code, two backslashes are necessary:

file = fopen("mydirectory\\myfile","rt");

#### **Recognized pragma directives (6.8.6)**

In addition to the pragma directives described in the chapter *Pragma directives*, the following directives are recognized and will have an indeterminate effect. If a pragma directive is listed both in the chapter *Pragma directives* and here, the information provided in the chapter *Pragma directives* overrides the information here.

alignment baseaddr basic template matching building\_runtime can\_instantiate codeseq constseg cspy\_support dataseq define\_type\_info do\_not\_instantiate early\_dynamic\_initialization function function\_effects hdrstop important\_typedef instantiate

keep\_definition

library\_default\_requirements

library\_provides

library\_requirement\_override

memory

module\_name

no\_pch

once

system\_include

vector

warnings

#### Default \_\_DATE\_\_ and \_\_TIME\_\_ (6.8.8)

The definitions for \_\_TIME\_\_ and \_\_DATE\_\_ are always available.

### LIBRARY FUNCTIONS FOR THE IAR DLIB RUNTIME ENVIRONMENT

Note that some items in this list only apply when file descriptors are supported by the library configuration. See the chapter *The DLIB runtime environment* for more information about runtime library configurations.

#### NULL macro (7.1.6)

The NULL macro is defined to 0.

#### Diagnostic printed by the assert function (7.2)

The assert() function prints:

filename: linenr expression -- assertion failed

when the parameter evaluates to zero.

#### Domain errors (7.5.1)

NaN (Not a Number) will be returned by the mathematic functions on domain errors.

#### Underflow of floating-point values sets errno to ERANGE (7.5.1)

The mathematics functions set the integer expression errno to ERANGE (a macro in errno.h) on underflow range errors.

#### fmod() functionality (7.5.6.4)

If the second argument to fmod() is zero, the function returns NaN; errno is set to EDOM.

#### signal() (7.7.1.1)

The signal part of the library is not supported.

**Note:** The default implementation of signal does not perform anything. Use the template source code to implement application-specific signal handling. See *signal*, page 152 and *raise*, page 150, respectively.

#### Terminating newline character (7.9.2)

stdout stream functions recognize either newline or end of file (EOF) as the terminating character for a line.

#### Blank lines (7.9.2)

Space characters written to the stdout stream immediately before a newline character are preserved. There is no way to read the line through the stdin stream that was written through the stdout stream.

#### Null characters appended to data written to binary streams (7.9.2)

No null characters are appended to data written to binary streams.

#### Files (7.9.3)

Whether the file position indicator of an append-mode stream is initially positioned at the beginning or the end of the file, depends on the application-specific implementation of the low-level file routines.

Whether a write operation on a text stream causes the associated file to be truncated beyond that point, depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 122.

The characteristics of the file buffering is that the implementation supports files that are unbuffered, line buffered, or fully buffered.

Whether a zero-length file actually exists depends on the application-specific implementation of the low-level file routines.

Rules for composing valid file names depends on the application-specific implementation of the low-level file routines.

Whether the same file can be simultaneously open multiple times depends on the application-specific implementation of the low-level file routines.

#### remove() (7.9.4.1)

The effect of a remove operation on an open file depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 122.

#### rename() (7.9.4.2)

The effect of renaming a file to an already existing filename depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 122.

#### %p in printf() (7.9.6.1)

The argument to a &p conversion specifier, print pointer, to printf() is treated as having the type void \*. The value will be printed as a hexadecimal number, similar to using the &x conversion specifier.

#### %p in scanf() (7.9.6.2)

The p conversion specifier, scan pointer, to scanf() reads a hexadecimal number and converts it into a value with the type void \*.

#### Reading ranges in scanf() (7.9.6.2)

A - (dash) character is always treated as a range symbol.

#### File position errors (7.9.9.1, 7.9.9.4)

On file position errors, the functions fgetpos and ftell store EFPOS in errno.

#### Message generated by perror() (7.9.10.4)

The generated message is:

usersuppliedprefix:errormessage

#### Allocating zero bytes of memory (7.10.3)

The calloc(), malloc(), and realloc() functions accept zero as an argument. Memory will be allocated, a valid pointer to that memory is returned, and the memory block can be modified later by realloc.

#### Behavior of abort() (7.10.4.1)

The abort() function does not flush stream buffers, and it does not handle files, because this is an unsupported feature.

#### Behavior of exit() (7.10.4.3)

The argument passed to the exit function will be the return value returned by the main function to cstartup.

#### Environment (7.10.4.4)

The set of available environment names and the method for altering the environment list is described in *getenv*, page 148.

#### system() (7.10.4.5)

How the command processor works depends on how you have implemented the system function. See *system*, page 153.

#### Message returned by strerror() (7.11.6.2)

The messages returned by strerror() depending on the argument is:

Argument	Message
EZERO	no error
EDOM	domain error
ERANGE	range error
EFPOS	file positioning error
EILSEQ	multi-byte encoding error
<0    >99	unknown error
all others	error nnn

Table 53: Message returned by strerror()-DLIB runtime environment

#### The time zone (7.12.1)

The local time zone and daylight savings time implementation is described in *\_\_time32*, *\_\_time64*, page 153.

#### clock() (7.12.2.1)

From where the system clock starts counting depends on how you have implemented the clock function. See *clock*, page 147.

Descriptions of implementation-defined behavior

### Α

a (ielfdump option)	543
AAPCS (predefined symbol)	452
aapcs (compiler option)	263
AAPCS_VFP (predefined symbol)	452
ABI, AEABI and IA64	
abort	
implementation-defined behavior	585
implementation-defined behavior in C89 (DLIB)	601
system termination (DLIB)	144
absolute (extended keyword)	363
absolute location	
data, placing at (@)	227
language support for	185
placing data in registers (@)	
#pragma location	
advanced_heap (linker option)	
aeabi (compiler option)	
_AEABI_PORTABILITY_LEVEL (preprocessor	
symbol)	217
_AEABI_PORTABLE (preprocessor symbol)	217
algorithm (library header file)	469
alias_def (pragma directive)	579
alignment	343
forcing stricter (#pragma data_alignment)	382
in structures (#pragma pack)	394
in structures, causing problems	224
of an object (ALIGNOF)	186
of data types	344
restrictions for inline assembler	
alignment (pragma directive)	597
ALIGNOF (operator)	186
align_sp_on_irq (compiler option)	263
all (ielfdump option)	544
alternate_target_def (pragma directive)	
anonymous structures	
ANSI C. See C89	

application
building, overview of67
execution, overview of62
startup and termination (DLIB)141
argv (argument), implementation-defined behavior 572
Arm
and Thumb code, overview
supported devices
_arm (extended keyword)
arm (compiler option)
Arm TrustZone
ARMVFP (predefined symbol)456
ARMVFPV2 (predefined symbol)
ARMVFPV3 (predefined symbol)
ARMVFPV4 (predefined symbol)
ARMVFP_D16 (predefined symbol)456
ARMVFP_SP (predefined symbol)
ARM_ADVANCED_SIMD (predefined symbol) 452
ARM_ARCH (predefined symbol)453
ARM_ARCH_ISA_ARM (predefined symbol)453
ARM_ARCH_ISA_THUMB (predefined symbol)453
ARM_ARCH_PROFILE (predefined symbol) 453
ARM_BIG_ENDIAN (predefined symbol)
arm_cdp (intrinsic function)
arm_cdp2 (intrinsic function)
ARM_FEATURE_CMSE (predefined symbol) 453
ARM_FEATURE_CRC32 (predefined symbol)454
ARM_FEATURE_CRYPTO (predefined symbol)454
ARM_FEATURE_DIRECTED_ROUNDING (predefined
symbol)
ARM_FEATURE_DSP (predefined symbol) 454
ARM_FEATURE_FMA (predefined symbol)454
ARM_FEATURE_IDIV (predefined symbol)454
ARM_FEATURE_NUMERIC_MAXMIN (predefined
symbol)
ARM_FEATURE_UNALIGNED (predefined symbol) 455
ARM_FP (predefined symbol)
arm_ldc (intrinsic function)
arm_ldcl (intrinsic function)
arm_ldcl2 (intrinsic function)

arm_ldc2 (intrinsic function)	405
arm_mcr (intrinsic function)	
arm_mcrr (intrinsic function)	406
arm_mcrr2 (intrinsic function)	406
arm_mcr2 (intrinsic function)	
ARM_MEDIA (predefined symbol)	455
arm_mrc (intrinsic function)	407
arm_mrc2 (intrinsic function)	407
arm_mrrc (intrinsic function)	407
arm_mrrc2 (intrinsic function)	407
ARM_NEON (predefined symbol)	455
ARM_NEON_FP (predefined symbol)	455
ARM_PROFILE_M (predefined symbol)	456
arm_rsr (intrinsic function)	407
arm_rsrp (intrinsic function)	408
arm_rsr64 (intrinsic function)	407
arm_stc (intrinsic function)	408
arm_stcl (intrinsic function)4	08-409
arm_stc2 (intrinsic function)	408
arm_stc2l (intrinsic function)4	08-409
arm_wsr (intrinsic function)	409
ARM4TM (predefined symbol)	457
ARM5 (predefined symbol)	457
ARM5E (predefined symbol)	457
ARM6 (predefined symbol)	457
ARM6M (predefined symbol)	457
ARM6SM (predefined symbol)	457
ARM7A (predefined symbol)	457
ARM7EM (predefined symbol)	457
ARM7M (predefined symbol)	457
ARM7R (predefined symbol)	457
ARM8A (predefined symbol)	457
ARM8EM_MAINLINE (predefined symbol)	457
ARM8M_BASELINE (predefined symbol)	
ARM8M_MAINLINE (predefined symbol)	457
ARM8R (predefined symbol)	
array (library header file)	469
arrays	
implementation-defined behavior	577

implementation-defined behavior in C89595
non-lvalue
of incomplete types
single-value initialization
arrays of incomplete types
asm,asm (language extension)
assembler code
calling from C
calling from C++ 171
inserting inline
assembler directives
for call frame information
using in inline assembler code
assembler instructions
for software interrupts82
assembler instructions, inserting inline
assembler labels
default for application startup
making public (public_equ)
assembler language interface159
calling convention. See assembler code
assembler list file, generating
assembler output file
assembler statements
asserts
implementation-defined behavior of
implementation-defined behavior of in C89, (DLIB) 598
including in application462
assert.h (DLIB header file)
assignment of pointer types
@ (operator)
placing at absolute address
placing in sections
atexit limit, setting up110
atexit, reserving space for calls
atomic accesses
atomic operations
atomic types for bitfields
implementation-defined behavior577

### В

backtrace information See call frame information
Barr, Michael
baseaddr (pragma directive)
BASE_FILE (predefined symbol)457
basic_heap (linker option)
basic_template_matching (pragma directive) 579, 597
batch files
error return codes
none for building library from command line130
BE32 (linker option)
BE8 (linker option)
big_endian (extended keyword)
big-endian (byte order)
bin (ielftool option)
binary streams
binary streams in C89 (DLIB)
bin-multi (ielftool option)
bit negation
bitfields
data representation of
hints
implementation-defined behavior
implementation-defined behavior in C89595
non-standard types in
bitfields (pragma directive)
bits in a byte, implementation-defined behavior 573
bitset (library header file)

bold style, in this guide	46
bool (data type)	345
adding support for in DLIB	. 468, 472
bounds_table_size (linker option)	305
.bss (ELF section)	512
building_runtime (pragma directive)	. 579, 597
BUILD_NUMBER (predefined symbol)	457
byte order	68
identifying	459

### С

C and C++ linkage
C/C++ calling convention. See calling convention
C header files
C language, overview
call frame information
in assembler list file
in assembler list file (-lA)
call graph root (stack usage control directive)
call stack
callee-save registers, stored on stack72
calling convention
C++, requiring C linkage 171
in compiler
calloc (library function)73
See also heap
implementation-defined behavior in C89 (DLIB) 600
calls (pragma directive)
call_graph (linker option)
call_graph_root (pragma directive)
call-info (in stack usage control file)
canaries
can_instantiate (pragma directive)
cassert (library header file)
casting
of pointers and integers
pointers to integers, language extension
category (in stack usage control file)

ccomplex (library header file)472
cctype (DLIB header file)472
CDP (intrinsic function)
CDP2 (intrinsic function)
cerrno (DLIB header file)
cexit (system termination code)
customizing system termination144
in DLIB
cfenv (library header file)
CFI (assembler directive)
CFI_COMMON_ARM (call frame information macro) 181
CFI_COMMON_Thumb (call frame information macro). 181
CFI_NAMES_BLOCK (call frame information macro) 181
cfloat (DLIB header file)
char (data type)
changing default representation (char_is_signed) 264
changing representation (char_is_unsigned)
implementation-defined behavior
signed and unsigned
character set, implementation-defined behavior
characters
implementation-defined behavior
implementation-defined behavior in C89
char_is_signed (compiler option)264
char_is_unsigned (compiler option)
char16_t (data type)
char32_t (data type)
check that (linker directive)
checksum
calculation of
display format in C-SPY for symbol
checksum (ielftool option)
chrono (library header file)
cinttypes (DLIB header file)
ciso646 (library header file)
climits (DLIB header file)
clobber
clocale (DLIB header file)
clock (DLIB library function),
implementation-defined behavior in C89601

CLREX (intrinsic function)
clustering (compiler transformation)
disabling (no_clustering)
CLZ (intrinsic function)
cmain (system initialization code)
in DLIB
cmath (DLIB header file)
CMSE
cmse (compiler option)
cmse_nonsecure_call (extended keyword)
cmse_nonsecure_entry (extended keyword) 365
CMSIS integration
code
Arm and Thumb, overview
facilitating for good generation of
interruption of execution
code (ielfdump option)
code motion (compiler transformation)
disabling (no_code_motion)
codecvt (library header file)
codeseg (pragma directive)
command line options
See also compiler options
See also linker options
part of compiler invocation syntax
part of linker invocation syntax
passing
typographic convention
command prompt icon, in this guide47
.comment (ELF section)
comments
after preprocessor directives
common block (call frame information)
common subexpr elimination (compiler transformation) . 234
disabling (no_cse)
Common.i (CFI header example file)
compilation date
exact time of (TIME)
identifying (DATE)
· · · · · · · · · · · · · · · · · · ·

compiler
environment variables
invocation syntax
output from
compiler listing, generating (-l)
compiler object file60
including debug information in (debug, -r)
output from compiler
compiler optimization levels232
compiler options
passing to compiler
reading from file (-f)
specifying parameters
summary
syntax
for creating skeleton code170
instruction scheduling
warnings_affect_exit_code
compiler platform, identifying459
compiler transformations
compiler version number
compiling
from the command line
syntax
complex (library header file)
complex.h (library header file)
computer style, typographic convention
concatenating strings
concatenating wide string literals with different encoding
types
implementation-defined behavior
condition_variable (library header file)470
config (linker option)
configuration
basic project settings67
low_level_init144
configuration file for linker.See linker configuration file
configuration symbols
for file input and output155
in library configuration files

in linker configuration files
specifying for linker
config_def (linker option)
config_search (linker option)
consistency, module
const
declaring objects
constseg (pragma directive)
contents, of this guide
control characters,
implementation-defined behavior
conventions, used in this guide
copyright notice
CORE (predefined symbol)
core
identifying
selecting
Cortex-M7
Cortex, special considerations for interrupt functions77
cos (library function)
cos (library routine)
cosf (library routine)140–141
cosl (library routine)
COUNTER (predefined symbol)
cplusplus (predefined symbol)
cplusplus_neutral (pragma directive)
cpp_init_routine (linker option)
cpu (compiler option)
cpu (linker option)
CPU_MODE (predefined symbol)
cpu_mode (compiler option)
CPU, specifying on command line for compiler
crc32b (intrinsic function)
crc32cb (intrinsic function)
crc32cd (intrinsic function)
crc32ch (intrinsic function)
crc32cw (intrinsic function)
crc32d (intrinsic function)
crc32h (intrinsic function)
crc32w (intrinsic function)

create (iarchive option)549
csetjmp (DLIB header file)472
csignal (DLIB header file)472
cspy_support (pragma directive)
CSTACK (ELF block)
See also stack
setting up size for
cstartup (system startup code)
customizing system initialization
source files for (DLIB)
cstat_disable (pragma directive)
cstat_dump (pragma directive)
cstat_enable (pragma directive)
cstat_restore (pragma directive)
cstat_suppress (pragma directive)
cstdalign (DLIB header file)
cstdarg (DLIB header file)
cstdbool (DLIB header file)472
cstddef (DLIB header file)
cstdio (DLIB header file)
cstdlib (DLIB header file)472
cstdnoreturn (DLIB header file)472
cstring (DLIB header file)472
ctgmath (library header file)
cthreads (DLIB header file)472
ctime (DLIB header file)472
ctype.h (library header file)468
cuchar (DLIB header file)472
cwctype.h (library header file)
C_INCLUDE (environment variable)247
C-RUN runtime error checking, documentation for $\ldots \ldots 44$
C-SPY
debug support for C++196
interface to system termination
C-STAT for static analysis, documentation for44
C++
absolute location
calling convention
header files

language extensions	196
static member variables	228
support for	. 53
c++ (compiler option)	267
C++ header files	469
C++ terminology	. 46
C++14	. 53
C++14. See Standard C++	
C11 standard	183
C11. See Standard C	
C89	
implementation-defined behavior	591
support for	183
c89 (compiler option)	264

### D

-D (compiler option)
-d (iarchive option)
data
alignment of
different ways of storing71
located, declaring extern
placing
at absolute location
placing in registers
representation of
storage
data block (call frame information)
data pointers
data types
floating point
in C++
integer types
dataseg (pragma directive)
data_alignment (pragma directive)
.data_init (ELF section)513
DATE (predefined symbol)
date (library function), configuring support for 127

DC32 (assembler directive)161
debug (compiler option)
debug information, including in object file
.debug (ELF section)
debug_heap (linker option)
decimal point, implementation-defined behavior588
declarations
empty
Kernighan & Ritchie
of functions
declarators, implementation-defined behavior in C89596
default_no_bounds (pragma directive)
default_to_complex_ranges (linker option)
define block (linker directive)
define memory (linker directive)
define overlay (linker directive)
define region (linker directive)
define section (linker directive)
define symbol (linker directive)
define_symbol (linker option)
define_type_info (pragma directive)580, 597
define_without_bounds (pragma directive)
define_with_bounds (pragma directive)
delete (iarchive option)
delete (keyword)73
denormalized numbers. See subnormal numbers
dependencies (compiler option)
dependencies (linker option)
deprecated (pragma directive)
deprecated_feature_warnings (compiler option) 269
deque (library header file)
destructors and interrupts, using
device description files, preconfigured for C-SPY54
diagnostic messages
classifying as compilation errors
classifying as compilation remarks
classifying as compiler warnings
classifying as errors
classifying as linker warnings

classifying as linking errors	315
classifying as linking remarks	
disabling compiler warnings	290
disabling linker warnings	331
disabling wrapping of in compiler	
disabling wrapping of in linker	332
enabling compiler remarks	295
enabling linker remarks	334
listing all used by compiler	271
listing all used by linker	316
suppressing in compiler	271
suppressing in linker	315
diagnostics	
iarchive	527
iobjmanip	533
isymexport	540
diagnostics_tables (compiler option)	271
diagnostics_tables (linker option)	316
diagnostics, implementation-defined behavior	571
diag_default (pragma directive)	385
diag_error (compiler option)	270
diag_error (linker option)	315
no_fragments (compiler option)	284
no_fragments (linker option)	328
diag_error (pragma directive)	386
diag_remark (compiler option)	270
diag_remark (linker option)	315
diag_remark (pragma directive)	386
diag_suppress (compiler option)	271
diag_suppress (linker option)	315
diag_suppress (pragma directive)	387
diag_warning (compiler option)	271
diag_warning (linker option)	316
diag_warning (pragma directive)	387
directives	
pragma5:	5, 377
to the linker	
directory, specifying as parameter	256
disable_check (pragma directive)	

disable_fiq (intrinsic function)412
disable_interrupt (intrinsic function)412
disable_irq (intrinsic function)413
disasm_data (ielfdump option)550
discard_unused_publics (compiler option)272
disclaimer
DLIB
configurations
configuring
naming convention47
reference information. See the online help system 465
runtime environment
dlib_config (compiler option)
DLib_Defaults.h (library configuration file)
DLIB_FILE_DESCRIPTOR (configuration symbol) 155
DMB (intrinsic function)413
do not initialize (linker directive)
document conventions
documentation
contents of this42
how to use this
overview of guides43
who should read this41
domain errors, implementation-defined behavior 582
domain errors, implementation-defined behavior in C89
(DLIB)
double (data type)
do_explicit_zero_opt_in_named_sections
(compiler option)
do_not_instantiate (pragma directive)580, 597
do_segment_pad (linker option)317
DSB (intrinsic function)
duplicate section merging
dynamic initialization141
and C++96
dynamic memory
dynamic RTTI data, including in the image

### Ε

-e (compiler option)	274
early_initialization (pragma directive)580,	597
edit (isymexport option)	551
edition, of this guide	2
ELF utilities	525
embedded systems, IAR special support for	. 55
empty region (in linker configuration file)	
empty translation unit	190
enable_fiq (intrinsic function)	413
enable_hardware_workaround (compiler option)	274
enable_hardware_workaround (linker option)	
enable_interrupt (intrinsic function)	414
enable_irq (intrinsic function)	414
enable_restrict (compiler option)	274
enabling restrict keyword	274
encoding of wchar_t, char16_t, and char32_t	
implementation-defined behavior	575
encodings	251
Raw	251
system default locale	251
Unicode	251
UTF-16	251
UTF-8	251
endianness. See byte order	
entry (linker option)	318
entry label, program	
enumerations	
implementation-defined behavior	577
implementation-defined behavior in C89	595
enums	
data representation	346
forward declarations of	188
enum_is_int (compiler option)	275
environment	
implementation-defined behavior	572
implementation-defined behavior in C89	591
runtime (DLIB)	121

environment names, implementation-defined behavior. . . 573 environment variables

C_INCLUDE	. 247
ILINKARM_CMD_LINE	. 247
QCCARM	. 247
environment (native),	
implementation-defined behavior	. 588
EQU (assembler directive)	. 294
ERANGE	. 582
ERANGE (C89)	. 599
errno value at underflow,	
implementation-defined behavior	. 585
errno.h (library header file)	
error checking (C-RUN), documentation for	44
error messages	. 253
classifying	, 328
classifying for compiler	. 270
classifying for linker	. 315
range	. 115
error return codes	. 249
error (linker directive)	. 508
error (pragma directive)	. 387
errors and warnings,	
listing all used by the compiler (diagnostics_tables) $\ .$ .	. 271
error_limit (compiler option)	. 275
error_limit (linker option)	
escape sequences, implementation-defined behavior	. 574
exception flags, for floating-point values	. 351
exception (library header file)	. 470
EXCEPTIONS (predefined symbol)	
exceptions, code for in section	. 513
exception_neutral (pragma directive)	. 580
exception_tables (linker option)	. 319
exclude (stack usage control directive)	. 518
.exc.text (ELF section)	. 513
_Exit (library function)	
exit (library function)	. 143
implementation-defined behavior	. 585
implementation-defined behavior in C89	. 601
_exit (library function)	. 143

exit (library function)	143
exp (library routine)	140
expf (library routine)	140
expl (library routine)	140
export (linker directive)	506
export_builtin_config (linker option)	319
expressions (in linker configuration file)	506
extended command line file	
for compiler	
for linker	320
passing options	246
extended keywords	359
enabling (-e).	
overview	
summary	362
syntax	
object attributes	362
type attributes on data objects	
type attributes on functions	
extended-selectors (in linker configuration file)	503
extern "C" linkage	194
extract (iarchive option)	
extra_init (linker option)	

### F

-f (compiler option)
-f (IAR utility option)
-f (linker option)
fast interrupts
fatal error messages
fdopen, in stdio.h
FENV_ACCESS, implementation-defined behavior 576
fenv.h (library header file)
fgetpos (library function), implementation-defined
behavior
fgetpos (library function), implementation-defined
behavior in C89
FILE (predefined symbol)

file buffering, implementation-defined behavior5	83
file dependencies, tracking	.68
file input and output	
configuration symbols for1	55
file paths, specifying for #include files	78
file position, implementation-defined behavior5	83
file (zero-length), implementation-defined behavior5	83
filename	
extension for device description files	54
extension for header files	54
of object executable image	32
of object file	32
search procedure for	47
specifying as parameter	56
filenames (legal), implementation-defined behavior5	
fileno, in stdio.h	74
files, implementation-defined behavior	
handling of temporary5	84
multibyte characters in5	
opening	83
fill (ielftool option)5	
fiq (extended keyword)	65
float (data type)	50
floating-point constants	
hints	24
floating-point conversions	
implementation-defined behavior5	76
floating-point environment, accessing or not	99
floating-point expressions	
contracting or not	99
floating-point format	50
hints	.24
implementation-defined behavior5	76
implementation-defined behavior in C895	94
special cases	52
32-bits	
64-bits	51
floating-point status flags	74
floating-point unit	

float.h (library header file)
FLT_EVAL_METHOD, implementation-defined
behavior
FLT_ROUNDS, implementation-defined
behavior
fma (intrinsic function)414
fmaf (intrinsic function)
fmod (library function),
implementation-defined behavior in C89 599
force_exceptions (linker option)
force_output (linker option)
formats
floating-point values
standard IEEE (floating point)
forward_list (library header file)
fpu (compiler option)
fpu (linker option)
FP_CONTRACT, implementation-defined behavior 577
fragmentation, of heap memory74
free (library function). See also heap73
freopen (function)
front_headers (ielftool option)
fsetpos (library function), implementation-defined
behavior
fstream (library header file)
ftell (library function), implementation-defined behavior. 585
in C89
Full DLIB (library configuration)132
func (predefined symbol)458
FUNCTION (predefined symbol)
function calls
calling convention
eliminating overhead of by inlining
preserved registers across
function declarations, Kernighan & Ritchie
function execution, in RAM
function inlining
function inlining (compiler transformation)
disabling (no_inline)
function pointers
•

## G

-g (ielfdump option)
GCC attributes
generate_entry_without_bounds (pragma directive) 378
generate_vfe_header (isymexport option)553
getw, in stdio.h
getzone (library function), configuring support for 127
get_BASEPRI (intrinsic function)
get_CONTROL (intrinsic function)415
get_CPSR (intrinsic function)
get_FAULTMASK (intrinsic function)415
get_FPSCR (intrinsic function)
get_interrupt_state (intrinsic function)
get_IPSR (intrinsic function)
get_LR (intrinsic function)

get_MSP (intrinsic function)
get_PRIMASK (intrinsic function)
get_PSP (intrinsic function)
get_PSR (intrinsic function)
get_SB (intrinsic function)
get_SP (intrinsic function)
global variables
affected by static clustering
handled during system termination
hints for not using
initialized during system startup
GRP_COMDAT, group type534
guard_calls (compiler option)
guidelines, reading41

## Η

heap size
and standard I/O
changing default110
HEAP (ELF section)
heap (zero-sized), implementation-defined behavior $\dots 585$
hide (isymexport directive)539
hide_symbols (iexe2obj option)
hints
for good code generation
implementation-defined behavior
using efficient data types

## 

-I (compiler option)	-
IAR Command Line Build Utility	-
IAR Systems Technical Support	-
iarbuild.exe (utility)130	-
iarchive	-
commands summary	-
options summary	-
iar_cos_accurate (library routine)	-
iar_cos_accuratef (library routine)141	-
iar_cos_accuratef (library function)	-
iar_cos_accuratel (library routine)141	-
iar_cos_accuratel (library function)	-
iar_cos_small (library routine)140	-
iar_cos_smallf (library routine)	-
iar_cos_smalll (library routine)140	-
iar_dlmalloc.h (library header file)	-
additional C functionality474	
iar_exp_small (library routine)	
iar_exp_smallf (library routine)140	]
iar_exp_smalll (library routine)140	-
iar_log_small (library routine)140	1
iar_log_smallf (library routine)140	]
iar_log_smalll (library routine)140	
iar_log10_small (library routine)140	
iar_log10_smallf (library routine)140	i

	iar_log10_smalll (library routine)14	40
204	iar_maximum_atexit_calls1	10
10	iar_pow_accurate (library routine)14	41
513	iar_pow_accuratef (library routine)	41
585	iar_pow_accuratef (library function)	66
539	iar_pow_accuratel (library routine)14	41
553	iar_pow_accuratel (library function)4	66
	iar_pow_small (library routine)14	40
236	iar_pow_smallf (library routine)14	40
577	iar_pow_smalll (library routine)	40
223	iar_program_start (label)	42
	iar_ReportAssert (library function)14	47
	iar_sin_accurate (library routine)14	41
	iar_sin_accuratef (library routine)	41
278	iar_sin_accuratef (library function)4	66
30	iar_sin_accuratel (library routine)14	41
254	iar_sin_accuratel (library function)40	66
30	iar_sin_small (library routine)	40
525	iar_sin_smallf (library routine)	40
526	iar_sin_smalll (library routine)	40
527	IAR_SYSTEMS_ICC (predefined symbol)4	59
41	iar_tan_accurate (library routine)14	41
41	iar_tan_accuratef (library routine)	41
66	iar_tan_accuratef (library function)	66
41	iar_tan_accuratel (library routine)	41
66	iar_tan_accuratel (library function)4	66
40	iar_tan_small (library routine)14	40
40	iar_tan_smallf (library routine)14	40
40	iar_tan_smalll (library routine)	40
	iar_tls.\$\$DATA (ELF section)	13
74	.iar.debug (ELF section)	12
40	.iar.dynexit (ELF section)	14
40	IA64 ABI	15
40	ICCARM (predefined symbol)	59
40	icons, in this guide	47
40	IDE	
40	building a library from 12	29
40	overview of build tools	51
40	ident (pragma directive)58	80

identifiers, implementation-defined behavior
identifiers, implementation-defined behavior in C89 592
IEEE format, floating-point values
ielfdump
options summary
ielftool
options summary
iexe2obj
if (linker directive)
ignore_uninstrumented_pointers (linker option) 306
ihex (ielftool option)
ILINK options. See linker options
ILINKARM_CMD_LINE (environment variable) 247
ILINK. See linker
image_input (linker option)
implements_aspect (pragma directive)
important_typedef (pragma directive)580, 597
import_cmse_lib_in (linker option)
import_cmse_lib_out (linker option)
include files
including before source files
specifying
include (linker directive)
include_alias (pragma directive)
infinity
infinity (style for printing), implementation-defined
behavior
initialization
changing default110
C++ dynamic
dynamic
manual
packing algorithm for111
single-value
suppressing110
initialization_routine (pragma directive)580
initialize (linker directive)
initializers, static
initializer_list (library header file)
.init_array (section)

init_routines_only_for_needed_variables		
(pragma directive)		580
inline (linker option)		323
inline assembler		160
avoiding		237
for passing values between C and assembler		240
See also assembler language interface		
inline functions		
in compiler		234
inline (pragma directive)		389
inline_template (pragma directive)		580
inlining		119
inlining functions		
implementation-defined behavior		577
installation directory		
instantiate (pragma directive)	80,	597
instruction scheduling (compiler option)		
int (data type) signed and unsigned		345
integer types		345
casting		
implementation-defined behavior		
intptr_t		
ptrdiff_t		
size_t		
uintptr_t		
integers, implementation-defined behavior in C89		
integral promotion		238
Intel hex		
Intel IA64 ABI		
internal error		
interrupt functions		
fast interrupts		
in Cortex		
nested interrupts		
operations		
software interrupts		. 82
interrupt handler. See interrupt service routine		
interrupt service routine		
interrupt state, restoring		430

interrupt vector table	83
start address for	
interrupts	
processor state	72
using with C++ destructors	
interwork (extended keyword)	
intptr_t (integer type)	353
intrinsic (extended keyword)	
intrinsic functions	237
for Neon	403
overview	159
summary	403
intrinsics.h (header file)	403
inttypes.h (library header file)	468
.intvec (ELF section)	514
invocation syntax	245
iobjmanip	532
options summary	533
iomanip (library header file)	470
ios (library header file)	470
iosfwd (library header file)	470
iostream (library header file)	470
irq (extended keyword)	366
IRQ_STACK (section)	514
ISB (intrinsic function)	418
iso646.h (library header file)	468
istream (library header file)	470
iswalnum (function)	476
iswxdigit (function)	476
isymexport	535
options summary	537
italic style, in this guide	46
iterator (library header file)	470
I/O register. See SFR	

## Κ

keep (linker option)	4
keep (linker directive)	5

keep_definition (pragma directive)	. 580, 598
keep_mode_symbols (iexe2obj option)	554
Kernighan & Ritchie function declarations	238
disallowing	295
keywords	359
extended, overview of	55

#### L

-L (linker option)	335
-l (compiler option)	278
for creating skeleton code	
labels.	
assembler, making public	294
iar_program_start	
program_start	
Labrosse, Jean J.	45
language extensions	
enabling using pragma	389
enabling (-e)	
language overview	
language (pragma directive)	
_LDC (intrinsic function)	
LDCL (intrinsic function)	
LDCL_noidx (intrinsic function)	
LDC_noidx (intrinsic function)	
_LDC2 (intrinsic function)	418
_LDC2L (intrinsic function)	418
LDC2L_noidx (intrinsic function)	
LDC2_noidx (intrinsic function)	
LDREX (intrinsic function)	
LDREXB (intrinsic function)	
LDREXD (intrinsic function)	
LDREXH (intrinsic function)	
legacy (compiler option)	
libraries	217
reason for using	60
using a prebuilt	

-•

library configuration files

DLIB
DLib_Defaults.h
modifying
specifying
library documentation
library files, linker search path to (search)
library functions
summary, DLIB
online help for
library header files
library modules
introduction
overriding
library object files
library project, building using a template
library_default_requirements (pragma directive) 580, 598
library_provides (pragma directive)
library_requirement_override (pragma directive) 580, 598
lightbulb icon, in this guide
limits (library header file)470
limits.h (library header file)468
LINE (predefined symbol)459
linkage, C and C++172
linker
output from
linker configuration file
for placing code and data91
in depth
overview of
selecting
linker object executable image
specifying filename of (-o)
linker options
reading from file (-f)
summary
typographic convention46
linking
from the command line67
in the build process

introduction	87
process for	89
list (library header file)	70
listing, generating 2	278
literature, recommended	45
LITTLE_ENDIAN (predefined symbol)4	59
little_endian (extended keyword)3	66
little-endian (byte order)	68
local symbols, removing from ELF image	530
local variables, See auto variables	
locale	
changing at runtime1	56
implementation-defined behavior	87
library header file	
support for	55
locale.h (library header file)4	68
located data, declaring extern	228
location (pragma directive)	
log (linker option)	
log (library routine)	40
logf (library routine)	
logical (linker directive)	
logl (library routine)	40
log_file (linker option)	325
log10 (library routine)	40
log10f (library routine) 1	
log10l (library routine)	
long double (data type)	50
long float (data type), synonym for double 1	88
long long (data type) signed and unsigned	645
long (data type) signed and unsigned	645
longjmp, restrictions for using4	67
loop unrolling (compiler transformation)2	234
disabling2	289
#pragma unroll	01
loop-invariant expressions	234
low_level_init	42
customizing1	44
initialization phase	63

low_level_init.c14	1
low-level processor operations	4
accessing	9
lz77, packing algorithm for initializers	3

## M

macros	
embedded in #pragma optimize	393
ERANGE (in errno.h)5	82, 599
inclusion of assert	462
NULL, implementation-defined behavior	583
in C89 for DLIB	598
substituted in #pragma directives	184
macro_positions_in_diagnostics (compiler option) $% {\begin{subarray}{c} \label{eq:complex} \label{eq:complex} \end{array} }$	279
main (function)	
definition (C89)	
implementation-defined behavior	572
make_all_definitions_weak (compiler option)	280
malloc (library function)	
<i>See also</i> heap	73
implementation-defined behavior in C89	600
mangled_names_in_messages (linker option)	325
Mann, Bernhard	45
manual_dynamic_initialization (linker option). $\ldots$	
-map (linker option)	326
map file, producing	326
map (library header file)	470
math functions rounding mode,	
implementation-defined behavior	
math functions (library functions)	
math.h (library header file)	
max recursion depth (stack usage control directive)	
max_cost_constexpr_call (compiler option)	
max_depth_constexpr_call (compiler option)	
MB_LEN_MAX, implementation-defined behavior	
MCR (intrinsic function)	
MCRR (intrinsic function)	
MCRR2 (intrinsic function)	421

MCR2 (intrinsic function)
memory
allocating in C++
dynamic
heap
non-initialized
RAM, saving
releasing in C++73
stack
saving
used by global or static variables
memory clobber
memory map
initializing SFRs144
linker configuration for
output from linker
producing (map)
memory (library header file)
memory (pragma directive)
merge duplicate sections
-merge_duplicate_sections (linker option)
message (pragma directive)
messages
disabling
forcing
Meyers, Scott
mfc (compiler option)
migration, from earlier IAR compilers
MISRA C
documentation
misrac (compiler option)
misrac (linker option)
misrac_verbose (compiler option)
misrac_verbose (linker option)
misrac1998 (compiler option)
misrac1998 (linker option)
misrac2004 (compiler option)
misrac2004 (linker option)
mode changing, implementation-defined behavior 584

-•

module consistency	7
rtmodel	5
modules, introduction	3
module_name (pragma directive)	3
module-spec (in stack usage control file)	l
Motorola S-records	L
MRC (intrinsic function)	2
MRC2 (intrinsic function)	2
MRRC (intrinsic function)	2
MRRC2 (intrinsic function)	2
multibyte characters, implementation-defined	
behavior	7
multithreaded environment	5
multi-file compilation	L
multi-threaded environment	
implementation-defined behavior	2
mutex (library header file)470	)

## Ν

name (in stack usage control file)	522
names block (call frame information)	178
naming conventions	47
NaN	
implementation of	352
implementation-defined behavior	584
native environment,	
implementation-defined behavior	588
NDEBUG (preprocessor symbol)	462
Neon intrinsic functions	403
nested (extended keyword)	366
nested interrupts	
new (keyword)	73
new (library header file)	470
no calls from (stack usage control directive)	519
.noinit (ELF section)	515
nonportable_path_warnings (compiler option)	291
non-initialized variables, hints for	
non-scalar parameters, avoiding	237

non-secure mode	218
NOP (assembler instruction)	423
noreturn (extended keyword)	368
Normal DLIB (library configuration)	131
Not a number (NaN)	352
no_alignment_reduction (compiler option)	281
no_alloc (extended keyword)	367
no_alloc_str (operator)	367
no_alloc_str16 (operator)	
no_alloc16 (extended keyword)	367
no_bom (ielfdump option)	554
no_bom (iobjmanip option)	554
no_bom (isymexport option)	554
no_bom (compiler option)	281
no_bom (iarchive option)	554
no_bom (linker option)	327
no_bounds (pragma directive)	379
no_clustering (compiler option)	282
no_code_motion (compiler option)	282
no_const_align (compiler option)	282
no_cse (compiler option)	283
no_dwarf3_cfi (compiler option)	283
no_dynamic_rtti_elimination (linker option)	327
no_entry (linker option)	328
no_exceptions (compiler option)	283
no_exceptions (linker option)	328
no_free_heap (linker option)	329
no_header (ielfdump option)	555
no_init (extended keyword)	240, 368
no_inline (compiler option)	284
no_inline (linker option)	329
no_library_search (linker option)	329
no_literal_pool (compiler option)	284
no_literal_pool (linker option)	330
no_locals (linker option)	330
no_loop_align (compiler option)	285
no_mem_idioms (compiler option)	285
no_operation (intrinsic function)	423
no_path_in_file_macros (compiler option)	285

no_pch (pragma directive)	. 580, 598
no_range_reservations (linker option)	
no_rel_section (ielfdump option)	555
no_remove (linker option)	
no_rtti (compiler option)	
no_rw_dynamic_init (compiler option)	286
no_scheduling (compiler option)	
no_size_constraints (compiler option)	
no_stack_protect (pragma directive)	
no_static_destruction (compiler option)	
no_strtab (ielfdump option)	555
no_system_include (compiler option)	287
no_tbaa (compiler option)	288
no_typedefs_in_diagnostics (compiler option)	288
no_unaligned_access (compiler option)	
no_uniform_attribute_syntax (compiler option)	
no_unroll (compiler option)	
no_utf8_in (ielfdump option)	555
no_var_align (compiler option)	
no_vfe (linker option)	
no_vtable_use (pragma directive)	
no_warnings (compiler option)	
no_warnings (linker option)	
no_wrap_diagnostics (compiler option)	
no_wrap_diagnostics (linker option)	
NULL	
implementation-defined behavior	583
implementation-defined behavior in C89 (DLIB)	) 598
pointer constant, relaxation to Standard C	188
numbers (in linker configuration file)	507
numeric conversion functions,	
implementation-defined behavior	
numeric (library header file)	

### Ο

-O (compiler option)	. 291
-o (compiler option)	. 292
-o (iarchive option)	. 556

-o (ielfdump option)	556
-o (linker option)	332
object attributes.	361
object filename, specifying (-o)	332
object files, linker search path to (search)	335
object_attribute (pragma directive)241,	392
offset (ielftool option)	556
once (pragma directive)	598
only_stdout (compiler option)	292
only_stdout (linker option)	332
open_s (function)	476
operators	
See also @ (operator)	
for region expressions	484
for section control	186
precision for 32-bit float	351
precision for 64-bit float	351
sizeof, implementation-defined behavior	587
ALIGNOF, for alignment control	186
?, language extensions for	197
optimization	
clustering, disabling	282
code motion, disabling	282
common sub-expression elimination, disabling	283
configuration	. 69
disabling	233
function inlining, disabling (no_inline)	284
hints	236
loop unrolling, disabling	289
scheduling, disabling	286
specifying (-O).	
techniques	233
type-based alias analysis, disabling (tbaa)	288
using inline assembler code	161
using pragma directive	393
optimization levels	232
optimize (pragma directive)	
option parameters	
options, compiler. See compiler options	

•

options, ielfdump. <i>See</i> ielfdump options options, ielftool. <i>See</i> ielftool options
options, iobjmanip. See iobjmanip options
options, isymexport. See isymexport options
options, linker. See linker options
option_name (compiler option)
Oram, Andy
ostream (library header file)
output
from preprocessor
specifying for linker67
output (compiler option)
output (iarchive option)
output (ielfdump option)556
output (linker option)
overhead, reducing

## Ρ

pack (pragma directive)	394
packbits, packing algorithm for initializers	493
packed (extended keyword)	369
packed structure types	354
packing, algorithms for initializers	493
parameters	
function	174
hidden	174
non-scalar, avoiding	237
register	174
rules for specifying a file or directory	256
specifying	257
stack	175
typographic convention	. 46
parity (ielftool option)	557
part number, of this guide	2
pcrel (extended keyword)	363
pending_instantiations (compiler option)	292
permanent registers	173

perror (library function),
implementation-defined behavior in C89 600
pi_veneers (linker option)
PKHBT (intrinsic function)
PKHTB (intrinsic function)
place at (linker directive)
place in (linker directive)
placement
in named sections
of code and data, introduction to
place_holder (linker option)
plain char, implementation-defined behavior
PLD (intrinsic function)
PLDW (intrinsic function)
PLI (intrinsic function)
pointer types
mixing
pointers
casting
data
function
implementation-defined behavior
implementation-defined behavior in C89595
pointers to different function types
polymorphic RTTI data, including in the image 327
pop_macro (pragma directive)
porting, code containing pragma directives
possible calls (stack usage control directive)
pow (library routine)140–141
alternative implementation of
powf (library routine)
powl (library routine)140–141
pragma directives
summary
for absolute located data
list of all recognized579
list of all recognized (C89)
pack
preconfig (linker option)

predefined symbols
overview
summary
predef_macro (compiler option)
preferred_typedef (pragma directive)
Prefetch_Handler (exception function)
prefix (iexe2obj option)
preinclude (compiler option)
.preinit_array (section)
.prepreinit_array (section)
preprocess (compiler option)
preprocessor
output
preprocessor directives
comments at the end of
implementation-defined behavior
implementation-defined behavior in C89596
#pragma
preprocessor extensions
#warning message
preprocessor symbols
defining
preserved registers
PRETTY_FUNCTION (predefined symbol) 459
print formatter, selecting
printf (library function)
choosing formatter
implementation-defined behavior
implementation-defined behavior in C89600
printf_args (pragma directive)
printf_multibytes (linker option)
printing characters, implementation-defined behavior 588
processor configuration
processor operations
accessing
low-level
program entry label142
program termination, implementation-defined behavior 572
programming hints

program_start (label)	. 142
projects	
basic settings for	67
setting up for a library	. 129
prototypes, enforcing	. 295
ptrdiff_t (integer type)	. 353
PUBLIC (assembler directive)	. 294
publication date, of this guide	2
public_equ (compiler option)	. 294
public_equ (pragma directive)	. 395
push_macro (pragma directive)	. 581
putenv (library function), absent from DLIB	. 149
putw, in stdio.h	. 475

### Q

QADD (intrinsic function)42QADD8 (intrinsic function)42QADD16 (intrinsic function)42QASX (intrinsic function)42QCCARM (environment variable)24QCFlag (intrinsic function)42QDADD (intrinsic function)42QDOUBLE (intrinsic function)42QDOUBLE (intrinsic function)42QDSUB (intrinsic function)42QSAX (intrinsic function)42QSUB (intrinsic function)42QSUB8 (intrinsic function)43QSUB8 (intrinsic function)43QSUB8 (intrinsic function) <th></th> <th></th>		
QADD16 (intrinsic function)42QASX (intrinsic function)42QCCARM (environment variable)24QCFlag (intrinsic function)42QDADD (intrinsic function)42QDOUBLE (intrinsic function)42QDSUB (intrinsic function)42QFlag (intrinsic function)42QSAX (intrinsic function)42QSUB (intrinsic function)42QSUB (intrinsic function)42QSUB (intrinsic function)42QSUB16 (intrinsic function)42QSUB8 (intrinsic function)43QSUB8 (intrinsic function)43QSUB8 (intrinsic function)<	QADD (intrinsic function)	425
QASX (intrinsic function).42QCCARM (environment variable)24QCFlag (intrinsic function).42QDADD (intrinsic function).42QDOUBLE (intrinsic function).42QDSUB (intrinsic function).42QFlag (intrinsic function).42QFlag (intrinsic function).42QSAX (intrinsic function).42QSUB (intrinsic function).42QSUB (intrinsic function).42QSUB16 (intrinsic function).42QSUB8 (intrinsic function).43QSUB8 (intrinsic function).43	QADD8 (intrinsic function)	425
QCCARM (environment variable)       24        QCFlag (intrinsic function)       42        QDADD (intrinsic function)       42        QDOUBLE (intrinsic function)       42        QDSUB (intrinsic function)       42        QFlag (intrinsic function)       42        QFlag (intrinsic function)       42        QSAX (intrinsic function)       42        QSUB (intrinsic function)       42        QSUB16 (intrinsic function)       42        QSUB8 (intrinsic function)       42 <t< td=""><td>QADD16 (intrinsic function)</td><td> 425</td></t<>	QADD16 (intrinsic function)	425
QCFlag (intrinsic function).       42        QDADD (intrinsic function).       42        QDOUBLE (intrinsic function).       42        QDSUB (intrinsic function).       42        QFlag (intrinsic function).       42        QSAX (intrinsic function).       42        QSUB (intrinsic function).       42        QSUB (intrinsic function).       42        QSUB (intrinsic function).       42        QSUB16 (intrinsic function).       42        QSUB8 (intrinsic function).       42	QASX (intrinsic function)	425
QDADD (intrinsic function)       42        QDOUBLE (intrinsic function)       42        QDSUB (intrinsic function)       42        QFlag (intrinsic function)       42        QSAX (intrinsic function)       42        QSUB (intrinsic function)       42        QSUB (intrinsic function)       42        QSUB (intrinsic function)       42        QSUB16 (intrinsic function)       42        QSUB8 (intrinsic function)       42	QCCARM (environment variable)	
QDOUBLE (intrinsic function).       42        QDSUB (intrinsic function)       42        QFlag (intrinsic function)       42        QSAX (intrinsic function).       42        QSUB (intrinsic function).       42        QSUB (intrinsic function).       42        QSUB16 (intrinsic function).       42        QSUB8 (intrinsic function).       42 </td <td>QCFlag (intrinsic function)</td> <td> 426</td>	QCFlag (intrinsic function)	426
QDOUBLE (intrinsic function).       42        QDSUB (intrinsic function)       42        QFlag (intrinsic function)       42        QSAX (intrinsic function).       42        QSUB (intrinsic function).       42        QSUB (intrinsic function).       42        QSUB16 (intrinsic function).       42        QSUB8 (intrinsic function).       42 </td <td>QDADD (intrinsic function)</td> <td> 425</td>	QDADD (intrinsic function)	425
QDSUB (intrinsic function)       42        QFlag (intrinsic function)       42        QSAX (intrinsic function)       42        QSUB (intrinsic function)       42        QSUB16 (intrinsic function)       42        QSUB8 (intrinsic function)       42         qualifiers       55         implementation-defined behavior       57         implementation-defined behavior in C89       59		
QFlag (intrinsic function)       42        QSAX (intrinsic function)       42        QSUB (intrinsic function)       42        QSUB16 (intrinsic function)       42        QSUB8 (intrinsic function)       42        QSUB8 (intrinsic function)       42        QSUB8 (intrinsic function)       42        QSUB8 (intrinsic function)       42         qualifiers       35         implementation-defined behavior       57         implementation-defined behavior in C89       59		
QSUB (intrinsic function).       42        QSUB16 (intrinsic function).       42        QSUB8 (intrinsic function).       42         qualifiers       35         const and volatile.       35         implementation-defined behavior       57         implementation-defined behavior in C89.       59		
QSUB16 (intrinsic function).       42        QSUB8 (intrinsic function).       42         qualifiers       42         const and volatile.       35         implementation-defined behavior       57         implementation-defined behavior in C89.       59	QSAX (intrinsic function)	425
QSUB8 (intrinsic function)	QSUB (intrinsic function)	425
qualifiers       35         const and volatile       35         implementation-defined behavior       57         implementation-defined behavior in C89       59	QSUB16 (intrinsic function)	425
qualifiers       35         const and volatile       35         implementation-defined behavior       57         implementation-defined behavior in C89       59	QSUB8 (intrinsic function)	425
implementation-defined behavior       57         implementation-defined behavior in C89       59	qualifiers	
implementation-defined behavior in C8959	const and volatile	355
-	implementation-defined behavior	578
queue (library header file)	implementation-defined behavior in C89	596
	queue (library header file)	470
quick_exit (library function)14	quick_exit (library function)	144

## R

-r (compiler option)	. 268
-r (iarchive option)	562
RAM	
example of declaring region	. 92
execution	. 76
initializers copied from ROM	. 65
running code from	113
saving memory	. 237
ramfunc (extended keyword)	. 370
ram_reserve_ranges (isymexport option)	559
random (library header file)	
range (ielfdump option)	559
range errors	
ratio (library header file)	
raw (ielfdump option).	
RBIT (intrinsic function)	
read formatter, selecting	
reading guidelines	
reading, recommended	. 45
realloc (library function)	
implementation-defined behavior in C89	600
See also heap	
recursive functions	
avoiding	. 237
storing data on stack	. 72
redirect (linker option)	. 334
reentrancy (DLIB)	466
reference information, typographic convention	. 46
region expression (in linker configuration file)	483
region literal (in linker configuration file)	482
register keyword, implementation-defined behavior	577
register parameters	. 174
registered trademarks	2
registers	
assigning to parameters	. 175
callee-save, stored on stack	
for function returns	

implementation-defined behavior in C89	. 595
in assembler-level routines	. 172
preserved	. 173
scratch	. 173
.rel (ELF section)	. 512
.rela (ELF section)	. 512
relaxed_fp (compiler option)	. 294
relay, see veneers	. 115
relocatable ELF object file	
creating	. 541
relocation errors, resolving	. 115
remark (diagnostic message)	. 253
classifying for compiler	. 270
classifying for linker	. 315
enabling in compiler	. 295
enabling in linker	. 334
remarks (compiler option)	. 295
remarks (linker option)	. 334
remove (library function)	
implementation-defined behavior	. 584
implementation-defined behavior in C89 (DLIB)	
remove_file_path (iobjmanip option)	. 560
remove_section (iobjmanip option)	
remquo, magnitude of	. 582
rename (isymexport directive)	. 539
rename (library function)	
implementation-defined behavior	
implementation-defined behavior in C89 (DLIB)	. 600
rename_section (iobjmanip option)	. 561
rename_symbol (iobjmanip option)	
replace (iarchive option)	. 562
required (pragma directive)	
require_prototypes (compiler option)	
reserve_ranges (isymexport option)	
reset vector table	
reset_QC_flag (intrinsic function)	
reset_Q_flag (intrinsic function)	
restrict keyword, enabling	
return values, from functions	. 175

REV (intrinsic function)
REVSH (intrinsic function)
REV16 (intrinsic function)
rintn (intrinsic function)
rintnf (intrinsic function)
.rodata (ELF section)
ROM to RAM, copying113
root (extended keyword)
ROPI (predefined symbol)
ropi (compiler option)
ropi_cb (compiler option)
ROR (intrinsic function)
routines, time-critical
ro_placement (extended keyword)
RRX (intrinsic function)
rtmodel (assembler directive)
rtmodel (pragma directive)
RTTI (predefined symbol)460
RTTI data (dynamic), including in the image
runtime environment
DLIB
setting up (DLIB)126
runtime error checking, documentation for44
runtime libraries (DLIB)
introduction
customizing system startup code
filename syntax
overriding modules in
using prebuilt
runtime model attributes
runtime model definitions
RWPI (predefined symbol)
rwpi (compiler option)
rwpi_near (compiler option)

## S

-s (ielfdump option)	
SADD8 (intrinsic function)	

SADD16 (intrinsic function)	. 428
SASX (intrinsic function)	. 428
sbrel (extended keyword)	. 363
scanf (library function)	
choosing formatter (DLIB)	. 137
implementation-defined behavior	. 584
implementation-defined behavior in C89 (DLIB)	. 600
scanf_args (pragma directive)	. 397
scanf_multibytes (linker option)	. 335
scheduling (compiler transformation)	. 236
disabling	. 286
scoped_allocator (library header file)	.471
scratch registers	. 173
search (linker option)	. 335
search directory, for linker configuration files (config_	
search)	
search path to library files (search)	
search path to object files (search)	
section (ielfdump option)	
section (compiler option)	. 298
sections	
summary	
allocation of	
declaring (#pragma section)	. 397
introduction	
specifying (section)	
section_begin (extended operator)	
section_end (extended operator)	
section_size (extended operator)	
section-selectors (in linker configuration file)	
secure mode	
segment (ielfdump option)	
segment (pragma directive)	
SEL (intrinsic function)	
self_reloc (ielftool option)	
semihosting (linker option)	
semihosting, overview	
separate_init_routine (pragma directive)	. 581
set (library header file)	
setjmp.h (library header file)	. 468

.....

setlocale (library function)156
settings, basic for project configuration
set_BASEPRI (intrinsic function)
set_CONTROL (intrinsic function)
set_CPSR (intrinsic function)
set_FAULTMASK (intrinsic function)430
set_FPSCR (intrinsic function)
set_generate_entries_without_bounds (pragma directive). 581
set_interrupt_state (intrinsic function)
set_LR (intrinsic function)
set_MSP (intrinsic function)
set_PRIMASK (intrinsic function)
set_PSP (intrinsic function)
set_SB (intrinsic function)
set_SP (intrinsic function)
SEV (intrinsic function)
severity level, of diagnostic messages
specifying
SFR
accessing special function registers
declaring extern special function registers
SHADD8 (intrinsic function)
SHADD16 (intrinsic function)
shared object
shared_mutex (library header file)471
SHASX (intrinsic function)
short (data type)
show (isymexport directive)
show_entry_as (isymexport option)
show-weak (isymexport directive)
SHSAX (intrinsic function)
.shstrtab (ELF section)
SHSUB16 (intrinsic function)
SHSUB8 (intrinsic function)
signal (library function)
implementation-defined behavior
implementation-defined behavior in C89
signals, implementation-defined behavior
at system startup
· · · · · · · · · · · · · · · · · · ·

signal.h (library header file)
signed char (data type)
specifying
signed int (data type)
signed long long (data type)
signed long (data type) 345
signed short (data type)
silent (compiler option)
silent (iarchive option)
silent (ielftool option)564
silent (linker option)
silent operation
specifying in compiler
specifying in linker
simple (ielftool option)
simple-ne (ielftool option)
sin (library function)
sin (library routine)140–141
sinf (library routine)
sinl (library routine)
64-bits (floating-point format)
size (in stack usage control file)
size (in stack usage control file)
size (in stack usage control file)523size_t (integer type)353skeleton code, creating for assembler language interface169slist (library header file)471small function inlining119smallest, packing algorithm for initializers493_SMLABB (intrinsic function)433_SMLABT (intrinsic function)433_SMLAD (intrinsic function)433_SMLADX (intrinsic function)434_SMLALBB (intrinsic function)434_SMLALBT (intrinsic function)434_SMLALDX (intrinsic function)434_SMLALD (intrinsic function)434_SMLALDX (intrinsic function)434_SMLALTB (intrinsic function)434_SMLALTB (intrinsic function)434_SMLALTB (intrinsic function)434
size (in stack usage control file)523size_t (integer type)353skeleton code, creating for assembler language interface169slist (library header file)471small function inlining119smallest, packing algorithm for initializers493_SMLABB (intrinsic function)433_SMLAD (intrinsic function)433_SMLAD (intrinsic function)433_SMLADX (intrinsic function)434_SMLALBB (intrinsic function)434_SMLALBB (intrinsic function)434_SMLALBT (intrinsic function)434_SMLALDX (intrinsic function)434_SMLALDX (intrinsic function)434_SMLALDX (intrinsic function)434_SMLALDX (intrinsic function)434_SMLALDX (intrinsic function)434_SMLALTT (intrinsic function)434_SMLALTB (intrinsic function)434_SMLALTT (intrinsic function)434

SMLAWB (intrinsic function)	
SMLAWT (intrinsic function)	
SMLSD (intrinsic function)	
SMLSDX (intrinsic function)	
SMLSLD (intrinsic function)	
SMLSLDX (intrinsic function)	434
SMMLA (intrinsic function)	
SMMLAR (intrinsic function)	435
SMMLS (intrinsic function)	435
SMMLSR (intrinsic function)	435
SMMUL (intrinsic function)	435
SMMULR (intrinsic function)	435
SMUAD (intrinsic function)	435
SMUL (intrinsic function)	436
SMULBB (intrinsic function)	436
SMULBT (intrinsic function)	436
SMULTB (intrinsic function)	436
SMULTT (intrinsic function)	436
SMULWB (intrinsic function)	436
SMULWT (intrinsic function)	436
SMUSD (intrinsic function)	435
SMUSDX (intrinsic function)	435
software interrupts	82
source (ielfdump option)	565
source files, list all referred.	277
source_encoding (compiler option)	299
space characters, implementation-defined behavior	583
special function registers (SFR)	239
sprintf (library function)	135
choosing formatter	135
sqrt (intrinsic function)	436
sqrtf (intrinsic function)	436
srec (ielftool option)	566
srec-len (ielftool option)	566
srec-s3only (ielftool option)	566
SSAT (intrinsic function)	437
SSAT16 (intrinsic function)	437
SSAX (intrinsic function)	428

sscanf (library function)
choosing formatter (DLIB)
sstream (library header file)
SSUB16 (intrinsic function)
SSUB8 (intrinsic function)
stack
advantages and problems using
block for holding
cleaning after function return
contents of
layout
saving space
setting up size for
size
stack buffer overflow
stack buffer overrun
stack canaries
stack parameters
stack pointer
stack protection
stack smashing
stack (library header file)
stackless (extended keyword)
stack_protect (pragma directive)
sack_protection (compiler option)
stack_usage_control (linker option)
stack-size (in stack usage control file)
Standard C
library compliance with
specifying strict usage
Standard C++
standard error
redirecting in compiler
redirecting in linker
See also diagnostic messages
standard output
specifying in compiler
specifying in linker

startup code
cstartup
startup system. See system startup
statements, implementation-defined behavior in C89596
static analysis
documentation for
static clustering (compiler transformation)
static variables
taking the address of
status flags for floating-point
STC (intrinsic function)
STCL (intrinsic function)
STCL_noidx (intrinsic function)
STC_noidx (intrinsic function)
STC2 (intrinsic function)
STC2L (intrinsic function)
STC2L_noidx (intrinsic function)
STC2_noidx (intrinsic function)
stdalign.h (library header file)
stdarg.h (library header file)
stdatomic.h (library header file)
stdbool.h (library header file)
STDC (predefined symbol)
STDC CX_LIMITED_RANGE (pragma directive) 398
STDC FENV_ACCESS (pragma directive)
STDC FP_CONTRACT (pragma directive)
STDC_LIB_EXT1 (predefined symbol)
STDC_NO_ATOMICS (preprocessor symbol)461
STDC_NO_THREADS (preprocessor symbol)461
STDC_NO_VLA (preprocessor symbol)
STDC_UTF16 (preprocessor symbol)
STDC_UTF32 (preprocessor symbol)
STDC_VERSION (predefined symbol)
STDC_WANT_LIB_EXT1 (preprocessor symbol) . 462
stddef.h (library header file)
stderr127, 292, 332
stdexcept (library header file)
stdin
implementation-defined behavior in C89 (DLIB) 599

stdint.h (library header file)	472
stdio.h (library header file)	468
stdio.h, additional C functionality	474
stdlib.h (library header file)	469
stdnoreturn.h (library header file)	469
stdout	332
implementation-defined behavior	583
implementation-defined behavior in C89 (DLIB)	599
Steele, Guy L	. 45
steering file, input to isymexport	537
strcasecmp, in string.h	475
strcoll (function)	476
strdup, in string.h	475
streambuf (library header file)	471
streams	
implementation-defined behavior	572
strerror (library function), implementation-defined	
behavior	589
strerror (library function),	
implementation-defined behavior in C89 (DLIB)	
STREX (intrinsic function)	
STREXB (intrinsic function)	
STREXD (intrinsic function)	
STREXH (intrinsic function)	
strict (compiler option)	
string (library header file)	
string.h (library header file)	
string.h, additional C functionality	
strip (ielftool option)	
strip (iobjmanip option)	
strip (linker option)	
strncasecmp, in string.h.	
strnlen, in string.h	
strstream (library header file)	
.strtab (ELF section)	512
structure types	
alignment	
layout of	
packed	354

structures	
aligning	4
anonymous	5
implementation-defined behavior	7
implementation-defined behavior in C89593	5
packing and unpacking22	5
strxfrm (function)	6
subnormal numbers	2
support, technical	4
Sutter, Herb	5
SVC #immed, for software interrupts	2
swi (extended keyword)	2
SWI_Handler (exception function)80	0
swi_number (pragma directive)	9
SWO, directing stdout/stderr via	6
SWP (intrinsic function)	0
SWPB (intrinsic function)	0
SXTAB (intrinsic function)	1
SXTAB16 (intrinsic function)	1
SXTAH (intrinsic function)	1
SXTB16 (intrinsic function)	1
symbols	
directing from one to another	4
including in output	5
local, removing from ELF image	0
overview of predefined55	5
preprocessor, defining	
symbols (iarchive option)	7
.symtab (ELF section)	2
syntax	
command line options	
extended keywords	
invoking compiler and linker	
system function, implementation-defined behavior 573, 585	5
system startup	
customizing144	
DLIB	
initialization phase6.	3
	2

system termination	
C-SPY interface to	. 144
DLIB	. 143
system (library function)	
implementation-defined behavior in C89 (DLIB)	. 601
system_error (library header file)	. 471
system_include (pragma directive)	, 598
system_include_dir (compiler option)	. 300

#### Т

-t (iarchive option)
tan (library function)
tan (library routine)140–141
tanf (library routine)
tanl (library routine)
task (extended keyword)
technical support, IAR Systems
template support
in C++
Terminal I/O window
not supported when
termination of system. See system termination
termination status, implementation-defined behavior 585
terminology
.text (ELF section)
text encodings
text_out (iarchive option)568
text_out (ielfdump option) 568
text_out (iobjmanip option)568
text_out (isymexport option)568
text_out (linker option)
text_out (compiler option)
tgmath.h (library header file)469
32-bits (floating-point format)
this (pointer)
thread (library header file)471
threaded environment
threaded_lib (linker option)

threads.h (library header file)
thumb (extended keyword)
thumb (compiler option)
TIME (predefined symbol)
time zone (library function)
implementation-defined behavior in C89601
time zone (library function), implementation-defined
behavior
TIMESTAMP_ (predefined symbol)
timezone_lib (linker option)
time-critical routines159, 184
time.h (library header file)
additional C functionality
time32 (library function), configuring support for127
time64 (library function), configuring support for127
tips, programming236
titxt (ielftool option)
toc (iarchive option)
tools icon, in this guide
towlower (function)
towupper (function)
trademarks
trailing comma
transformations, compiler
translation
implementation-defined behavior
implementation-defined behavior in C89
treat_rvct_modules_as_softfp (linker option)338
TrustZone
TT (intrinsic function)
TTA (intrinsic function)
TTAT (intrinsic function)
TTT (intrinsic function)
tuple (library header file)
type attributes
specifying
type qualifiers
const and volatile
implementation-defined behavior
implementation-defined behavior in C89
•

typedefs
excluding from diagnostics
repeated
typeindex (library header file)471
typeinfo (library header file)471
typetraits (library header file)
type_attribute (pragma directive)400
type-based alias analysis (compiler transformation) $\dots 235$
disabling
typographic conventions

## U

UADD8 (intrinsic function)	442
UADD16 (intrinsic function)	442
UASX (intrinsic function)	442
uchar.h (library header file)	469
UHADD8 (intrinsic function)	442
UHADD16 (intrinsic function)	442
UHASX (intrinsic function)	442
UHSAX (intrinsic function)	442
UHSUB16 (intrinsic function)	
UHSUB8 (intrinsic function)	442
uintptr_t (integer type)	
UMAAL (intrinsic function)	
underflow errors, implementation-defined behavior	582
underflow range errors,	
implementation-defined behavior in C89	599
ungetchar, in stdio.h	475
Unicode	251
uniform attribute syntax	360
uniform_attribute_syntax (compiler option)	301
unions	
anonymous	225
implementation-defined behavior	577
implementation-defined behavior in C89	595
universal character names, implementation-defined	
behavior	579
unordered_map (library header file)	471

unordered_set (library header file)471
unroll (pragma directive)
unsigned char (data type)
changing to signed char
unsigned int (data type)
unsigned long long (data type)
unsigned long (data type)
unsigned short (data type)
UQADD8 (intrinsic function)
UQADD16 (intrinsic function)
UQASX (intrinsic function)
UQSAX (intrinsic function)
UQSUB16 (intrinsic function)
UQSUB8 (intrinsic function)
USADA8 (intrinsic function)
USAD8 (intrinsic function)
USAT (intrinsic function)
USAT16 (intrinsic function)
USAX (intrinsic function)
use init table (linker directive)
uses_aspect (pragma directive)581
use_c++_inline (compiler option)
use_full_std_template_names (ielfdump option) 569
use_full_std_template_names (linker option)338
use_unix_directory_separators (compiler option) 302
USUB16 (intrinsic function)
USUB8 (intrinsic function)
UTF-16
UTF-8
utf8_text_in (compiler option)
utf8_text_in (iarchive option)
utf8_text_in (ielfdump option)
utf8_text_in (iobjmanip option)
utf8_text_in (isymexport option)
utf8_text_in (linker option)
utilities (ELF)
utility (library header file)
UXTAB (intrinsic function)
UXTAB16 (intrinsic function)

UXTAH (intrinsic function)	445
UXTB16 (intrinsic function)	445

#### V

-V (iarchive option)	570
valarray (library header file)	471
variables	
auto	72
defined inside a function	
global	
placement in memory	71
hints for choosing	236
local. See auto variables	
non-initialized	
placing at absolute addresses	
placing in named sections	
static	
placement in memory	71
taking the address of	236
vector floating-point unit	
vector (library header file)	471
vector (pragma directive)	581,598
vectorize (compiler option)	302
vectorize (pragma directive)	401
vector_table, array holding vector table	
veneers	115
verbose (iarchive option)	570
verbose (ielftool option)	570
version	
identifying C standard in use (STDC_VERS	
of compiler (VER)	
of this guide	
version (linker option)	339
version (compiler option)	
version (utitilies option)	
vfe (linker option)	
VFMA_F32 (intrinsic function)	
VFMA_F64 (intrinsic function)	446

VFMS_F32 (intrinsic function)
VFMS_F64 (intrinsic function)
VFNMA_F32 (intrinsic function)
VFNMA_F64 (intrinsic function)446
VFNMS_F32 (intrinsic function)
VFNMS_F64 (intrinsic function)446
VFP
vla (compiler option)
VMAXNM_F32 (intrinsic function)447
VMAXNM_F64 (intrinsic function)447
VMINNM_F32 (intrinsic function)
VMINNM_F64 (intrinsic function)
void, pointers to
volatile
and const, declaring objects
declaring objects
protecting simultaneously accesses variables239
rules for access
VRINTA_F32 (intrinsic function)
VRINTA_F64 (intrinsic function)
VRINTM_F32 (intrinsic function)449
VRINTM_F64 (intrinsic function)448
VRINTN_F32 (intrinsic function)
VRINTN_F64 (intrinsic function)
VRINTP_F32 (intrinsic function)449
VRINTP_F64 (intrinsic function)448
VRINTR_F32 (intrinsic function)
VRINTR_F64 (intrinsic function)
VRINTX_F32 (intrinsic function)
VRINTX_F64 (intrinsic function)
VRINTZ_F32 (intrinsic function)449
VRINTZ_F64 (intrinsic function)449
VSQRT_F32 (intrinsic function)449
VSQRT_F64 (intrinsic function)

## W

### X

-x (iarchive option)	5	1
----------------------	---	---

## Y

YIELD	(intrinsic function)	)	50
-------	----------------------	---	----

## Ζ

zeros, pa	cking algori	thm for initialize	rs 493
-----------	--------------	--------------------	--------

# **Symbols**

#### \_AEABI\_PORTABILITY\_LEVEL (preprocessor

symbol)	217
_AEABI_PORTABLE (preprocessor symbol)	217
_Exit (library function)	144
_exit (library function)	143
AAPCS_VFP (predefined symbol)	452
AAPCS (predefined symbol)	452
absolute (extended keyword)	363
ALIGNOF (operator)	186
arm (extended keyword)	363
ARMVFPV2 (predefined symbol)	456
ARMVFPV3 (predefined symbol)	456
ARMVFPV4 (predefined symbol)	456
ARMVFP_D16 (predefined symbol)	456
ARMVFP_SP (predefined symbol)	456
ARMVFP (predefined symbol)	456
ARM_ADVANCED_SIMD_ (predefined symbol)	452
ARM_ARCH (predefined symbol)	453
ARM_ARCH_ISA_ARM (predefined symbol)	453
ARM_ARCH_ISA_THUMB (predefined symbol)	453
ARM_ARCH_PROFILE (predefined symbol)	453
ARM_BIG_ENDIAN (predefined symbol)	453
arm_cdp (intrinsic function)	404
arm_cdp2 (intrinsic function)	404
ARM_FEATURE_CMSE (predefined symbol)	453
ARM_FEATURE_CRC32 (predefined symbol)	454
ARM_FEATURE_CRYPTO (predefined symbol)	454
ARM_FEATURE_DIRECTED_ROUNDING (predefined)	
symbol)	
ARM_FEATURE_DSP (predefined symbol)	454
ARM_FEATURE_FMA (predefined symbol)	
ARM_FEATURE_IDIV (predefined symbol)	
ARM_FEATURE_NUMERIC_MAXMIN (predefined	
symbol)	
ARM_FEATURE_UNALIGNED (predefined symbol)	
ARM_FP (predefined symbol)	455

arm_ldc (intrinsic function)	405
arm_ldcl (intrinsic function)	405
arm_ldcl2 (intrinsic function)	405
arm_ldc2 (intrinsic function)	405
arm_mcr (intrinsic function)	406
arm_mcrr (intrinsic function)	406
arm_mcrr2 (intrinsic function)	406
arm_mcr2 (intrinsic function)	406
ARM_MEDIA (predefined symbol)	
arm_mrc (intrinsic function)	407
arm_mrc2 (intrinsic function)	407
arm_mrrc (intrinsic function)	407
arm_mrrc2 (intrinsic function)	407
ARM_NEON (predefined symbol)	455
ARM_NEON_FP (predefined symbol)	455
ARM_PROFILE_M (predefined symbol)	456
arm_rsr (intrinsic function)	407
arm_rsrp (intrinsic function)	408
arm_rsr64 (intrinsic function)	407
arm_stc (intrinsic function)	408
arm_stcl (intrinsic function)	408-409
arm_stc2 (intrinsic function)	408
arm_stc2l (intrinsic function)	408-409
arm_wsr (intrinsic function)	409
ARM4TM (predefined symbol)	457
ARM5E (predefined symbol)	457
ARM5 (predefined symbol)	457
ARM6M (predefined symbol)	457
ARM6SM (predefined symbol)	457
ARM6 (predefined symbol)	
ARM7A (predefined symbol)	457
ARM7EM (predefined symbol)	
ARM7M (predefined symbol)	
ARM7R (predefined symbol)	457
ARM8A (predefined symbol)	457
ARM8EM_MAINLINE (predefined symbol)	457
ARM8M_BASELINE_ (predefined symbol)	
ARM8M_MAINLINE (predefined symbol)	
ARM8R (predefined symbol)	457

asm (language extension)	
BASE_FILE (predefined symbol)	457
big_endian (extended keyword)	364
BUILD_NUMBER (predefined symbol)	457
CDP (intrinsic function)	410
CDP2 (intrinsic function)	410
CLREX (intrinsic function)	410
CLZ (intrinsic function)	411
cmse_nonsecure_call (extended keyword)	364
cmse_nonsecure_entry (extended keyword)	
CORE (predefined symbol)	457
COUNTER (predefined symbol)	457
cplusplus (predefined symbol)	457
CPU_MODE (predefined symbol)	458
crc32b (intrinsic function)	411
crc32cb (intrinsic function)	412
crc32cd (intrinsic function)	412
crc32ch (intrinsic function)	412
crc32cw (intrinsic function)	412
crc32d (intrinsic function)	411
crc32h (intrinsic function)	
crc32w (intrinsic function)	
DATE (predefined symbol)	
disable_fiq (intrinsic function)	
disable_interrupt (intrinsic function)	
disable_irq (intrinsic function)	
DLIB_FILE_DESCRIPTOR (configuration symbol)	
DMB (intrinsic function)	
DSB (intrinsic function)	
enable_fiq (intrinsic function)	
enable_interrupt (intrinsic function)	
enable_irq (intrinsic function)	
EXCEPTIONS (predefined symbol)	
exit (library function)	
FILE (predefined symbol)	
fiq (extended keyword)	
fma (intrinsic function)	
fmaf (intrinsic function)	
fp16 (data type)	350

FUNCTION (predefined symbol)	459
func (predefined symbol)	458
gets, in stdio.h.	474
get_BASEPRI (intrinsic function)	414
get_CONTROL (intrinsic function)	415
get_CPSR (intrinsic function)	415
get_FAULTMASK (intrinsic function)	415
get_FPSCR (intrinsic function)	415
get_interrupt_state (intrinsic function)	416
get_IPSR (intrinsic function)	416
get_LR (intrinsic function)	416
get_MSP (intrinsic function)	417
get_PRIMASK (intrinsic function)	417
get_PSP (intrinsic function)	417
get_PSR (intrinsic function)	417
get_SB (intrinsic function)	418
get_SP (intrinsic function)	418
iar_cos_accurate (library routine)	141
iar_cos_accuratef (library routine)	141
iar_cos_accuratel (library routine)	141
iar_cos_small (library routine)	140
iar_cos_smallf (library routine)	140
iar_cos_smalll (library routine)	140
iar_exp_small (library routine)	140
iar_exp_smallf (library routine)	140
iar_exp_smalll (library routine)	140
iar_log_small (library routine)	140
iar_log_smallf (library routine)	140
iar_log_smalll (library routine)	140
iar_log10_small (library routine)	140
iar_log10_smallf (library routine)	140
iar_log10_smalll (library routine)	140
iar_maximum_atexit_calls	110
iar_pow_accurate (library routine)	141
iar_pow_accuratef (library routine)	141
iar_pow_accuratel (library routine)	141
iar_pow_small (library routine)	140
iar_pow_smallf (library routine)	140
iar_pow_smalll (library routine)	140

iar_program_start (label)	142
iar_ReportAssert (library function)	147
iar_sin_accurate (library routine)	141
iar_sin_accuratef (library routine)	141
iar_sin_accuratel (library routine)	141
iar_sin_small (library routine)	140
iar_sin_smallf (library routine)	
iar_sin_smalll (library routine)	140
IAR_SYSTEMS_ICC (predefined symbol)	459
iar_tan_accurate (library routine)	141
iar_tan_accuratef (library routine)	141
iar_tan_accuratel (library routine)	141
iar_tan_small (library routine)	140
iar_tan_smallf (library routine)	140
iar_tan_smalll (library routine)	140
iar_tls.\$\$DATA (ELF section)	513
ICCARM (predefined symbol)	
interwork (extended keyword)	
intrinsic (extended keyword)	
irq (extended keyword)	366
ISB (intrinsic function)	
LDC (intrinsic function)	418
LDCL (intrinsic function)	
LDCL_noidx (intrinsic function)	
LDC_noidx (intrinsic function)	
LDC2 (intrinsic function)	418
LDC2L (intrinsic function)	418
LDC2L_noidx (intrinsic function)	
LDC2_noidx (intrinsic function)	
LDREX (intrinsic function)	
LDREXB (intrinsic function)	420
LDREXD (intrinsic function)	
LDREXH (intrinsic function)	
LINE (predefined symbol)	
little_endian (extended keyword)	
LITTLE_ENDIAN (predefined symbol)	
low_level_init	
initialization phase	63
low_level_init, customizing	

MCR (intrinsic function)	
MCRR (intrinsic function)	421
MCRR2 (intrinsic function)	
MCR2 (intrinsic function)	
MRC (intrinsic function)	
MRC2 (intrinsic function)	
MRRC (intrinsic function)	
MRRC2 (intrinsic function)	
nested (extended keyword)	
noreturn (extended keyword)	
no_alloc (extended keyword)	
no_alloc_str (operator)	
no_alloc_str16 (operator)	
no_alloc16 (extended keyword)	
no_init (extended keyword)	. 240, 368
no_operation (intrinsic function)	
packed (extended keyword)	
pcrel (extended keyword)	
PKHBT (intrinsic function)	
PKHTB (intrinsic function)	424
PLD (intrinsic function)	
PLDW (intrinsic function)	
PLI (intrinsic function)	
PRETTY_FUNCTION (predefined symbol)	459
printf_args (pragma directive)	395
program_start (label)	142
QADD (intrinsic function)	425
QADD8 (intrinsic function)	425
QADD16 (intrinsic function)	
QASX (intrinsic function)	
QCFlag (intrinsic function)	
QDADD (intrinsic function)	
QDOUBLE (intrinsic function)	
QDSUB (intrinsic function)	
QFlag (intrinsic function)	
QSAX (intrinsic function)	425
QSUB (intrinsic function)	425
QSUB16 (intrinsic function)	
QSUB8 (intrinsic function)	

.....

ramfunc (extended keyword)
RBIT (intrinsic function)
reset_QC_flag (intrinsic function)
reset_Q_flag (intrinsic function)427
REV (intrinsic function)
REVSH (intrinsic function)
REV16 (intrinsic function)
rintn (intrinsic function)
rintnf (intrinsic function)
root (extended keyword)
ROPI (predefined symbol)
ROR (intrinsic function)
ro_placement (extended keyword)
RRX (intrinsic function)
RTTI (predefined symbol)
RWPI (predefined symbol)
SADD8 (intrinsic function)
SADD16 (intrinsic function)
SASX (intrinsic function)
sbrel (extended keyword)
scanf_args (pragma directive)
section_begin (extended operator)186
section_end (extended operator)
section_size (extended operator)186
SEL (intrinsic function)
set_BASEPRI (intrinsic function)429
set_CONTROL (intrinsic function)
set_CPSR (intrinsic function)
set_FAULTMASK (intrinsic function)
set_FPSCR (intrinsic function)
set_interrupt_state (intrinsic function)
set_LR (intrinsic function)
set_MSP (intrinsic function)431
set_PRIMASK (intrinsic function)431
set_PSP (intrinsic function)
set_SB (intrinsic function)
set_SP (intrinsic function)
SEV (intrinsic function)
SHADD8 (intrinsic function)

SHADD16 (intrinsic function)	432
SHASX (intrinsic function)	432
SHSAX (intrinsic function)	432
SHSUB16 (intrinsic function)	432
SHSUB8 (intrinsic function)	432
SMLABB (intrinsic function)	433
SMLABT (intrinsic function)	433
SMLAD (intrinsic function)	433
SMLADX (intrinsic function)	433
SMLALBB (intrinsic function)	434
SMLALBT (intrinsic function)	434
SMLALD (intrinsic function)	434
SMLALDX (intrinsic function)	434
SMLALTB (intrinsic function)	434
SMLALTT (intrinsic function)	434
SMLATB (intrinsic function)	433
SMLATT (intrinsic function)	433
SMLAWB (intrinsic function)	433
SMLAWT (intrinsic function)	433
SMLSD (intrinsic function)	
SMLSDX (intrinsic function)	433
SMLSLD (intrinsic function)	434
SMLSLDX (intrinsic function)	434
SMMLA (intrinsic function)	435
SMMLAR (intrinsic function)	435
SMMLS (intrinsic function)	435
SMMLSR (intrinsic function)	435
SMMUL (intrinsic function)	435
SMMULR (intrinsic function)	435
SMUAD (intrinsic function)	435
SMUL (intrinsic function)	
SMULBB (intrinsic function)	
SMULBT (intrinsic function)	436
SMULTB (intrinsic function)	436
SMULTT (intrinsic function)	436
SMULWB (intrinsic function)	
SMULWT (intrinsic function)	436
SMUSD (intrinsic function)	
SMUSDX (intrinsic function)	435

sqrt (intrinsic function)	
sqrtf (intrinsic function)	
SSAT (intrinsic function)	
SSAT16 (intrinsic function)	
SSAX (intrinsic function)	
SSUB16 (intrinsic function)	
SSUB8 (intrinsic function)	
stackless (extended keyword)	
STC (intrinsic function)	
STCL (intrinsic function)	
STCL_noidx (intrinsic function)	
STC_noidx (intrinsic function)	
STC2 (intrinsic function)	
STC2L (intrinsic function)	
STC2L_noidx (intrinsic function)	
STC2_noidx (intrinsic function)	
STDC_LIB_EXT1 (predefined symbol)	
STDC_NO_ATOMICS (preprocessor symbol) 461	
STDC_NO_THREADS (preprocessor symbol)461	
STDC_NO_VLA (preprocessor symbol)	
STDC_UTF16 (preprocessor symbol)	
STDC_UTF32 (preprocessor symbol)	
STDC_VERSION (predefined symbol)	
STDC_WANT_LIB_EXT1 (preprocessor symbol) . 462	
STDC (predefined symbol)	
STREX (intrinsic function)	
STREXB (intrinsic function)	
STREXD (intrinsic function)	
STREXH (intrinsic function)	
swi (extended keyword)	
SWP (intrinsic function)	
SWPB (intrinsic function)	
SXTAB (intrinsic function)	
SXTAB16 (intrinsic function)	
SXTAH (intrinsic function)	
SXTB16 (intrinsic function)	
task (extended keyword)	
thumb (extended keyword)	
TIMESTAMP (predefined symbol)	

36	TIME (predefined symbol)	461
36	TT (intrinsic function)	
37	TTA (intrinsic function)	
37	TTAT (intrinsic function)	441
28	TTT (intrinsic function)	441
28	UADD8 (intrinsic function)	442
28	UADD16 (intrinsic function)	442
72	UASX (intrinsic function)	442
38	UHADD8 (intrinsic function)	442
38	UHADD16 (intrinsic function)	442
39	UHASX (intrinsic function)	442
39	UHSAX (intrinsic function)	442
38	UHSUB16 (intrinsic function)	442
38	UHSUB8 (intrinsic function)	442
39	UMAAL (intrinsic function)	
39	ungetchar, in stdio.h	475
60	UQADD8 (intrinsic function)	443
61	UQADD16 (intrinsic function)	
61	UQASX (intrinsic function)	
61	UQSAX (intrinsic function)	
61	UQSUB16 (intrinsic function)	
61	UQSUB8 (intrinsic function)	
61	USADA8 (intrinsic function)	
62	USAD8 (intrinsic function)	
60	USAT (intrinsic function)	
40	USAT16 (intrinsic function)	
40	USAX (intrinsic function).	
40	USUB16 (intrinsic function)	
40	USUB8 (intrinsic function)	
72	UXTAB (intrinsic function)	
40	UXTAB16 (intrinsic function)	
40	UXTAH (intrinsic function)	
41	UXTB16 (intrinsic function)	
41	VFMA_F32 (intrinsic function)	
41	VFMA_F64 (intrinsic function)	
41	VFMS_F32 (intrinsic function)	
73	VFMS_F64 (intrinsic function).	
74	VFNMA_F32 (intrinsic function)	
62	VFNMA_F64 (intrinsic function)	

VFNMS_F32 (intrinsic function)446
VFNMS_F64 (intrinsic function)446
VMAXNM_F32 (intrinsic function)447
VMAXNM_F64 (intrinsic function)447
VMINNM_F32 (intrinsic function)
VMINNM_F64 (intrinsic function)
VRINTA_F32 (intrinsic function)
VRINTA_F64 (intrinsic function)
VRINTM_F32 (intrinsic function)449
VRINTM_F64 (intrinsic function)448
VRINTN_F32 (intrinsic function)
VRINTN_F64 (intrinsic function)
VRINTP_F32 (intrinsic function)449
VRINTP_F64 (intrinsic function)448
VRINTR_F32 (intrinsic function)
VRINTR_F64 (intrinsic function)
VRINTX_F32 (intrinsic function)
VRINTX_F64 (intrinsic function)
VRINTZ_F32 (intrinsic function)449
VRINTZ_F64 (intrinsic function)449
VSQRT_F32 (intrinsic function)
VSQRT_F64 (intrinsic function)449
weak (extended keyword)
WFE (intrinsic function)
WFI (intrinsic function)
write_array, in stdio.h
write_buffered (DLIB library function)126
YIELD (intrinsic function)
-D (compiler option)267
-d (iarchive option)
-e (compiler option)
-f (compiler option)
-f (IAR utility option)551
-f (linker option)
-g (ielfdump option)
-I (compiler option)
-l (compiler option)278
for creating skeleton code170
-L (linker option)

-O (compiler option)	. 291
-o (compiler option)	. 292
-o (iarchive option)	. 556
-o (ielfdump option)	. 556
-o (linker option)	. 332
-r (compiler option)	. 268
-r (iarchive option)	. 562
-s (ielfdump option)	. 563
-t (iarchive option)	. 568
-V (iarchive option)	. 570
-x (iarchive option)	. 551
a (ielfdump option)	. 543
aapcs (compiler option)	. 263
advanced_heap (linker option)	. 309
aeabi (compiler option)	. 263
align_sp_on_irq (compiler option)	. 263
all (ielfdump option)	. 544
arm (compiler option)	. 264
basic_heap (linker option)	. 309
BE32 (linker option)	. 310
BE8 (linker option)	. 310
bin (ielftool option)	. 544
bin-multi (ielftool option)	. 545
bounds_table_size (linker option)	. 305
call_graph (linker option)	
char_is_signed (compiler option)	. 264
char_is_unsigned (compiler option)	. 265
checksum (ielftool option)	. 545
cmse (compiler option)	. 265
code (ielfdump option)	. 549
config (linker option)	
config_def (linker option)	. 311
config_search (linker option)	
cpp_init_routine (linker option)	. 312
cpu (compiler option)	. 265
cpu (linker option)	
cpu_mode (compiler option)	. 267
create (iarchive option)	. 549
c++ (compiler option)	. 267

c89 (compiler option)264	
debug (compiler option)268	
debug_heap (linker option)	
default_to_complex_ranges (linker option)313	
define_symbol (linker option)	
delete (iarchive option)	
dependencies (compiler option)	
dependencies (linker option)	
deprecated_feature_warnings (compiler option) 269	
diagnostics_tables (compiler option)271	
diagnostics_tables (linker option)	
diag_error (compiler option)	
diag_error (linker option)	
diag_remark (compiler option)	
diag_remark (linker option)	
diag_suppress (compiler option)	
diag_suppress (linker option)	
diag_warning (compiler option)271	
diag_warning (linker option)	
disasm_data (ielfdump option)550	
discard_unused_publics (compiler option)272	
dlib_config (compiler option)	
do_segment_pad (linker option)	
edit (isymexport option)551	
enable_hardware_workaround (compiler option)274	
enable_hardware_workaround (linker option)317	
enable_restrict (compiler option)	
entry (linker option)	
enum_is_int (compiler option)	
error_limit (compiler option)	
error_limit (linker option)	
exception_tables (linker option)	
export_builtin_config (linker option)	
extract (iarchive option)	
extra_init (linker option)	
fill (ielftool option)	
force_exceptions (linker option)	
force_output (linker option)	
fpu (compiler option)	

fpu (linker option)	321
front_headers (ielftool option)	553
generate_vfe_header (isymexport option)	553
guard_calls (compiler option)	277
header_context (compiler option)	277
hide_symbols (iexe2obj option)	553
ignore_uninstrumented_pointers (linker option)	306
ihex (ielftool option)	554
image_input (linker option)	322
import_cmse_lib_in (linker option)	322
import_cmse_lib_out (linker option)	323
inline (linker option)	323
keep (linker option)	
keep_mode_symbols (iexe2obj option)	554
legacy (compiler option)	279
log (linker option)	324
log_file (linker option)	325
macro_positions_in_diagnostics (compiler option)	279
make_all_definitions_weak (compiler option)	280
mangled_names_in_messages (linker option)	325
manual_dynamic_initialization (linker option)	325
map (linker option)	326
merge_duplicate_sections (linker option)	326
mfc (compiler option)	281
misrac (compiler option)	259
misrac (linker option)	307
misrac_verbose (compiler option)	259
misrac_verbose (linker option)	307
misrac1998 (compiler option)	259
misrac1998 (linker option)	307
misrac2004 (compiler option)	259
misrac2004 (linker option)	307
nonportable_path_warnings (compiler option)	291
no_alignment_reduction (compiler option)	281
no_bom (ielfdump option)	554
no_bom (iobjmanip option)	554
no_bom (isymexport option)	554
no_clustering (compiler option)	
no_code_motion (compiler option)	282

no_const_align (compiler option)
no_cse (compiler option)
no_dwarf3_cfi (compiler option)
no_dynamic_rtti_elimination (linker option)
no_entry (linker option)
no_exceptions (compiler option)
no_exceptions (linker option)
no_fragments (compiler option)284
no_fragments (linker option)
no_free_heap (linker option)
no_header (ielfdump option)555
no_inline (compiler option)
no_inline (linker option)
no_library_search (linker option)
no_literal_pool (compiler option)
no_literal_pool (linker option)
no_locals (linker option)
no_loop_align (compiler option)285
no_mem_idioms (compiler option)285
no_path_in_file_macros (compiler option)
no_range_reservations (linker option)
$no\_rel\_section \ (ielf dump \ option) \dots \dots \dots 555$
no_remove (linker option)
no_rtti (compiler option)
no_rw_dynamic_init (compiler option)
no_scheduling (compiler option)
no_size_constraints (compiler option)
$no\_static\_destruction\ (compiler\ option)\ .\ .\ .\ .\ .\ .\ .\ .\ .\ .\ .\ .\ .\$
no_strtab (ielfdump option)555
no_system_include (compiler option)287
no_typedefs_in_diagnostics (compiler option) 288
no_unaligned_access (compiler option)
no_unroll (compiler option)
no_utf8_in (ielfdump option)
no_var_align (compiler option)
no_vfe (linker option)
no_warnings (compiler option)
no_warnings (linker option)
no_wrap_diagnostics (compiler option)

no_wrap_diagnostics (linker option)	. 332
offset (ielftool option)	. 556
only_stdout (compiler option)	. 292
only_stdout (linker option)	. 332
option_name (compiler option)	. 317
output (compiler option)	. 292
output (iarchive option)	. 556
output (ielfdump option)	. 556
output (linker option)	. 332
parity (ielftool option)	. 557
pending_instantiations (compiler option)	. 292
pi_veneers (linker option)	. 332
place_holder (linker option)	. 333
preconfig (linker option)	. 333
predef_macro (compiler option)	. 293
prefix (iexe2obj option)	. 558
preinclude (compiler option)	. 293
preprocess (compiler option)	. 294
printf_multibytes (linker option)	. 334
ram_reserve_ranges (isymexport option)	
range (ielfdump option)	. 559
raw (ielfdump] option)	. 560
redirect (linker option)	. 334
relaxed_fp (compiler option)	
remarks (compiler option)	
remarks (linker option)	
remove_file_path (iobjmanip option)	. 560
remove_section (iobjmanip option)	. 560
rename_section (iobjmanip option)	
rename_symbol (iobjmanip option)	
replace (iarchive option)	
require_prototypes (compiler option)	
reserve_ranges (isymexport option)	
ropi (compiler option)	
ropi_cb (compiler option)	
rwpi (compiler option)	. 297
rwpi_near (compiler option)	
scanf_multibytes (linker option)	. 335
search (linker option)	. 335

section (compiler option)	. 298
section (ielfdump option)	. 563
segment (ielfdump option)	. 563
self_reloc (ielftool option)	. 564
semihosting (linker option)	. 335
show_entry_as (isymexport option)	. 564
silent (compiler option)	. 298
silent (iarchive option)	. 564
silent (ielftool option)	. 564
silent (linker option)	. 336
simple (ielftool option)	. 565
simple-ne (ielftool option)	. 565
source (ielfdump option)	. 565
srec (ielftool option)	
srec-len (ielftool option)	. 566
srec-s3only (ielftool option)	
stack_protection (compiler option)	
stack_usage_control (linker option)	. 336
strict (compiler option)	
strip (ielftool option)	. 567
strip (iobjmanip option)	. 567
strip (linker option)	. 336
symbols (iarchive option)	. 567
system_include_dir (compiler option)	. 300
text_out (iarchive option)	. 568
text_out (ielfdump option)	. 568
text_out (iobjmanip option)	. 568
text_out (isymexport option)	. 568
text_out (linker option)	. 337
threaded_lib (linker option)	. 337
thumb (compiler option)	. 301
timezone_lib (linker option)	. 338
titxt (ielftool option)	. 568
toc (iarchive option)	. 568
treat_rvct_modules_as_softfp (linker option)	. 338
use_c++_inline (compiler option)	
use_full_std_template_names (ielfdump option)	
use_full_std_template_names (linker option)	
use_unix_directory_separators (compiler option)	. 302

vectorize (compiler option)	302
verbose (iarchive option)	
verbose (ielftool option)	
version (compiler option)	303
version (linker option)	
version (utilities option)	
vfe (linker option)	339
vla (compiler option)	303
warnings_affect_exit_code (compiler option)	249, 303
warnings_affect_exit_code (linker option)	
warnings_are_errors (compiler option)	304
warnings_are_errors (linker option)	
warn_about_c_style_casts (compiler option)	303
whole_archive (linker option)	
wrap (iexe2obj option)	
.bss (ELF section)	512
.comment (ELF section)	512
.data (ELF section)	513
.data_init (ELF section)	513
.debug (ELF section)	512
.exc.text (ELF section)	513
.iar.debug (ELF section)	512
.iar.dynexit (ELF section)	514
.init_array (section)	514
.intvec (ELF section)	514
.noinit (ELF section)	515
.preinit_array (section)	515
.prepreinit_array (section)	515
.rel (ELF section)	512
.rela (ELF section)	512
.rodata (ELF section)	515
.shstrtab (ELF section)	512
.strtab (ELF section)	512
.symtab (ELF section)	512
.text (ELF section)	515
.textrw (ELF section)	516
.textrw_init (ELF section)	516
@ (operator)	
placing at absolute address	227

placing in sections
#include files, specifying
#include_next
#warning
#warning message (preprocessor extension)
%Z replacement string,
implementation-defined behavior

## **Numerics**

32-bits (floating-point format)	•	•	•	•	•	•	•	 •	•	•	•	•	•	•	•	•	 .3	351
64-bits (floating-point format)									•		•		•		•	•	 .3	351