

# IAR Embedded Workbench<sup>®</sup>

IDE Project Management and Building Guide



UIDEEW-5

**IAR**  
SYSTEMS

## **COPYRIGHT NOTICE**

Copyright © 1996–2012 IAR Systems AB.

No part of this document may be reproduced without the prior written consent of IAR Systems AB. The software described in this document is furnished under a license and may only be used or copied in accordance with the terms of such a license.

## **DISCLAIMER**

The information in this document is subject to change without notice and does not represent a commitment on any part of IAR Systems. While the information contained herein is assumed to be accurate, IAR Systems assumes no responsibility for any errors or omissions.

In no event shall IAR Systems, its employees, its contractors, or the authors of this document be liable for special, direct, indirect, or consequential damage, losses, costs, charges, claims, demands, claim for lost profits, fees, or expenses of any nature or kind.

## **TRADEMARKS**

IAR Systems, IAR Embedded Workbench, C-SPY, visualSTATE, The Code to Success, IAR KickStart Kit, I-jet, IAR, and the logotype of IAR Systems are trademarks or registered trademarks owned by IAR Systems AB.

Microsoft and Windows are registered trademarks of Microsoft Corporation.

Adobe and Acrobat Reader are registered trademarks of Adobe Systems Incorporated.

All other product names are trademarks or registered trademarks of their respective owners.

## **EDITION NOTICE**

Fourth edition: December 2012

Part number: UIDEEW-5

Together with the *C-SPY® Debugging Guide*, the *IDE Project Management and Building Guide* replaces the *IAR Embedded Workbench IDE User Guide*.

Internal reference: M12 , Too6.5.2 , ISUD.

# Brief contents

Tables .....	11
Figures .....	13
Preface .....	17
<b>Part 1. Project management and building</b> .....	<b>25</b>
The development environment .....	27
Managing projects .....	33
Building .....	67
Editing .....	75
<b>Part 2. Reference information</b> .....	<b>107</b>
Installed files .....	109
IAR Embedded Workbench IDE reference .....	115
Glossary .....	175
Index .....	191



# Contents

Tables .....	11
Figures .....	13
Preface .....	17
<b>Who should read this guide</b> .....	17
required knowledge .....	17
<b>How to use this guide</b> .....	17
Some descriptions do not apply to your product .....	18
<b>What this guide contains</b> .....	19
<b>Other documentation</b> .....	19
User and reference guides .....	20
The online help system .....	20
Web sites .....	21
<b>Document conventions</b> .....	21
Typographic conventions .....	21
Naming conventions .....	22
<b>Part I. Project management and building</b> .....	25
The development environment .....	27
<b>The IAR Embedded Workbench IDE—an overview</b> .....	27
The toolchain .....	27
An extensible and modular environment .....	27
Window management .....	27
Running the IDE .....	28
<b>Customizing the environment</b> .....	29
Organizing the windows on the screen .....	29
Customizing the IDE .....	30
Invoking external tools .....	31

Managing projects .....	33
<b>Introduction to managing projects</b> .....	33
Briefly about managing projects .....	33
How projects are organized .....	34
Interacting with version control systems .....	38
<b>Procedures for managing projects</b> .....	38
Creating and managing workspaces .....	39
Viewing the workspace .....	40
Displaying browse information .....	41
Interacting with SCC-compatible systems .....	42
Interacting with Subversion .....	43
<b>Reference information on managing projects</b> .....	44
Workspace window .....	45
Create New Project dialog box .....	49
Configurations for project dialog box .....	50
New Configuration dialog box .....	51
Source Browser window .....	52
Call Graph window .....	56
Find All Declarations window .....	57
Find All References window .....	58
Version Control System menu for SCC .....	59
Select Source Code Control Provider dialog box .....	61
Check In Files dialog box .....	62
Check Out Files dialog box .....	63
Source code control states .....	64
Version Control System menu for Subversion .....	64
Subversion states .....	65
Building .....	67
<b>Building your project</b> .....	67
Setting options .....	67
Building a project .....	69
Building multiple configurations in a batch .....	69
Using pre- and post-build actions .....	70

Correcting errors found during build .....	70
Building from the command line .....	71
<b>Extending the toolchain</b> .....	72
Tools that can be added to the toolchain .....	72
Adding an external tool .....	72
<b>Editing</b> .....	75
<b>Introduction to the IAR Embedded Workbench editor</b> .....	75
Briefly about the editor .....	75
<b>Using the editor</b> .....	76
Editing a file .....	76
Using and adding code templates .....	80
Navigation .....	82
Searching .....	83
Customizing the editor environment .....	83
Using an external editor .....	85
<b>Reference information on the editor</b> .....	87
Editor window .....	88
Find in Files window .....	95
Find All Declarations window .....	96
Find All References window .....	97
Find dialog box .....	98
Replace dialog box .....	99
Find in Files dialog box .....	100
Incremental Search dialog box .....	102
Template dialog box .....	103
Editor shortcut key summary .....	104
<b>Part 2. Reference information</b> .....	107
<b>Installed files</b> .....	109
<b>Directory structure</b> .....	109
Root directory .....	109
The <i>cpuname</i> directory .....	109

The common directory .....	110
The install-info directory .....	111
<b>File types</b> .....	111
Extending filename recognition .....	114
<b>IAR Embedded Workbench IDE reference</b> .....	115
<b>Windows</b> .....	115
IAR Embedded Workbench IDE window .....	116
Build window .....	118
Tool Output window .....	119
Debug Log window .....	120
<b>Menus</b> .....	121
File menu .....	121
Edit menu .....	124
View menu .....	128
Project menu .....	130
Add Project Connection dialog box .....	133
Erase Memory dialog box .....	134
Options dialog box .....	135
Argument variables .....	137
Batch Build dialog box .....	138
Edit Batch Build dialog box .....	139
Tools menu .....	140
Common Fonts options .....	141
Key Bindings options .....	142
Language options .....	144
Editor options .....	145
Configure Auto Indent dialog box .....	148
External Editor options .....	149
Editor Setup Files options .....	151
Editor Colors and Fonts options .....	152
Messages options .....	153
Project options .....	155
Source Code Control options .....	157



Debugger options .....	158
Stack options .....	160
Register Filter options .....	162
Terminal I/O options .....	164
Configure Tools dialog box .....	165
Filename Extensions dialog box .....	168
Filename Extension Overrides dialog box .....	169
Edit Filename Extensions dialog box .....	170
Configure Viewers dialog box .....	170
Edit Viewer Extensions dialog box .....	171
Window menu .....	172
Help menu .....	173
<b>Glossary</b> .....	175
<b>Index</b> .....	191



# Tables

1: Filename extensions in XLINK versus ILINK .....	18
2: Typographic conventions used in this guide .....	21
3: Naming conventions used in this guide .....	22
4: iarbuild.exe command line options .....	71
5: Editor shortcut keys for insertion point navigation .....	104
6: Editor shortcut keys for selecting text .....	104
7: Editor shortcut keys for scrolling .....	104
8: Miscellaneous editor shortcut keys .....	105
9: The CPUNAME directory .....	109
10: The common directory .....	110
11: File types .....	111
12: Argument variables .....	137



# Figures

1: IAR Embedded Workbench IDE window .....	28
2: Configure Tools dialog box .....	31
3: Customized Tools menu .....	32
4: Examples of workspaces and projects .....	36
5: Displaying a project in the Workspace window .....	40
6: Workspace window—an overview .....	41
7: Source browser progress information .....	42
8: Workspace window .....	45
9: Workspace window context menu .....	47
10: Create New Project dialog box .....	49
11: Configurations for project dialog box .....	50
12: New Configuration dialog box .....	51
13: Source Browser window .....	52
14: Source Browser window context menu .....	54
15: Call Graph window (calls from) .....	56
16: Call Graph window context menu .....	57
17: Find All Declarations window (message window) .....	57
18: Find All Declarations window context menu .....	58
19: Find All References window (message window) .....	58
20: Find All References window context menu .....	59
21: Version Control System menu for SCC .....	59
22: Select Source Code Control Provider dialog box .....	61
23: Check In Files dialog box .....	62
24: Check Out Files dialog box .....	63
25: Version Control System menu for Subversion .....	64
26: General options .....	68
27: Parameter hints for overloaded versions of a function .....	77
28: Code completion .....	77
29: Code folding .....	77
30: Parenthesis matching in the editor window .....	78
31: Splitter control in the top-right corner of the editor window .....	79

32: Inserting a code template .....	81
33: Specifying an external command line editor .....	86
34: External editor DDE settings .....	87
35: Editor window .....	88
36: Editor window tab context menu .....	89
37: Go to Function menu .....	90
38: Editor window context menu .....	91
39: Find in Files window (message window) .....	95
40: Find in Files window context menu .....	96
41: Find All Declarations window (message window) .....	96
42: Find All Declarations window context menu .....	97
43: Find All References window (message window) .....	97
44: Find All References window context menu .....	98
45: Find dialog box .....	98
46: Replace dialog box .....	99
47: Find in Files dialog box .....	100
48: Incremental Search dialog box .....	102
49: Template dialog box .....	103
50: IAR Embedded Workbench IDE window .....	116
51: IDE toolbar .....	117
52: IAR Embedded Workbench IDE window status bar .....	118
53: Build window (message window) .....	118
54: Build window context menu .....	119
55: Tool Output window (message window) .....	119
56: Tool Output window context menu .....	120
57: Debug Log window (message window) .....	120
58: Debug Log window context menu .....	121
59: File menu .....	122
60: Edit menu .....	124
61: View menu .....	128
62: Project menu .....	130
63: Add Project Connection dialog box .....	133
64: Erase Memory dialog box .....	134
65: Options dialog box .....	135

66: Batch Build dialog box .....	138
67: Edit Batch Build dialog box .....	139
68: Tools menu .....	140
69: Common Fonts options .....	141
70: Key Bindings options .....	142
71: Language options .....	144
72: Editor options .....	145
73: Configure Auto Indent dialog box .....	148
74: External Editor options .....	149
75: Editor Setup Files options .....	151
76: Editor Colors and Fonts options .....	152
77: Messages options .....	153
78: Message dialog box containing a Don't show again option .....	154
79: Project options .....	155
80: Source Code Control options .....	157
81: Debugger options .....	158
82: Stack options .....	160
83: Register Filter options .....	162
84: Creating a new register group .....	162
85: Terminal I/O options .....	164
86: Configure Tools dialog box .....	165
87: Customized Tools menu .....	166
88: Filename Extensions dialog box .....	168
89: Filename Extension Overrides dialog box .....	169
90: Edit Filename Extensions dialog box .....	170
91: Configure Viewers dialog box .....	170
92: Edit Viewer Extensions dialog box .....	171
93: Window menu .....	172





# Preface

Welcome to the *IDE Project Management and Building Guide*. The purpose of this guide is to help you fully use the features in IAR Embedded Workbench with its integrated Windows development tools. The IAR Embedded Workbench IDE is a very powerful Integrated Development Environment that allows you to develop and manage a complete embedded application project.

This guide describes the processes of editing, project managing, and building, and provides related reference information

---

## Who should read this guide

Read this guide if you plan to develop an application using IAR Embedded Workbench and want to get the most out of the features and tools available in the IDE.

### REQUIRED KNOWLEDGE

To use the tools in IAR Embedded Workbench, you should have working knowledge of:

- The C or C++ programming language
- Application development for embedded systems
- The architecture and instruction set of the processor (refer to the chip manufacturer's documentation)
- The operating system of your host computer.

For more information about the other development tools incorporated in the IDE, refer to their respective documentation, see *Other documentation*, page 19.

---

## How to use this guide

If you are new to using this product, we suggest that you first read the guide *Getting Started with IAR Embedded Workbench®* for an overview of the tools and the features that the IDE offers. The tutorials, which you can find in IAR Information Center, will help you get started using IAR Embedded Workbench.

The process of managing projects and building, as well as editing, is described in this guide, whereas information about how to use C-SPY for debugging is described in the *C-SPY® Debugging Guide*.

If you are an experienced user and need this guide only for reference information, see the reference chapters in *Part 2. Reference information* and the online help system available from the IAR Embedded Workbench IDE **Help** menu.

Finally, we recommend the *Glossary* if you should encounter any unfamiliar terms in the IAR Systems user documentation.

## SOME DESCRIPTIONS DO NOT APPLY TO YOUR PRODUCT

This guide describes the IDE, which is a generic component in IAR Embedded Workbench.

However, some functionality and some tools described do not apply to all IAR Embedded Workbench product packages, for example:

- Not all product packages support C++
- IAR Embedded Workbench includes either the IAR ILINK Linker or the IAR XLINK Linker, but not both
- IAR Embedded Workbench includes either the IAR DLIB Library, the IAR CLIB Library, or both
- Not all product packages support invoking flash loaders based on the IAR flash loader mechanism.

Descriptions that do not apply to all product packages have a brief disclaimer.

For a list of components used in your product package, see the Information Center.

### Filename extensions

Depending on whether your IAR Embedded Workbench comes with the IAR XLINK Linker or the IAR ILINK Linker, different sets of filename extensions will be used. In this guide, all filename extensions in examples and in screenshots reflect the XLINK linker. This table maps the different sets of filename extensions:

Type of file	Filename extension for products with XLINK*	Filename extension for products with ILINK
Target application	axx	out
Target application with debug information	dxx	out
Object module	rxx	o
Library module	rxx	a
Assembler source code	sxx or s	s

*Table 1: Filename extensions in XLINK versus ILINK*

\* xx is a numeric part that represents your product package.

For more information about filename extensions, see *File types*, page 111.

### **The terms segment versus section**

In the UBROF object format—used by the XLINK linker—object such as variables or functions are contained in *segments*. In the ELF object format—used by the ILINK linker—the corresponding containers are called *sections*. Whenever these two terms are used in this guide, they relate to XLINK and ILINK, respectively.

---

## **What this guide contains**

This is a brief outline and summary of the chapters in this guide.

### **Part 1. Project management and building**

This section describes the process of editing and building your application:

- *The development environment* introduces you to the IAR Embedded Workbench development environment. The chapter also demonstrates the facilities available for customizing the environment to meet your requirements.
- *Managing projects* describes how you can create workspaces with multiple projects, build configurations, groups, source files, and options that help you handle different versions of your applications.
- *Building* discusses the process of building your application.
- *Editing* contains detailed descriptions of the IAR Embedded Workbench editor, how to use it, and the facilities related to its usage. The final section also contains information about how to integrate an external editor of your choice.

### **Part 2. Reference information**

- *Installed files* describes the directory structure and the types of files it contains.
- *IAR Embedded Workbench IDE reference* contains detailed reference information about the development environment, such as details about the graphical user interface.

---

## **Other documentation**

User documentation is available as hypertext PDFs and as a context-sensitive online help system in HTML format. You can access the documentation from the Information Center or from the **Help** menu in the IAR Embedded Workbench IDE. The online help system is also available via the F1 key.

## USER AND REFERENCE GUIDES

The complete set of IAR Systems development tools is described in a series of guides. For information about:

- System requirements and information about how to install and register the IAR Systems products, refer to the booklet *Quick Reference* (available in the product box) and the *Installation and Licensing Guide*.
- Getting started using IAR Embedded Workbench and the tools it provides, see the guide *Getting Started with IAR Embedded Workbench®*.
- Using the IDE for project management and building, see the *IDE Project Management and Building Guide*.
- Using the IAR C-SPY® Debugger, see the *C-SPY® Debugging Guide*.
- Programming for the IAR C/C++ Compiler, see the *IAR C/C++ Compiler Reference Guide* if your product package includes the IAR XLINK Linker, and the *IAR C/C++ Development Guide* if your product package includes the IAR ILINK Linker.
- Using the IAR XLINK Linker, the IAR XAR Library Builder, and the IAR XLIB Librarian, see the *IAR Linker and Library Tools Reference Guide*. This guide is only available if your product package includes the IAR XLINK Linker.
- Programming for the IAR Assembler, see the *IAR Assembler Reference Guide*.
- Using the IAR DLIB Library, see the *DLIB Library Reference information*, available in the online help system.
- Using the IAR CLIB Library, see the *IAR C Library Functions Reference Guide*, available in the online help system. This guide is only available if your product package includes the CLIB library.
- Developing safety-critical applications using the MISRA C guidelines, see the *IAR Embedded Workbench® MISRA C:2004 Reference Guide* or the *IAR Embedded Workbench® MISRA C:1998 Reference Guide*.

**Note:** Additional documentation might be available depending on your product installation.

## THE ONLINE HELP SYSTEM

The context-sensitive online help contains:

- Comprehensive information about debugging using the IAR C-SPY® Debugger
- Reference information about the menus, windows, and dialog boxes in the IDE
- Compiler reference information
- Keyword reference information for the DLIB library functions. To obtain reference information for a function, select the function name in the editor window and press

F1. Note that if you select a function name in the editor window and press F1 while using the CLIB library, you will get reference information for the DLIB library.

## WEB SITES

Recommended web sites:

- The Chip manufacturer web site that contains information and news about the microcontroller.
- The IAR Systems web site, [www.iar.com](http://www.iar.com), that holds application notes and other product information.
- The web site of the C standardization working group, [www.open-std.org/jtc1/sc22/wg14](http://www.open-std.org/jtc1/sc22/wg14).
- The web site of the C++ Standards Committee, [www.open-std.org/jtc1/sc22/wg21](http://www.open-std.org/jtc1/sc22/wg21).
- Finally, the Embedded C++ Technical Committee web site, [www.caravan.net/ec2plus](http://www.caravan.net/ec2plus), that contains information about the Embedded C++ standard.

---

## Document conventions

When, in the IAR Systems documentation, we refer to the programming language C, the text also applies to C++, unless otherwise stated.

When referring to a directory in your product installation, for example *cpuname*\doc, the full path to the location is assumed, for example `c:\Program Files\IAR Systems\Embedded Workbench 6.n\cpuname\doc`.

## TYPOGRAPHIC CONVENTIONS

The IAR Systems documentation set uses the following typographic conventions:

Style	Used for
<code>computer</code>	<ul style="list-style-type: none"> <li>• Source code examples and file paths.</li> <li>• Text on the command line.</li> <li>• Binary, hexadecimal, and octal numbers.</li> </ul>
<i>parameter</i>	A placeholder for an actual value used as a parameter, for example <i>filename.h</i> where <i>filename</i> represents the name of the file. Note that this style is also used for <i>cpuname</i> , <i>configfile</i> , <i>libraryfile</i> , and other labels representing your product, as well as for the numeric part of filename extensions— <i>xx</i> .
[option]	An optional part of a command.

Table 2: Typographic conventions used in this guide





Style	Used for
[a   b   c]	An optional part of a command with alternatives.
{a   b   c}	A mandatory part of a command with alternatives.
<b>bold</b>	Names of menus, menu commands, buttons, and dialog boxes that appear on the screen.
<i>italic</i>	<ul style="list-style-type: none"> <li>• A cross-reference within this guide or to another guide.</li> <li>• Emphasis.</li> </ul>
...	An ellipsis indicates that the previous item can be repeated an arbitrary number of times.
	Identifies instructions specific to the IAR Embedded Workbench® IDE interface.
	Identifies instructions specific to the command line interface.
	Identifies helpful tips and programming hints.
	Identifies warnings.

Table 2: Typographic conventions used in this guide (Continued)

## NAMING CONVENTIONS

The following naming conventions are used for the products and tools from IAR Systems®, when referred to in the documentation:

Brand name	Generic term
IAR Embedded Workbench®	IAR Embedded Workbench®
IAR Embedded Workbench® IDE	the IDE
IAR C-SPY® Debugger	C-SPY, the debugger
IAR C-SPY® Simulator	the simulator
IAR C/C++ Compiler™	the compiler
IAR Assembler™	the assembler
IAR XLINK Linker™	XLINK, the linker
IAR ILINK Linker™	ILINK, the linker
IAR XAR Library Builder™	the library builder
IAR XLIB Librarian™	the librarian
IAR DLIB Library™	the DLIB library
IAR CLIB Library™	the CLIB library

Table 3: Naming conventions used in this guide

Note that some of these products and tools might not be available in the product package you are using.







# Part I. Project management and building

This part of the IDE Project Management and Building Guide contains these chapters:

- The development environment
- Managing projects
- Building
- Editing.

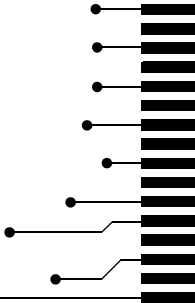

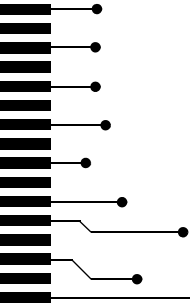

# The development environment

This chapter introduces you to the IAR Embedded Workbench® integrated development environment (IDE). The chapter also demonstrates how you can customize the environment to suit your requirements.

---

## The IAR Embedded Workbench IDE—an overview

### THE TOOLCHAIN

The IDE is the environment where all necessary tools—the *toolchain*—are integrated: a C/C++ compiler, an assembler, a linker, an editor, a project manager with Make utility, and the IAR C-SPY® Debugger. The tools used specifically for building your source code are referred to as the *build tools*.

The compiler, assembler, and linker can also be run from a command line environment, if you want to use them as external tools in an already established project environment.

You have the same user interface regardless of which microcontroller you have chosen to work with—coupled with general and target-specific support for each device.

### AN EXTENSIBLE AND MODULAR ENVIRONMENT

Although the IDE provides all the features required for your project, you can also integrate other tools. For example, you can add IAR visualSTATE to the toolchain, which means that you can add state machine diagrams directly to your project in the IDE. Using a version control system is useful for keeping track of different versions of your source code. The IDE can identify and access any third-party version control system that conforms to the SCC interface published by Microsoft. The IDE can also attach to files in a Subversion working copy. You can use the Custom Build mechanism to incorporate also other tools to the toolchain, see *Extending the toolchain*, page 72.

### WINDOW MANAGEMENT

To give you full and convenient control of the placement of the windows, each window is *dockable* and you can optionally organize the windows in *tab groups*.

This illustration shows the IAR Embedded Workbench IDE window with various components.

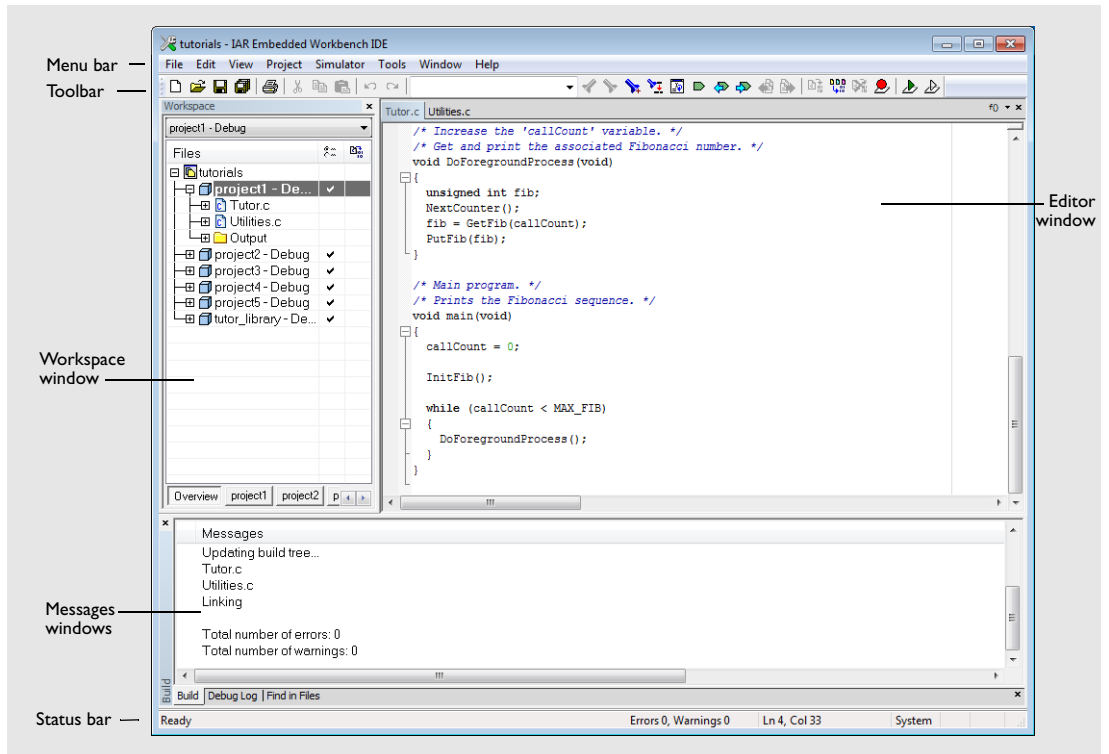


Figure 1: IAR Embedded Workbench IDE window

The window might look different depending on what additional tools you are using.

## RUNNING THE IDE

Click the **Start** button on the Windows taskbar and choose **All Programs>IAR Systems>IAR Embedded Workbench for *Chip manufacturer* CPUNAME>IAR Embedded Workbench**.

The file `IarIdePm.exe` is located in the `common\bin` directory under your IAR Systems installation, in case you want to start the program from the command line or from within Windows Explorer.

## Double-clicking the workspace filename

The workspace file has the filename extension `.eww`. If you double-click a workspace filename, the IDE starts.

If you have several versions of IAR Embedded Workbench installed, the workspace file is opened by the most recently used version of your IAR Embedded Workbench that uses that file type, regardless of which version the project file was created in.

---

## Customizing the environment

The IDE is a highly customizable environment. This section demonstrates how you can work with and organize the windows on the screen, the possibilities for customizing the IDE, and how you can set up the environment to communicate with external tools.

### ORGANIZING THE WINDOWS ON THE SCREEN

In the IDE, you can position the windows and arrange a layout according to your preferences. You can *dock* windows at specific places, and organize them in tab groups. You can also make a window *floating*, which means it is always on top of other windows. If you change the size or position of a floating window, other currently open windows are not affected.

Each time you open a previously saved workspace, the same windows are open, and they have the same sizes and positions.

For every project that is executed in the C-SPY environment, a separate layout is saved. In addition to the information saved for the workspace, information about all open debugger-specific windows is also saved.

### Using docked versus floating windows

Each window that you open has a default location, which depends on other currently open windows. To give you full and convenient control of window placement, each window can either be docked or floating.

A docked window is locked to a specific area in the Embedded Workbench main window, which you can decide. To keep many windows open at the same time, you can organize the windows in tab groups. This means one area of the screen is used for several concurrently open windows. The system also makes it easy to rearrange the size of the windows. If you rearrange the size of one docked window, the sizes of any other docked windows are adjusted accordingly.

A floating window is always on top of other windows. Its location and size does not affect other currently open windows. You can move a floating window to any place on your screen, also outside of the IAR Embedded Workbench IDE main window.

**Note:** The editor window is always docked. When you open the editor window, its placement is decided automatically depending on other currently open windows. For more information about how to work with the editor window, see *Introduction to the IAR Embedded Workbench editor*, page 75.

### Organizing windows

To place a window as a *separate* window, drag it next to another open window.

To place a window in the same tab group as another open window, drag the window you want to locate and drop it in the middle of the other window.

To make a window floating, double-click on the window's title bar.



The status bar, located at the bottom of the IAR Embedded Workbench IDE main window, contains useful help about how to arrange windows.

## CUSTOMIZING THE IDE

To customize the IDE, choose **Tools>Options** to get access to a wide variety of commands for:

- Configuring the editor
- Configuring the editor colors and fonts
- Configuring the project build command
- Organizing the windows in C-SPY
- Using an external editor
- Changing common fonts
- Changing key bindings
- Configuring the amount of output to the Messages window.

In addition, you can increase the number of recognized filename extensions. By default, each tool in the build toolchain accepts a set of standard filename extensions. If you have source files with a different filename extension, you can modify the set of accepted filename extensions. Choose **Tools>Filename Extensions** to get access to the necessary commands.

For more information about the commands for customizing the IDE, see *Tools menu*, page 140. For information about customizing the editor, see the section *Customizing the editor environment*, page 83. For more information about customizations related to C-SPY, see the *C-SPY® Debugging Guide*.

## INVOKING EXTERNAL TOOLS

The **Tools** menu is a configurable menu to which you can add external tools for convenient access to these tools from within the IDE. For this reason, the menu might look different depending on which tools you have preconfigured to appear as menu commands.

To add an external tool to the menu, choose **Tools>Configure Tools** to open the **Configure Tools** dialog box.

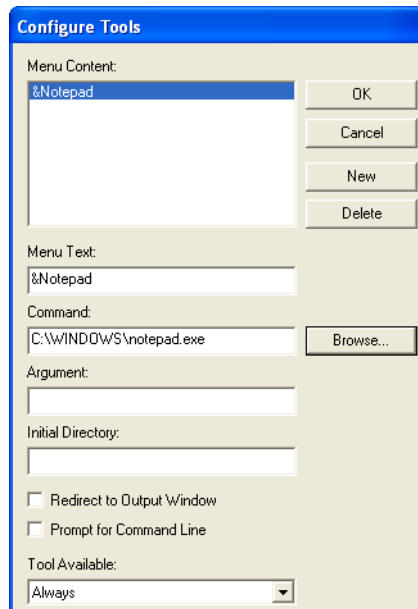


Figure 2: *Configure Tools dialog box*

For more information about this dialog box, see *Configure Tools dialog box*, page 165.

**Note:** You cannot use the **Configure Tools** dialog box to extend the toolchain in the IDE, see *The toolchain*, page 27.

After you have entered the appropriate information and clicked **OK**, the menu command you have specified is displayed on the **Tools** menu.




Figure 3: Customized Tools menu

**Note:** If you intend to add an external tool to the standard build toolchain, see *Extending the toolchain*, page 72.

### Adding command line commands

Command line commands and calls to batch files must be run from a command shell. You can add command line commands to the **Tools** menu and execute them from there.

- 1 To add commands to the **Tools** menu, you must specify an appropriate command shell. Type a command shell in the **Command** text box, for example `cmd.exe`.
- 2 Specify the command line command or batch file name in the **Argument** text box.

The **Argument** text should be specified as:

```
/C name
```

where *name* is the name of the command or batch file you want to run.

The `/C` option terminates the shell after execution, to allow the IDE to detect when the tool has finished.

#### Example

To add the command **Backup** to the **Tools** menu to make a copy of the entire `project` directory to a network drive, you would specify **Command** as `cmd.exe` (or `command.cmd` depending on your host environment), and **Argument** as:

```
/C copy c:\project\*.* F:
```

Alternatively, to use a variable for the argument to allow relocatable paths:

```
/C copy $PROJ_DIR$*.* F:
```



# Managing projects

This chapter describes how projects are organized and how you can specify workspaces with multiple projects, build configurations, groups, source files, and options that help you handle different versions of your applications. The chapter also describes the steps involved in interacting with an external third-party version control system.

More specifically, this means:

- Introduction to managing projects
- Procedures for managing projects
- Reference information on managing projects.

---

## Introduction to managing projects

This section introduces project management in the IDE.

These topics are covered:

- Briefly about managing projects
- How projects are organized
- Interacting with version control systems.

### **BRIEFLY ABOUT MANAGING PROJECTS**

In a large-scale development project, with hundreds of files, you must be able to organize the files in a structure that is easily navigated and maintained by perhaps several engineers.

The IDE comes with functions that will help you to stay in control of all project modules, for example, C or C++ source code files, assembler files, include files, and other related modules. You create workspaces and let them contain one or several projects. Files can be grouped, and options can be set on all levels—project, group, or file. Changes are tracked so that a request for rebuild will retranslate all required modules, making sure that no executable files contain out-of-date modules.

This list shows some additional features:

- Project templates to create a project that can be built and executed for a smooth development startup
- Hierarchical project representation
- Source browser with an hierarchical symbol presentation
- Options can be set globally, on groups of source files, or on individual source files
- The Make command automatically detects changes and performs only the required operations
- Text-based project files
- Custom Build utility to expand the standard toolchain in an easy way
- Command line build with the project file as input.

### **Navigating between project files**

There are two main different ways to navigate your project files: using the Workspace window or the Source Browser window. The Workspace window displays an hierarchical view of the source files, dependency files, and output files and how they are logically grouped. The Source Browser window, on the other hand, displays information about the build configuration that is currently active in the Workspace window. For that configuration, the Source Browser window displays a hierarchical view of all globally defined symbols, such as variables, functions, and type definitions. For classes, information about any base classes is also displayed.

### **HOW PROJECTS ARE ORGANIZED**

The IDE allows you to organize projects in an hierarchical tree structure showing the logical structure at a glance.

The IDE has been designed to suit the way that software development projects are typically organized. For example, perhaps you need to develop related versions of an application for different versions of the target hardware, and you might also want to include debugging routines into the early versions, but not in the final application.

Versions of your applications for different target hardware will often have source files in common, and you might want to be able to maintain only one unique copy of these files, so that improvements are automatically carried through to each version of the application. Perhaps you also have source files that differ between different versions of the application, such as those dealing with hardware-dependent aspects of the application.

In the following sections the various levels of the hierarchy are described.

## Projects and workspaces

Typically you create one or several *projects*, where each project can contain either:

- Source code files, which you can use for producing your embedded application or a library. For an example where a library project has been combined with an application project, see the example about creating and using libraries in the tutorials.
- An externally built executable file that you want to load in C-SPY. For information about how to load executable files built outside of the IDE, see the *C-SPY® Debugging Guide*.

If you have several related projects, you can access and work with them simultaneously. To achieve this, you can organize related projects in *workspaces*.

Each workspace you define can contain one or more projects, and each project must be part of at least one workspace.

Consider this example: two related applications—for instance A and B—are developed, requiring one development team each (team A and B). Because the two applications are related, they can share parts of the source code between them. The following project model can be applied:

- Three projects—one for each application, and one for the common source code
- Two workspaces—one for team A and one for team B.

Collecting the common sources in a library project (compiled but not linked object code) is both convenient and efficient, to avoid having to compile it unnecessarily.

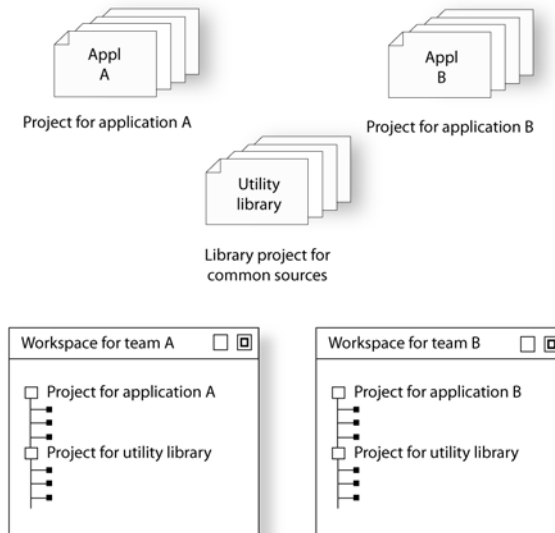


Figure 4: Examples of workspaces and projects

## Projects and build configurations

Often, you need to build several versions of your project, for example, for different debug solutions that require different settings for the linker and debugger. Another example is when you need a separately built executable file with special debug output for execution trace, etc. The IAR Embedded Workbench lets you define multiple build configurations for each project. In a simple case, you might need just two, called **Debug** and **Release**, where the only differences are the options used for optimization, debug information, and output format. In the Release configuration, the preprocessor symbol `NDEBUG` is defined, which means the application will not contain any asserts.

Additional build configurations might be useful, for instance, if you intend to use the application on different target devices. The application is the same, but hardware-related parts of the code differ. Thus, depending on which target device you intend to build for, you can exclude some source files from the build configuration. These build configurations might fulfil these requirements for Project A:

- Project A - Device 1:Release
- Project A - Device 1:Debug

- Project A - Device 2:Release
- Project A - Device 2:Debug

## Groups

Normally, projects contain hundreds of files that are logically related. You can define each project to contain one or more groups, in which you can collect related source files. You can also define multiple levels of subgroups to achieve a logical hierarchy. By default, each group is present in all build configurations of the project, but you can also specify a group to be excluded from a particular build configuration.

## Source files and their paths

Source files can be located directly under the project node or in a hierarchy of groups. The latter is convenient if the amount of files makes the project difficult to survey. By default, each file is present in all build configurations of the project, but you can also specify a file to be excluded from a particular build configuration.

Only the files that are part of a build configuration will actually be built and linked into the output code.

Once a project has been successfully built, all include files and output files are displayed in the structure below the source file that included or generated them.

**Note:** The settings for a build configuration can affect which include files that are used during the compilation of a source file. This means that the set of include files associated with the source file after compilation can differ between the build configurations.

The IDE supports relative source file paths to a certain degree, for:

- Project file
  - Paths to files part of the project file is relative if they are located on the same drive. The path is relative either to `$PROJ_DIR$` or `$EW_DIR$`. The argument variable `$EW_DIR$` is only used if the path refers to a file located in subdirectory to `$EW_DIR$` and the distance from `$EW_DIR$` is shorter than the distance from `$PROJ_DIR$`.
  - Paths to files that are part of the project file are absolute if the files are located on different drives.
- Workspace file
  - For files located on the same drive as the workspace file, the path is relative to `$PROJ_DIR$`.
  - For files located on another drive as the workspace file, the path is absolute.
- Debug files
  - If your debug image file contains debug information, any paths in the file that refer to source files are absolute.

### Drag and drop

You can easily drag individual source files and project files from the Windows file explorer to the Workspace window. Source files dropped on a *group* are added to that group. Source files dropped outside the project tree—on the Workspace window background—are added to the active project.

## INTERACTING WITH VERSION CONTROL SYSTEMS

The IAR Embedded Workbench IDE can identify and access any:

- Installed third-party version control system that conforms to the Source Code Control (SCC) interface published by Microsoft corporation
- Files that are in a Subversion (SVN) working copy.

From within the IDE you can connect an IAR Embedded Workbench project to an external SCC or SVN project, and perform some of the most commonly used operations.

To connect your IAR Embedded Workbench project to a version control system you should be familiar with the version control *client application* you are using. Note that some of the windows and dialog boxes that appear when you work with version control in the IDE originate from the version control system and are not described in the documentation from IAR Systems. For information about details in the client application, refer to the documentation supplied with that application.

**Note:** Different version control systems use very different terminology even for some of the most basic concepts involved. You must keep this in mind when you read the descriptions about interacting between the IDE and the version control system.

---

## Procedures for managing projects

This section gives you step-by-step descriptions of how to use certain features related to project management.

More specifically, you will get information about:

- Creating and managing workspaces
- Viewing the workspace
- Displaying browse information
- Interacting with SCC-compatible systems
- Interacting with Subversion.

## CREATING AND MANAGING WORKSPACES

Here, you will get the overall procedure for creating the workspace, projects, groups, files, and build configurations, but not the corresponding in-depth step-by-step descriptions. The **File** menu provides the commands for creating workspaces. The **Project** menu provides commands for creating projects, adding files to a project, creating groups, specifying project options, and running the IAR Systems development tools on the current projects.

The steps involved for creating and managing a workspace and its contents are:

- Creating a workspace.
 

An empty Workspace window appears, which is the place where you can view your projects, groups, and files.
- Adding new or existing projects to the workspace.
 

When creating a new project, you can base it on a *template project* with preconfigured project settings. Template projects are available for C applications, C++ applications, assembler applications, and library projects.
- Creating groups.
 

A group can be added either to the project's top node or to another group within the project.
- Adding files to the project.
 

A file can be added either to the project's top node or to a group within the project.
- Creating new build configurations.
 

By default, each project you add to a workspace will have two build configurations called **Debug** and **Release**.

You can base a *new* configuration on an already existing configuration. Alternatively, you can choose to create a default build configuration.

Note that you do not have to use the same toolchain for the new build configuration as for other build configurations in the same project.
- Excluding groups and files from a build configuration (using the project **Options** dialog box).
 

Note that the icon indicating the excluded group or file will change to white in the Workspace window.
- Removing items from a project.

**Note:** It might not be necessary for you to perform all of these steps.

For a detailed example, see *Creating an application project* in the tutorials.

## VIEWING THE WORKSPACE

The Workspace window is where you access your projects and files during the application development.

- 1 To choose which project you want to view, click its tab at the bottom of the Workspace window.

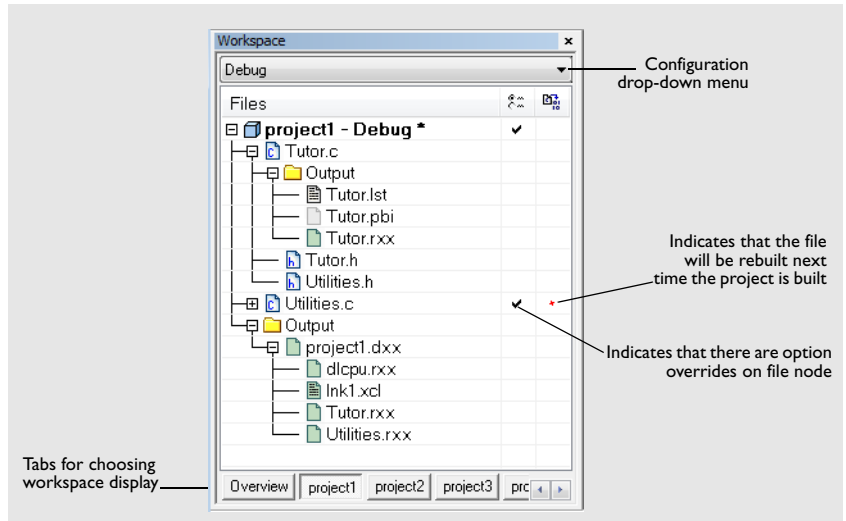


Figure 5: Displaying a project in the Workspace window

For each file that has been built, an `Output` folder icon appears, containing generated files, such as object files and list files. The latter is generated only if the list file option is enabled. There is also an `Output` folder related to the project node that contains generated files related to the whole project, such as the executable file and the linker map file (if the list file option is enabled).

Also, any included header files will appear, showing dependencies at a glance.

- 2 To display the project with a different build configuration, choose that build configuration from the drop-down list at the top of the Workspace window.

The project and build configuration you have selected are displayed highlighted in the Workspace window. It is the project and build configuration that you select from the drop-down list that is built when you build your application.

- 3 To display an overview of all projects in the workspace, click the **Overview** tab at the bottom of the Workspace window.



An overview of all project members is displayed.

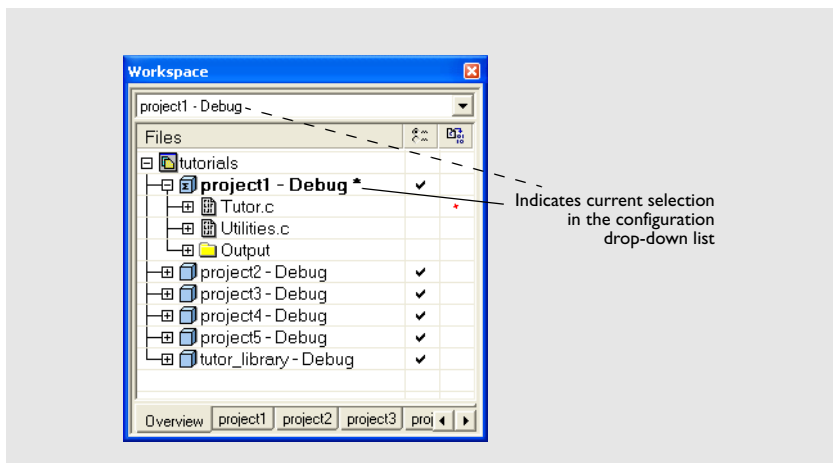


Figure 6: Workspace window—an overview

The current selection in the **Build Configuration** drop-down list is also highlighted when an overview of the workspace is displayed.

## DISPLAYING BROWSE INFORMATION

- 1 To open the Source Browser window, choose **View>Source Browser>Source Browser**.

The Source Browser window is, by default, docked with the Workspace window. Source browse information is displayed for the active build configuration.

Note that you can choose a file filter and a type filter from the context menu that appears when you right-click in the top pane of the window.

- 2 To display browse information in the Source Browser window, choose **Tools>Options>Project** and select the option **Generate browse information**.

**Note:** If you want the source browser to halt when you change focus from the IAR Embedded Workbench IDE to another program, make sure to enable the **No source browser and build status updates when the IDE is not the foreground process** option.

- 3 To see the definition of a global symbol or a function, you can use three alternative methods:
  - In the Source Browser window, right-click on a symbol, or function, and choose the **Go to definition** command from the context menu that appears

- In the Source Browser window, double-click on a row
- In the editor window, right-click on a symbol, or function, and choose the **Go to definition** command from the context menu that appears.

The definition of the symbol or function is displayed in the editor window.

The source browse information is updated when a file in the project is saved. When you save an edited source file, or when you open a new project, there will be a short delay before the information is up-to-date. During the update, progress information is displayed in the Source Browser window title and in the status bar.



Figure 7: Source browser progress information

## INTERACTING WITH SCC-COMPATIBLE SYSTEMS

In any SCC-compatible system, you use a client application to maintain a central archive. In this archive you keep the working copies of the files of your project. The version control integration in IAR Embedded Workbench allows you to conveniently perform some of the most common version control operations directly from within the IDE. However, several tasks must still be performed in the client application.

### To connect an IAR Embedded Workbench project to an SCC system:

- 1 In the Microsoft SCC-compatible client application, set up an SCC project
- 2 In the IDE, connect your application project to the SCC project.

### Setting up an SCC project in the SCC client application

Use your SCC client tools to set up a working directory for the files in your IAR Embedded Workbench project that you want to control using your SCC system. The files can be placed in one or more nested subdirectories, all located under a common root. Specifically, all source files must reside in the same directory as the `ewp` project file, or in subdirectories of this directory.

For information about the steps involved, refer to the documentation supplied with the SCC client application.

### To connect application projects to the SCC project

- 1 In the Workspace window, select the project for which you have created an SCC project.

- 2 From the **Project** menu, choose **Version Control System>Connect Project To SCC Project**. This command is also available from the context menu that appears when you right-click in the Workspace window.

**Note:** The commands on the **Source Code Control** submenu are available when you have successfully connected your application project to your SCC project.

- 3 If you have SCC-compatible systems from different vendors installed, you will be prompted to choose which system you want to connect to.
- 4 An SCC-specific dialog box will appear where you can navigate to the SCC project that you have set up.

For more information about the commands available for accessing the SCC system, see *Version Control System menu for SCC*, page 59.

### Viewing the SCC states

When your IAR Embedded Workbench project has been connected to the SCC project, a column that contains status information for version control will appear in the Workspace window. Different icons are displayed depending on the state.

There are also icons for some combinations of these states. Note that the interpretation of these states depends on the SCC client application you are using. For more information about the icons and the different states they represent, see *Source code control states*, page 64.

### Configuring the interaction between the IDE and SCC

To configure the interaction between the IDE and SCC, choose **Tools>Options** and click the **Source Code Control** tab. For more information about the available commands, see *Source Code Control options*, page 157.

## INTERACTING WITH SUBVERSION

The version control integration in IAR Embedded Workbench allows you to conveniently perform some of the most common Subversion operations directly from within the IDE, using the client applications `svn.exe` and `TortoiseProc.exe`.

### To connect an IAR Embedded Workbench project to a Subversion system:

- 1 In the Subversion client application, set up a Subversion working copy.
- 2 In the IDE, connect your application project to the Subversion working copy.

### To set up a Subversion working copy

- 1 To use the Subversion integration in the IDE, make sure that `svn.exe` and `TortoiseProc.exe` are in your path.

- 2 Check out a working copy from a Subversion repository.

The files that constitute your project do not have to come from the same working copy; all files in the project are treated individually. However, note that `TortoiseProc.exe` does not allow you to simultaneously, for example, check in files coming from different repositories.

### To connect application projects to the Subversion working copy

- 1 In the Workspace window, select the project for which you have created a Subversion working copy.
- 2 From the **Project** menu, choose **Version Control System>Connect Project to Subversion**. This command is also available from the context menu that appears when you right-click in the Workspace window.

For more information about the commands available for accessing the Subversion working copy, see *Version Control System menu for Subversion*, page 64.

### Viewing the Subversion states

When your IAR Embedded Workbench project has been connected to the Subversion working copy, a column that contains status information for version control will appear in the Workspace window. Various icons are displayed, where each icon reflects the Subversion status, see *Subversion states*, page 65.

---

## Reference information on managing projects

This section gives reference information about these windows and dialog boxes:

- *Workspace window*, page 45
- *Create New Project dialog box*, page 49
- *Configurations for project dialog box*, page 50
- *New Configuration dialog box*, page 51
- *Source Browser window*, page 52
- *Call Graph window*, page 56
- *Find All Declarations window*, page 57
- *Find All References window*, page 58
- *Version Control System menu for SCC*, page 59
- *Select Source Code Control Provider dialog box*, page 61
- *Check In Files dialog box*, page 62
- *Check Out Files dialog box*, page 63

- *Source code control states*, page 64
- *Version Control System menu for Subversion*, page 64
- *Subversion states*, page 65.

See also:

*Source Code Control options*, page 157.

## Workspace window

The Workspace window is available from the **View** menu.

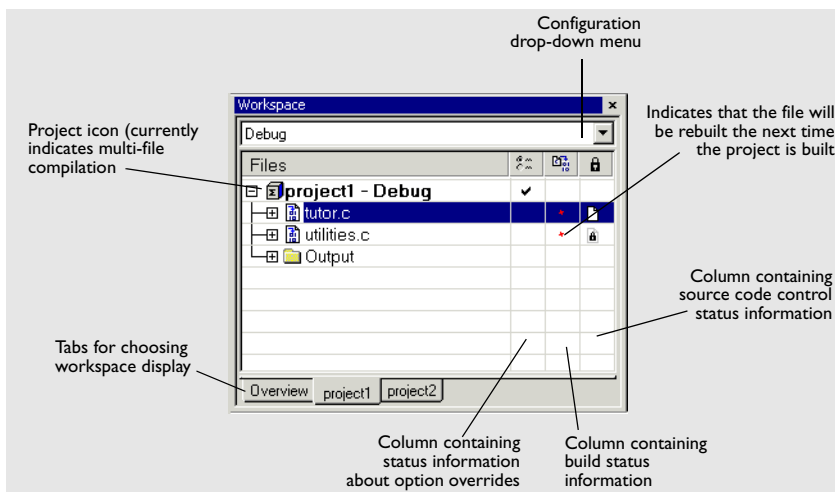


Figure 8: Workspace window

Use the Workspace window to access your projects and files during the application development.

### Drop-down list

At the top of the window there is a drop-down list where you can choose a build configuration to display in the window for a specific project.

## The display area

This area contains four columns.

The **Files** column displays the name of the current workspace and a tree representation of the projects, groups and files included in the workspace. One or more of these icons are displayed:



Workspace



Project



Project with multi-file compilation



Group of files



Group excluded from the build



Group of files, part of multi-file compilation



Group of files, part of multi-file compilation, but excluded from the build



Object file or library



Assembler source file



C source file



C++ source file



Source file excluded from the build



Header file



Text file



HTML text file



Control file, for example the linker configuration file



IDE internal file



Other file



The column that contains status information about option overrides can have one of three icons for each level in the project:

Blank                      There are no settings/overrides for this file/group.

Black check mark        There are local settings/overrides for this file/group.

Red check mark      There are local settings/overrides for this file/group, but they are either identical to the inherited settings or they are ignored because you use multi-file compilation, which means that the overrides are not needed.



The column that contains build status information can have one of three icons for each file in the project:

Blank                      The file will not be rebuilt next time the project is built.

Red star                    The file will be rebuilt next time the project is built.

Gearwheel                The file is being rebuilt.



The column contains status information about version control. For information about the various icons, see:

- *Source code control states*, page 64
- *Subversion states*, page 65.

Use the tabs at the bottom of the window to choose which project to display. Alternatively, you can choose to display an overview of the entire workspace.

For more information about project management and using the Workspace window, see the *Introduction to managing projects*, page 33.

## Context menu

This context menu is available:

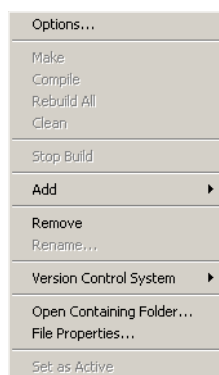


Figure 9: Workspace window context menu

These commands are available:

<b>Options</b>	Displays a dialog box where you can set options for each build tool, for the selected item in the Workspace window. You can set options for the entire project, for a group of files, for on an individual file. See <i>Setting options</i> , page 67.
<b>Make</b>	Brings the current target up to date by compiling, assembling, and linking only the files that have changed since the last build.
<b>Compile</b>	Compiles or assembles the currently active file as appropriate. You can choose the file either by selecting it in the Workspace window, or by selecting the editor window containing the file you want to compile.
<b>Rebuild All</b>	Recompiles and relinks all files in the selected build configuration.
<b>Clean</b>	Deletes intermediate files.
<b>Stop Build</b>	Stops the current build operation.
<b>Add&gt;Add Files</b>	Displays a dialog box where you can add files to the project.
<b>Add&gt;Add filename</b>	Adds the indicated file to the project. This command is only available if there is an open file in the editor.
<b>Add&gt;Add Group</b>	Displays the <b>Add Group</b> dialog box where you can add new groups to the project. For more information about groups, see <i>Groups</i> , page 37.
<b>Remove</b>	Removes selected items from the Workspace window.
<b>Rename</b>	Displays the <b>Rename Group</b> dialog box where you can rename a group. For more information about groups, see <i>Groups</i> , page 37.
<b>Version Control System</b>	Opens a submenu with commands for source code control, see <i>Version Control System menu for SCC</i> , page 59.
<b>Open Containing Folder</b>	Opens the File Explorer that displays the directory where the selected file resides.
<b>File Properties</b>	Displays a standard <b>File Properties</b> dialog box for the selected file.



**Set as Active**

Sets the selected project in the overview display to be the active project. It is the active project that will be built when the **Make** command is executed.

**Create New Project dialog box**

The **Create New Project** dialog box is available from the **Project** menu.

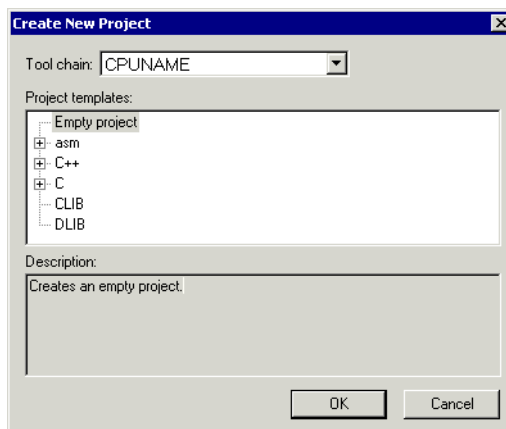


Figure 10: Create New Project dialog box

Use this dialog box to create a new project based on a template project. Template projects are available for C/C++ applications, assembler applications, and library projects. You can also create your own template projects.

**Tool chain**

Selects the target to build for. If you have several versions of IAR Embedded Workbench for different targets installed on your host computer, the drop-down list might contain some or all of these targets.

**Project templates**

Select a template to base the new project on, from this list of available template projects.

**Description**

A description of the currently selected template.

## Configurations for project dialog box

The **Configurations for project** dialog box is available by choosing **Project>Edit Configurations**.

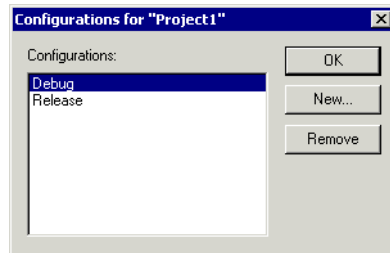


Figure 11: Configurations for project dialog box

Use this dialog box to define new build configurations for the selected project; either entirely new, or based on a previous project.

### Configurations

Lists existing configurations, which can be used as templates for new configurations.

### New

Displays a dialog box where you can define new build configurations, see *New Configuration dialog box*, page 51.

### Remove

Removes the configuration that is selected in the **Configurations** list.

## New Configuration dialog box

The **New Configuration** dialog box is available by clicking **New** in the **Configurations for project** dialog box.

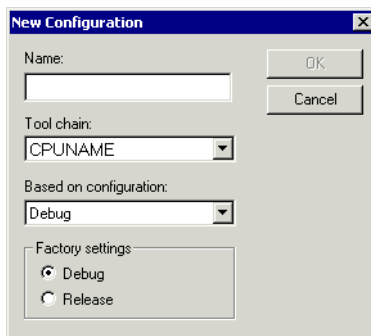


Figure 12: New Configuration dialog box

Use this dialog box to define new build configurations; either entirely new, or based on any currently defined configuration.

### Name

Type the name of the build configuration.

### Tool chain

Specify the target to build for. If you have several versions of IAR Embedded Workbench for different targets installed on your host computer, the drop-down list might contain some or all of these targets.

### Based on configuration

Selects a currently defined build configuration to base the new configuration on. The new configuration will inherit the project settings and information about the factory settings from the old configuration. If you select **None**, the new configuration will be based strictly on the factory settings.

### Factory settings

Select the default factory settings that you want to apply to your new build configuration. These factory settings will be used by your project if you click the **Factory Settings** button in the **Options** dialog box.

Choose between:

- |                |  |
|----------------|--|
| <b>Debug</b>   | Factory settings suitable for a debug build configuration.   |
| <b>Release</b> | Factory settings suitable for a release build configuration. |

## Source Browser window

The Source Browser window is available from the **View** menu.

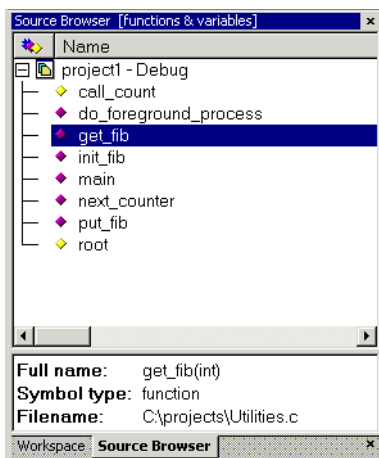


Figure 13: Source Browser window

The Source Browser window displays an hierarchical view in alphabetical order of all symbols defined in the active build configuration. This means that source browse information is available for symbols in source files and include files part of that configuration. Source browse information is not available for symbols in linked libraries. The window consists of two separate display areas.

For more information about how to use the Source Browser window, see *Displaying browse information*, page 41.

### The upper display area

The upper display area contains two columns:



An icon that corresponds to the Symbol type classification, see *Icons used for the symbol types*, page 53.

**Name** The names of global symbols and functions defined in the project. Note that unnamed types, for example a `struct` or a `union` without a name, will get a name based on the filename and line number where it is defined. These pseudonames are enclosed in angle brackets.

If you click in the window header, you can sort the symbols either by name or by symbol type.

In the upper display area you can also access a context menu; see *Context menu*, page 54.













### The lower display area


For a symbol selected in the upper display area, the lower area displays its properties:

<b>Full name</b>	Displays the unique name of each element, for instance <code>classname::membername</code> .
<b>Symbol type</b>	Displays the symbol type for each element, see <i>Icons used for the symbol types</i> , page 53.
<b>Filename</b>	Specifies the path to the file in which the element is defined.

### Icons used for the symbol types

These are the icons used:

	Base class
	Class
	Configuration
	Enumeration
	Enumeration constant
 (Yellow rhomb)	Field of a struct
 (Purple rhomb)	Function
	Macro
	Namespace
	Template class
	Template function
	Type definition



### Context menu

This context menu is available in the upper display area:

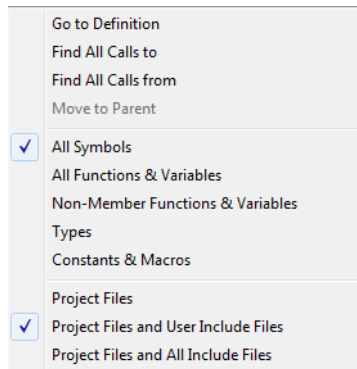


Figure 14: Source Browser window context menu

These commands are available on the context menu:

<b>Go to Definition</b>	The editor window will display the definition of the selected item.
<b>Find All Calls to</b>	Opens the Call Graph window which displays all functions in the project that calls the selected function, see <i>Call Graph window</i> , page 56. If this command is disabled, make sure to select a function in the Source Browser window.
<b>Find All Calls from</b>	Opens the Call Graph window which displays all functions in the project that are called from the selected function, see <i>Call Graph window</i> , page 56. If this command is disabled, make sure to select a function in the Source Browser window.
<b>Move to Parent</b>	If the selected element is a member of a class, struct, union, enumeration, or namespace, this menu command can be used for moving to its enclosing element.
<b>All Symbols</b>	Type filter; displays all global symbols and functions defined in the project.

<b>All Functions &amp; Variables</b>	Type filter; displays all functions and variables defined in the project.
<b>Non-Member Functions &amp; Variables</b>	Type filter; displays all functions and variables that are not members of a class.
<b>Types</b>	Type filter; displays all types such as structures and classes defined in the project.
<b>Constants &amp; Macros</b>	Type filter; displays all constants and macros defined in the project.
<b>Project Files</b>	File filter; displays symbols from all files that you have explicitly added to your project and all files included by them.
<b>Project Files and User Include Files</b>	File filter; displays symbols from all files that you have explicitly added to your project and all files included by them, except the include files in the IAR Embedded Workbench installation directory.
<b>Project Files and All Include Files</b>	File filter; displays symbols from all files that you have explicitly added to your project, but no include files.

## Call Graph window

The Call Graph window is available by choosing **View>Source Browser>Call Graph**.

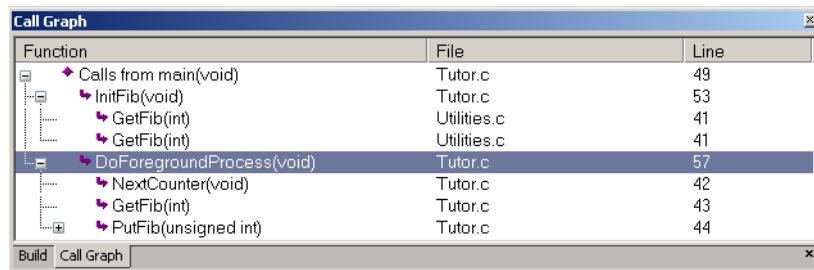


Figure 15: Call Graph window (calls from)

This window displays calls to or calls from a function. The window is useful for navigating between the function calls.

To display a call graph, select a function name in the editor window or in the Source Browser window, right-click and select either **Find All Calls to** or **Find All Calls from** from the context menu.

Double-click an entry in the window to place the insertion point at the location of the function call (or definition, if a call is not applicable for the entry). The editor will open the file that contains the call if necessary.

### Display area

The display area shows the call graph for the selected function, where each line lists a function. These columns are available:

<b>Function</b>	Displays the call graph for the selected function; first the selected function, followed by a list of all called or calling functions. The functions calling the selected function are preceded with left arrow and the functions called by the selected function are preceded with a right arrow.
<b>File</b>	The name of the source file.
<b>Line</b>	The line number for the call.



## Context menu

This context menu is available:




Figure 16: Call Graph window context menu

These commands are available:

- |                         |  |
|-------------------------|--|
| <b>Go to Definition</b> | Places the insertion point at the location of the function definition. |
| <b>Go to Call</b>       | Places the insertion point at the location of the function call.       |

## Find All Declarations window

The Find All Declarations window is available by choosing **View>Messages**.

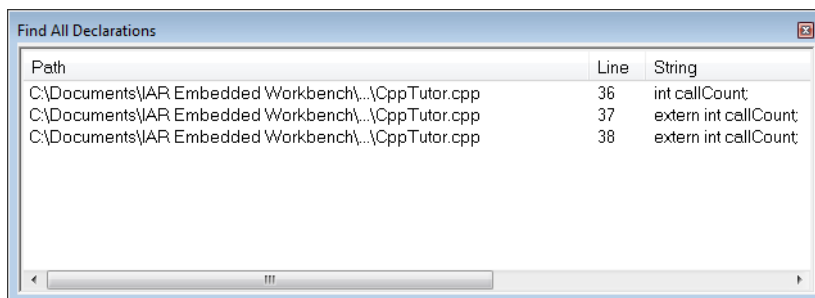


Figure 17: Find All Declarations window (message window)

This window displays the result from the **Go to Declaration** command on the editor window context menu.

When opened, this window is by default grouped together with the other message windows, see *Windows*, page 111.

Double-click an entry in the window to open the appropriate file with the insertion point positioned at the correct location. Choose **Edit>Next Error/Tag** or press F4 to jump to the next in sequence.

## Context menu

This context menu is available:




Figure 18: Find All Declarations window context menu

These commands are available:

<b>Copy</b>	Copies the contents of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window.

## Find All References window

The Find All References window is available by choosing **View>Messages**.

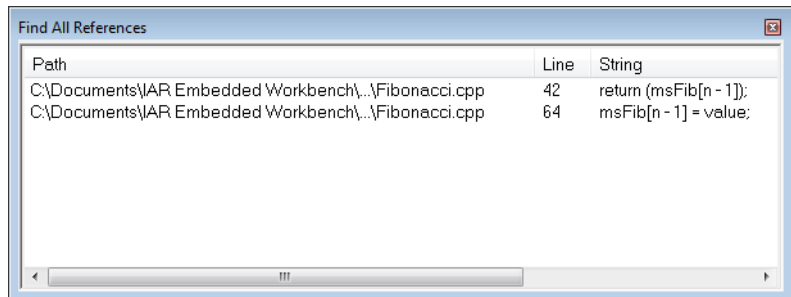


Figure 19: Find All References window (message window)

This window displays the result from the **Find All References** commands on the editor window context menu.

When opened, this window is by default grouped together with the other message windows, see *Windows*, page 111.

Double-click an entry in the window to open the appropriate file with the insertion point positioned at the correct location. Choose **Edit>Next Error/Tag** or press F4 to jump to the next in sequence.

## Context menu

This context menu is available:




Figure 20: Find All References window context menu

These commands are available:

<b>Copy</b>	Copies the contents of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window.

## Version Control System menu for SCC

The **Version Control System** submenu is available from the **Project** menu and from the context menu in the Workspace window.

This is the menu for SCC-compatible systems:

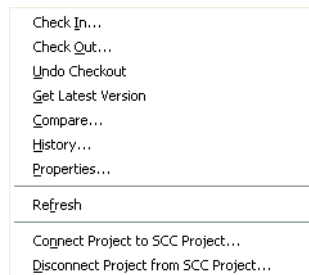


Figure 21: Version Control System menu for SCC

**Note:** The contents of the Version Control System submenu reflect the version control system in use, either an SCC-compatible system or Subversion.

For more information about interacting with an external version control system, see *Interacting with version control systems*, page 38.


These commands are available for SCC:

<b>Check In</b>	Displays the <b>Check In Files</b> dialog box where you can check in the selected files; see <i>Check In Files dialog box</i> , page 62. Any changes you have made in the files will be stored in the archive. This command is enabled when currently checked-out files are selected in the Workspace window.
<b>Check Out</b>	Checks out the selected file or files. Depending on the SCC (Source Code Control) system you are using, a dialog box might appear; see <i>Check Out Files dialog box</i> , page 63. This means you get a local copy of the file(s), which you can edit. This command is enabled when currently checked-in files are selected in the Workspace window.
<b>Undo Checkout</b>	Reverts the selected files to the latest archived version; the files are no longer checked out. Any changes you have made to the files will be lost. This command is enabled when currently checked-out files are selected in the Workspace window.
<b>Get Latest Version</b>	Replaces the selected files with the latest archived version.
<b>Compare</b>	Displays—in an SCC-specific window—the differences between the local version and the most recent archived version.
<b>History</b>	Displays SCC-specific information about the revision history of the selected file.
<b>Properties</b>	Displays information available in the version control system for the selected file.
<b>Refresh</b>	Updates the version control system display status for all the files that are part of the project. This command is always enabled for all projects under version control.
<b>Connect Project to SCC Project</b>	Displays a dialog box, which originates from the SCC client application, to let you create a connection between the selected IAR Embedded Workbench project and an SCC project; the IAR Embedded Workbench project will then be an SCC-controlled project. After creating this connection, a special column that contains status information will appear in the Workspace window.

**Disconnect Project from SCC Project** Removes the connection between the selected IAR Embedded Workbench project and an SCC project; your project will no longer be an SCC-controlled project. The column in the Workspace window that contains SCC status information will no longer be visible for that project.

## Select Source Code Control Provider dialog box

The **Select Source Code Control Provider** dialog box is displayed if several SCC systems from different vendors are available.

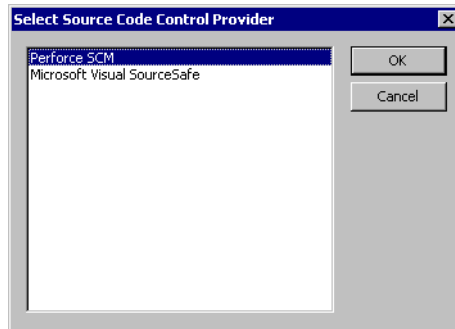

*Figure 22: Select Source Code Control Provider dialog box*

Use this dialog box to choose the SCC system you want to use.

## Check In Files dialog box

The **Check In Files** dialog box is available by choosing the **Project>Source Code Control>Check In** command, alternatively available from the Workspace window context menu.

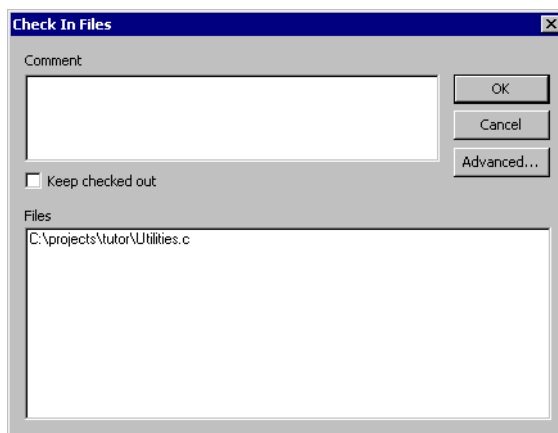


Figure 23: Check In Files dialog box

### Comment

Specify a comment—typically a description of your changes—that will be stored in the archive together with the file revision. This text box is only enabled if the SCC system supports adding comments at check in.

### Keep checked out

Specifies that the files will continue to be checked out after they have been checked in. Typically, this is useful if you want to make your modifications available to other members in your project team, without stopping your own work with the file.

### Advanced

Displays a dialog box, originating from the SCC client application, that contains advanced options. This button is only available if the SCC system supports setting advanced options at check in.

### Files

Lists the files that will be checked in. The list will contain all files that were selected in the Workspace window when the **Check In Files** dialog box was opened.

## Check Out Files dialog box

The **Check Out Files** dialog box is available by choosing the **Project>Source Code Control>Check Out** command, alternatively available from the Workspace window context menu. However, this dialog box is only available if the SCC system supports adding comments at check out or advanced options.

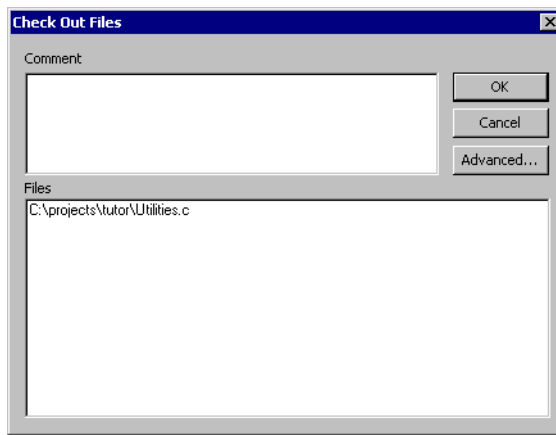


Figure 24: Check Out Files dialog box

### Comment

Specify a comment—typically the reason why the file is checked out—that will be placed in the archive together with the file revision. This text box is only enabled if the SCC system supports the adding of comments at check out.

### Advanced







Displays a dialog box, originating from the SCC client application, that contains advanced options. This button is only available if the SCC system supports setting advanced options at check out.

### Files

Lists files that will be checked out. The list will contain all files that were selected in the Workspace window when the **Check Out Files** dialog box was opened.

## Source code control states

Each source code-controlled file can be in one of several states.

	(blank)	Checked out to you. The file is editable.
	(checkmark)	Checked out to you. The file is editable and you have modified the file.
	(gray padlock)	Checked in. In many SCC systems this means that the file is write-protected.
	(gray padlock)	Checked in. A new version is available in the archive.
	(red padlock)	Checked out exclusively to another user. In many SCC systems this means that you cannot check out the file.
	(red padlock)	Checked out exclusively to another user. A new version is available in the archive. In many SCC systems this means that you cannot check out the file.

**Note:** The source code control in the IAR Embedded Workbench IDE depends on the information provided by the SCC system. If the SCC system provides incorrect or incomplete information about the states, the IDE might display incorrect symbols.

## Version Control System menu for Subversion

The **Version Control System** submenu is available from the **Project** menu and from the context menu in the Workspace window.

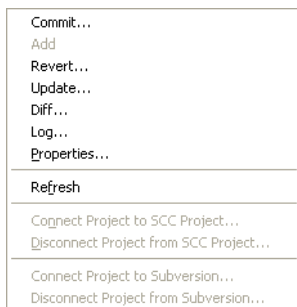


Figure 25: Version Control System menu for Subversion

**Note:** The contents of the Version Control System submenu reflect the version control system in use, either an SCC-compatible system or Subversion.



For more information about interacting with an external version control system, see *Interacting with version control systems*, page 38.

These commands are available for Subversion:

<b>Commit</b>	Displays Tortoise's <b>Commit</b> dialog box for the selected file(s).
<b>Add</b>	Displays Tortoise's <b>Add</b> dialog box for the selected file(s).
<b>Revert</b>	Displays Tortoise's <b>Revert</b> dialog box for the selected file(s).
<b>Update</b>	Opens Tortoise's <b>Update</b> window for the selected file(s).
<b>Diff</b>	Opens Tortoise's <b>Diff</b> window for the selected file(s).
<b>Log</b>	Opens Tortoise's <b>Log</b> window for the selected file(s).
<b>Properties</b>	Displays information available in the version control system for the selected file.
<b>Refresh</b>	Updates the version control system display status for all files that are part of the project. This command is always enabled for all projects under the version control system.
<b>Connect Project to SVN Project</b>	Checks whether <code>svn.exe</code> and <code>TortoiseProc.exe</code> are in the path and then enables the connection between the IAR Embedded Workbench project and an existing checked-out working copy. After this connection has been created, a special column that contains status information appears in the Workspace window. Note that you must check out the source files from outside the IDE.
<b>Disconnect Project from SVN Project</b>	Removes the connection between the selected IAR Embedded Workbench project and Subversion. The column in the Workspace window that contains SVN status information will no longer be visible for that project.

## Subversion states

Each Subversion-controlled file can be in one of several states.



(blue A)

Added.











(red C)

Conflicted.



(red D)

Deleted.

	(red I)	Ignored.
	(blank)	Not modified.
	(red M)	Modified.
	(red R)	Replaced.
	(gray X)	An unversioned directory created by an external definition.
	(gray question mark)	Item is not under version control.
	(black exclamation mark)	Item is missing—removed by a non-SVN command—or incomplete.
	(red tilde)	Item obstructed by an item of a different type.

**Note:** The version control system in the IAR Embedded Workbench IDE depends on the information provided by Subversion. If Subversion provides incorrect or incomplete information about the states, the IDE might display incorrect symbols.

# Building

This chapter briefly discusses the process of building your project, and describes how you can extend the chain of build tools with tools from third-party suppliers.

---

## Building your project

The build process consists of these steps:

- Setting project options
- Building the project, either an application project or a library project
- Correcting any errors detected during the build procedure.

To make the build process more efficient, you can use the **Batch Build** command. This gives you the possibility to perform several builds in one operation. If necessary, you can also specify pre-build and post-build actions.

In addition to using the IAR Embedded Workbench IDE to build projects, you can also use the command line utility `iarbuild.exe`.

For examples of building application and library projects, see the tutorials in the Information Center. For further information about building library projects, see the *IAR C/C++ Compiler Reference Guide*.

### SETTING OPTIONS

To specify how your project should be built, you must define one or several build configurations. Every build configuration has its own settings, which are independent of the other configurations. All settings are indicated in a separate column in the Workspace window.

For example, a configuration that is used for debugging would not be highly optimized, and would produce output that suits the debugging. Conversely, a configuration for building the final application would be highly optimized, and produce output that suits a flash or PROM programmer.

For each build configuration, you can set options on the project level, group level, and file level. Many options can only be set on the project level because they affect the entire build configuration. Examples of such options are General Options, linker settings, and debug settings. Other options, such as compiler and assembler options, that you set on project level are default for the entire build configuration.

To override project level settings, select the required item—for instance a specific group of files—and then select the option **Override inherited settings**. The new settings will affect all members of that group, that is, files and any groups of files. To restore all settings to the default factory settings, click the **Factory Settings** button.

**Note:** There is one important restriction on setting options. If you set an option on group or file level (group or file level override), no options on higher levels that operate on files will affect that group or file.

### Using the Options dialog box

The **Options** dialog box—available by choosing **Project>Options**—provides options for the build tools. You set these options for the selected item in the Workspace window. Options in the **General Options**, **Linker**, and **Debugger** categories can only be set for the entire build configuration, and not for individual groups and files. However, the options in the other categories can be set for the entire build configuration, a group of files, or an individual file.

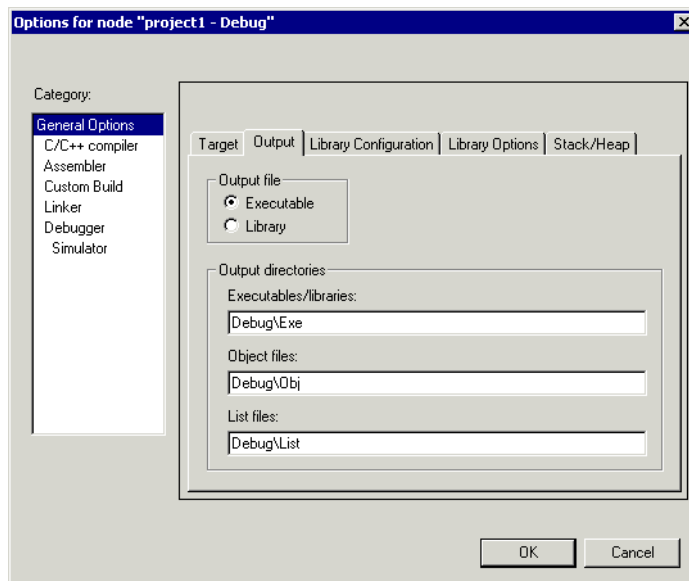


Figure 26: General options

The **Category** list allows you to select which building tool to set options for. Which tools that are available in the **Category** list depends on which tools are included in your product. When you select a category, one or more pages containing options for that component are displayed.

Click the tab corresponding to the type of options you want to view or change. To restore all settings to the default factory settings, click the **Factory Settings** button, which is available for all categories except **General Options** and **Custom Build**. Note that two sets of factory settings are available: Debug and Release. Which one that is used depends on your build configuration; see *New Configuration dialog box*, page 51.

For information about each option and how to set options, see the online help system. For the debugger options you can also see the *C-SPY® Debugging Guide*.

**Note:** If you add to your project a source file with a non-recognized filename extension, you cannot set options on that source file. However, you can add support for additional filename extensions. For more information, see *Filename Extensions dialog box*, page 168.

## BUILDING A PROJECT

You can build your project either as an application project or a library project.

**Note:** To build your project as a library project, choose **Project>Options>General Options>Output>Output file>Library** before you build your project. Then, **Linker** is replaced by **Library Builder** in the **Category** list in the options dialog box, and the result of the build will be a library. For an example, see the tutorials.

You have access to the build commands both from the **Project** menu and from the context menu that appears if you right-click an item in the Workspace window.

The three build commands **Make**, **Compile**, and **Rebuild All** run in the background, so you can continue editing or working with the IDE while your project is being built.

For more information, see *Project menu*, page 130.

## BUILDING MULTIPLE CONFIGURATIONS IN A BATCH

Use the batch build feature when you want to build more than one configuration at once. A batch is an ordered list of build configurations. The **Batch Build** dialog box—available from the **Project** menu—lets you create, modify, and build batches of configurations.

For workspaces that contain several configurations, it is convenient to define one or more different batches. Instead of building the entire workspace, you can build only the appropriate build configurations, for instance Release or Debug configurations.

For more information about the **Batch Build** dialog box, see *Batch Build dialog box*, page 138.

## USING PRE- AND POST-BUILD ACTIONS

If necessary, you can specify pre-build and post-build actions that you want to occur before or after the build. The **Build Actions** dialog box—available from the **Project** menu—lets you specify the actions required.

For more information about the **Build Actions** dialog box, see *Build actions options*, page 237the online help system.



### Using pre-build actions for time stamping

You can use pre-build actions to embed a time stamp for the build in the resulting binary file. Follow these steps:

- 1 Create a dedicated time stamp file, for example, `timestamp.c` and add it to your project.
- 2 In this source file, use the preprocessor macros `__TIME__` and `__DATE__` to initialize a string variable.
- 3 Choose **Project>Options>Build Actions** to open the **Build Actions** dialog box.
- 4 In the **Pre-build command line** text field, specify for example this pre-build action:

```
"touch $PROJ_DIR$timestamp.c"
```

You can use the open source command line utility `touch` for this purpose or any other suitable utility which updates the modification time of the source file.

- 5 If the project is not entirely up-to-date, the next time you use the **Make** command, the pre-build action will be invoked before the regular build process. Then the regular build process must always recompile `timestamp.c` and the correct timestamp will end up in the binary file.

If the project already is up-to-date, the pre-build action will not be invoked. This means that nothing is built, and the binary file still contains the timestamp for when it was last built.

## CORRECTING ERRORS FOUND DURING BUILD

The compiler, assembler, and debugger are fully integrated with the development environment. If your source code contains errors, you can jump directly to the correct position in the appropriate source file by double-clicking the error message in the error listing in the Build message window, or selecting the error and pressing Enter.

After you have resolved any problems reported during the build process and rebuilt the project, you can directly start debugging the resulting code at the source level.

To specify the level of output to the Build message window, choose **Tools>Options** to open the **IDE Options** dialog box. Click the **Messages** tab and select the level of output in the **Show build messages** drop-down list. Alternatively, you can right-click in the **Build Messages** window and select **Options** from the context menu.

For more information about the Build messages window, see *Build window*, page 118.

## BUILDING FROM THE COMMAND LINE

To build the project from the command line, use the IAR Command Line Build Utility (`iarbuild.exe`) located in the `common\bin` directory. As input you use the project file, and the invocation syntax is:

```
iarbuild project.ewp [-clean|-build|-make] <configuration>
[-log errors|warnings|info|all]
```

Parameter	Description
<code>project.ewp</code>	Your IAR Embedded Workbench project file.
<code>-clean</code>	Removes any intermediate and output files.
<code>-build</code>	Rebuilds and relinks all files in the current build configuration.
<code>-make</code>	Brings the current build configuration up to date by compiling, assembling, and linking only the files that have changed since the last build.
<code>configuration</code>	The name of the configuration you want to build, which can either be one of the predefined configurations Debug or Release, or a name that you define yourself. For more information about build configurations, see <i>Projects and build configurations</i> , page 36.
<code>-log errors</code>	Displays build error messages.
<code>-log warnings</code>	Displays build warning and error messages.
<code>-log info</code>	Displays build warning and error messages, and messages issued by the <code>#pragma message</code> preprocessor directive.
<code>-log all</code>	Displays all messages generated from the build, for example compiler sign-on information and the full command line.

Table 4: `iarbuild.exe` command line options

If you run the application from a command shell without specifying a project file, you will get a sign-on message describing available parameters and their syntax.

---

## Extending the toolchain

IAR Embedded Workbench provides a feature—Custom Build—which lets you extend the standard toolchain. This feature is used for executing external tools (not provided by IAR Systems). You can make these tools execute each time specific files in your project have changed.

If you specify custom build options on the **Custom tool configuration** page, the build commands treat the external tool and its associated files in the same way as the standard tools within the IAR Embedded Workbench IDE and their associated files. The relation between the external tool and its input files and generated output files is similar to the relation between the C/C++ Compiler, `c` files, `h` files, and `xxx` files. For more information about available custom build options, see the online help system.

You specify filename extensions of the files used as input to the external tool. If the input file has changed since you last built your project, the external tool is executed; just as the compiler executes if a `c` file has changed. In the same way, any changes in additional input files (for instance include files) are detected.

You must specify the name of the external tool. You can also specify any necessary command line options needed by the external tool, and the name of the output files generated by the external tool. Note that you can use argument variables for substituting file paths.

For some of the file information, you can use argument variables.

You can specify custom build options to any level in the project tree. The options you specify are inherited by any sublevel in the project tree.

### TOOLS THAT CAN BE ADDED TO THE TOOLCHAIN

Some examples of external tools, or types of tools, that you can add to the IAR Embedded Workbench toolchain are:

- Tools that generate files from a specification, such as Lex and YACC
- Tools that convert binary files—for example files that contain bitmap images or audio data—to a table of data in an assembler or C source file. This data can then be compiled and linked together with the rest of your application.

### ADDING AN EXTERNAL TOOL

The following example demonstrates how to add the tool *Flex* to the toolchain. The same procedure can be used also for other tools.

In the example, Flex takes the file `myFile.lex` as input. The two files `myFile.c` and `myFile.h` are generated as output.

- I Add the file you want to work with to your project, for example `myFile.lex`.



**2** Select this file in the workspace window and choose **Project>Options**. Select **Custom Build** from the list of categories.

**3** In the **Filename extensions** field, type the filename extension `.lex`. Remember to specify the leading period (`.`).

**4** In the **Command line** field, type the command line for executing the external tool, for example

```
flex $FILE_PATH$ -o$FILE_BNAME$.c
```

During the build process, this command line is expanded to:

```
flex myFile.lex -omyFile.c
```

Note the usage of *argument variables*. Note specifically the use of `$FILE_BNAME$` which gives the base name of the input file, in this example appended with the `c` extension to provide a C source file in the same directory as the input file `foo.lex`. For more information about these variables, see *Argument variables*, page 137.

**5** In the **Output files** field, describe the output files that are relevant for the build. In this example, the tool Flex would generate two files—one source file and one header file. The text in the **Output files** text box for these two files would look like this:

```
$FILE_BPATH$.c  
$FILE_BPATH$.h
```

**6** If the external tool uses any additional files during the build, these should be added in the **Additional input files** field, for instance:

```
$TOOLKIT_DIR$\inc\stdio.h
```

This is important, because if the dependency files change, the conditions will no longer be the same and the need for a rebuild is detected.

**7** Click **OK**.

**8** To build your application, choose **Project>Make**.



# Editing

This chapter describes how to use and customize the IAR Embedded Workbench editor, as well as how to use an external editor of your choice.

More specifically, this means:

- Introduction to the IAR Embedded Workbench editor
- Using the editor
- Reference information on the editor.

---

## Introduction to the IAR Embedded Workbench editor

This section introduces the IAR Embedded Workbench editor.

These topics are covered:

- Briefly about the editor.

### BRIEFLY ABOUT THE EDITOR

The integrated text editor allows you to edit multiple files in parallel, and provides both basic editing features and functions specific to software development, like:

- Automatic word and code completion, and indentation
- Block indentation
- Parenthesis and bracket matching
- Function navigation within source files
- Context-sensitive help system that can display reference information for DLIB library functions and language extensions
- Text styles and color that identifies the syntax of C or C++ programs and assembler directives
- Powerful search and replace commands, including multi-file search
- Direct jump to context from error listing
- Multibyte character support
- Parameter hints
- Bookmarks

- Unlimited undo and redo for each window.

---

## Using the editor

This section describes various tasks related to using the editor.

More specifically, you will get information about:

- Editing a file
- Using and adding code templates
- Navigation
- Searching
- Customizing the editor environment
- Using an external editor.

### EDITING A FILE

The editor window is where you write, view, and modify your source code.

#### Word completion

Word completion attempts to complete the word that you have started to type, basing the assumption on the contents of the rest of your document.

After writing one or more letters of a word, press **Ctrl+Alt+Space** or choose **Complete Word** from the context menu to make the editor suggest and replace the current word. If the suggestion is incorrect, repeat the command to get new suggestions.

#### Parameter hint

When you start typing the first parenthesis after a function name, the editor suggests parameters as tooltip information.

When there are several overloaded versions of a function, you can choose which one to use by clicking the arrows in the tooltip (Ctrl+Up/Down). Press Ctrl+Enter to insert the parameters as text.

```

int overload(char c);
int overload(short s);
int overload(int i);

int function (void)
{
    overload
    1/3 int overload(char c)

```

Figure 27: Parameter hints for overloaded versions of a function

## Code completion

When you type `.`, `->`, or `::` after a class or object name, the editor shows a list of symbols that are available in a class.

```

struct MyStruct
{
    int a;
    int b;
};

int function (void)
{
    struct MyStruct myStruct;

    myStruct.
    a
    b

```

Figure 28: Code completion

Click on a symbol name in the list or choose it with the arrow keys and press return to insert it at the current insertion point.

## Code folding

Sections of code can be hidden and displayed using code folding. By clicking on the fold points in the fold margin, groups of lines will be collapsed or expanded.

```

struct MyStruct
- {
    int a;
    int b;
};

```

Figure 29: Code folding

The fold point positions are based on the hierarchical structure of the document contents. For example, brace characters in C/C++ or the element hierarchy of an XML file. The **Toggle All Folds** command (Ctrl+Alt+F) can be used for expanding (or collapsing) all folds in the current document. The command is available from the **Edit** menu and from the context menu in the Editor window. You can enable or disable the fold margin from **Tools>Options>Editor**.

### Indenting text automatically

The text editor can perform various kinds of indentation. For assembler source files and plain text files, the editor automatically indents a line to match the previous line. If you want to indent several lines, select the lines and press the Tab key. Press Shift+Tab to move a whole block of lines back to the left again.

For C/C++ source files, the editor indents lines according to the syntax of the C/C++ source code. This is performed whenever you:

- Press the Return key
- Type any of the special characters {, }, :, and #
- Have selected one or several lines, and choose the **Edit>Auto Indent** command.

#### To enable or disable the indentation:


- 1 Choose **Tools>Options** and select **Editor**.
- 2 Select or deselect the **Auto indent** option.

To customize the C/C++ automatic indentation, click the **Configure** button.

For more information, see *Configure Auto Indent dialog box*, page 148.

### Matching brackets and parentheses

When the insertion point is located next to a parenthesis, the matching parentheses are highlighted with a light gray color:



```
void NextCounter(void)
{
    callCount += 1;
}
```

Figure 30: Parenthesis matching in the editor window

The highlight remains in place as long as the insertion point is located next to the parenthesis.

To select all text between the brackets surrounding the insertion point, choose **Edit>Match Brackets**. Every time you choose **Match Brackets (grow)** or **Match Brackets (shrink)** after that, the selection will increase or shrink, respectively, to the next hierarchic pair of brackets.

**Note:** Both of these functions—automatic matching of corresponding parentheses and selection of text between brackets—apply to `()`, `[]`, `{}`, and `<>` (requires **Match All Brackets**).

### Accessing online help for reference information

When you need to know the syntax for a library function, extended keyword, intrinsic function, etc, type the name in the editor window and press F1. The documentation for the item appears in a help window.

### Splitting the editor window into panes

You can split the editor window horizontally or vertically into multiple panes, to look at different parts of the same source file at once, or to move text between two different panes.

To split the window vertically, double-click the splitter bar, or drag it to the middle of the window.




Figure 31: Splitter control in the top-right corner of the editor window

Alternatively, you can split a window into panes (horizontally or vertically) using the **Window>Split** command.

To revert to a single pane, double-click the splitter control or drag it back to the end of the scroll bar.

### Dragging text

You can easily move text within an editor window or copy between editor windows. Select the text and drag it to the new location.

### Displaying status information

The status bar is available by choosing **View>Status Bar**. For more information, see *Status bar*, page 118.

## USING AND ADDING CODE TEMPLATES

Code templates are a method of conveniently inserting frequently used source code sequences, for example `for` loops and `if` statements. The code templates are defined in a plain text file. By default, a few example templates are provided. In addition, you can easily add your own code templates.

### Enabling code templates

By default, code templates are enabled.

#### To enable and disable the use of code templates:

- 1 Choose **Tools>Options**.
- 2 Go to the **Editor>Setup Files** page.
- 3 Select or deselect the **Use Code Templates** option.
- 4 In the text field, specify which template file you want to use: either the default file or one of your own template files. A browse button is available for your convenience.



## Inserting a code template into your source code

To insert a code template into your source code, right-click where you want the template to be inserted and choose **Insert Template**. Choose a code template from the menu that appears.

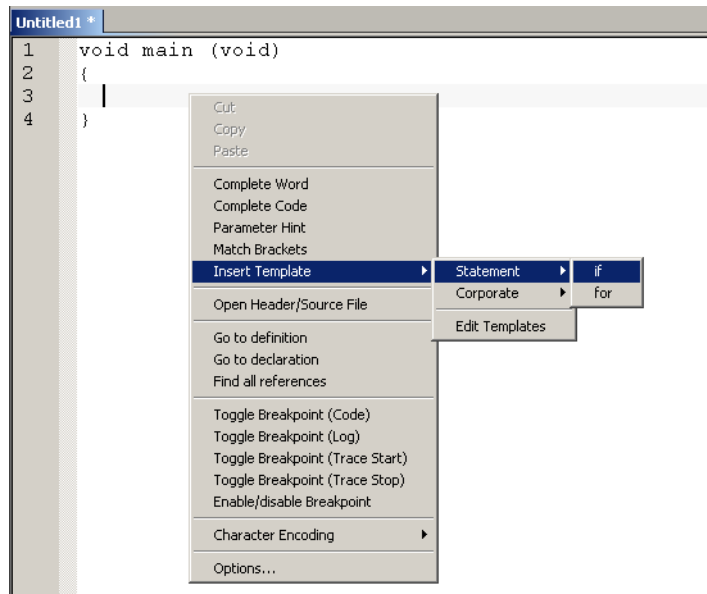


Figure 32: Inserting a code template

If the code template you choose requires any type of field input, as in the `for` loop example which needs an end value and a count variable, an input dialog box appears.

## Adding your own code templates

The source code templates are defined in a plain text file. The original template file `CodeTemplates.txt` is located in the `common\config` directory of your product installation. The first time you use IAR Embedded Workbench, the original template file is copied to a directory for local settings, and this is the file that is used by default if code templates are enabled. To use your own template file, follow the procedure described in *Enabling code templates*, page 80.

To open the template file and define your own code templates, choose **Edit>Code Templates>Edit Templates**.

The syntax for defining templates is described in the default template file.

## Selecting the correct language version of the code template file

When you start the IAR Embedded Workbench IDE for the very first time, you are asked to select a language version. This only applies if you are using an IDE that is available in other languages than English.

Selecting a language creates a corresponding language version of the default code template file in the `Application Data\IAR Embedded Workbench` subdirectory of the current Windows user (for example `CodeTemplates.ENU.txt` for English and `CodeTemplates.JPN.txt` for Japanese). The default code template file does not change automatically if you change the language version of the IDE afterwards.

### To change the code template:

- 1 Choose **Tools>Options>Editor>Setup Files**.
- 2 Click the browse button of the **Use Code Templates** option and select a different template file.

If the code template file you want to select is not in the browsed directory, you must:

- 3 Delete the filename in the **Use Code Templates** text box.
- 4 Deselect the **Use Code Templates** option and click **OK**.
- 5 Restart the IAR Embedded Workbench IDE.
- 6 Then choose **Tools>Options>Editor>Setup Files** again.

The default code template file for the selected language version of the IDE should now be displayed in the **Use Code Templates** text box. Select the check box to enable the template.

## NAVIGATION

The editor provides several functions for easy navigation within the files and between files:

- Using shortcut keys, see *Using and customizing editor commands and shortcut keys*, page 84.
- Switching between source and header files

If the insertion point is located on an `#include` line, you can choose the **Open "header.h"** command from the context menu, which opens the header file in an editor window. You can also choose the command **Open Header/Source File**, which opens the header or source file with a corresponding filename to the current file, or activates it if it is already open. This command is available if the insertion point is located on any line except an `#include` line.



- **Function navigation**  
Click the **Go to function** button in the top-right corner of the editor window to list all functions defined in the source file displayed in the window. You can then choose to go directly to one of the functions by clicking it in the list. Note that the list is refreshed when you save the file.
- **Adding bookmarks**  
Use the **Edit>Navigate>Toggle Bookmark** command to add and remove bookmarks. To switch between the marked locations, choose **Edit>Navigate>Navigate Next Bookmark** or **Navigate Previous Bookmark**.

## SEARCHING

There are several standard search functions available in the editor:

- **Quick search** text box
- **Find** dialog box
- **Replace** dialog box
- **Find in files** dialog box
- **Incremental Search** dialog box.

### To use the Quick search text box on the toolbar:

- 1 Type the text you want to search for and press Enter.
- 2 Press Esc to stop the search. This is a quick method of searching for text in the active editor window.

### To use the Find, Replace, Find in Files, and Incremental Search functions:

- 1 Before you use the search commands, choose **Tools>Options>Editor** and make sure the **Show bookmarks** option is selected.
- 2 Choose the appropriate search command from the **Edit** menu. For more information about each search function, see *Edit menu*, page 124.
- 3 To remove the blue flag icons that have appeared in the left-hand margin, right-click in the Find in Files window and choose **Clear All** from the context menu.

## CUSTOMIZING THE EDITOR ENVIRONMENT

The IDE editor can be configured on the **IDE Options** pages **Editor** and **Editor>Colors and Fonts**. Choose **Tools>Options** to access the pages.

For information about these pages, see *Tools menu*, page 140.

## Using and customizing editor commands and shortcut keys

The **Edit** menu provides commands for editing and searching in editor windows, for instance, unlimited undo/redo. You can also find some of these commands on the context menu that appears when you right-click in the editor window. For more information about each command, see *Edit menu*, page 124.

There are also editor shortcut keys for:

- moving the insertion point
- scrolling text
- selecting text.

For more information about these shortcut keys, see *Editor shortcut key summary*, page 104.

To change the default shortcut key bindings, choose **Tools>Options**, and click the **Key Bindings** tab. For more information, see *Key Bindings options*, page 142.

## Syntax coloring

If the **Tools>Options>Editor>Syntax highlighting** option is enabled, the IAR Embedded Workbench editor automatically recognizes the syntax of different parts of source code, for example:

- C and C++ keywords
- C and C++ comments
- Assembler directives and comments
- Preprocessor directives
- Strings.

The different parts of source code are displayed in different text styles.

To change these styles, choose **Tools>Options**, and use the **Editor>Colors and Fonts** options. For more information, see *Editor Colors and Fonts options*, page 152.

### To define your own set of keywords that should be syntax-colored automatically:

- 1 In a text file, list all the keywords that you want to be automatically syntax-colored. Separate each keyword with either a space or a new line.
- 2 Choose **Tools>Options** and select **Editor>Setup Files**.
- 3 Select the **Use Custom Keyword File** option and specify your newly created text file. A browse button is available for your convenience.

- 4 Select **Editor>Colors and Fonts** and choose **User Keyword** from the **Syntax Coloring** list. Specify the font, color, and type style of your choice. For more information, see *Editor Colors and Fonts options*, page 152.

In the editor window, type any of the keywords you listed in your keyword file; see how the keyword is colored according to your specification.

## USING AN EXTERNAL EDITOR

The **External Editor** options—available by choosing **Tools>Options>Editor**—let you specify an external editor of your choice.

**Note:** While you are debugging using C-SPY, C-SPY will not use the external editor for displaying the current debug state. Instead, the built-in editor will be used.

### To specify an external editor of your choice:

- 1 Select the option **Use External Editor**.
- 2 An external editor can be called in one of two ways, using the **Type** drop-down menu:
  - **Command Line** calls the external editor by passing command line parameters.
  - **DDE** calls the external editor by using DDE (Windows Dynamic Data Exchange).
- 3 If you use the command line, specify the command line to pass to the editor, that is, the name of the editor and its path, for instance:

```
C:\Windows\notepad.exe
```

To send an argument to the external editor, type the argument in the **Arguments** field. For example, type `$FILE_PATH$` to start the editor with the active file (in editor, project, or messages windows).

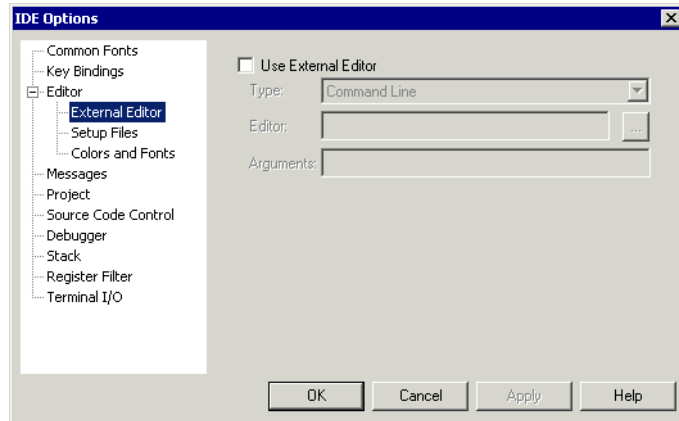


Figure 33: Specifying an external command line editor

**Note:** Options for Register Filter and Terminal I/O are only available when the C-SPY debugger is running.

- 4 If you use DDE, specify the editor's DDE service name in the **Service** field. In the **Command** field, specify a sequence of command strings to send to the editor.

The service name and command strings depend on the external editor that you are using. Refer to the user documentation of your external editor to find the appropriate settings.

The command strings should be entered as:

```
DDE-Topic CommandString1
DDE-Topic CommandString2
```

as in this example, which applies to Codewright®:

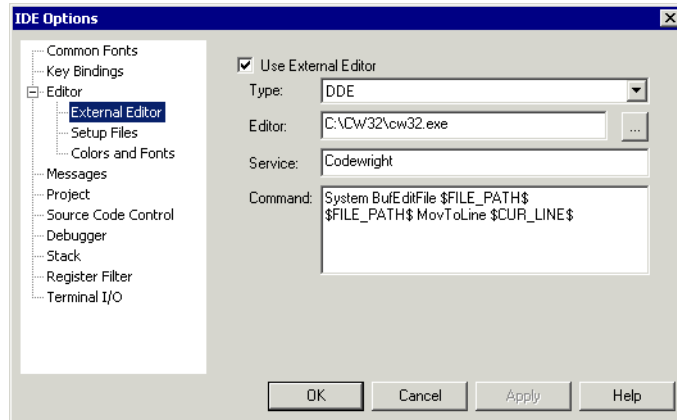


Figure 34: External editor DDE settings

The command strings used in this example will open the external editor with a dedicated file activated. The cursor will be located on the current line as defined in the context from where the file is open, for instance when searching for a string in a file, or when double-clicking an error message in the Message window.

## 5 Click **OK**.

When you double-click a filename in the Workspace window, the file is opened by the external editor.

Variables can be used in the arguments. For more information about the argument variables that are available, see *Argument variables*, page 137.

---

## Reference information on the editor

This section gives reference information about these windows and dialog boxes:

- *Editor window*, page 88
- *Find in Files window*, page 95
- *Find All Declarations window*, page 96
- *Find All References window*, page 97
- *Find dialog box*, page 98
- *Replace dialog box*, page 99
- *Find in Files dialog box*, page 100

- *Incremental Search dialog box*, page 102
- *Template dialog box*, page 103
- *Editor shortcut key summary*, page 104.

## Editor window

The editor window is opened when you open or create a text file in the IDE.

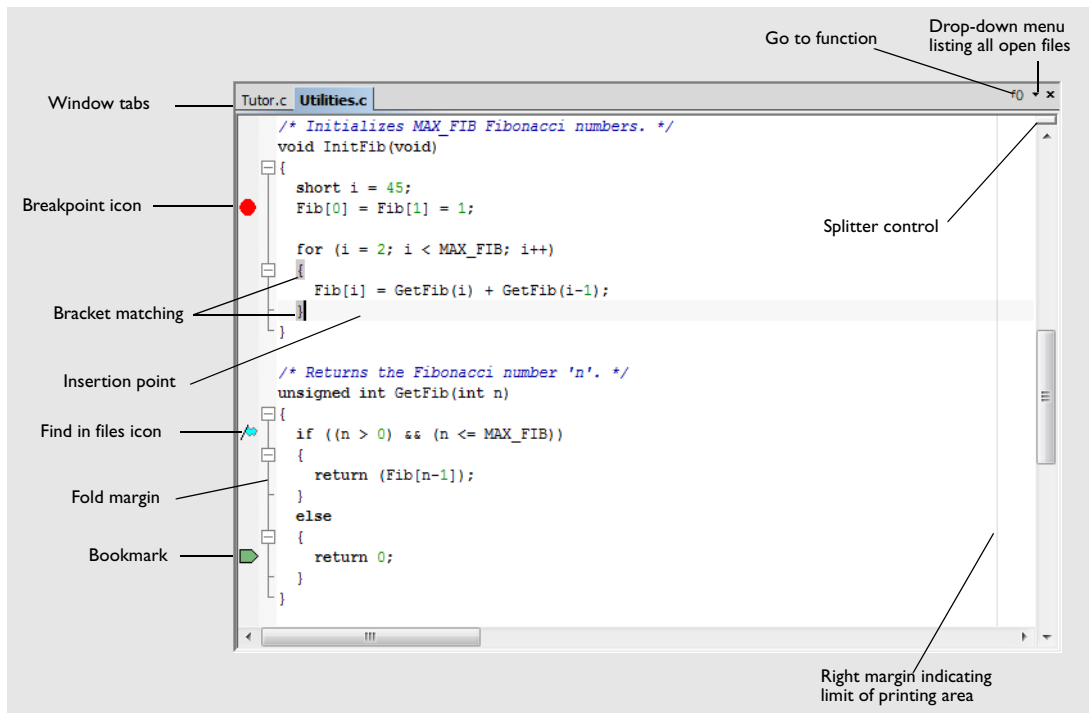


Figure 35: Editor window

You can open one or several text files, either from the **File** menu, or by double-clicking them in the Workspace window. All open files are also available from the drop-down menu at the upper right corner of the editor window. Several editor windows can be open at the same time.



Source code files and HTML files are displayed in editor windows. From an open HTML document, hyperlinks to HTML files work like in an ordinary web browser. A link to an `eww` workspace file opens the workspace in the IDE, and closes any currently open workspace and the open HTML document.



When you want to print a source file, it can be useful to enable the option **Show line numbers**—available by choosing **Tools>Options>Editor**.

The editor window is always docked, and its size and position depend on other currently open windows.

For more information about using the editor, see *Edit menu*, page 124 and the *IDE Project Management and Building Guide*.

### Relative source file paths

The IDE has partial support for relative source file paths.

If a source file is located in the project file directory or in any subdirectory of the project file directory, the IDE uses a path relative to the project file when accessing the source file.

### Window tabs, tab groups, and tab context menu

The name of the open file is displayed on the tab. If you open several files, they are organized in a *tab group*. Click the tab for the file that you want to display. If a file has been modified after it was last saved, an asterisk appears on the tab after the filename, for example `Utilities.c *`. If a file is read-only, a padlock icon is visible on the tab.

The tab's tooltip shows the full path and a remark if the file is not a member of the active project.

A context menu appears if you right-click on a tab in the editor window.




Figure 36: Editor window tab context menu

These commands are available:

<b>Save file</b>	Saves the file.
<b>Close</b>	Closes the file.
<b>Open Containing Folder</b>	Opens the File Explorer that displays the directory where the selected file resides.

**File Properties**      Displays a standard file properties dialog box.

### Multiple editor windows and splitter controls

You can have one or several editor windows open at the same time. The commands on the **Window** menu allow you to split the editor window into panes and to open multiple editor windows. There are also commands for moving files between editor windows.


To split the editor window vertically into multiple panes, you can also use the splitter controls.

For more information about each command on the Window menu, see the *IDE Project Management and Building Guide*.

### Go to function



Click the **Go to function** button in the top right-hand corner of the editor window to list all functions of the C or C++ editor window.



*Figure 37: Go to Function menu*

Click the function that you want to show in the editor window.

## Context menu

This context menu is available:

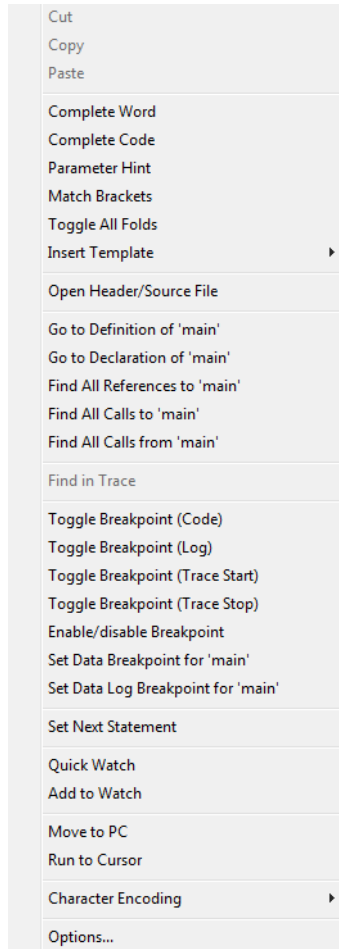


Figure 38: Editor window context menu

The contents of this menu depend on whether the debugger is started or not, and on the C-SPY driver you are using. Typically, additional breakpoint types might be available on this menu. For information about available breakpoints, see the *C-SPY® Debugging Guide*.

These commands are available:

<b>Cut, Copy, Paste</b>	Standard window commands.
<b>Complete Word</b>	Attempts to complete the word you have begun to type, basing the guess on the contents of the rest of the editor document.
<b>Complete Code</b>	Shows a list of symbols that are available in a class, when you place the insertion point after <code>.</code> , <code>-&gt;</code> , or <code>::</code> and when these characters are preceded by a class or object name. For more information, see <i>Code completion</i> , page 77.
<b>Parameter Hint</b>	Suggests parameters as tooltip information for the function parameter list you have begun to type. When there are several overloaded versions of a function, you can choose which one to use by clicking the arrows in the tooltip. For more information, see <i>Parameter hint</i> , page 76.
<b>Toggle All Folds</b>	Expands/collapses all code folds in the active project.
<b>Match Brackets</b>	Selects all text between the brackets immediately surrounding the insertion point, increases the selection to the next hierarchic pair of brackets, or beeps if there is no higher bracket hierarchy.
<b>Insert Template</b>	Displays a list in the editor window from which you can choose a code template to be inserted at the location of the insertion point. If the code template you choose requires any field input, the <b>Template</b> dialog box appears; for information about this dialog box, see <i>Template dialog box</i> , page 103. For information about using code templates, see <i>Using and adding code templates</i> , page 80.
<b>Open "header.h"</b>	Opens the header file <i>header.h</i> in an editor window. This menu command is only available if the insertion point is located on an <code>#include</code> line when you open the context menu.
<b>Open Header/Source File</b>	Opens the header or source code file that has same base name as the current file. If the destination file is not open when you choose the command, the file will first be opened. This menu command is only available if the insertion point is located on any line except an <code>#include</code> line when you open the context menu. This command is also available from the <b>File&gt;Open</b> menu.
<b>Go to Definition of symbol</b>	Puts the insertion point at the definition of the symbol. If no definition is found in the source code, the first declaration will be used instead.

<b>Go to Declaration of symbol</b>	If only one declaration is found, the command puts the insertion point at the declaration of the symbol. If more than one declaration is found, these declarations are listed in the Find All Declarations window.
<b>Find All References to symbol</b>	The references are listed in the Find All References window.
<b>Find All Calls to</b>	Opens the Call Graph window which displays all functions in the project that calls the selected function, see <i>Call Graph window</i> , page 56. If this command is disabled, make sure to select a function in the editor window.
<b>Find All Calls from</b>	Opens the Call Graph window which displays all functions in the project that are called from the selected function, see <i>Call Graph window</i> , page 56. If this command is disabled, make sure to select a function in the editor window.
<b>Check In</b>	Commands for source code control; for more information, see <i>Version Control System menu for SCC</i> , page 59. These menu commands are only available if the current source file in the editor window is SCC-controlled. The file must also be a member of the current project.
<b>Check Out</b>	
<b>Undo Checkout</b>	
<b>Toggle Breakpoint (Code)</b>	Toggles a code breakpoint at the statement or instruction containing or close to the cursor in the source window. For information about code breakpoints, see the <i>C-SPY® Debugging Guide</i> .
<b>Toggle Breakpoint (Log)</b>	Toggles a log breakpoint at the statement or instruction containing or close to the cursor in the source window. For information about log breakpoints, see the <i>C-SPY® Debugging Guide</i> .
<b>Toggle Breakpoint (Trace Start)</b>	Toggles a Trace Start breakpoint. When the breakpoint is triggered, trace data collection starts. For information about Trace Start breakpoints, see the <i>C-SPY® Debugging Guide</i> . Note that this menu command is only available if the C-SPY driver you are using supports trace.
<b>Toggle Breakpoint (Trace Stop)</b>	Toggles a Trace Stop breakpoint. When the breakpoint is triggered, trace data collection stops. For information about Trace Stop breakpoints, see the <i>C-SPY® Debugging Guide</i> . Note that this menu command is only available if the C-SPY driver you are using supports trace.

<b>Enable/disable Breakpoint</b>	Toggles a breakpoint between being disabled, but not actually removed—making it available for future use—and being enabled again.
<b>Set Data Breakpoint for 'variable'</b>	Toggles a data breakpoint on variables with static storage duration. Requires support in the C-SPY driver you are using.
<b>Find in Trace</b>	Searches the contents of the Trace window for occurrences of the given location—the position of the insertion point in the source code—and reports the result in the Find in Trace window. This menu command requires support for Trace in the C-SPY driver you are using, see the <i>C-SPY® Debugging Guide</i> .
<b>Edit Breakpoint</b>	Displays the <b>Edit Breakpoint</b> dialog box to let you edit the breakpoint available on the source code line where the insertion point is located. If there is more than one breakpoint on the line, a submenu is displayed that lists all available breakpoints on that line.
<b>Set Next Statement</b>	Sets the Program Counter directly to the selected statement or instruction without executing any code. This menu command is only available when you are using the debugger. For more information, see the <i>C-SPY® Debugging Guide</i> .
<b>Quick Watch</b>	Opens the Quick Watch window, see the <i>C-SPY® Debugging Guide</i> . This menu command is only available when you are using the debugger.
<b>Add to Watch</b>	Adds the selected symbol to the Watch window. This menu command is only available when you are using the debugger.
<b>Move to PC</b>	Moves the insertion point to the current PC position in the editor window. This menu command is only available when you are using the debugger.
<b>Run to Cursor</b>	Executes from the current statement or instruction up to the statement or instruction where the insertion point is located. This menu command is only available when you are using the debugger.

**Character Encoding** Interprets the source file according to the specified character encoding. Choose between:

**System** (uses the Windows settings)

**Western European**

**UTF-8**

**Japanese (Shift-JIS)**

**Chinese Simplified (GB2312)**

**Korean (Unified Hangul Code)**

**Arabic**

**Baltic**

**Central European**

**Greek**

**Hebrew**

**Russian**

**Thai**

**Vietnamese**

**Convert to UTF-8** (converts the document to UTF-8)

Use one of these settings if the **Auto-detect character encoding** option could not determine the correct encoding or if the option is deselected. See *File Encoding*, page 146.

**Options** Displays the **IDE Options** dialog box, see *Tools menu*, page 140.

## Find in Files window

The Find in Files window is available by choosing **View>Messages**.

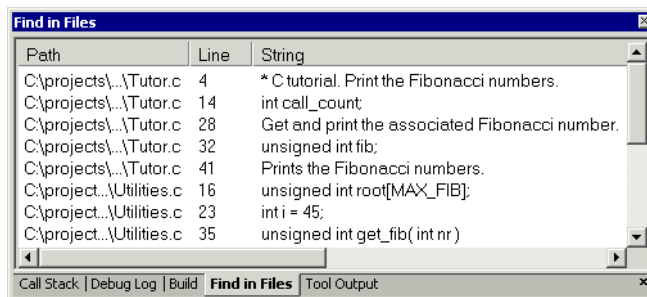


Figure 39: Find in Files window (message window)

This window displays the output from the **Edit>Find and Replace>Find in Files** command. When opened, this window is, by default, grouped together with the other message windows, see *Windows*, page 115.

Double-click an entry in the window to open the appropriate file with the insertion point positioned at the correct location. That source location is highlighted with a blue flag icon. Choose **Edit>Next Error/Tag** or press F4 to jump to the next in sequence.

### Context menu

This context menu is available:




Figure 40: Find in Files window context menu

These commands are available:

<b>Copy</b>	Copies the selected content of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window and any blue flag icons in the left-side margin of the editor window.

## Find All Declarations window

The Find All Declarations window is available by choosing **View>Messages**.

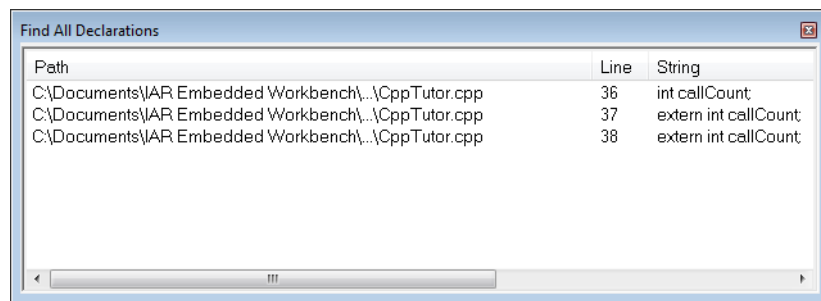


Figure 41: Find All Declarations window (message window)

This window displays the result from the **Go to Declaration** command on the editor window context menu.



When opened, this window is by default grouped together with the other message windows, see *Windows*, page 115.

Double-click an entry in the window to open the appropriate file with the insertion point positioned at the correct location. Choose **Edit>Next Error/Tag** or press F4 to jump to the next in sequence.

### Context menu

This context menu is available:




Figure 42: Find All Declarations window context menu

These commands are available:

<b>Copy</b>	Copies the contents of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window.

## Find All References window

The Find All References window is available by choosing **View>Messages**.

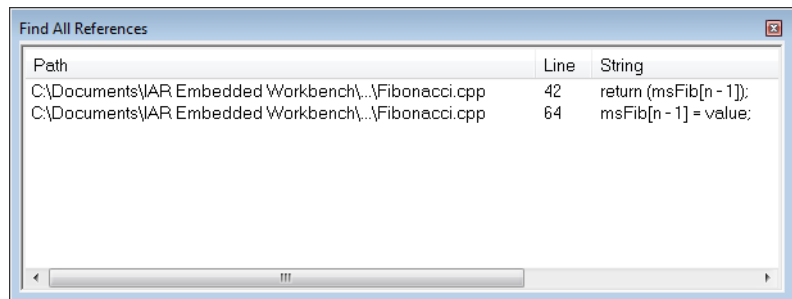


Figure 43: Find All References window (message window)

This window displays the result from the **Find All References** commands on the editor window context menu.

When opened, this window is by default grouped together with the other message windows, see *Windows*, page 115.

Double-click an entry in the window to open the appropriate file with the insertion point positioned at the correct location. Choose **Edit>Next Error/Tag** or press F4 to jump to the next in sequence.

### Context menu

This context menu is available:




Figure 44: Find All References window context menu

These commands are available:

<b>Copy</b>	Copies the contents of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window.

### Find dialog box

The **Find** dialog box is available from the **Edit** menu.

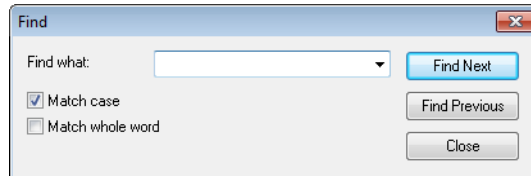



Figure 45: Find dialog box

Note that the contents of the dialog box might be different if you search in an editor window compared to if you search in the Memory window.

<b>Find what</b>	Specify the text to search for. Use the drop-down list to use old search strings.
<b>Match case</b>	Searches only for occurrences that exactly match the case of the specified text. Otherwise, specifying <code>int</code> will also find <code>INT</code> and <code>Int</code> . This option is only available when you perform the search in an editor window.

<b>Match whole word</b>	Searches for the specified text only if it occurs as a separate word. Otherwise, specifying <code>int</code> will also find <code>print</code> , <code>sprintf</code> etc. This option is only available when you perform the search in an editor window.
<b>Search as hex</b>	Searches for the specified hexadecimal value. This option is only available when you perform the search in the Memory window.
 <b>Find next</b>	Searches for the next occurrence of the selected text.
<b>Find previous</b>	Searches for the previous occurrence of the selected text.
<b>Stop</b>	Stops an ongoing search. This button is only available during a search in the Memory window.

## Replace dialog box

The **Replace** dialog box is available from the **Edit** menu.

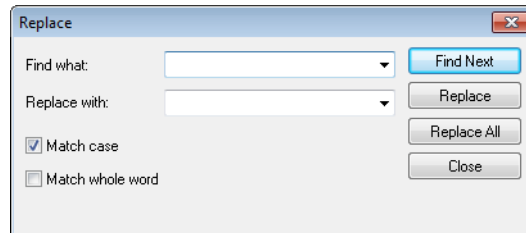


Figure 46: Replace dialog box

Note that the contents of the dialog box is different if you search in an editor window compared to if you search in the Memory window.

<b>Find what</b>	Specify the text to search for. Use the drop-down list to use old search strings.
<b>Replace with</b>	Specify the text to replace each found occurrence with. Use the drop-down list to use old search strings.
<b>Match case</b>	Searches only for occurrences that exactly match the case of the specified text. Otherwise, specifying <code>int</code> will also find <code>INT</code> and <code>Int</code> . This option is only available when you perform the search in an editor window.

<b>Match whole word</b>	Searches for the specified text only if it occurs as a separate word. Otherwise, <code>int</code> will also find <code>print</code> , <code>sprintf</code> etc. This option is only available when you search in an editor window.
<b>Search as hex</b>	Searches for the specified hexadecimal value. This option is only available when you perform the search in the Memory window.
<b>Find next</b>	Searches for the next occurrence of the text you have specified.
<b>Replace</b>	Replaces the searched text with the specified text.
<b>Replace all</b>	Replaces all occurrences of the searched text in the current editor window.

## Find in Files dialog box

The **Find in Files** dialog box is available from the **Edit** menu.

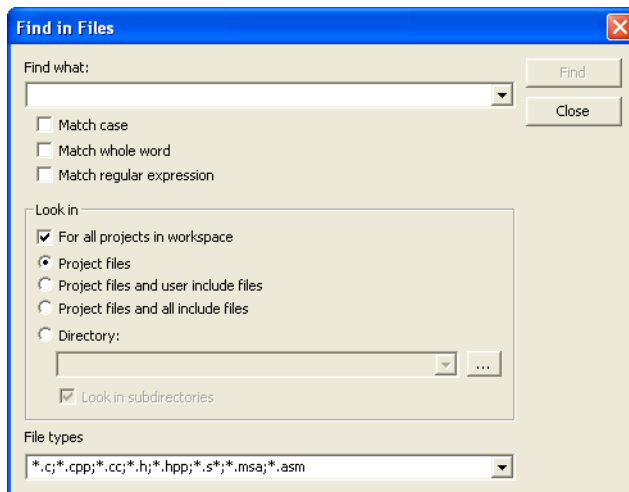


Figure 47: Find in Files dialog box

Use this dialog box to search for a string in files.

The result of the search appears in the Find in Files message window—available from the **View** menu. You can then go to each occurrence by choosing the **Edit>Next Error/Tag** command, alternatively by double-clicking the messages in the Find in Files message window. This opens the corresponding file in an editor window with the insertion point positioned at the start of the specified text. A blue flag in the left-hand margin indicates the line with the string you searched for.

### Find what

Specify the string you want to search for, or a regular expression. Use the drop-down list to use old search strings/expressions. You can narrow the search down with one or more of these conditions:

- Match case** Searches only for occurrences that exactly match the case of the specified text. Otherwise, specifying `int` will also find `INT` and `Int`.
- Match whole word** Searches only for the string when it occurs as a separate word (mnemonic `&w`). Otherwise, `int` will also find `print`, `sprintf` and so on.
- Match regular expression** Interprets the search string as a the regular expression, which must follow the standard for the Perl programming language.

### Look in

Specify which files you want to search in. Choose between:

- For all projects in workspace** Searches all projects in the workspace, not just the active project.
- Project files** Searches all files that you have explicitly added to your project.
- Project files and user include files** Searches all files that you have explicitly added to your project and all files that they include, except the include files in the IAR Embedded Workbench installation directory.
- Project files and all include files** Searches all project files that you have explicitly added to your project and all files that they include.
- Directory** Searches the directory that you specify. Recent search locations are saved in the drop-down list. Locate the directory using the browse button.
- Look in subdirectories** Searches the directory that you have specified and all its subdirectories.

### File types

A filter for choosing which type of files to search; the filter applies to all **Look in** settings. Choose the appropriate filter from the drop-down list. The text field is editable, to let you add your own filters. Use the \* character to indicate zero or more unknown characters of the filters, and the ? character to indicate one unknown character.

### Stop

Stops an ongoing search. This button is only available during an ongoing search.

## Incremental Search dialog box

The **Incremental Search** dialog box is available from the **Edit** menu.



Figure 48: Incremental Search dialog box

Use this dialog box to gradually fine-tune or expand the search string.

### Find what

Type the string to search for. The search is performed from the location of the insertion point—the *start point*. Every character you add to or remove from the search string instantly changes the search accordingly. If you remove a character, the search starts over again from the start point.

If a word in the editor window is selected when you open the **Incremental Search** dialog box, this word will be displayed in the **Find What** text box.

Use the drop-down list to use old search strings.

### Match case

Searches for occurrences that exactly match the case of the specified text. Otherwise, searching for `int` will also find `INT` and `Int`.

### Find Next

Searches for the next occurrence of the current search string. If the **Find What** text box is empty when you click the **Find Next** button, a string to search for will automatically be selected from the drop-down list. To search for this string, click **Find Next**.

**Close**

Closes the dialog box.

**Template dialog box**

The **Template** dialog box appears when you insert a code template that requires any field input.

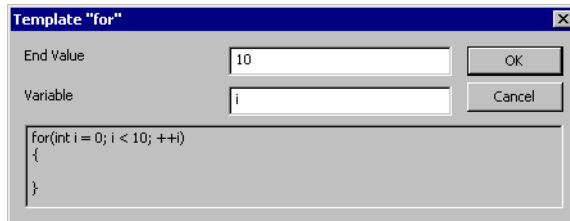


Figure 49: Template dialog box

Use this dialog box to specify any field input that is required by the source code template you insert.

**Note:** The figure reflects the default code template that can be used for automatically inserting code for a `for` loop.

**Text fields**

Specify the required input in the text fields. Which fields that appear depends on how the code template is defined.

**Display area**

The display area shows the code that would result from the code template, using the values you submit.

For more information about using code templates, see *Using and adding code templates*, page 80.

## Editor shortcut key summary

The following tables summarize the editor's shortcut keys.

### Moving the insertion point

To move the insertion point	Press
One character to the left	Left arrow
One character to the right	Right arrow
One word to the left	Ctrl + Left arrow
One word to the right	Ctrl + Right arrow
Word part to the left; when using mixed cases, for example mixedCaseName	Ctrl + Alt + Left arrow
Word part to the right; when using mixed cases, for example mixedCaseName	Ctrl + Alt + Right arrow
One line up	Up arrow
One line down	Down arrow
To the previous paragraph	Ctrl + Alt + Up arrow
To the next paragraph	Ctrl + Alt + Down arrow
To the start of the line	Home
To the end of the line	End
To the beginning of the file	Ctrl + Home
To the beginning of the file	Ctrl + End

Table 5: Editor shortcut keys for insertion point navigation

### Selecting text

To select text, press Shift and the corresponding command for moving the insertion point. In addition, this command is available:

To select	Press
A column-based block	Shift + Alt + Arrow key

Table 6: Editor shortcut keys for selecting text

### Scrolling text

To scroll	Press
Up one line	Ctrl + Up arrow

Table 7: Editor shortcut keys for scrolling



To scroll	Press
Down one line	Ctrl + Down arrow
Up one page	Page Up
Down one page	Page Down

Table 7: Editor shortcut keys for scrolling (Continued)

## Miscellaneous commands

Command	Press
Bracket matching: Expand selection to next level of matching of {}, [], or()-	Ctrl + B
Bracket matching: Expand selection to next level of matching of {}, [], (), or <>.	Ctrl + Alt + B
Bracket matching: Shrink selection to next level of matching of {}, [], or()-	Ctrl + Shift + B
Bracket matching: Shrink selection to next level of matching of {}, [], (), or <>.	Ctrl + Alt + Shift + B
Changing case for selected text to lower	Ctrl + u
Changing case for selected text to upper	Ctrl + U
Complete code	Ctrl + Space
Complete word	Ctrl + Alt + Space
Insert template	Ctrl + Alt + V
Parameter hint	Ctrl + Shift + Space
Zooming	Mouse wheel
Zoom in	Ctrl + numeric keypad '+'
Zoom out	Ctrl + numeric keypad '-'
Zoom normal	Ctrl + numeric keypad '/'

Table 8: Miscellaneous editor shortcut keys




# Part 2. Reference information

This part of the IDE Project Management and Building Guide contains these chapters:

- Installed files
- IAR Embedded Workbench IDE reference.





# Installed files

This chapter describes which directories that are created during installation and which file types that are used.

---

## Directory structure

The installation procedure creates several directories to contain the various types of files used with the IAR Systems development tools. The following sections give a description of the files contained by default in each directory.

### ROOT DIRECTORY

The root directory created by the default installation procedure is the `x:\Program Files\IAR Systems\Embedded Workbench 6.n\` directory where `x` is the drive where Microsoft Windows is installed and `6.n` is the version number of the IDE.

In the root directory, there are two subdirectories—`common` and one named after the processor you are using. The latter directory will hereafter be referred to as `cpuname`.

### THE CPUNAME DIRECTORY

The `cpuname` directory contains all product-specific subdirectories.

Directory	Description
<code>cpuname\bin</code>	The <code>cpuname\bin</code> subdirectory contains executable files for target-specific components, such as the compiler, the assembler, the linker and the library tools, and the C-SPY® drivers.
<code>cpuname\config</code>	The <code>cpuname\config</code> subdirectory contains files used for configuring the development environment and projects, for example: <ul style="list-style-type: none"><li>• Linker configuration files (<code>*.xcl</code> for XLINK)(<code>*.icf</code> for ILINK)</li><li>• Special function register description files (<code>*.sfr</code>)</li><li>• C-SPY device description files (<code>*.ddf</code>)</li><li>• Device selection files (<code>*.ixx</code>, <code>*.menu</code>)</li><li>• Flash loader applications for various devices (<code>*.dxx</code>), depends on your product package</li><li>• Syntax coloring configuration files (<code>*.cfg</code>)</li><li>• Project templates for both application and library projects (<code>*.ewp</code>), and for the library projects, the corresponding library configuration files.</li></ul>

Table 9: The `cpuname` directory

Directory	Description
<code>cpuname\doc</code>	The <code>cpuname\doc</code> subdirectory contains release notes with recent additional information about the tools. We recommend that you read all of these files. The directory also contains online versions in hypertext PDF format of this user guide, and of the reference guides, as well as online help files (*.chm).
<code>cpuname\drivers</code>	The <code>cpuname\drivers</code> subdirectory contains low-level device drivers, typically USB drivers required by the C-SPY drivers.
<code>cpuname\examples</code>	The <code>cpuname\examples</code> subdirectory contains files related to example projects, which can be opened from the Information Center.
<code>cpuname\inc</code>	The <code>cpuname\inc</code> subdirectory holds include files, such as the header files for the standard C or C++ library. There are also specific header files that define special function registers (SFRs); these files are used by both the compiler and the assembler.
<code>cpuname\lib</code>	The <code>cpuname\lib</code> subdirectory holds prebuilt libraries and the corresponding library configuration files, used by the compiler.
<code>cpuname\plugins</code>	The <code>cpuname\plugins</code> subdirectory contains executable files and description files for components that can be loaded as plugin modules.
<code>cpuname\src</code>	The <code>cpuname\src</code> subdirectory holds source files for some configurable library functions. This directory also holds the library source code and the source code for ELF utilities (the latter only for the ILINK linker). If your product package includes the XLINK linker, the directory also contains source files for components common to all IAR Embedded Workbench products, such as a sample reader of the IAR XLINK Linker output format SIMPLE.
<code>cpuname\tutor</code>	The <code>cpuname\tutor</code> subdirectory contains the files used for the tutorials in the Information Center.

Table 9: The `cpuname` directory (Continued)

## THE COMMON DIRECTORY

The `common` directory contains subdirectories for components shared by all IAR Embedded Workbench products.

Directory	Description
<code>common\bin</code>	The <code>common\bin</code> subdirectory contains executable files for components common to all IAR Embedded Workbench products, such as the editor and the graphical user interface components. The executable file for the IDE is also located here.

Table 10: The `common` directory

Directory	Description
<code>common\config</code>	The <code>common\config</code> subdirectory contains files used by the IDE for settings in the development environment.
<code>common\doc</code>	The <code>common\doc</code> subdirectory contains release notes with recent additional information about the components common to all IAR Embedded Workbench products. We recommend that you read these files. The directory also contains documentation related to installation and licensing, and getting started using IAR Embedded Workbench.
<code>common\plugins</code>	The <code>common\plugins</code> subdirectory contains executable files and description files for components that can be loaded as plugin modules, for example modules for code coverage.

Table 10: The common directory (Continued)

## THE INSTALL-INFO DIRECTORY

The `install-info` directory contains metadata (version number, name, etc.) about the installed product components. Do not modify these files.

## File types

The IAR Systems development tools use the following default filename extensions to identify the produced files and other recognized file types:

Ext.	Type of file	Output from	Input to
<code>a</code>	Library	<code>iarchive</code>	ILINK
<code>axx</code>	Target application	XLINK	EPROM, C-SPY, etc.
<code>asm</code>	Assembler source code	Text editor	Assembler
<code>bat</code>	Windows command batch file	C-SPY	Windows
<code>board</code>	Configuration file for flash loader, depends on your product package	Text editor	C-SPY
<code>c</code>	C source code	Text editor	Compiler
<code>cfg</code>	Syntax coloring configuration	Text editor	IDE
<code>cgx</code>	Call graph file	ILINK	–
<code>chm</code>	Online help system file	--	IDE
<code>cpp</code>	C++ source code	Text editor	Compiler
<code>dxx</code>	Target application with debug information	XLINK	C-SPY and other symbolic debuggers
<code>dat</code>	Macros for formatting of STL containers	IDE	IDE

Table 11: File types

<b>Ext.</b>	<b>Type of file</b>	<b>Output from</b>	<b>Input to</b>
dbg	Target application with debug information	XLINK	C-SPY and other symbolic debuggers
dbgdtd	Debugger desktop settings	C-SPY	C-SPY
ddf	Device description file	Text editor	C-SPY
dep	Dependency information	IDE	IDE
dni	Debugger initialization file	C-SPY	C-SPY
ewd	Project settings for C-SPY	IDE	IDE
ewp	IAR Embedded Workbench project (current version)	IDE	IDE
ewplugin	IDE description file for plugin modules	--	IDE
eww	Workspace file	IDE	IDE
flash	Configuration file for flash loader	Text editor	C-SPY
flashdict	Flash loader redirection specification	Text editor	C-SPY
fmt	Formatting information for the Locals and Watch windows	IDE	IDE
h	C/C++ or assembler header source	Text editor	Compiler or assembler #include
helpfiles	Help menu configuration file	Text editor	IDE
html, htm	HTML document	Text editor	IDE
i	Preprocessed source	Compiler	Compiler
ixx	Device selection file	Text editor	IDE
icf	Linker configuration file	Text editor	ILINK linker
inc	Assembler header source	Text editor	Assembler #include
ini	Project configuration	IDE	–
log	Log information	IDE	–
lst	List output	Compiler and assembler	–
mac	C-SPY macro definition	Text editor	C-SPY
map	List output	XLINK	–
menu	Device selection file	Text editor	IDE
o	Object module	Compiler and assembler	ILINK

Table 11: File types (Continued)



Ext.	Type of file	Output from	Input to
out	Target application	ILINK	EPROM, C-SPY, etc.
out	Target application with debug information	ILINK	C-SPY and other symbolic debuggers
pbd	Source browse information	IDE	IDE
pbi	Source browse information	IDE	IDE
pew	IAR Embedded Workbench project (old project format)	IDE	IDE
prj	IAR Embedded Workbench project (old project format)	IDE	IDE
rxx	Object module	Compiler and assembler	XLINK, XAR, and XLIB
rxx	Library	XAR, XLIB	XLINK, XAR, and XLIB
s	Assembler source code	Text editor	Assembler
sxx	Assembler source code	Text editor	Assembler
sfr	Special function register definitions	Text editor	C-SPY
suc	Stack usage control file	Text editor	ILINK
vsp	visualSTATE project files	IAR visualSTATE Designer	IAR visualSTATE Designer and IAR Embedded Workbench IDE
wsdt	Workspace desktop settings	IDE	IDE
xcl	Extended command line	Text editor	Assembler, compiler, linker
xlb	Extended librarian batch command	Text editor	XLIB

Table 11: File types (Continued)

**Note:** *xx* stands for two digits that identify the product you are using.

When you run the IDE, some files are created and located in dedicated directories under your project directory, by default `$PROJ_DIR$\Debug`, `$PROJ_DIR$\Release`, `$PROJ_DIR$\settings`, and the file `*.dep` under the installation directory. None of these directories or files affect the execution of the IDE, which means you can safely remove them if required.

## EXTENDING FILENAME RECOGNITION



In the IDE you can increase the number of recognized filename extensions using the **Filename Extensions** dialog box, available from the **Tools** menu. You can also connect your filename extension to a specific tool in the toolchain. See *Filename Extensions dialog box*, page 168.



To override the default filename extension from the command line, include an explicit extension when you specify a filename.



**Note:** If you run the tools from the command line, the XLINK listings (map files) will, by default, have the extension `lst`, which might overwrite the list file generated by the compiler. Therefore, we recommend that you name XLINK map files explicitly, for example `project1.map`.

# IAR Embedded Workbench IDE reference

This chapter contains reference information about the windows, menus, menu commands, and the corresponding components that are found in the IDE. This chapter contains the following sections:

- *Windows*, page 115
- *Menus*, page 121.

The IDE is a modular application. Which menus are available depends on which components are installed.

---

## Windows

The available windows are:

- IAR Embedded Workbench IDE window
- Workspace window
- Editor window
- Source Browser window
- Message windows.

In addition, a set of C-SPY®-specific windows becomes available when you start the debugger. For reference information about these windows, see the *C-SPY® Debugging Guide*.

## IAR Embedded Workbench IDE window

The main window of the IDE is displayed when you launch the IDE.

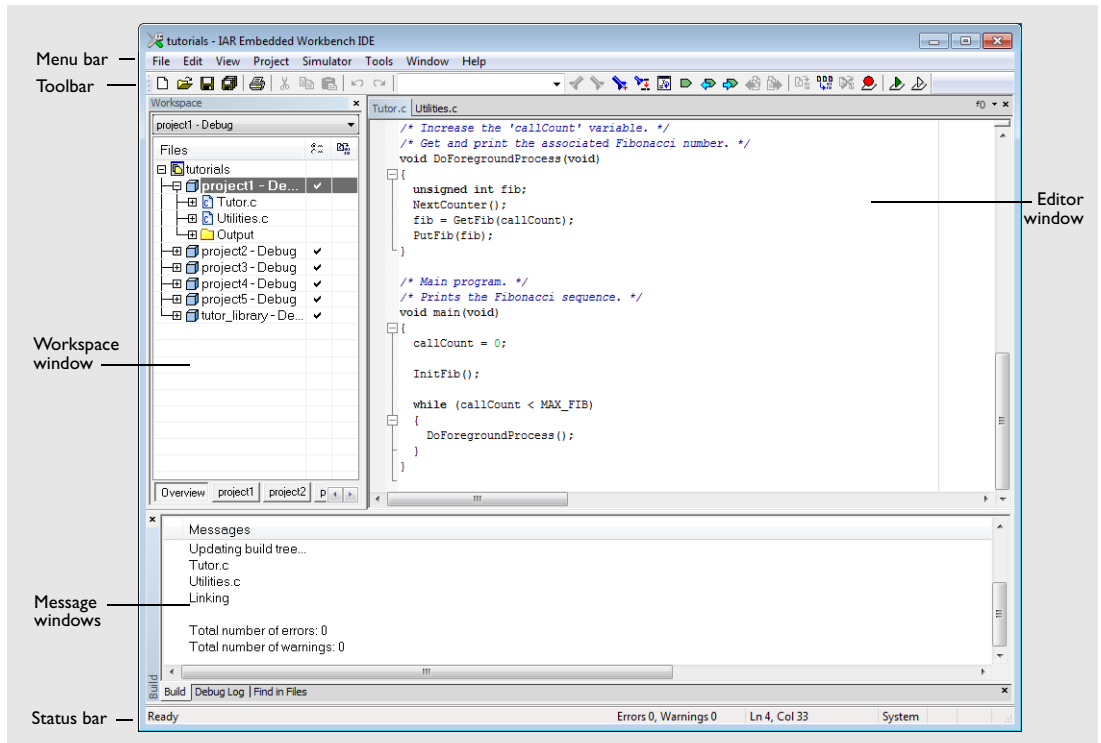


Figure 50: IAR Embedded Workbench IDE window

The figure shows the window and its various components. The window might look different depending on which plugin modules you are using.

### Menu bar

The menu bar contains:

- File**      Commands for opening source and project files, saving and printing, and exiting from the IDE.
- Edit**      Commands for editing and searching in editor windows and for enabling and disabling breakpoints in C-SPY.

<b>View</b>	Commands for opening windows and controlling which toolbars to display.
<b>Project</b>	Commands for adding files to a project, creating groups, and running the IAR Systems tools on the current project.
<b>Tools</b>	User-configurable menu to which you can add tools for use with the IDE.
<b>Window</b>	Commands for manipulating the IDE windows and changing their arrangement on the screen.
<b>Help</b>	Commands that provide help about the IDE.

For more information about each menu, see *Menus*, page 121.

## Toolbar

The IDE toolbar—available from the **View** menu—provides buttons for the most useful commands on the IDE menus, and a text box for typing a string to do a quick search.

For a description of any button, point to it with the mouse button. When a command is not available, the corresponding toolbar button is dimmed, and you will not be able to click it.

This figure shows the menu commands corresponding to each of the toolbar buttons:

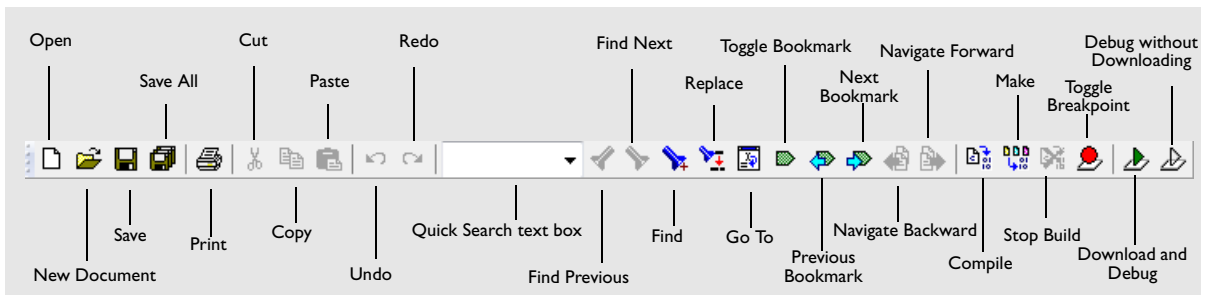


Figure 51: IDE toolbar



**Note:** When you start C-SPY, the **Download and Debug** button will change to a **Make and Debug** button and the **Debug without Downloading** will change to a **Restart**



**Debugger** button .

## Status bar

The status bar at the bottom of the window can be enabled from the **View** menu.




Figure 52: IAR Embedded Workbench IDE window status bar

The status bar displays:

- Source browser progress information
- The number of errors and warnings generated during a build
- The position of the insertion point in the editor window. When you edit, the status bar shows the current line and column number containing the insertion point.
- The character encoding
- The state of the modifier keys Caps Lock, Num Lock, and Overwrite.
- If your product package is available in more languages than English, a flag in the corner shows the language version you are using. Click the flag to change the language. The change will take force the next time you launch the IDE.

## Build window

The Build window is available by choosing **View>Messages**.

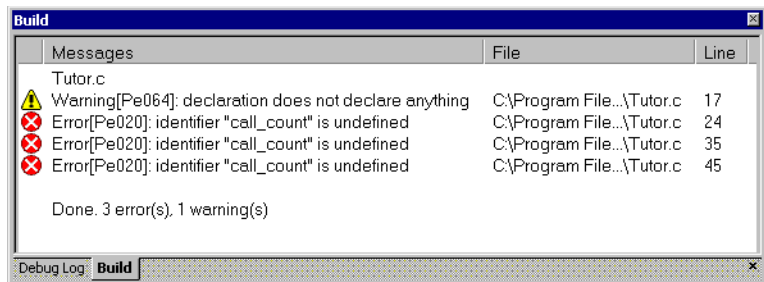


Figure 53: Build window (message window)

The Build window displays the messages generated when building a build configuration. When opened, this window is, by default, grouped together with the other message windows, see *Windows*, page 115. Double-click a message in the Build window to open the appropriate file for editing, with the insertion point at the correct position.

## Context menu

This context menu is available:




Figure 54: Build window context menu

These commands are available:

<b>Copy</b>	Copies the contents of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window.
<b>Options</b>	Opens the <b>Messages</b> page of the <b>IDE options</b> dialog box. On this page you can set options related to messages; see <i>Messages options</i> , page 153.

## Tool Output window

The Tool Output window is available by choosing **View>Messages>Tool Output**.

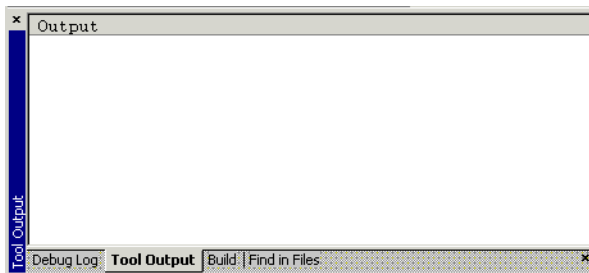


Figure 55: Tool Output window (message window)

The Tool Output window displays any messages output by user-defined tools in the **Tools** menu, provided that you have selected the option **Redirect to Output Window** in the **Configure Tools** dialog box; see *Configure Tools dialog box*, page 165. When opened, this window is, by default, grouped together with the other message windows, see *Windows*, page 115.

## Context menu

This context menu is available:




Figure 56: Tool Output window context menu

These commands are available:

<b>Copy</b>	Copies the contents of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window.

## Debug Log window

The Debug Log window is available by choosing **View>Messages>Debug Log**.

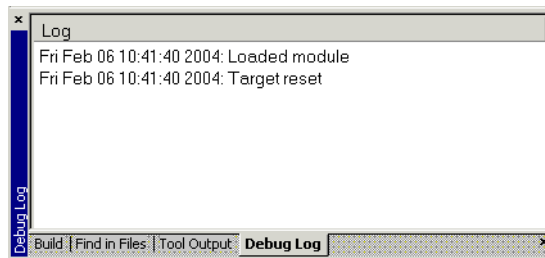


Figure 57: Debug Log window (message window)

The Debug Log window displays debugger output, such as diagnostic messages and trace information. When opened, this window is, by default, grouped together with the other message windows, see *Windows*, page 115.

Double-click any rows in one of the following formats to display the corresponding source code in the editor window:

```
<path> (<row>) :<message>
<path> (<row>,<column>) :<message>
```



## Context menu

This context menu is available:




Figure 58: Debug Log window context menu

These commands are available:

<b>Copy</b>	Copies the contents of the window.
<b>Select All</b>	Selects the contents of the window.
<b>Clear All</b>	Deletes the contents of the window.

---

## Menus

The available menus are:

- File menu
- Edit menu
- View menu
- Project menu
- Tools menu
- Window menu
- Help menu.

In addition, a set of C-SPY-specific menus become available when you start the debugger. For more information about these menus, see the *C-SPY® Debugging Guide*.

## File menu

The **File** menu provides commands for opening workspaces and source files, saving and printing, and exiting from the IDE.

The menu also includes a numbered list of the most recently opened files and workspaces. To open one of them, choose it from the menu.

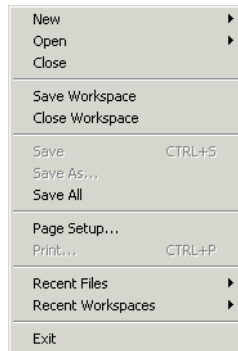


Figure 59: File menu

These commands are available:



**New**  
Ctrl+N

Displays a submenu with commands for creating a new workspace, or a new text file.



**Open>File**  
Ctrl+O

Displays a submenu from which you can select a text file or an HTML document to open. See *Editor window*, page 88.



**Open>Workspace**

Displays a submenu from which you can select a workspace file to open. Before a new workspace is opened you will be prompted to save and close any currently open workspaces.



**Open>Header/Source File**  
Ctrl+Shift+H

Opens the header file or source file that corresponds to the current file, and jumps from the current file to the newly opened file. This command is also available from the context menu available from the editor window.

**Close**

Closes the active window. You will be given the opportunity to save any files that have been modified before closing.

**Save Workspace**

Saves the current workspace file.

**Close Workspace**

Closes the current workspace file.



**Save**  
Ctrl+S

Saves the current text file or workspace file.

**Save As**

Displays a dialog box where you can save the current file with a new name.

**Save All**

Saves all open text documents and workspace files.

**Page Setup**

Displays a dialog box where you can set printer options.



**Print**  
Ctrl+P

Displays a dialog box where you can print a text document.

**Recent Files**

Displays a submenu where you can quickly open the most recently opened text documents.

**Recent Workspaces**

Displays a submenu where you can quickly open the most recently opened workspace files.

**Exit**

Exits from the IDE. You will be asked whether to save any changes to text files before closing them. Changes to the project are saved automatically.

## Edit menu

The **Edit** menu provides commands for editing and searching.

Cut	Ctrl+X
Copy	Ctrl+C
Paste	Ctrl+V
Select All	Ctrl+A
Find and Replace	▶
Navigate	▶
Code Templates	▶
Next Error/Tag	F4
Previous Error/Tag	Shift+F4
Complete Word	Ctrl+Alt+Space
Complete Code	Ctrl+Space
Parameter Hint	Ctrl+Shift+Space
Match Brackets	▶
Toggle All Folds	Ctrl+Alt+F
Auto Indent	Ctrl+T
Block Comment	Ctrl+K
Block Uncomment	Ctrl+Shift+K
Toggle Breakpoint	F9
Enable/Disable Breakpoint	Ctrl+F9

Figure 60: Edit menu

These commands are available:



**Undo**  
Ctrl+Z

Undoes the last edit made to the current editor window.



**Redo**  
Ctrl+Y

Redoes the last **Undo** in the current editor window.

You can undo and redo an unlimited number of edits independently in each editor window.



**Cut**  
Ctrl+X

The standard Windows command for cutting text in editor windows and text boxes.







**Copy**  
Ctrl+C

The standard Windows command for copying text in editor windows and text boxes.



**Paste**  
Ctrl+V

The standard Windows command for pasting text in editor windows and text boxes.

<b>Select All</b> Ctrl+A	Selects all text in the active editor window.
 <b>Find and Replace&gt;Find</b> Ctrl+F	Displays the <b>Find</b> dialog box where you can search for text within the current editor window; see <i>Find dialog box</i> , page 98. Note that if the insertion point is located in the Memory window when you choose the <b>Find</b> command, the dialog box will contain a different set of options than otherwise. If the insertion point is located in the Trace window when you choose the <b>Find</b> command, the <b>Find in Trace</b> dialog box is opened; the contents of this dialog box depend on the C-SPY driver you are using, see the <i>C-SPY® Debugging Guide</i> for more information.
 <b>Find and Replace&gt;Find Next</b> F3	Finds the next occurrence of the specified string.
 <b>Find and Replace&gt;Find Previous</b> Shift+F3	Finds the previous occurrence of the specified string.
<b>Find and Replace&gt;Find Next (Selected)</b> Ctrl+F3	Searches for the next occurrence of the currently selected text or the word currently surrounding the insertion point.
<b>Find and Replace&gt;Find Previous (Selected)</b> Ctrl+Shift+F3	Searches for the previous occurrence of the currently selected text or the word currently surrounding the insertion point.
 <b>Find and Replace&gt;Replace</b> Ctrl+H	Displays a dialog box where you can search for a specified string and replace each occurrence with another string; see <i>Replace dialog box</i> , page 99. Note that if the insertion point is located in the Memory window when you choose the <b>Replace</b> command, the dialog box will contain a different set of options than otherwise.
<b>Find and Replace&gt;Find in Files</b>	Displays a dialog box where you can search for a specified string in multiple text files; see <i>Find in Files window</i> , page 95.
<b>Find and Replace&gt;Incremental Search</b> Ctrl+I	Displays a dialog box where you can gradually fine-tune or expand the search by continuously changing the search string; see <i>Incremental Search dialog box</i> , page 102.



**Navigate>Go To**  
Ctrl+G

Displays the **Go to Line** dialog box where you can move the insertion point to a specified line and column in the current editor window.

**Navigate>Toggle Bookmark**  
Ctrl+F2

Toggles a bookmark at the line where the insertion point is located in the active editor window.

**Navigate>Previous Bookmark**  
Shift+F2

Moves the insertion point to the previous bookmark that has been defined with the Toggle Bookmark command.

**Navigate>Next Bookmark**  
F2

Moves the insertion point to the next bookmark that has been defined with the Toggle Bookmark command.

**Navigate>Navigate Backward**  
Alt+Left Arrow

Navigates backward in the insertion point history. The current position of the insertion point is added to the history by actions like **Go to definition** and clicking on a result from the **Find in Files** command.

**Navigate>Navigate Forward**  
Alt+Right Arrow

Navigates forward in the insertion point history. The current position of the insertion point is added to the history by actions like **Go to definition** and clicking on a result from the **Find in Files** command.

**Navigate>Go to Definition**  
F12

Shows the declaration of the selected symbol or the symbol where the insertion point is placed. This menu command is available when browse information has been enabled, see *Project options*, page 155.

**Code Templates>Insert Template**  
Ctrl+Alt+V

Displays a list in the editor window from which you can choose a code template to be inserted at the location of the insertion point. If the code template you choose requires any field input, the **Template** dialog box appears; see *Template dialog box*, page 103. For information about using code templates, see *Using and adding code templates*, page 80.

**Code Templates>Edit Templates**

Opens the current code template file, where you can modify existing code templates and add your own code templates. For information about using code templates, see *Using and adding code templates*, page 80.

**Next Error/Tag**  
F4

If the message window contains a list of error messages or the results from a **Find in Files** search, this command displays the next item from that list in the editor window.

<b>Previous Error/Tag</b> Shift+F4	If the message window contains a list of error messages or the results from a <b>Find in Files</b> search, this command displays the previous item from that list in the editor window.
<b>Complete Word</b> Ctrl+Alt+Space	Attempts to complete the word you have begun to type, basing the guess on the contents of the rest of the editor document.
<b>Complete Code</b> Ctrl+Space	Shows a list of symbols that are available in a class, when you place the insertion point after <code>.</code> , <code>-&gt;</code> , or <code>::</code> and when these characters are preceded by a class or object name. For more information, see <i>Code completion</i> , page 77.
<b>Parameter Hint</b> Ctrl+Shift+Space	Suggests parameters as tooltip information for the function parameter list you have begun to type. When there are several overloaded versions of a function, you can choose which one to use by clicking the arrows in the tooltip. For more information, see <i>Parameter hint</i> , page 76.
<b>Match Brackets</b>	Selects all text between the brackets immediately surrounding the insertion point, increases the selection to the next hierarchic pair of brackets, or beeps if there is no higher bracket hierarchy.
<b>Toggle All Folds</b> Ctrl+Alt+F	Expands/collapses all code folds in the active project.
<b>Auto Indent</b> Ctrl+T	Indents one or several lines you have selected in a C/C++ source file. To configure the indentation, see <i>Configure Auto Indent dialog box</i> , page 148.
<b>Block Comment</b> Ctrl+K	Places the C++ comment character sequence <code>//</code> at the beginning of the selected lines.
<b>Block Uncomment</b> Ctrl+K	Removes the C++ comment character sequence <code>//</code> from the beginning of the selected lines.
<b>Toggle Breakpoint</b> F9	Toggles a breakpoint at the statement or instruction that contains or is located near the cursor in the source window.  This command is also available as an icon button in the debug bar.

**Enable/Disable Breakpoint**    Toggles a breakpoint between being disabled, but not Ctrl+F9    actually removed—making it available for future use—and being enabled again.

## View menu

The **View** menu provides several commands for opening windows and displaying toolbars in the IDE. When C-SPY is running you can also open debugger-specific windows from this menu. See the *C-SPY® Debugging Guide* for information about these.




Figure 61: View menu

These commands are available:

- |   |   |
|---|---|
| <b>Messages</b>   | Displays a submenu which gives access to the message windows—Build, Find in Files, Tool Output, Debug Log—that display messages and text output from the IAR Embedded Workbench commands. If the window you choose from the menu is already open, it becomes the active window. |
| <b>Workspace</b>  | Opens the current Workspace window, see <i>Workspace window</i> , page 45.  |
| <b>Source Browser&gt;<br/>Source Browser</b>            | Opens the Source Browser window, see <i>Source Browser window</i> , page 52.  |
| <b>Source Browser&gt;<br/>Find All<br/>References</b>   | Opens the Find All References window, see <i>Find All References window</i> , page 58.  |
| <b>Source Browser&gt;<br/>Find All<br/>Declarations</b> | Opens the Find All Declarations window, see <i>Find All Declarations window</i> , page 57.  |
| <b>Source Browser&gt;<br/>Call Graph</b>                | Opens the Call Graph window, see <i>Call Graph window</i> , page 56.  |



<b>Breakpoints</b>	Opens the Breakpoints window, see the <i>C-SPY® Debugging Guide</i> .
<b>Disassembly</b>	Opens the Disassembly window. Only available when C-SPY is running.
<b>Memory</b>	Opens the Memory window. Only available when C-SPY is running.
<b>Symbolic Memory</b>	Opens the Symbolic Memory window. Only available when C-SPY is running.
<b>Register</b>	Opens the Register window. Only available when C-SPY is running.
<b>Watch</b>	Opens the Watch window. Only available when C-SPY is running.
<b>Locals</b>	Opens the Locals window. Only available when C-SPY is running.
<b>Statics</b>	Opens the Statics window. Only available when C-SPY is running.
<b>Auto</b>	Opens the Auto window. Only available when C-SPY is running.
<b>Live Watch</b>	Opens the Live Watch window. Only available when C-SPY is running.
<b>Quick Watch</b>	Opens the Quick Watch window. Only available when C-SPY is running.
<b>Call Stack</b>	Opens the Call Stack window. Only available when C-SPY is running.
<b>Stack</b>	Opens the Stack window. Only available when C-SPY is running.
<b>Terminal I/O</b>	Opens the Terminal I/O window. Only available when C-SPY is running.
<b>Images</b>	Opens the Images window. Only available when C-SPY is running.
<b>Code Coverage</b>	Opens the Code Coverage window. Only available when C-SPY is running.
<b>Symbols</b>	Opens the Symbols window. Only available when C-SPY is running.
<b>Toolbars</b>	The options <b>Main</b> and <b>Debug</b> toggle the two toolbars on or off.

**Status bar** Toggles the status bar on or off.

## Project menu

The **Project** menu provides commands for working with workspaces, projects, groups, and files, and for specifying options for the build tools, and running the tools on the current project.

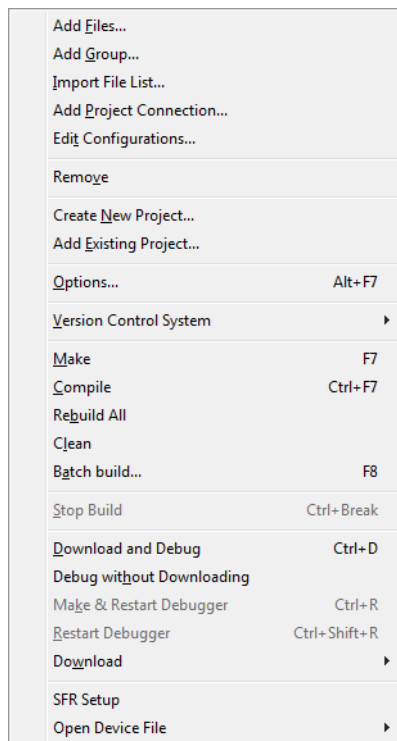



Figure 62: Project menu

These commands are available:

**Add Files** Displays a dialog box where you can select which files to include in the current project.

<b>Add Group</b>	Displays a dialog box where you can create a new group. In the <b>Group Name</b> text box, specify the name of the new group. For more information about groups, see <i>Groups</i> , page 37.
<b>Import File List</b>	Displays a standard <b>Open</b> dialog box where you can import information about files and groups from projects created using another IAR Systems toolchain.  To import information from project files which have one of the older filename extensions <code>.pew</code> or <code>.prj</code> you must first have exported the information using the context menu command <b>Export File List</b> available in your current IAR Embedded Workbench.
<b>Add Project Connection</b>	Displays the <b>Add Project Connection</b> dialog box, see <i>Add Project Connection dialog box</i> , page 133.
<b>Edit Configurations</b>	Displays the <b>Configurations for project</b> dialog box, where you can define new or remove existing build configurations. See <i>Configurations for project dialog box</i> , page 50.
<b>Remove</b>	In the Workspace window, removes the selected item from the workspace.
<b>Create New Project</b>	Displays the <b>Create New Project</b> dialog box where you can create a new project and add it to the workspace; see <i>Create New Project dialog box</i> , page 49.
<b>Add Existing Project</b>	Displays a standard <b>Open</b> dialog box where you can add an existing project to the workspace.
<b>Options</b> Alt+F7	Displays the <b>Options</b> dialog box, where you can set options for the build tools, for the selected item in the Workspace window; see <i>Options dialog box</i> , page 135. You can set options for the entire project, for a group of files, or for an individual file.
<b>Version Control System</b>	Displays a submenu with commands for version control, see <i>Version Control System menu for SCC</i> , page 59.
 <b>Make</b> F7	Brings the current build configuration up to date by compiling, assembling, and linking only the files that have changed since the last build.



**Compile**  
Ctrl+F7

Compiles or assembles the currently selected file, files, or group.

One or more files can be selected in the Workspace window—all files in the same project, but not necessarily in the same group. You can also select the editor window containing the file you want to compile. The **Compile** command is only enabled if *all* files in the selection can be compiled or assembled.

You can also select a *group*, in which case the command is applied to each file in the group (including inside nested groups) that can be compiled, even if the group contains files that cannot be compiled, such as header files.

If the selected file is part of a multi-file compilation group, the command will still only affect the selected file.

**Rebuild All**

Rebuilds and relinks all files in the current target.

**Clean**

Removes any intermediate files.

**Batch Build**  
F8

Displays the **Batch Build** dialog box where you can configure named batch build configurations, and build a named batch. See *Batch Build dialog box*, page 138.



**Stop Build**  
Ctrl+Break

Stops the current build operation.



**Download and Debug**  
Ctrl+D

Downloads the application and starts C-SPY so that you can debug the project object file. If necessary, a make will be performed before running C-SPY to ensure the project is up to date. This command is not available during a debug session.



**Debug without Downloading**

Starts C-SPY so that you can debug the project object file. This menu command is a shortcut for the **Suppress Download** option available on the **Download** page. The **Debug without Downloading** command is not available during a debug session.



**Make & Restart Debugger**

Stops C-SPY, makes the active build configuration, and starts the debugger again; all in a single command. This command is only available during a debug session.



**Restart Debugger**

Stops C-SPY and starts the debugger again; all in a single command. This command is only available during a debug session.

**Download**

Commands for flash download and erase. Note that these menu commands might not be applicable to the product package you are using. Choose between these commands:

**Download active application** downloads the active application to the target without launching a full debug session. The result is roughly equivalent to launching a debug session but exiting it again before the execution starts.

**Download file** opens a standard **Open** dialog box where you can specify a file to be downloaded to the target system without launching a full debug session.

**Erase memory** erases all parts of the flash memory.

If your product package supports erasing multiple flash loaders, and in that case, if your `.board` file specifies only one flash memory, a simple confirmation dialog box is displayed where you confirm the erasure. However, if your `.board` file specifies two or more flash memories, the **Erase Memory** dialog box is displayed. See *Erase Memory dialog box*, page 134.

**SFR Setup**

Opens the SFR Setup window which displays the currently defined SFRs that C-SPY has information about. For more information about this window, see the *C-SPY® Debugging Guide*.

**Open Device File**

Opens a submenu with commands for opening the active file that contains a device description or SFR definitions.

**Add Project Connection dialog box**

The **Add Project Connection** dialog box is available from the **Project** menu.

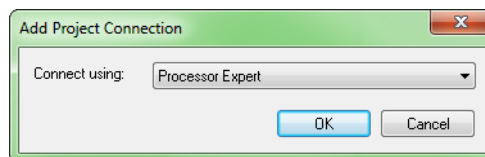


Figure 63: Add Project Connection dialog box

Use this dialog box to set up a project connection between IAR Embedded Workbench and an external tool. This can, for example, be useful if you want IAR Embedded Workbench to build source code files provided by the external tool. The source files will automatically be added to your project. If the set of files changes, the new set of files will automatically be used when the project is built in IAR Embedded Workbench.

To disable support for this, see *Project options*, page 155.

### Connect using

Chooses the external tool that you want to set up a connection with.

### OK

Displays a dialog box where you specify the connection.

## Erase Memory dialog box

The **Erase Memory** dialog box is displayed when you have chosen **Project>Download>Erase Memory** and your flash memory system configuration file (filename extension `.board`) specifies two or more flash memories.

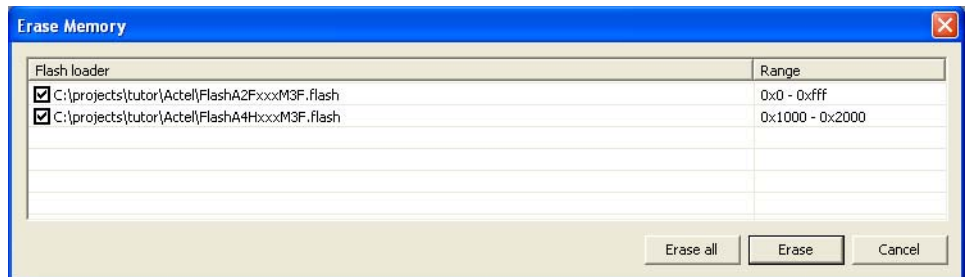


Figure 64: Erase Memory dialog box

Use this dialog box to erase one or more of the flash memories.

**Note:** The **Erase Memory** dialog box is only available if your product package supports the IAR Embedded Workbench flash loader mechanism.

### Display area

Each line lists the path to the flash memory device configuration file (filename extension `.flash`) and the associated memory range. Select the memory you want to erase.

## Buttons

These buttons are available:

<b>Erase all</b>	All memories listed in the dialog box are erased, regardless of individually selected lines.
<b>Erase</b>	Erases the selected memories.
<b>Cancel</b>	Closes the dialog box.

## Options dialog box

The **Options** dialog box is available from the **Project** menu.

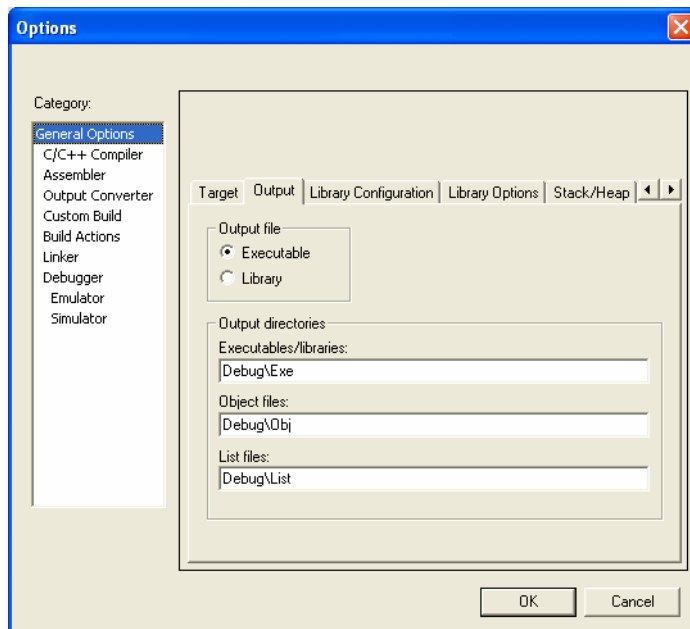


Figure 65: Options dialog box

Use this dialog box to specify your project settings.

## Category

Selects the build tool you want to set options for. The available categories will depend on the tools installed in your IAR Embedded Workbench IDE, and will typically include:

<b>General Options</b>	General options.
<b>C/C++ Compiler</b>	IAR C/C++ Compiler options.
<b>Assembler</b>	IAR Assembler options.
<b>Output Converter</b>	Options for converting ELF output to Motorola, Intel-standard, or other simple formats. These options are only available if your product package includes the ILINK linker.
<b>Custom Build</b>	Options for extending the toolchain.
<b>Build Actions</b>	Options for pre-build and post-build actions.
<b>Linker</b>	Linker options. This category is available for application projects.
<b>Library Builder</b>	Library builder options. This category is available for library projects.
<b>Debugger</b>	IAR C-SPY Debugger options.
<b>Simulator</b>	Simulator-specific options.
<b><i>C-SPY hardware drivers</i></b>	Options specific to additional hardware debuggers might be available depending on the installed drivers.

Selecting a category displays one or more pages of options for that component of the IDE.

For information about the options in each category, see the online help system. For the debugger options, you can also find them in the *C-SPY® Debugging Guide*.

## Factory Settings

Restores all settings to the default factory settings.



## Argument variables

On many of the pages in the **Options** dialog box, you can use argument variables for paths and arguments:

Variable	Description
\$CONFIG_NAME\$	The name of the current build configuration, for example Debug or Release.
\$CUR_DIR\$	Current directory
\$CUR_LINE\$	Current line
\$DATE\$	Today's date
\$EW_DIR\$	Top directory of IAR Embedded Workbench, for example c:\program files\iar systems\embedded workbench 6.n
\$EXE_DIR\$	Directory for executable output
\$FILE_BNAME\$	Filename without extension
\$FILE_BPATH\$	Full path without extension
\$FILE_DIR\$	Directory of active file, no filename
\$FILE_FNAME\$	Filename of active file without path
\$FILE_PATH\$	Full path of active file (in Editor, Project, or Message window)
\$LIST_DIR\$	Directory for list output
\$OBJ_DIR\$	Directory for object output
\$PROJ_DIR\$	Project directory
\$PROJ_FNAME\$	Project filename without path
\$PROJ_PATH\$	Full path of project file
\$TARGET_DIR\$	Directory of primary output file
\$TARGET_BNAME\$	Filename without path of primary output file and without extension
\$TARGET_BPATH\$	Full path of primary output file without extension
\$TARGET_FNAME\$	Filename without path of primary output file
\$TARGET_PATH\$	Full path of primary output file
\$TOOLKIT_DIR\$	Directory of the active product, for example c:\program files\iar systems\embedded workbench 6.n\curname
\$USER_NAME\$	Your host login name
\$_ENVVAR_\$	The environment variable <i>ENVVAR</i> . Any name within \$_ and _\$ will be expanded to that system environment variable.

Table 12: Argument variables

Argument variables can also be used on some pages in the **IDE Options** dialog box, see *Tools menu*, page 140.

## Batch Build dialog box

The **Batch Build** dialog box is available by choosing **Project>Batch build**.

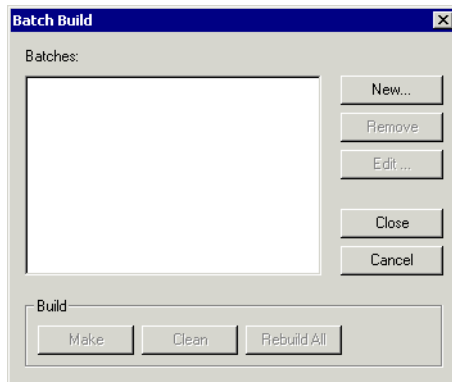


Figure 66: Batch Build dialog box

This dialog box lists all defined batches of build configurations. For more information, see *Building multiple configurations in a batch*, page 69.

### Batches

Select the batch you want to build from this list of currently defined batches of build configurations.

### Build

Give the build command you want to execute:

- **Make**
- **Clean**
- **Rebuild All.**

### New

Displays the **Edit Batch Build** dialog box, where you can define new batches of build configurations; see *Edit Batch Build dialog box*, page 139.

**Remove**

Removes the selected batch.

**Edit**

Displays the **Edit Batch Build** dialog box, where you can edit existing batches of build configurations.

**Edit Batch Build dialog box**

The **Edit Batch Build** dialog box is available from the **Batch Build** dialog box.

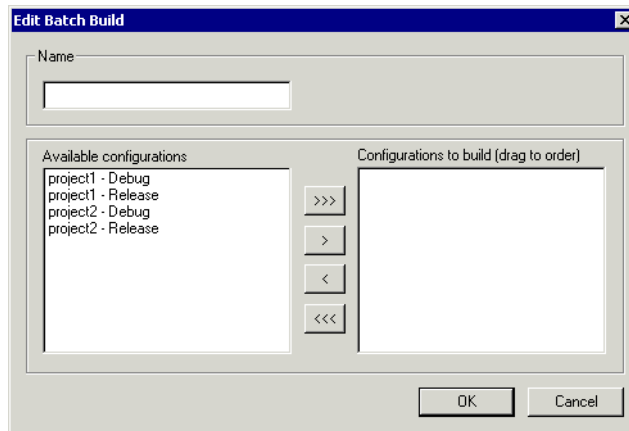


Figure 67: Edit Batch Build dialog box

Use this dialog box to create new batches of build configurations, and edit already existing batches.

**Name**

Type a name for a batch that you are creating, or change the existing name (if you wish) for a batch that you are editing.

**Available configurations**

Select the configurations you want to move to be included in the batch you are creating or editing, from this list of all build configurations that belong to the workspace.

To move a build configuration from the **Available configurations** list to the **Configurations to build** list, use the arrow buttons.

### Configurations to build

Lists the build configurations that will be included in the batch you are creating or editing. Drag the build configurations up and down to set the order between the configurations.

## Tools menu

The **Tools** menu provides commands for customizing the environment, such as changing common fonts and shortcut keys.

It is a user-configurable menu to which you can add tools for use with IAR Embedded Workbench. Thus, it might look different depending on which tools you have preconfigured to appear as menu items.




Figure 68: Tools menu

These commands are available:

### Options

Displays the **IDE Options** dialog box where you can customize the IDE. See:

*Common Fonts options*, page 141

*Key Bindings options*, page 142

*Language options*, page 144

*Editor options*, page 145

*Configure Auto Indent dialog box*, page 148

*External Editor options*, page 149

*Editor Setup Files options*, page 151

*Editor Colors and Fonts options*, page 152

*Messages options*, page 153

*Project options*, page 155

*Source Code Control options*, page 157

*Debugger options*, page 158

*Stack options*, page 160

*Register Filter options*, page 162

*Terminal I/O options*, page 164.

<b>Configure Tools</b>	Displays the <b>Configure Tools</b> dialog box where you can set up the interface to use external tools; see <i>Configure Tools dialog box</i> , page 165.
<b>Filename Extensions</b>	Displays the <b>Filename Extensions</b> dialog box where you can define the filename extensions to be accepted by the build tools; see <i>Filename Extensions dialog box</i> , page 168.
<b>Configure Viewers</b>	Displays the <b>Configure Viewers</b> dialog box where you can configure viewer applications to open documents with; see <i>Configure Viewers dialog box</i> , page 170.
<b>Notepad</b>	User-configured. This is an example of a user-configured addition to the Tools menu.

## Common Fonts options

The **Common Fonts** options are available by choosing **Tools>Options**.

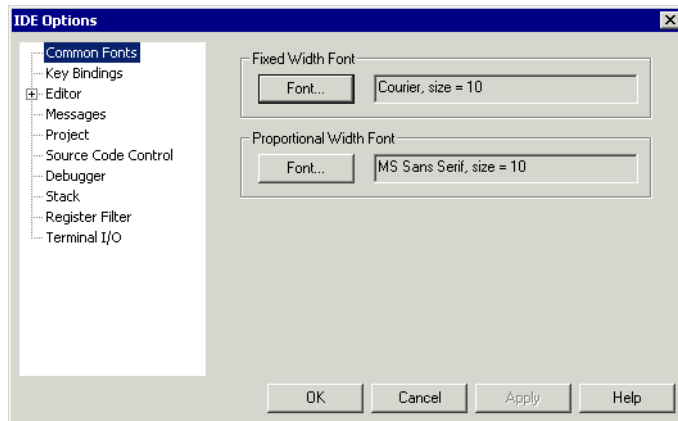


Figure 69: Common Fonts options

Use this page to configure the fonts used for all project windows except the editor windows.

For information about how to change the font in the editor windows, see *Editor Colors and Fonts options*, page 152.

### Fixed Width Font

Selects which font to use in the Disassembly, Register, and Memory windows.

### Proportional Width Font

Selects which font to use in all windows except the Disassembly, Register, Memory, and editor windows.

## Key Bindings options

The **Key Bindings** options are available by choosing **Tools>Options**.

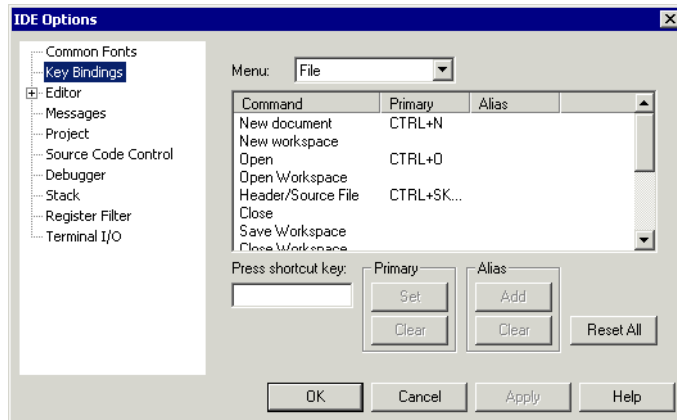


Figure 70: Key Bindings options

Use this page to customize the shortcut keys used for the IDE menu commands.

### Menu

Selects the menu to be edited. Any currently defined shortcut keys for the selected menu are listed below the **Menu** drop-down list.

### List of commands

Selects the menu command you want to configure your own shortcut keys for, from this list of all commands available on the selected menu.

### Press shortcut key

Type the key combination you want to use as shortcut key for the selected command. You cannot set or add a shortcut if it is already used by another command.

## Primary

Choose to:

- Set** Saves the key combination in the **Press shortcut key** field as a shortcut for the selected command in the list.
- Clear** Removes the listed primary key combination as a shortcut for the selected command in the list.

The new shortcut will be displayed next to the command on the menu.

## Alias

Choose to:

- Add** Saves the key combination in the **Press shortcut key** field as an alias—a hidden shortcut—for the selected command in the list.
- Clear** Removes the listed alias key combination as a shortcut for the selected command in the list.

The new shortcut will be not displayed next to the command on the menu.

## Reset All

Reverts the shortcuts for all commands to the factory settings.

## Language options

The **Language** options are available by choosing **Tools>Options**.

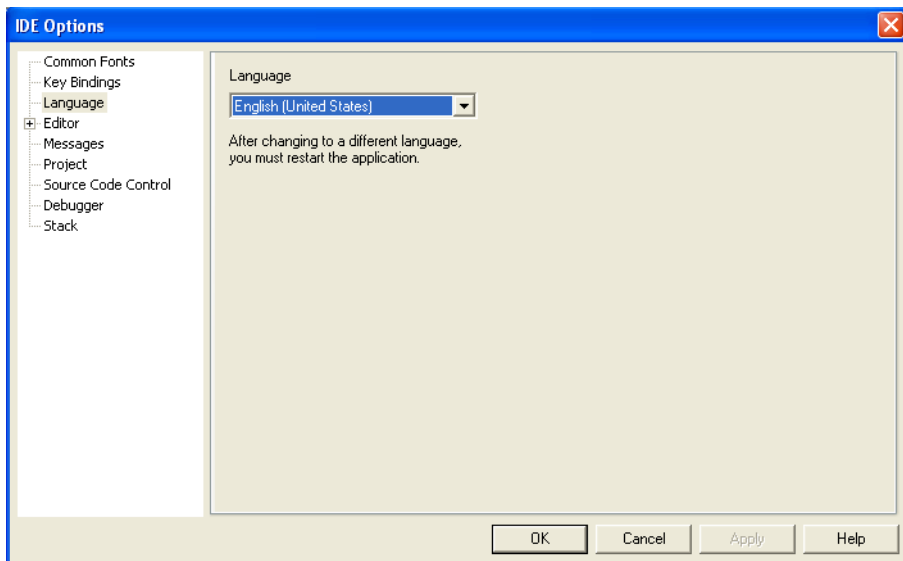


Figure 71: Language options

Use this page to specify the language to be used in windows, menus, dialog boxes, etc.

### Language

Selects the language to be used. The available languages depend on your product package.

**Note:** If you have installed IAR Embedded Workbench for several different toolchains in the same directory, the IDE might be in mixed languages if the toolchains are available in different languages.



## Editor options

The **Editor** options are available by choosing **Tools>Options**.

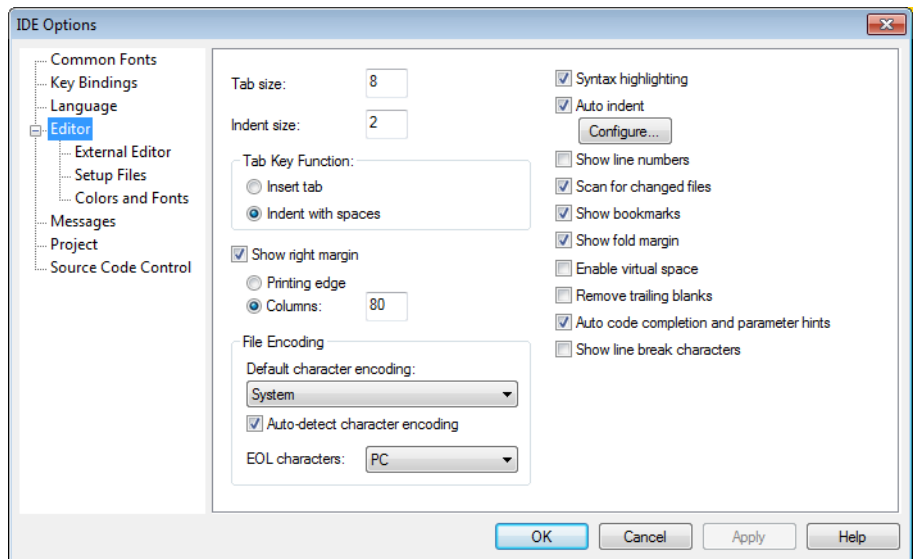


Figure 72: Editor options

Use this page to configure the editor.

For more information about the editor, see *Editing*, page 75.

### Tab size

Specify the width of a tab character, in terms of character spaces.

### Indent size

Specify the number of spaces to be used when tabulating with an indentation.

### Tab Key Function

Controls what happens when you press the Tab key. Choose between:

- |                           |  |
|---------------------------|--|
| <b>Insert tab</b>         | Inserts a tab character when the Tab key is pressed.                   |
| <b>Indent with spaces</b> | Inserts an indentation (space characters) when the Tab key is pressed. |

**Show right margin**

Displays the area of the editor window outside the right margin as a light gray field. If this option is selected, you can set the width of the text area between the left margin and the right margin. Choose to set the width based on:

**Printing edge** Bases the width on the printable area, which is taken from the general printer settings.

**Columns** Bases the width based on the number of columns.

**File Encoding**

Controls file encoding. Choose between:

**Default character encoding** Selects the character encoding to be used by default for new files. Choose between:

System (uses the Windows settings)

Western European

UTF-8

Japanese (Shift-JIS)

Chinese Simplified (GB2312)

Korean (Unified Hangul Code)

Arabic

Baltic

Central European

Greek

Hebrew

Russian

Thai

Vietnamese

Note that if you have specified a character encoding from the editor window context menu, that encoding will override this setting for the specific document.

**Auto-detect character encoding** Detects automatically which character encoding that should be used when you open an existing document.

**EOL characters** Selects which line break character to use when editor documents are saved. Choose between:

**PC** (default), Windows and DOS end of line characters.

**Unix**, UNIX end of line characters.

**Preserve**, the same end of line character as the file had when it was opened, either PC or UNIX. If both types or neither type are present in the opened file, PC end of line characters are used.

### Syntax highlighting

Makes the editor display the syntax of C or C++ applications in different text styles.

To read more about syntax highlighting, see *Editor Colors and Fonts options*, page 152, and *Syntax coloring*, page 84.

### Auto indent

Makes the editor indent the new line automatically when you press Return. For C/C++ source files, click the **Configure** button to configure the automatic indentation; see *Configure Auto Indent dialog box*, page 148. For all other text files, the new line will have the same indentation as the previous line.

### Show line numbers

Makes the editor display line numbers in the editor window.

### Scan for changed files

Makes the editor reload files that have been modified by another tool.

If a file is open in the IDE, and the same file has concurrently been modified by another tool, the file will be automatically reloaded in the IDE. However, if you already started to edit the file, you will be prompted before the file is reloaded.

### Show bookmarks

Makes the editor display a column on the left side in the editor window, with icons for compiler errors and warnings, **Find in Files** results, user bookmarks, and breakpoints.

### Show fold margin

Makes the editor display the fold margin in the left side of the editor window. For more information, see *Code folding*, page 77.

**Enable virtual space**

Allows the insertion point to move outside the text area.

**Remove trailing blanks**

Removes trailing blanks from files when they are saved to disk. Trailing blanks are blank spaces between the last non-blank character and the end of line character.

**Auto code completion and parameter hints**

Enables code completion and parameter hints. For more information, see *Editing a file*, page 76.

**Show line break characters**

Toggles the display of carriage return and line feed characters in the editor window.

**Configure Auto Indent dialog box**

The **Configure Auto Indent** dialog box is available from the **IDE Options** dialog box.

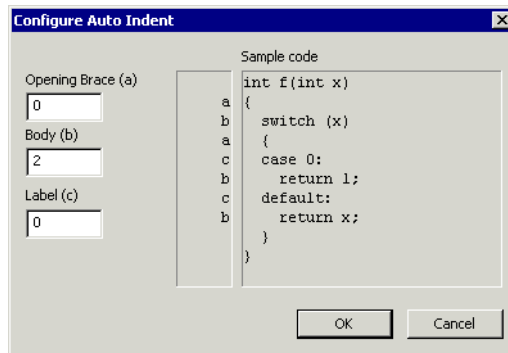


Figure 73: Configure Auto Indent dialog box

Use this dialog box to configure the editor's automatic indentation of C/C++ source code.

For more information about indentation, see *Indenting text automatically*, page 78.

**To open the Configure Auto Indent dialog box:**

- 1** Choose **Tools>Options**.
- 2** Open the **Editor** page.
- 3** Select the **Auto indent** option and click the **Configure** button.

**Opening Brace (a)**

Specify the number of spaces used for indenting an opening brace.

**Body (b)**

Specify the number of additional spaces used for indenting code after an opening brace, or a statement that continues onto a second line.

**Label (c)**

Specify the number of additional spaces used for indenting a label, including case labels.

**Sample code**

This area reflects the settings made in the text boxes for indentation. All indentations are relative to the preceding line, statement, or other syntactic structures.

**External Editor options**

The **External Editor** options are available by choosing **Tools>Options**.

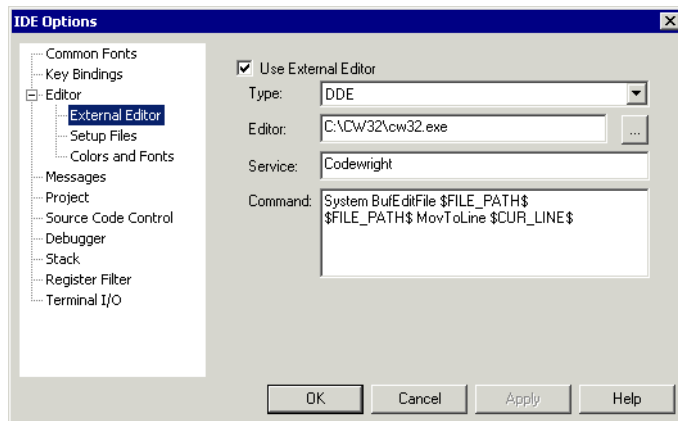


Figure 74: External Editor options

Use this page to specify an external editor of your choice.

**Note:** The contents of this dialog box depends on the setting of the **Type** option.

See also *Using an external editor*, page 85.

**Use External Editor**

Enables the use of an external editor.

## Type

Selects the type of interface. Choose between:

- **Command Line**
- **DDE** (Windows Dynamic Data Exchange).

## Editor

Specify the filename and path of your external editor. A browse button is available for your convenience.

## Arguments

Specify any arguments to be passed to the editor. This is only applicable if you have selected **Command Line** as the interface type, see *Type*, page 150.

## Service

Specify the DDE service name used by the editor. This is only applicable if you have selected **DDE** as the interface type, see *Type*, page 150.

The service name depends on the external editor that you are using. Refer to the user documentation of your external editor to find the appropriate settings.

## Command

Specify a sequence of command strings to be passed to the editor. The command strings should be typed as:

*DDE-Topic CommandString1*

*DDE-Topic CommandString2*

This is only applicable if you have selected **DDE** as the interface type, see *Type*, page 150.

The command strings depend on the external editor that you are using. Refer to the user documentation of your external editor to find the appropriate settings.



**Note:** You can use variables in arguments. See *Argument variables*, page 137, for information about available argument variables.

## Editor Setup Files options

The **Editor Setup Files** options are available by choosing **Tools>Options**.

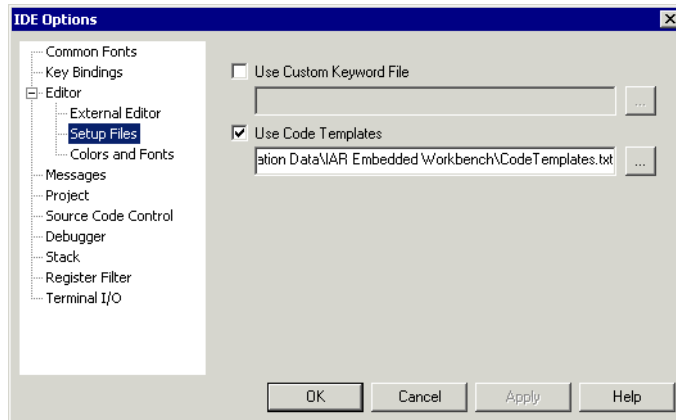


Figure 75: Editor Setup Files options

Use this page to specify setup files for the editor.

### Use Custom Keyword File

Specify a text file containing keywords that you want the editor to highlight. For information about syntax coloring, see *Syntax coloring*, page 84.

### Use Code Templates

Specify a text file with code templates that you can use for inserting frequently used code in your source file. For information about using code templates, see *Using and adding code templates*, page 80.

## Editor Colors and Fonts options

The **Editor Colors and Fonts** options are available by choosing **Tools>Options**.

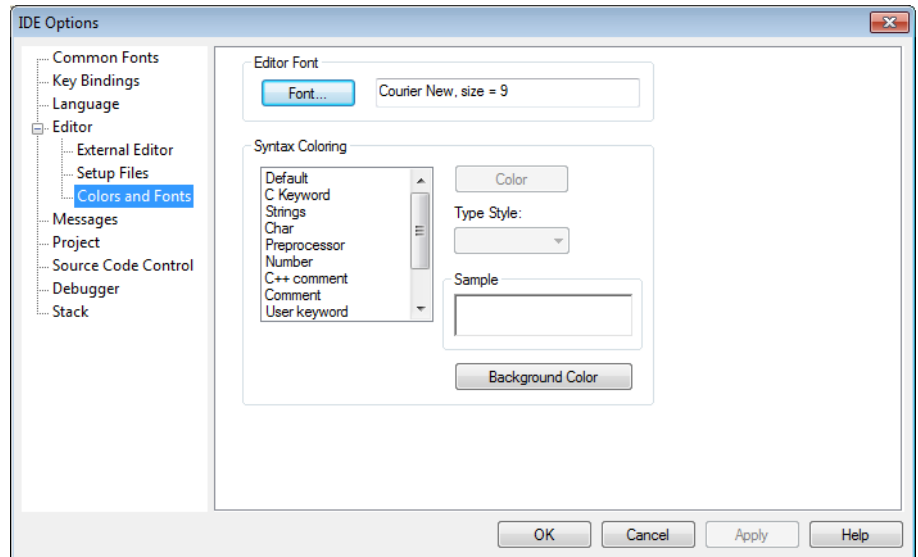


Figure 76: Editor Colors and Fonts options

Use this page to specify the colors and fonts used for text in the editor windows. The keywords controlling syntax highlighting for assembler and C or C++ source code are specified in the files `syntax_icc.cfg` and `syntax_asm.cfg`, respectively. These files are located in the `cpuname\config` directory.

### Editor Font

Click the **Font** button to open the standard **Font** dialog box where you can choose the font and its size to be used in editor windows.

### Syntax Coloring

Selects a syntax element in the list and sets the color and style for it:

- |                   |   |
|-------------------|---|
| <b>Color</b>      | Lists colors to choose from. Choose <b>Custom</b> from the list to define your own color. |
| <b>Type Style</b> | Select <b>Normal</b> , <b>Bold</b> , or <b>Italic</b> style for the selected element.     |
| <b>Sample</b>     | Displays the current appearance of the selected element.                                  |



**Background Color** Click to set the background color of the editor window.

**Note:** The **User keyword** syntax element refers to the keywords that you have listed in the custom keyword file; see *Use Custom Keyword File*, page 151.

## Messages options

The **Messages** options are available by choosing **Tools>Options**.

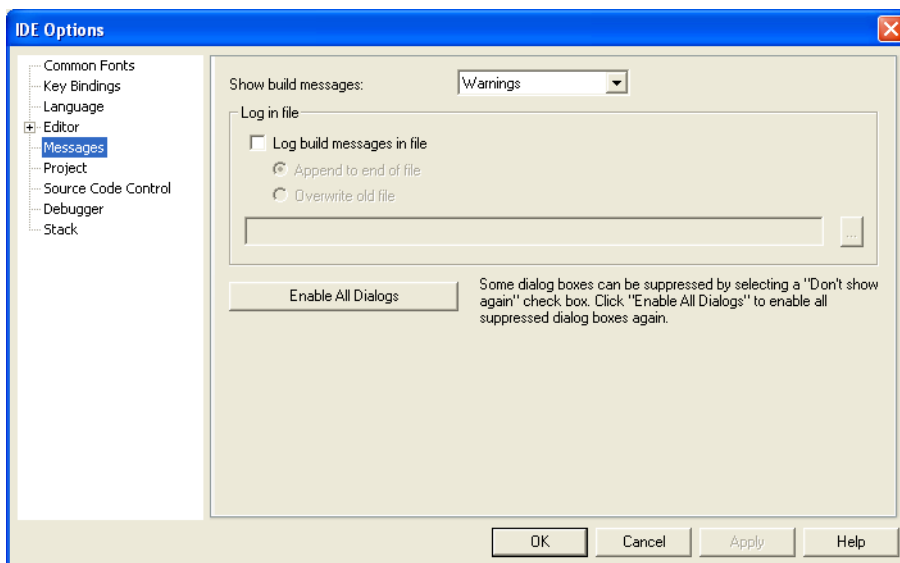


Figure 77: Messages options

Use this page to choose the amount of output in the Build messages window.

### Show build messages

Selects the amount of output to display in the Build messages window. Choose between:

- |                 |  |
|-----------------|--|
| <b>All</b>      | Shows all messages, including compiler and linker information. |
| <b>Messages</b> | Shows messages, warnings, and errors.                          |
| <b>Warnings</b> | Shows warnings and errors.                                     |
| <b>Errors</b>   | Shows errors only.   |

### Log in file

Select the **Log build messages in file** option to write build messages to a log file. Choose between:

**Append to end of file**      Appends the messages at the end of the specified file.

**Overwrite old file**        Replaces the contents in the file you specify.

Type the filename you want to use in the text box. A browse button is available for your convenience.

### Enable All Dialogs

Enables all dialog boxes you have suppressed by selecting a **Don't show again** check box, for example:

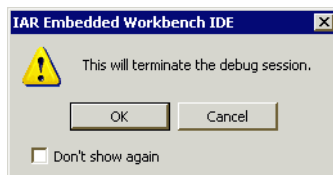


Figure 78: Message dialog box containing a *Don't show again* option

## Project options

The **Project** options are available by choosing **Tools>Options**.

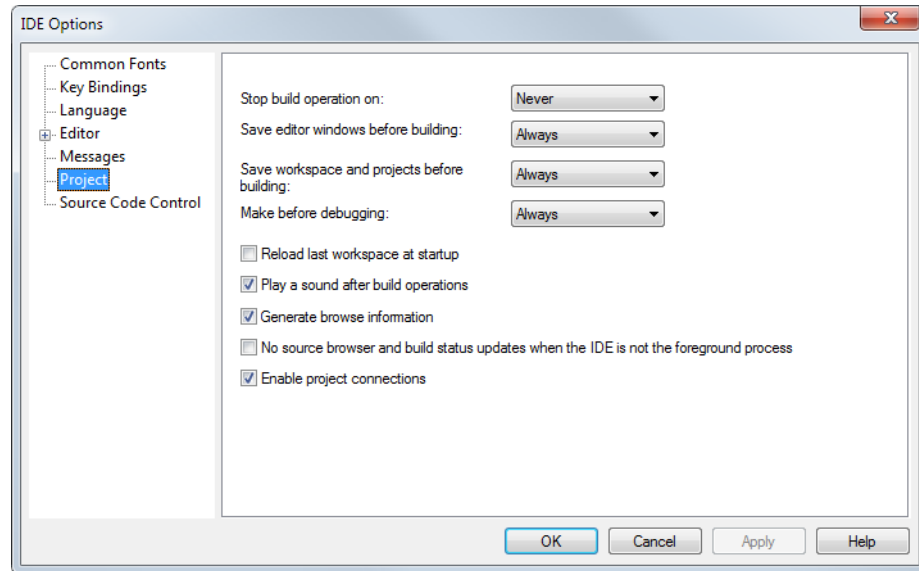


Figure 79: Project options

Use this page to set options for the **Make** and **Build** commands.

### Stop build operation on

Selects when the build operation should stop. Choose between:

<b>Never</b>	Never stops.
<b>Warnings</b>	Stops on warnings and errors.
<b>Errors</b>	Stops on errors.

### Save editor windows before building

Selects when the editor windows should be saved before a build operation. Choose between:

<b>Never</b>	Never saves.
--------------	--------------

<b>Ask</b>	Prompts before saving.
<b>Always</b>	Always saves before Make or Build.

**Save workspace and projects before building**

Selects when a workspace and included projects should be saved before a build operation. Choose between:

<b>Never</b>	Never saves.
<b>Ask</b>	Prompts before saving.
<b>Always</b>	Always saves before Make or Build.

**Make before debugging**

Selects when a Make operation should be performed as you start a debug session. Choose between:

<b>Never</b>	Never performs a Make operation before a debug session.
<b>Ask</b>	Prompts before performing a Make operation.
<b>Always</b>	Always performs a Make operation before a debug session.

**Reload last workspace at startup**

Loads the last active workspace automatically the next time you start the IAR Embedded Workbench IDE.

**Play a sound after build operations**

Plays a sound when the build operations are finished.

**Generate browse information**

Enables the use of the Source Browser window, see *Source Browser window*, page 52.

**Enable project connections**

Enables the support for setting up live project connections, see *Add Project Connection dialog box*, page 133.

### No source browser and build status updates when the IDE is not the foreground process

Halts the source browser when the IDE is not the foreground process. This also means that the build status is no longer updated in the Workspace window. This option is useful for example, if you are using a laptop and want to reduce power consumption.

## Source Code Control options

The **Source Code Control** options are available by choosing **Tools>Options**.

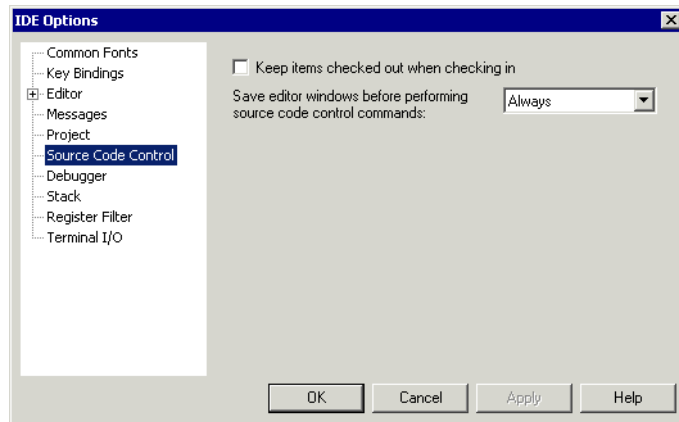


Figure 80: Source Code Control options

Use this page to configure the interaction between an IAR Embedded Workbench project and an SCC project.

### Keep items checked out when checking in

Determines the default setting for the option **Keep Checked Out** in the **Check In Files** dialog box; see *Check In Files dialog box*, page 62.

### Save editor windows before performing source code control commands

Determines whether editor windows should be saved before you perform any source code control commands. Choose between:

- |              |  |
|--------------|--|
| <b>Never</b> | Never saves editor windows before performing any source code control commands. |
| <b>Ask</b>   | Prompts before performing any source code control commands.                    |

**Always**

Always saves editor windows before performing any source code control commands.

## Debugger options

The **Debugger** options are available by choosing **Tools>Options**.

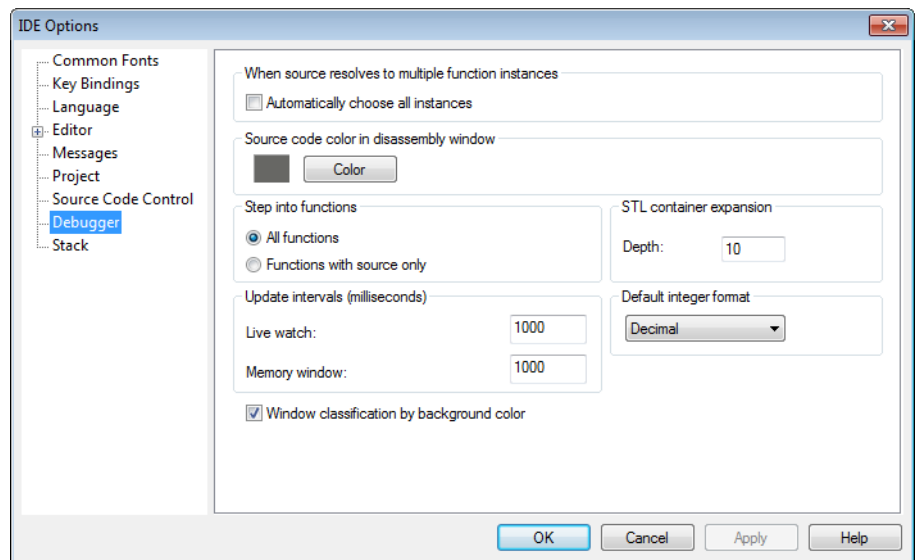


Figure 81: Debugger options

Use this page to configure the debugger environment.

### When source resolves to multiple function instances

Some source code corresponds to multiple code instances, for example template code. When specifying a source location in such code, for example when setting a source breakpoint, you can make C-SPY act on all instances or a subset of instances. Use the **Automatically choose all instances** option to let C-SPY act on all instances without asking first.

### Source code color in disassembly window

Click the **Color** button to select the color for source code in the Disassembly window. To define your own color, choose **Custom** from the list.

### Step into functions

Controls the behavior of the **Step Into** command. Choose between:

**All functions**

Makes the debugger step into all functions.

**Functions with source only**

Makes the debugger step only into functions for which the source code is known. This helps you avoid stepping into library functions or entering disassembly mode debugging.

### STL container expansion

Specify how many elements that are shown initially when a container value is expanded in, for example, the Watch window.

### Update intervals

Specify how often the contents of the Live Watch window and the Memory window are updated.

These text boxes are only available if the C-SPY driver you are using has access to the target system memory while executing your application.

### Default integer format

Selects the default integer format in the Watch, Locals, and related windows.

### Window classification by background color

Toggles background colors in some C-SPY windows on or off. Colors are used for differentiating types of windows; for example, all interrupt-related windows have one background color, and all watch-related windows have another color, etc.

## Stack options

The **Stack** options are available by choosing **Tools>Options** or from the context menu in the Memory window.

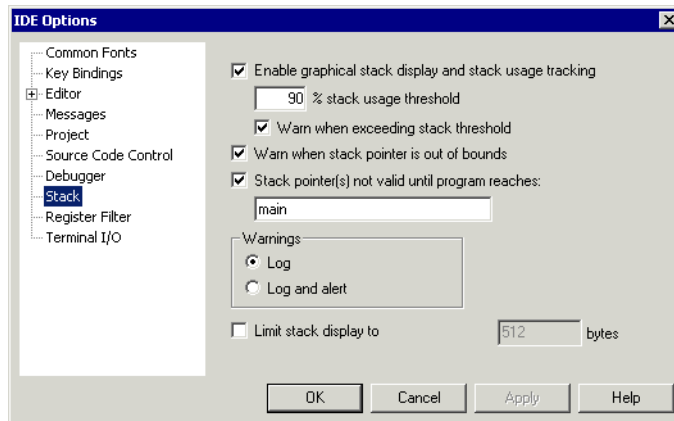


Figure 82: Stack options

Use this page to set options specific to the Stack window.

### Enable graphical stack display and stack usage tracking

Enables the graphical stack bar available at the top of the Stack window. It also enables detection of stack overflows. To read more about the stack bar and the information it provides, see the *C-SPY® Debugging Guide*.

### % stack usage threshold

Specify the percentage of stack usage above which C-SPY should issue a warning for stack overflow.



**Warn when exceeding stack threshold**

Makes C-SPY issue a warning when the stack usage exceeds the threshold specified in the **% stack usage threshold** option.

**Warn when stack pointer is out of bounds**

Makes C-SPY issue a warning when the stack pointer is outside the stack memory range.

**Stack pointer(s) not valid until program reaches**

Specify a *location* in your application code from where you want the stack display and verification to occur. The Stack window will not display any information about stack usage until execution has reached this location.

By default, C-SPY will not track the stack usage before the `main` function. If your application does not have a `main` function, for example, if it is an assembler-only project, you should specify your own start label. If this option is selected, after each reset C-SPY keeps a breakpoint on the given location until it is reached.

Typically, the stack pointer is set up in the system initialization code `cstartup`, but not necessarily from the very first instruction. Select this option to avoid incorrect warnings or misleading stack display for this part of the application.

**Warnings**

Selects where warnings should be issued. Choose between:

<b>Log</b>	Warnings are issued in the Debug Log window.
<b>Log and alert</b>	Warnings are issued in the Debug Log window and as alert dialog boxes.

**Limit stack display to**

Limits the amount of memory displayed in the Stack window by specifying a number of bytes, counting from the stack pointer. This can be useful if you have a big stack or if you are only interested in the topmost part of the stack. Using this option can improve the Stack window performance, especially if reading memory from the target system is slow. By default, the Stack window shows the whole stack, or in other words, from the stack pointer to the bottom of the stack. If the debugger cannot determine the memory range for the stack, the byte limit is used even if the option is not selected.

**Note:** The Stack window does not affect the execution performance of your application, but it might read a large amount of data to update the displayed information when the execution stops.

## Register Filter options

The **Register Filter** options are available by choosing **Tools>Options** when C-SPY is running.

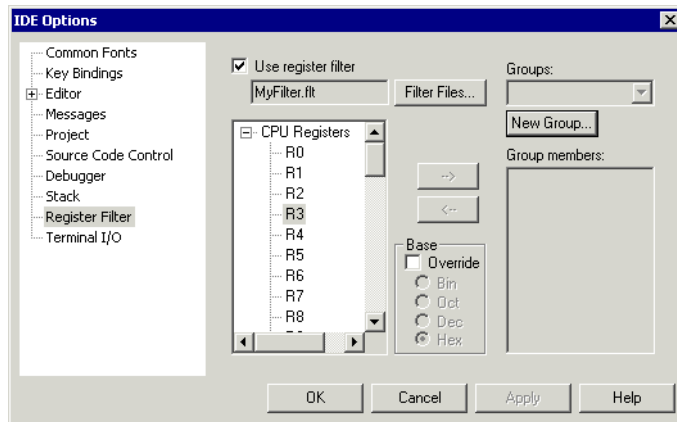


Figure 83: Register Filter options

Use this page to define your own filters for application-specific register groups or to edit predefined filters. The register groups can then be viewed in the Register window.

Defining application-specific register groups minimizes the amount of registers displayed in the Register window and speeds up the debugging.

For more information about register groups, see the *C-SPY® Debugging Guide*.

### To define application-specific register groups:

- 1 Choose **Tools>Options>Register Filter**.

For information about the register filter options, see the *IDE Project Management and Building Guide*.

- 2 Select **Use register filter** and specify the filename and destination of the filter file for your new group in the dialog box that appears.
- 3 Click **New Group** and specify the name of your group, for example My Timer Group.

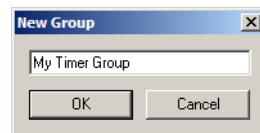


Figure 84: Creating a new register group

- 4 In the register tree view on the Register Filter page, select a register and click the arrow button to add it to your group. Repeat this process for all registers that you want to add to your group.
- 5 Optionally, select any registers for which you want to change the integer base, and choose a suitable base.
- 6 When you are done, click **OK**. Your new group is now available in the Register window.

If you want to add more groups to your filter file, repeat this procedure for each group you want to add.

### **Use register filter**

Enables the use of register filters.

### **Filter Files**

Displays a dialog box where you can select or create a new filter file. The file will be created in the same directory as your active project.

### **Groups**

Lists all available register groups in the filter file, alternatively displays the new register group.

### **New Group**

Click to create a new register group.

### **Group members**

Shows the registers in the group currently selected in the **Groups** drop-down list.

To add registers to the group, select the registers you want to add in the list of all available registers to the left and move them using the arrow button.

To remove registers from the group, select the registers you want to remove and move them using the arrow button.

### **Base**

Overrides the default integer base.

## Terminal I/O options

The **Terminal I/O** options are available by choosing **Tools>Options** when C-SPY is running.

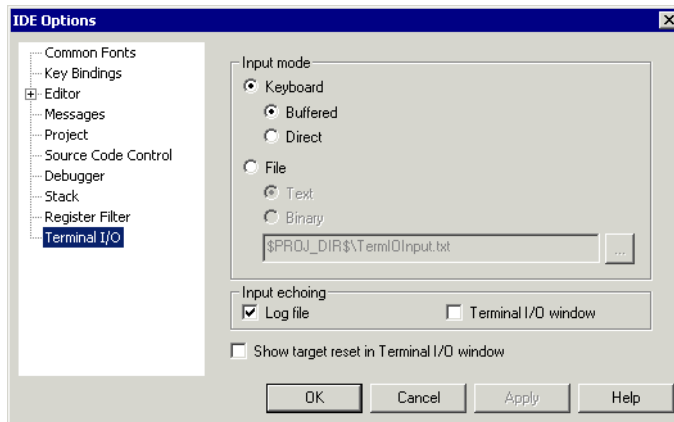


Figure 85: Terminal I/O options

Use this page to configure the C-SPY terminal I/O functionality.

### Input mode

Controls how the terminal I/O input is read.

**Keyboard** Makes the input characters be read from the keyboard. Choose between:

**Buffered:** Buffers input characters.

**Direct:** Does not buffer input characters.

**File** Makes the input characters be read from a file. Choose between:

**Text:** Reads input characters from a text file.

**Binary:** Reads input characters from a binary file.

A browse button is available for locating the input file.

## Input echoing

Determines whether to echo the input characters and where to echo them. The choices are:

- **Log file.** Requires that you have enabled the option **Debug>Logging>Enable log file**.
- **Terminal I/O window.**

## Show target reset in Terminal I/O window

Displays a message in the C-SPY Terminal I/O window when the target resets.

## Configure Tools dialog box

The **Configure Tools** dialog box is available from the **Tools** menu.

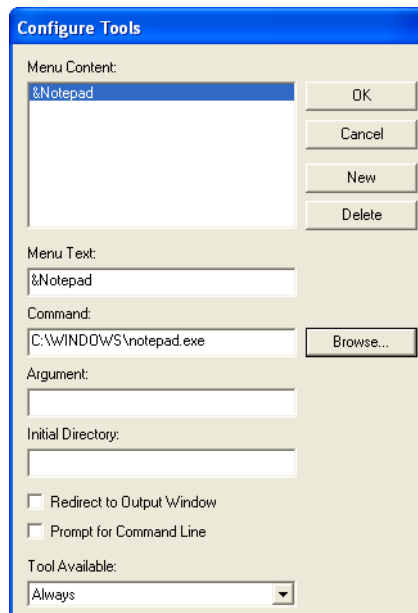


Figure 86: Configure Tools dialog box

Use this dialog box to specify a tool of your choice to add to the **Tools** menu, like this:




Figure 87: Customized Tools menu

**Note:** If you intend to add an external tool to the standard build toolchain, see *Extending the toolchain*, page 72.



You can use variables in the arguments, which allows you to set up useful tools such as interfacing to a command line revision control system, or running an external tool on the selected file.

#### **Adding a command line command or batch file to the Tools menu:**

- 1** Specify or browse to the `cmd.exe` command shell in the **Command** text box.
- 2** Specify the command line command or batch file name in the **Argument** text box.

The **Argument** text should be specified as:

```
/C name
```

where *name* is the name of the command or batch file you want to run.

The `/C` option terminates the shell after execution, to allow the IDE to detect when the tool has finished.

For an example, see *Adding command line commands*, page 32.

#### **New**

Creates a stub for a new menu command for you to configure using this dialog box.

#### **Delete**

Removes the command selected in the **Menu Content** list.

#### **Menu Content**

Lists all menu commands that you have defined.

#### **Menu Text**

Specify the name of the menu command. If you add the `&` sign anywhere in the name, the following letter, `N` in this example, will appear as the mnemonic key for this command. The text you specify will be reflected in the **Menu Content** list.

**Command**

Specify the tool and its path, to be run when you choose the command from the menu. A browse button is available for your convenience.

**Argument**

Optional: Specify an argument for the command.

**Initial Directory**

Specify an initial working directory for the tool.

**Redirect to Output window**

Makes the IDE send any console output from the tool to the **Tool Output** page in the message window. Tools that are launched with this option cannot receive any user input, for instance input from the keyboard.

Tools that *require* user input or make special assumptions regarding the console that they execute in, will *not* work at all if launched with this option.

**Prompt for Command Line**

Makes the IDE prompt for the command line argument when the command is chosen from the **Tools** menu.

**Tool Available**

Specifies in which context the tool should be available. Choose between:

- **Always**
- **When debugging**
- **When not debugging.**

## Filename Extensions dialog box

The **Filename Extensions** dialog box is available from the **Tools** menu.

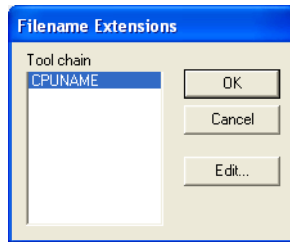


Figure 88: *Filename Extensions dialog box*

Use this dialog box to customize the filename extensions recognized by the build tools. This is useful if you have many source files with different filename extensions.

### Toolchain

Lists the toolchains for which you have an IAR Embedded Workbench installed on your host computer. Select the toolchain you want to customize filename extensions for.

Note the \* character which indicates user-defined overrides. If there is no \* character, factory settings are used.

### Edit

Displays the **Filename Extension Overrides** dialog box; see *Filename Extension Overrides dialog box*, page 169.



## Filename Extension Overrides dialog box

The **Filename Extension Overrides** dialog box is available from the **Filename Extensions** dialog box.

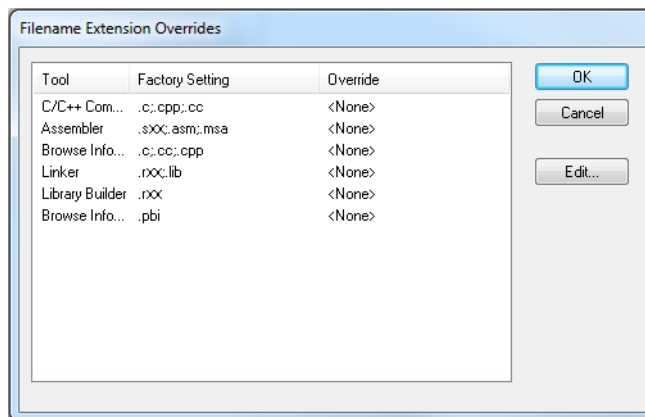


Figure 89: Filename Extension Overrides dialog box

**Note:** The filename extensions depend on the object file format used by your product, either UBROF or ELF/DWARF. This screenshot reflects the filename extensions for the UBROF object file format.

This dialog box lists filename extensions recognized by the build tools.

### Display area

This area contains these columns:

- Tool** The available tools in the build chain.
- Factory Setting** The filename extensions recognized by default by the build tool.
- Override** The filename extensions recognized by the build tool if there are overrides to the default setting.

### Edit

Displays the **Edit Filename Extensions** dialog box for the selected tool.

## Edit Filename Extensions dialog box

The **Edit File Extensions** dialog box is available from the **Filename Extension Overrides** dialog box.

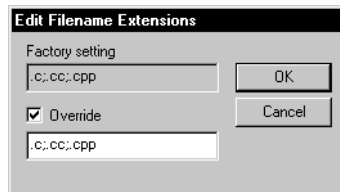


Figure 90: Edit Filename Extensions dialog box

This dialog box lists the filename extensions recognized by the IDE and lets you add new filename extensions.

### Factory setting

Lists the filename extensions recognized by default.

### Override

Specify the filename extensions you want to be recognized. Extensions can be separated by commas or semicolons, and should include the leading period.

## Configure Viewers dialog box

The **Configure Viewers** dialog box is available from the **Tools** menu.

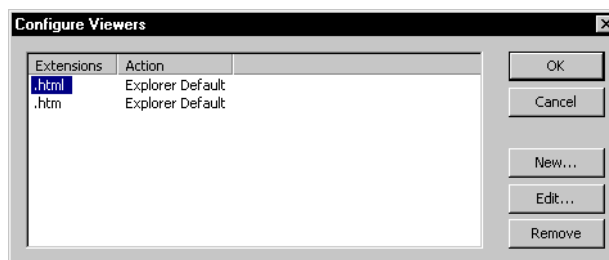


Figure 91: Configure Viewers dialog box

This dialog box lists overrides to the default associations between the document formats that IAR Embedded Workbench can handle and viewer applications.

## Display area

This area contains these columns:

<b>Extensions</b>	Explicitly defined filename extensions of document formats that IAR Embedded Workbench can handle.
<b>Action</b>	The viewer application that is used for opening the document type. <code>Explorer Default</code> means that the default application associated with the specified type in Windows Explorer is used.

## New

Displays the **Edit Viewer Extensions** dialog box; see *Edit Viewer Extensions dialog box*, page 171.

## Edit

Displays the **Edit Viewer Extensions** dialog box; see *Edit Viewer Extensions dialog box*, page 171.

## Delete

Removes the association between the selected filename extensions and the viewer application.

## Edit Viewer Extensions dialog box

The **Edit Viewer Extensions** dialog box is available from the **Configure Viewers** dialog box.

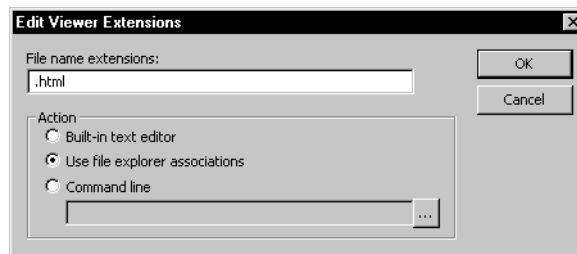


Figure 92: Edit Viewer Extensions dialog box

Use this dialog box to specify how to open a new document type or edit the setting for an existing document type.

### File name extensions

Specify the filename extension for the document type—including the separating period (.).

### Action

Selects how to open documents with the filename extension specified in the **Filename extensions** text box. Choose between:

<b>Built-in text editor</b>	Opens all documents of the specified type with the IAR Embedded Workbench text editor.
<b>Use file explorer associations</b>	Opens all documents of the specified type with the default application associated with the specified type in Windows Explorer.
<b>Command line</b>	Opens all documents of the specified type with the viewer application you type or browse your way to. You can give any command line options you would like to the tool.

## Window menu

The **Window** menu provides commands for manipulating the IDE windows and changing their arrangement on the screen.




Figure 93: Window menu

The last section of the **Window** menu lists the currently open windows. Choose the window you want to switch to.

These commands are available:

<b>Close Tab</b>	Closes the active tab.
<b>Close Window</b> Ctrl+F4	Closes the active editor window.
<b>Split</b>	Splits an editor window horizontally or vertically into two or four panes, which means that you can see more parts of a file simultaneously.
<b>New Vertical Editor Window</b>	Opens a new empty window next to the current editor window.
<b>New Horizontal Editor Window</b>	Opens a new empty window under the current editor window.
<b>Move Tabs To Next Window</b>	Moves all tabs in the current window to the next window.
<b>Move Tabs To Previous Window</b>	Moves all tabs in the current window to the previous window.
<b>Close All Tabs Except Active</b>	Closes all the tabs except the active tab.
<b>Close All Editor Tabs</b>	Closes all tabs currently available in editor windows.

## Help menu

The **Help** menu provides help about IAR Embedded Workbench and displays the version numbers of the user interface and of the IDE.

You can also access the Information Center from the **Help** menu. The Information Center is an integrated navigation system that gives easy access to the information resources you need to get started and during your project development: tutorials, example projects, user guides, support information, and release notes. It also provides shortcuts to useful sections on the IAR Systems web site.



# Glossary

This is a general glossary for terms relevant to embedded systems programming. Some of the terms do not apply to the IAR Embedded Workbench® version that you are using.

## A

### Absolute location

A specific memory address for an object specified in the source code, as opposed to the object being assigned a location by the linker.

### Absolute segments

Segments that have fixed locations in memory before linking.

### Address expression

An expression which has an address as its value.

### AEABI

Embedded Application Binary Interface for ARM, defined by ARM Limited.

### Application

The program developed by the user of the IAR Systems toolkit and which will be run as an embedded application on a target processor.

### Ar

The GNU binary utility for creating, modifying, and extracting from archives, that is, libraries. See also *larchive*.

### Architecture

A term used by computer designers to designate the structure of complex information-processing systems. It includes the kinds of instructions and data used, the memory organization and addressing, and the methods by which the system is implemented. The two main architecture types used in processor design are *Harvard architecture* and *von Neumann architecture*.

### Archive

See *Library*.

### Assembler directives

The set of commands that control how the assembler operates.

### Assembler language

A machine-specific set of mnemonics used to specify operations to the target processor and input or output registers or data areas. Assembler language might sometimes be preferred over C/C++ to save memory or to enhance the execution speed of the application.

### Assembler options

Parameters you can specify to change the default behavior of the assembler.

### Attributes

See *Section attributes (ILINK)*.

### Auto variables

The term refers to the fact that each time the function in which the variable is declared is called, a new instance of the variable is created automatically. This can be compared with the behavior of local variables in systems using static overlay, where a local variable only exists in one instance, even if the function is called recursively. Also called local variables. Compare *Register variables*.

## B

### Backtrace

Information for keeping call frame information up to date so that the IAR C-SPY® Debugger can return from a function correctly. See also *Call frame information*.

### Bank

See *Memory bank*.

### Bank switching

Switching between different sets of memory banks. This software technique increases a computer's usable memory by allowing different pieces of memory to occupy the same address space.

**Banked code**

Code that is distributed over several banks of memory. Each function must reside in only one bank.

**Banked data**

Data that is distributed over several banks of memory. Each data object must fit inside one memory bank.

**Banked memory**

Has multiple storage locations for the same address. See also *Memory bank*.

**Bank-switching routines**

Code that selects a memory bank.

**Batch files**

A text file containing operating system commands which are executed by the command line interpreter. In Unix, this is called a “shell script” because it is the Unix shell which includes the command line interpreter. Batch files can be used as a simple way to combine existing commands into new commands.

**Bitfield**

A group of bits considered as a unit.

**Block, in linker configuration file (ILINK)**

A continuous piece of code or data. It is either built up of blocks, overlays, and sections or it is empty. A block has a name, and the start and end address of the block can be referred to from the application. It can have attributes such as a maximum size, a specific size, or a minimum alignment. The contents can have a specific order or not.

**Breakpoint**

1. Code breakpoint. A point in a program that, when reached, triggers some special behavior useful to the process of debugging. Generally, breakpoints are used for stopping program execution or dumping the values of some or all of the program variables. Breakpoints can be part of the program itself, or they can be set by the programmer as part of an interactive session with a debugging tool for scrutinizing the program's execution.

2. Data breakpoint. A point in memory that, when accessed, triggers some special behavior useful to the process of debugging. Generally, data breakpoints are used to stop program execution when an address location is accessed either by a read operation or a write operation.

3. Immediate breakpoint. A point in memory that, when accessed, trigger some special behavior useful in the process of debugging. Immediate breakpoints are generally used for halting the program execution in the middle of a memory access instruction (before or after the actual memory access depending on the access type) while performing some user-specified action. The execution is then resumed. This feature is only available in the simulator version of C-SPY.

## C

**Call frame information**

Information that allows the IAR C-SPY® Debugger to show, without any runtime penalty, the complete stack of function calls—*call stack*—wherever the program counter is, provided that the code comes from compiled C functions. See also *Backtrace*.

**Calling convention**

A calling convention describes the way one function in a program calls another function. This includes how register parameters are handled, how the return value is returned, and which registers that will be preserved by the called function. The compiler handles this automatically for all C and C++ functions. All code written in assembler language must conform to the rules in the calling convention to be callable from C or C++, or to be able to call C and C++ functions. The C calling convention and the C++ calling conventions are not necessarily the same.

**Cheap**

As in *cheap memory access*. A cheap memory access either requires few cycles to perform, or few bytes of code to implement. A cheap memory access is said to have a low cost. See *Memory access cost*.



**Checksum**

A computed value which depends on the ROM content of the whole or parts of the application, and which is stored along with the application to detect corruption of the data. The checksum is produced by the linker to be verified with the application. Several algorithms are supported. Compare *CRC* (*cyclic redundancy checking*).

**Code banking**

See *Banked code*.

**Code model**

The code model controls how code is generated for an application. Typically, the code model controls behavior such as how functions are called and in which code segment/section functions will be located. All object files of an application must be compiled using the same code model.

**Code pointers**

A code pointer is a function pointer. As many microcontrollers allow several different methods of calling a function, compilers for embedded systems usually provide the users with the ability to use all these methods.

Do not confuse code pointers with data pointers.

**Code segments/sections**

Read-only segments/sections that contain code. See also *Segment* (*XLINK*) and *Section* (*ILINK*).

**Compilation unit**

See *Translation unit*.

**Compiler function directives (XLINK)**

The compiler function directives are generated by the compiler to pass information about functions and function calls to the IAR XLINK Linker. To view these directives, you must create an assembler list file. These directives are primarily intended for compilers that support static overlay, a feature which is useful in smaller microcontrollers.

**Compiler options**

Parameters you can specify to change the default behavior of the compiler.

**Context menu**

A context menu appears when you right-click in the user interface, and provides context-specific menu commands.

**Cost**

See *Memory access cost*.

**CRC (cyclic redundancy checking)**

A number derived from, and stored with, a block of data to detect corruption. A CRC is based on polynomials and is a more advanced way of detecting errors than a simple arithmetic checksum. Compare *Checksum*.

**C-SPY options**

Parameters you can specify to change the default behavior of the IAR C-SPY Debugger.

**Cstartup**

Code that sets up the system before the application starts executing.

**C-style preprocessor**

A preprocessor is either a stand-alone application or an integrated part of a compiler, that performs preprocessing of the input stream before the actual compilation occurs. A C-style preprocessor follows the rules set up in Standard C and implements commands like `#define`, `#if`, and `#include`, which are used to handle textual macro substitution, conditional compilation, and inclusion of other files.

## D

**Data banking**

See *Banked data*.

**Data model**

The data model specifies the default memory type. This means that the data model typically controls one or more of the following: The method used and the code generated to access static and global variables, dynamically allocated data, and the runtime stack. It also controls the default pointer type and in

which data segments/sections static and global variables will be located. A project can only use one data model at a time, and the same model must be used by all user modules and all library modules in the project.

### Data pointers

Many microcontrollers have different addressing modes to access different memory types or address spaces. Compilers for embedded systems usually have a set of different data pointer types so they can access the available memory efficiently.

### Data representation

How different data types are laid out in memory and what value ranges they represent.

### Declaration

A specification to the compiler that an object, a variable or function, exists. The object itself must be defined in exactly one translation unit (source file). An object must either be declared or defined before it is used. Normally an object that is used in many files is defined in one source file. A declaration is normally placed in a header file that is included by the files that use the object.

For example:

```
/* Variable "a" exists somewhere. Function
   "b" takes two int parameters and returns an
   int. */

extern int a;
int b(int, int);
```

### Definition

The variable or function itself. Only one definition can exist for each variable or function in an application. See also *Tentative definition*.

For example:

```
int a;
int b(int x, int y)
{
    return x + y;
}
```

### Demangling (ILINK)

To restore a mangled name to the more common C/C++ name. See also *Mangling (ILINK)*.

### Device description file

A file used by C-SPY that contains various device-specific information such as I/O register (SFR) definitions, interrupt vectors, and control register definitions.

### Device driver

Software that provides a high-level programming interface to a particular peripheral device.

### Digital signal processor (DSP)

A device that is similar to a microprocessor, except that the internal CPU is optimized for use in applications involving discrete-time signal processing. In addition to standard microprocessor instructions, digital signal processors usually support a set of complex instructions to perform common signal-processing computations quickly.

### Disassembly window

A C-SPY window that shows the memory contents disassembled as machine instructions, interspersed with the corresponding C source code (if available).

### DWARF

An industry-standard debugging format which supports source level debugging. This is the format used by the IAR ILINK Linker for representing debug information in an object.

### Dynamic initialization

Variables in a program written in C are initialized during the initial phase of execution, before the main function is called. These variables are always initialized with a static value, which is determined either at compile time or at link time. This is called static initialization. In C++, variables might require initialization to be performed by executing code, for example, running the constructor of global objects, or performing dynamic memory allocation.

**Dynamic memory allocation**

There are two main strategies for storing variables: statically at link time, or dynamically at runtime. Dynamic memory allocation is often performed from the heap and it is the size of the heap that determines how much memory that can be used for dynamic objects and variables. The advantage of dynamic memory allocation is that several variables or objects that are not active at the same time can be stored in the same memory, thus reducing the memory requirements of an application. See also *Heap memory*.

**Dynamic object**

An object that is allocated, created, destroyed, and released at runtime. Dynamic objects are almost always stored in memory that is dynamically allocated. Compare *Static object*.

**E****EEPROM**

Electrically Erasable, Programmable Read-Only Memory. A type of ROM that can be erased electronically, and then be re-programmed.

**ELF**

Executable and Linking Format, an industry-standard object file format. This is the format used by the IAR ILINK Linker. The debug information is formatted using DWARF.

**Embedded C++**

A subset of the C++ programming language, which is intended for embedded systems programming. The fact that performance and portability are particularly important in embedded systems development was considered when defining the language.

**Embedded system**

A combination of hardware and software, designed for a specific purpose. Embedded systems are often part of a larger system or product.

**Emulator**

An emulator is a hardware device that performs emulation of one or more derivatives of a processor family. An emulator can often be used instead of the actual microcontroller and connects directly to the printed circuit board—where the microcontroller would have been connected—via a connecting device. An emulator always behaves exactly as the processor it emulates, and is used when debugging requires all systems actuators, or when debugging device drivers.

**Enea OSE Load module format**

A specific ELF format that is loadable by the OSE operating system. See also *ELF*.

**Enumeration**

A type which includes in its definition an exhaustive list of possible values for variables of that type. Common examples include Boolean, which takes values from the list [true, false], and day-of-week which takes values [Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday]. Enumerated types are a feature of typed languages, including C and Ada.

Characters, (fixed-size) integers, and even floating-point types might be (but are not usually) considered to be (large) enumerated types.

**EPROM**

Erasable, Programmable Read-Only Memory. A type of ROM that can be erased by exposing it to ultraviolet light, and then be re-programmed.

**Executable image**

Contains the executable image; the result of linking several relocatable object files and libraries. The file format used for an object file is UBROF for XLINK and for ILINK, ELF with embedded DWARF for debug information.

**Exceptions**

An exception is an interrupt initiated by the processor hardware, or hardware that is tightly coupled with the processor, for instance, a memory management unit (MMU). The exception signals a violation of the rules of the architecture (access to protected memory), or an extreme error condition (division by zero).

Do not confuse this use of the word exception with the term *exception* used in the C++ language (but not in Embedded C++).

### **Expensive**

As in *expensive memory access*. An expensive memory access either requires many cycles to perform, or many bytes of code to implement. An expensive memory access is said to have a high cost. See *Memory access cost*.

### **Extended keywords**

Non-standard keywords in C and C++. These usually control the definition and declaration of objects (that is, data and functions). See also *Keywords*.

## **F**

### **Filling**

How to fill up bytes—with a specific fill pattern—that exists between the segments/sections in an executable image. These bytes exist because of the alignment demands on the segments/sections.

### **Format specifiers**

Used to specify the format of strings sent by library functions such as `printf`. In the following example, the function call contains one format string with one format specifier, `%c`, that prints the value of `a` as a single ASCII character:

```
printf("a = %c", a);
```

## **G**

### **General options**

Parameters you can specify to change the default behavior of all tools that are included in the IDE.

### **Generic pointers**

Pointers that have the ability to point to all different memory types in, for example, a microcontroller based on the Harvard architecture.

## **H**

### **Harvard architecture**

A microcontroller based on the Harvard architecture has separate data and instruction buses. This allows execution to occur in parallel. As an instruction is being fetched, the current instruction is executing on the data bus. Once the current instruction is complete, the next instruction is ready to go. This theoretically allows for much faster execution than a von Neumann architecture, but adds some silicon complexity. Compare *von Neumann architecture*.

### **Heap memory**

The heap is a pool of memory in a system that is reserved for dynamic memory allocation. An application can request parts of the heap for its own use; once memory is allocated from the heap it remains valid until it is explicitly released back to the heap by the application. This type of memory is useful when the number of objects is not known until the application executes. Note that this type of memory is risky to use in systems with a limited amount of memory or systems that are expected to run for a very long time.

### **Heap size**

Total size of memory that can be dynamically allocated.

### **Host**

The computer that communicates with the target processor. The term is used to distinguish the computer on which the debugger is running from the microcontroller the embedded application you develop runs on.

## **I**

### **Iarchive**

The IAR Systems utility for creating archives, that is, libraries. Iarchive is delivered with IAR Embedded Workbench.

### **IDE (integrated development environment)**

A programming environment with all necessary tools integrated into one single application.

**lelfdumpcpu`name`**

The IAR Systems utility for creating a text representation of the contents of ELF relocatable or executable image.

**lelftool**

The IAR Systems utility for performing various transformations on an ELF executable image, such as fill, checksum, and format conversion.

**ILINK**

The IAR ILINK Linker which produces absolute output in the ELF/DWARF format.

**ILINK configuration**

The definition of available physical memories and the placement of sections—pieces of code and data—into those memories. ILINK requires a configuration to build an executable image.

**Image**

See *Executable image*.

**Include file**

A text file which is included into a source file. This is often done by the preprocessor.

**Initialization setup in linker configuration file (ILINK)**

Defines how to initialize RAM sections with their initializers. Normally, only non-constant non-noinit variables are initialized but, for example, pieces of code can be initialized as well.

**Initialized segments/sections**

Read-write segments/sections that should be initialized with specific values at startup. See also *Segment (XLINK)* and *Section (ILINK)*.

**Inline assembler**

Assembler language code that is inserted directly between C statements.

**Inlining**

An optimization that replaces function calls with the body of the called function. This optimization increases the execution speed and can even reduce the size of the generated code.

**Instruction mnemonics**

A word or acronym used in assembler language to represent a machine instruction. Different processors have different instruction sets and therefore use a different set of mnemonics to represent them, such as, ADD, BR (branch), BLT (branch if less than), MOVE, LDR (load register).

**Interrupt vector**

A small piece of code that will be executed, or a pointer that points to code that will be executed when an interrupt occurs.

**Interrupt vector table**

A table containing interrupt vectors, indexed by interrupt type. This table contains the processor's mapping between interrupts and interrupt service routines and must be initialized by the programmer.

**Interrupts**

In embedded systems, the use of interrupts is a method of detecting external events immediately, for example a timer overflow or the pressing of a button.

Interrupts are asynchronous events that suspend normal processing and temporarily divert the flow of control through an “interrupt handler” routine. Interrupts can be caused by both hardware (I/O, timer, machine check) and software (supervisor, system call or trap instruction). Compare *Trap*.

**Intrinsic**

An adjective describing native compiler objects, properties, events, and methods.

**Intrinsic functions**

1. Function calls that are directly expanded into specific sequences of machine code. 2. Functions called by the compiler for internal purposes (that is, floating-point arithmetic etc.).

**lobjmanip**

The IAR Systems utility for performing low-level manipulation of ELF object files.

# K

## Key bindings

Key shortcuts for menu commands used in the IDE.

## Keywords

A fixed set of symbols built into the syntax of a programming language. All keywords used in a language are reserved—they cannot be used as identifiers (in other words, user-defined objects such as variables or procedures). See also *Extended keywords*.

# L

## L-value

A value that can be found on the left side of an assignment and thus be changed. This includes plain variables and de-referenced pointers. Expressions like  $(x + 10)$  cannot be assigned a new value and are therefore not L-values.

## Language extensions

Target-specific extensions to the C language.

## Library

See *Runtime library*.

## Library configuration file

A file that contains a configuration of the runtime library. The file contains information about what functionality is part of the runtime environment. The file is used for tailoring a build of a runtime library. See also *Runtime library*.

## Linker configuration file (XLINK)

A file used by the IAR XLINK Linker. It contains command line options which specify the locations where the memory segments can be placed, thereby assuring that your application fits on the target chip.

Because many of the chip-specific details are specified in the linker configuration file and not in the source code, the linker configuration file also helps to make the code portable.

In particular, the linker specifies the placement of segments, the stack size, and the heap size.

## Linker configuration file (ILINK)

A file that contains a configuration used by the IAR ILINK Linker when building an executable image. See also *ILINK configuration*.

## Local variable

See *Auto variables*.

## Location counter

See *Program location counter (PLC)*.

## Logical address

See *Virtual address (logical address)*.

# M

## MAC (Multiply and accumulate)

A special instruction, or on-chip device, that performs a multiplication together with an addition. This is very useful when performing signal processing where many filters and transforms have the form:

$$y_j = \sum_{i=0}^N c_i \cdot x_{i+j}$$

The accumulator of the MAC usually has a higher precision (more bits) than normal registers. See also *Digital signal processor (DSP)*.

## Macro

1. Assembler macros are user-defined sets of assembler lines that can be expanded later in the source file by referring to the given macro name. Parameters will be substituted if referred to.
2. C macro. A text substitution mechanism used during preprocessing of source files. Macros are defined using the `#define` preprocessing directive. The replacement text of each macro is then substituted for any occurrences of the macro name in the rest of the translation unit.

3. C-SPY macros are programs that you can write to enhance the functionality of C-SPY. A typical application of C-SPY macros is to associate them with breakpoints; when such a breakpoint is hit, the macro is run and can for example be used to simulate peripheral devices, to evaluate complex conditions, or to output a trace.

The C-SPY macro language is like a simple dialect of C, but is less strict with types.

### **Mailbox**

A mailbox in an RTOS is a point of communication between two or more tasks. One task can send messages to another task by placing the message in the mailbox of the other task. Mailboxes are also known as message queues or message ports.

### **Mangling (ILINK)**

Mangling is a technique used for mapping a complex C/C++ name into a simple name. Both mangled and unmangled names can be produced for C/C++ symbols in ILINK messages.

### **Memory, in linker configuration file (ILINK)**

A physical memory. The number of units it contains and how many bits a unit consists of, are defined in the linker configuration file. The memory is always addressable from  $0 \times 0$  to size -1.

### **Memory access cost**

The cost of a memory access can be in clock cycles, or in the number of bytes of code needed to perform the access. A memory which requires large instructions or many instructions is said to have a higher access cost than a memory which can be accessed with few, or small instructions.

### **Memory area**

A region of the memory.

### **Memory bank**

The smallest unit of continuous memory in banked memory. One memory bank at a time is visible in a microcontroller's physical address space.

### **Memory map**

A map of the different memory areas available to the microcontroller.

### **Memory model**

Specifies the memory hierarchy and how much memory the system can handle. Your application must use only one memory model at a time, and the same model must be used by all user modules and all library modules.

### **Microcontroller**

A microprocessor on a single integrated circuit intended to operate as an embedded system. In addition to a CPU, a microcontroller typically includes small amounts of RAM, PROM, timers, and I/O ports.

### **Microprocessor**

A CPU contained on one (or a few) integrated circuits. A single-chip microprocessor can include other components such as memory, memory management, caches, floating-point unit, I/O ports and timers. Such devices are also known as microcontrollers.

### **Module**

An object. An object file contains a module and library contains one or more objects. The basic unit of linking. A module contains definitions for symbols (exports) and references to external symbols (imports). When you compile C/C++, each translation unit produces one module.

### **Multi-file compilation**

A technique which means that the compiler compiles several source files as one compilation unit, which enables for interprocedural optimizations such as inlining, cross call, and cross jump on multiple source files in a compilation unit.

## **N**

### **Nested interrupts**

A system where an interrupt can be interrupted by another interrupt is said to have nested interrupts.

### **Non-banked memory**

Has a single storage location for each memory address in a microcontroller's physical address space.

### **Non-initialized memory**

Memory that can contain any value at reset, or in the case of a soft reset, can remember the value it had before the reset.

### **No-init segments/sections**

Read-write segments/sections that should not be initialized at startup. See also *Segment (XLINK)* and *Section (ILINK)*.

### **Non-volatile storage**

Memory devices such as battery-backed RAM, ROM, magnetic tape and magnetic disks that can retain data when electric power is shut off. Compare *Volatile storage*.

### **NOP**

No operation. This is an instruction that does not do anything, but is used to create a delay. In pipelined architectures, the `NOP` instruction can be used for synchronizing the pipeline. See also *Pipeline*.

## **O**

### **Objcopy**

A GNU binary utility for converting an absolute object file in ELF format into an absolute object file, for example the format `Motorola-std` or `Intel-std`. See also *lelftool*.

### **Object**

An object file or a library member.

### **Object file, absolute**

See *Executable image*.

### **Object file, relocatable**

The result of compiling or assembling a source file. The file format used for an object file is `UBROF` for `XLINK` and for `ILINK`, ELF with embedded `DWARF` for debug information.

### **Operator**

A symbol used as a function, with infix syntax if it has two arguments (+, for example) or prefix syntax if it has only one (for instance, bitwise negation, ~). Many languages use operators for built-in functions such as arithmetic and logic.

### **Operator precedence**

Each operator has a precedence number assigned to it that determines the order in which the operator and its operands are evaluated. The highest precedence operators are evaluated first. Use parentheses to group operators and operands to control the order in which the expressions are evaluated.

### **Options**

A set of commands that control the behavior of a tool, for example the compiler or linker. The options can be specified on the command line or via the IDE.

### **Output image**

See *Executable image*.

### **Overlay, in linker configuration file (ILINK)**

Like a block, but it contains several overlaid entities, each built up of blocks, overlays, and sections. The size of an overlay is determined by its largest constituent.

## **P**

### **Parameter passing**

See *Calling convention*.

### **Peripheral unit**

A hardware component other than the processor, for example memory or an I/O device.

### **Pipeline**

A structure that consists of a sequence of stages through which a computation flows. New operations can be initiated at the start of the pipeline even though other operations are already in progress through the pipeline.



**Placement, in linker configuration file (ILINK)**

How to place blocks, overlays, and sections into a region. It determines how pieces of code and data are actually placed in the available physical memory.

**Pointer**

An object that contains an address to another object of a specified type.

**#pragma**

During compilation of a C/C++ program, the `#pragma` preprocessing directive causes the compiler to behave in an implementation-defined manner. This can include, for example, producing output on the console, changing the declaration of a subsequent object, changing the optimization level, or enabling/disabling language extensions.

**Pre-emptive multitasking**

An RTOS task is allowed to run until a higher priority process is activated. The higher priority task might become active as the result of an interrupt. The term preemptive indicates that although a task is allotted to run a given length of time (a timeslice), it might lose the processor at any time. Each time an interrupt occurs, the task scheduler looks for the highest priority task that is active and switches to that task. If the located task is different from the task that was executing before the interrupt, the previous task is suspended at the point of interruption.

Compare *Round Robin*.

**Preprocessing directives**

A set of directives that are executed before the parsing of the actual code is started.

**Preprocessor**

See *C-style preprocessor*.

**Processor variant**

The different chip setups that the compiler supports.

**Program counter (PC)**

A special processor register that is used to address instructions. Compare *Program location counter (PLC)*.

**Program location counter (PLC)**

Used in the IAR Assembler to denote the code address of the current instruction. The PLC is represented by a special symbol (typically `$`) that can be used in arithmetic expressions. Also called simply location counter (LC).

**Project**

The user application development project.

**Project options**

General options that apply to an entire project, for example the target processor that the application will run on.

**PROM**

Programmable Read-Only Memory. A type of ROM that can be programmed only once.

**Q****Qualifiers**

See *Type qualifiers*.

**R****Range, in linker configuration file**

A range of consecutive addresses in a memory. A region is built up of ranges.

**Read-only segments/sections**

Segments/sections that contain code or constants. See also *Segment (XLINK)* and *Section (ILINK)*.

**Real-time operating system (RTOS)**

An operating system which guarantees the latency between an interrupt being triggered and the interrupt handler starting, and how tasks are scheduled. An RTOS is typically much smaller than a normal desktop operating system. Compare *Real-time system*.

**Real-time system**

A computer system whose processes are time-sensitive. Compare *Real-time operating system (RTOS)*.

**Region, in linker configuration file**

A set of non-overlapping ranges. The ranges can lie in one or more memories. For ILINK, blocks, overlays, and sections are placed into regions in the linker configuration file. For XLINK, the segments are placed in regions.

**Region expression, in linker configuration file (ILINK)**

A region built up from region literals, regions, and the common set operations possible in the linker configuration file.

**Region literal, in linker configuration file (ILINK)**

A literal that defines a set of one or more non-overlapping ranges in a memory.

**Register**

A small on-chip memory unit, usually just one or a few bytes in size, which is particularly efficient to access and therefore often reserved as a temporary storage area during program execution.

**Register constant**

A register constant is a value that is loaded into a dedicated processor register when the system is initialized. The compiler can then generate code that assumes that the constants are present in the dedicated registers.

**Register locking**

Register locking means that the compiler can be instructed that some processor registers shall not be used during normal code generation. This is useful in many situations. For example, some parts of a system might be written in assembler language to gain speed. These parts might be given dedicated processor registers. Or the register might be used by an operating system, or by other third-party software.

**Register variables**

Typically, register variables are local variables that are placed in registers instead of on the (stack) frame of the function. Register variables are much more efficient than other variables because they do not require memory accesses, so the compiler can use shorter/faster instructions when working with them. See also *Auto variables*.

**Relay**

A synonym to veneer, see *Veneer*.

**Relocatable segments/sections**

Segments/sections that have no fixed location in memory before linking.

**Reset**

A reset is a restart from the initial state of a system. A reset can originate from hardware (hard reset), or from software (soft reset). A hard reset can usually not be distinguished from the power-on condition, which a soft reset can be.

**ROM-monitor**

A piece of embedded software designed specifically for use as a debugging tool. It resides in the ROM of the evaluation board chip and communicates with a debugger via a serial port or network connection. The ROM-monitor provides a set of primitive commands to view and modify memory locations and registers, create and remove breakpoints, and execute your application. The debugger combines these primitives to fulfill higher-level requests like program download and single-step.

**Round Robin**

Task scheduling in an operating system, where all tasks have the same priority level and are executed in turn, one after the other. Compare *Pre-emptive multitasking*.

**RTOS**

See *Real-time operating system (RTOS)*.

**Runtime library**

A collection of relocatable object files that will be included in the executable image only if referred to from an object file, in other words conditionally linked.

**Runtime model attributes**

A mechanism that is designed to prevent modules that are not compatible to be linked into an application. A runtime attribute is a pair constituted of a named key and its corresponding value.

For XLINK, two modules can only be linked together if they have the same value for each key that they both define. ILINK uses the runtime model attributes when automatically choosing a library, to verify that the correct one is used.

**R-value**

A value that can be found on the right side of an assignment. This is just a plain value. See also *L-value*.

**S****Saturation arithmetics**

Most, if not all, C and C++ implementations use  $\text{mod}-2^N$  2-complement-based arithmetics where an overflow wraps the value in the value domain, that is,  $(127 + 1) = -128$ . Saturation arithmetics, on the other hand, does *not* allow wrapping in the value domain, for instance,  $(127 + 1) = 127$ , if 127 is the upper limit. Saturation arithmetics is often used in signal processing, where an overflow condition would have been fatal if value wrapping had been allowed.

**Scheduler**

The part of an RTOS that performs task-switching. It is also responsible for selecting which task that should be allowed to run. Many scheduling algorithms exist, but most of them are either based on static scheduling (performed at compile-time), or on dynamic scheduling (where the actual choice of which task to run next is taken at runtime, depending on the state of the system at the time of the task-switch). Most real-time systems use static scheduling, because it makes it possible to prove that the system will not violate the real-time requirements.

**Scope**

The section of an application where a function or a variable can be referenced by name. The scope of an item can be limited to file, function, or block.

**Section (ILINK)**

An entity that either contains data or text. Typically, one or more variables, or functions. A section is the smallest linkable unit.

**Section attributes (ILINK)**

Each section has a name and an attribute. The attribute defines what a section contains, that is, if the section content is read-only, read/write, code, data, etc.

**Section fragment (ILINK)**

A part of a section, typically a variable or a function.

**Section selection (ILINK)**

In the linker configuration file, defining a set of sections by using section selectors. A section belongs to the most restrictive section selector if it can be part of more than one selection. Three different selectors can be used individually or in conjunction to select the set of sections: *section attribute* (selecting by the section content), *section name* (selecting by the section name), and *object name* (selecting from a specific object).

**Segment (XLINK)**

A chunk of data or code that should be mapped to a physical location in memory. The segment can either be placed in RAM or in ROM.

**Segment map (XLINK)**

A set of segments and their locations. This map is part of the linker list file.

**Segment part (XLINK)**

A part of a segment, typically a variable or a function.

**Semaphore**

A semaphore is a type of flag that is used for guaranteeing exclusive access to resources. The resource can be a hardware port, a configuration memory, or a set of variables. If several tasks must access the same resource, the parts of the code (the critical sections) that access the resource must be made exclusive for every task. This is done by obtaining the semaphore that protects that resource, thus blocking all other tasks from it. If another task wishes to use the resource, it also must obtain the semaphore. If the semaphore is already in use, the second task must wait until the semaphore is released. After the semaphore is released, the second task is allowed to execute and can obtain the semaphore for its own exclusive access.

### Severity level

The level of seriousness of the diagnostic response from the assembler, compiler, or debugger, when it notices that something is wrong. Typical severity levels are remarks, warnings, errors, and fatal errors. A remark just points to a possible problem, while a fatal error means that the programming tool exits without finishing.

### Sharing

A physical memory that can be addressed in several ways. For ILINK, defined in the linker configuration file. For XLINK, the command line option `-U` is used to define it.

### Short addressing

Many microcontrollers have special addressing modes for efficient access to internal RAM and memory mapped I/O. Short addressing is therefore provided as an extended feature by many compilers for embedded systems. See also *Data pointers*.

### Side effect

An expression in C or C++ is said to have a side-effect if it changes the state of the system. Examples are assignments to a variable, or using a variable with the post-increment operator. The C and C++ standards state that a variable that is subject to a side-effect should not be used more than once in an expression. As an example, this statement violates that rule:

```
*d++ = *d;
```

### Signal

Signals provide event-based communication between tasks. A task can wait for one or more signals from other tasks. Once a task receives a signal it waits for, execution continues. A task in an RTOS that waits for a signal does not use any processing time, which allows other tasks to execute.

### Simple format

The Simple output format is a format that supplies the bytes of the application in a way that is easy to manipulate. If you want to modify the contents of some addresses in the application but the standard linker options are not sufficient, use the Simple output format. Generate the application in the Simple format and then write a small utility (example source code is delivered with XLINK) that modifies the output.

### Simulator

A debugging tool that runs on the host and behaves as similar to the target processor as possible. A simulator is used for debugging the application when the hardware is unavailable, or not needed for proper debugging. A simulator is usually not connected to any physical peripheral devices. A simulated processor is often slower, or even much slower, than the real hardware.

### Single stepping

Executing one instruction or one C statement at a time in the debugger.

### Skeleton code

An incomplete code framework that allows the user to specialize the code.

### Special function register (SFR)

A register that is used to read and write to the hardware components of the microcontroller.

### Stack frames

Data structures containing data objects like preserved registers, local variables, and other data objects that must be stored temporary for a particular scope (usually a function).

Earlier compilers usually had a fixed size and layout on a stack frame throughout a complete function, while modern compilers might have a very dynamic layout and size that can change anywhere and anytime in a function.

### Stack segments/sections

The segment/section or segments/sections that reserve space for the stack(s). Most processors use the same stack for calls and parameters, but some have separate stacks.

### Standard libraries

The C and C++ library functions as specified by the C and C++ standard, and support routines for the compiler, like floating-point routines.

### Static object

An object whose memory is allocated at link-time and is created during system startup (or at first use). Compare *Dynamic object*.

**Static overlay (XLINK)**

Instead of using a dynamic allocation scheme for parameters and auto variables, the linker allocates space for parameters and auto variables at link time. This generates a worst-case scenario of stack usage, but might be preferable for small chips with expensive stack access or no stack access at all.

**Statically allocated memory**

This kind of memory is allocated once and for all at link-time, and remains valid all through the execution of the application. Variables that are either global or declared `static` are allocated this way.

**Structure value**

A collecting names for structs and unions. A struct is a collection of data object placed sequentially in memory (possibly with pad bytes between them). A union is a collection of data sharing the same memory location.

**Symbolic location**

A location that uses a symbolic name because the exact address is unknown.

**T****Target**

1. An architecture. 2. A piece of hardware. The particular embedded system you are developing the application for. The term is usually used to distinguish the system from the host system.

**Task (thread)**

A task is an execution thread in a system. Systems that contain many tasks that execute in parallel are called multitasking systems. Because a processor only executes one instruction stream at the time, most systems implement some sort of task-switch mechanism (often called context switch) so that all tasks get their share of processing time. The process of determining which task that should be allowed to run next is called scheduling. Two common scheduling methods are *Pre-emptive multitasking* and *Round Robin*.

**Tentative definition**

A variable that can be defined in multiple files, provided that the definition is identical and that it is an absolute variable.

**Terminal I/O**

A simulated terminal window in C-SPY.

**Timer**

A peripheral that counts independent of the program execution.

**Timeslice**

The (longest) time an RTOS allows a task to run without running the task-scheduling algorithm. A task might be allowed to execute during several consecutive timeslices before being switched out. A task might also not be allowed to use its entire time slice, for example if, in a preemptive system, a higher priority task is activated by an interrupt.

**Translation unit**

A source file together with all the header files and source files included via the preprocessor directive `#include`, except for the lines skipped by conditional preprocessor directives such as `#if` and `#ifdef`.

**Trap**

A trap is an interrupt initiated by inserting a special instruction into the instruction stream. Many systems use traps to call operating system functions. Another name for trap is software interrupt.

**Type qualifiers**

In Standard C/C++, `const` or `volatile`. IAR Systems compilers usually add target-specific type qualifiers for memory and other type attributes.

**U****UBROF (Universal Binary Relocatable Object Format)**

File format produced by some of the IAR Systems programming tools, if your product package includes the XLINK linker.

## V

### Value expressions, in linker configuration file

A constant number that can be built up out of expressions that has a syntax similar to C expressions.

### Veneer

A small piece of code that is inserted as a springboard between caller and callee when:

- There is a mismatch in mode, for example ARM and Thumb
- The call instruction does not reach its destination.

### Virtual address (logical address)

An address that must be translated by the compiler, linker or the runtime system into a physical memory address before it is used. The virtual address is the address seen by the application, which can be different from the address seen by other parts of the system.

### Virtual space

An IAR Embedded Workbench Editor feature which allows you to place the insertion point outside of the area where there are actual characters.

### Volatile storage

Data stored in a volatile storage device is not retained when the power to the device is turned off. To preserve data during a power-down cycle, you should store it in non-volatile storage. This should not be confused with the C keyword `volatile`. Compare *Non-volatile storage*.

### von Neumann architecture

A computer architecture where both instructions and data are transferred over a common data channel. Compare *Harvard architecture*.

## W

### Watchpoints

Watchpoints keep track of the values of C variables or expressions in the C-SPY Watch window as the application is being executed.

## X

### XAR

An IAR tool that creates archives (libraries) in the UBROF format. XAR is delivered with IAR Embedded Workbench.

### XLIB

An IAR tool that creates archives (libraries) in the UBROF format, listing object code, converting and absolute object file into an absolute object file in another format. XLIB is delivered with IAR Embedded Workbench.

### XLINK

The IAR XLINK Linker which uses the UBROF output format.

## Z

### Zero-initialized segments/sections

Segments/sections that should be initialized to zero at startup. See also *Segment (XLINK)* and *Section (ILINK)*.

### Zero-overhead loop

A loop in which the loop condition, including branching back to the beginning of the loop, does not take any time at all. This is usually implemented as a special hardware feature of the processor and is not available in all architectures.

### Zone

Different processors have widely differing memory architectures. *Zone* is the term C-SPY uses for a named memory area. For example, on processors with separately addressable code and data memory there would be at least two zones. A processor with an intricate banked memory scheme might have several zones.

## A

a (filename extension) . . . . . 111  
 absolute location, definition of . . . . . 175  
 absolute segments, definition of . . . . . 175  
 accelerator keys. *See* shortcut keys  
 Add Files (Workspace window context menu) . . . . . 48  
 Add Group (Workspace window context menu) . . . . . 48  
 Add Project COnnection dialog box (Project menu) . . . . . 133  
 Add (Subversion control menu) . . . . . 65  
 address expression, definition of . . . . . 175  
 AEABI, definition of . . . . . 175  
 Alias (Key bindings option) . . . . . 143  
 application  
   definition of . . . . . 175  
   testing . . . . . 70  
 architecture, definition of . . . . . 175  
 archive, definition of . . . . . 175  
 argument variables . . . . . 167  
   environment variables . . . . . 137  
   summary . . . . . 137  
 Arguments (External editor option) . . . . . 150  
 ar, definition of . . . . . 175  
 asm (filename extension) . . . . . 111  
 assembler comments, text style in editor . . . . . 84  
 assembler directives  
   definition of . . . . . 175  
   text style in editor . . . . . 84  
 assembler language, definition of . . . . . 175  
 assembler options, definition of . . . . . 175  
 Assembler source file (Workspace window icon) . . . . . 46  
 assembler, command line version . . . . . 27  
 assert, in built applications . . . . . 36  
 assumptions, programming experience . . . . . 17  
 attributes on sections, definition of . . . . . 187  
 Auto code completion and parameter hints (editor option) 148  
 Auto indent (editor option) . . . . . 147  
 axx (filename extension) . . . . . 111

## B

Background color (IDE Tools option) . . . . . 153  
 backtrace information, definition of . . . . . 175  
 bank switching, definition of . . . . . 175  
 banked code, definition of . . . . . 176  
 banked data, definition of . . . . . 176  
 banked memory, definition of . . . . . 176  
 bank-switching routines, definition of . . . . . 176  
 Base (Register filter option) . . . . . 163  
 bat (filename extension) . . . . . 111  
 Batch Build . . . . . 69  
 Batch Build Configuration dialog box (Project menu) . . . 139  
 Batch Build dialog box (Project menu) . . . . . 138  
 batch files  
   definition of . . . . . 176  
   specifying from the Tools menu . . . . . 32  
 bin, common (subdirectory) . . . . . 110  
 bin, cpuname (subdirectory) . . . . . 109  
 bitfield, definition of . . . . . 176  
 blank (source code control icon) . . . . . 64  
 Block, definition of . . . . . 176  
 board (filename extension) . . . . . 111  
 Body (b) (Configure auto indent option) . . . . . 149  
 bold style, in this guide . . . . . 22  
 bookmarks  
   adding . . . . . 83  
   showing in editor . . . . . 147  
 breakpoints, definition of . . . . . 176  
 -build (iarbuild command line option) . . . . . 71  
 Build Actions . . . . . 70  
 build configuration  
   creating . . . . . 39  
   definition of . . . . . 36  
 Build window (View menu) . . . . . 118  
 building  
   commands for . . . . . 69  
   from the command line . . . . . 71  
   options . . . . . 155

pre- and post-actions . . . . .	70
the process . . . . .	67

## C

C comments, text style in editor . . . . .	84
C keywords, text style in editor . . . . .	84
C source file (Workspace window icon) . . . . .	46
c (filename extension) . . . . .	111
call frame information, definition of . . . . .	176
calling convention, definition of . . . . .	176
category, in Options dialog box . . . . .	68, 136
cfg (filename extension) . . . . .	111
cgx (filename extension) . . . . .	111
cheap memory access, definition of . . . . .	176
Check In Files dialog box . . . . .	62
Check In (Source code control menu) . . . . .	60
Check Out Files dialog box . . . . .	63
Check Out (Source code control menu) . . . . .	60
checkmark (source code control icon) . . . . .	64
checksum, definition of . . . . .	177
chm (filename extension) . . . . .	111
-clean (iarbuild command line option) . . . . .	71
Clean (Workspace window context menu) . . . . .	48
CLIB, documentation . . . . .	20
Close Workspace (File menu) . . . . .	122
code	
banked, definition of . . . . .	176
skeleton, definition of . . . . .	188
testing . . . . .	70
code completion, in editor . . . . .	77
code folding, in editor . . . . .	77
code integrity . . . . .	38
code model, definition of . . . . .	177
code pointers, definition of . . . . .	177
code sections, definition of . . . . .	177
code templates, using in editor . . . . .	80
colors in C-SPY windows, switching on or off . . . . .	159

command line options	
specifying from the Tools menu . . . . .	32
typographic convention . . . . .	22
command prompt icon, in this guide . . . . .	22
Command (External editor option) . . . . .	150
Commit (Subversion control menu) . . . . .	65
Common Fonts (IDE Options dialog box) . . . . .	141
common (directory) . . . . .	110
Compare (Source code control menu) . . . . .	60
Compile (Workspace window context menu) . . . . .	48
compiler function directives, definition of . . . . .	177
compiler options, definition of . . . . .	177
compiler, command line version . . . . .	27
computer style, typographic convention . . . . .	21
configuration file for linker, definition of . . . . .	181
Configurations for project dialog box (Project menu) . . . . .	50
Configure Auto Indent (IDE Options dialog box) . . . . .	148
Configure Tools (Tools menu) . . . . .	165
Configure Viewers dialog box (Tools menu) . . . . .	170
\$CONFIG_NAME\$ (argument variable) . . . . .	137
config, common (subdirectory) . . . . .	111
config, cpuname (subdirectory) . . . . .	109
Connect Project to SCC Project (Source code control menu) . . . . .	60
Connect Project to SVN Project (Subversion control menu) . . . . .	65
context menu, definition of . . . . .	177
Control file (Workspace window icon) . . . . .	46
conventions, used in this guide . . . . .	21
Copy (button) . . . . .	117
copyright notice . . . . .	2
cost. <i>See</i> memory access cost	
cpp (filename extension) . . . . .	111
cpuname (directory) . . . . .	109
CRC, definition of . . . . .	177
Create New Project dialog box (Project menu) . . . . .	49
cstartup (system startup code)	
definition of . . . . .	177
stack pointers not valid until reaching . . . . .	161
\$CUR_DIR\$ (argument variable) . . . . .	137



\$CUR_LINES\$ (argument variable)	137
custom build	72
using	72
custom tool configuration	72
C-SPY options	
definition of	177
in Options dialog box	136
setting	67
C-style preprocessor, definition of	177
C/C++ syntax, options for styles	152
C++ comments, text style in editor	84
C++ keywords, text style in editor	84
C++ source file (Workspace window icon)	46
C++ terminology	21

## D

dat (filename extension)	111
data model, definition of	177
data pointers, definition of	178
data representation, definition of	178
\$DATE\$ (argument variable)	137
dbg (filename extension)	112
dbgt (filename extension)	112
ddf (filename extension)	112
Debug Log window (View menu)	120
Debug without downloading text box	117
Debug (Configuration factory setting)	52
Debugger (IDE Options dialog box)	158
declaration, definition of	178
default installation path	109
Default integer format (IDE option)	159
definition, definition of	178
demangling, definition of	178
dep (filename extension)	112
development environment, introduction	27
device description files	109
definition of	178
device driver, definition of	178
device selection files	109
Diff (Subversion control menu)	65
digital signal processor, definition of	178
directories	
common	110
cpuname	109
root	109
directory structure	109
Disassembly window, definition of	178
disclaimer	2
Disconnect Project from SCC Project (Source code control menu)	61
Disconnect Project from SVN Project (Subversion control menu)	65
DLIB, documentation	20
dni (filename extension)	112
dockable windows	29
document conventions	21
documentation	109
online	110
overview of guides	19
overview of this guide	19
this guide	17
doc, common (subdirectory)	111
doc, cpuname (subdirectory)	110
drag-and-drop	
of files in workspace window	38
text in editor window	79
drivers, cpuname (subdirectory)	110
DSP. <i>See</i> digital signal processor	
DWARF, definition of	178
dxx (filename extension)	111
Dynamic Data Exchange (DDE)	85
calling external editor	150
dynamic initialization, definition of	178
dynamic memory allocation, definition of	179
dynamic object, definition of	179

## E

Edit Filename Extensions dialog box (Tools menu) . . . . .	170
Edit menu . . . . .	124
Edit Viewer Extensions (Tools menu) . . . . .	171
editing source files . . . . .	76
edition, of this guide . . . . .	2
editor	
code completion . . . . .	77
code folding . . . . .	77
code templates . . . . .	80
commands . . . . .	84
customizing the environment . . . . .	83
external . . . . .	85
indentation . . . . .	78
matching parentheses and brackets . . . . .	78
options . . . . .	145
parameter hint . . . . .	76
shortcut keys . . . . .	104
shortcut to functions . . . . .	83, 90
splitter controls . . . . .	90
status bar, using in . . . . .	80
using . . . . .	75
word completion . . . . .	76
Editor Colors and Fonts (IDE Options dialog box) . . . . .	152
Editor Font (Editor colors and fonts option) . . . . .	152
Editor Setup Files (IDE Options dialog box) . . . . .	151
editor setup files, options . . . . .	151
Editor window . . . . .	88
Editor (External editor option) . . . . .	150
Editor (IDE Options dialog box) . . . . .	145
EEPROM, definition of . . . . .	179
Embedded C++ Technical Committee . . . . .	21
Embedded C++, definition of . . . . .	179
embedded system, definition of . . . . .	179
Embedded Workbench	
editor . . . . .	75
layout . . . . .	29
main window . . . . .	28, 116

reference information . . . . .	115
running . . . . .	28
version number, displaying . . . . .	173
emulator (C-SPY driver), definition of . . . . .	179
Enable graphical stack display and stack usage tracking (Stack option) . . . . .	160
Enable project connections (IDE Project options) . . . . .	156
Enable virtual space (editor option) . . . . .	148
encoding, editor options . . . . .	146
Enea OSE load module format, definition of . . . . .	179
enumeration, definition of . . . . .	179
environment variables, as argument variables . . . . .	137
EOL character (editor option) . . . . .	147
EPROM, definition of . . . . .	179
Erase Memory dialog box . . . . .	134
ewd (filename extension) . . . . .	112
ewp (filename extension) . . . . .	112
ewp (filename extension) . . . . .	112
the workspace file . . . . .	29
\$EW_DIR\$ (argument variable) . . . . .	137
examples, cpuname (subdirectory) . . . . .	110
exceptions, definition of . . . . .	179
executable image, definition of . . . . .	179
\$EXE_DIR\$ (argument variable) . . . . .	137
expensive memory access, definition of . . . . .	180
extended command line file . . . . .	113
extended keywords, definition of . . . . .	180
extensions. <i>See</i> filename extensions <i>or</i> language extensions	
External Editor (IDE Options dialog box) . . . . .	149
external editor, using . . . . .	85

## F

factory settings, restoring default settings . . . . .	69
File Encoding (editor option) . . . . .	146
file extensions. <i>See</i> filename extensions	
File menu . . . . .	121
File Properties (Workspace window context menu) . . . . .	48

- file types
    - device description . . . . . 109
    - device selection . . . . . 109
    - documentation . . . . . 110
    - drivers . . . . . 110
    - extended command line . . . . . 113
    - flash loader applications . . . . . 109
    - header . . . . . 110
    - include . . . . . 110
    - library . . . . . 110
    - linker configuration files . . . . . 109
    - project templates . . . . . 109
    - readme . . . . . 110
    - special function registers description files . . . . . 109
    - syntax coloring configuration . . . . . 109
  - filename extensions. . . . . 111
    - cfg, syntax highlighting . . . . . 152
    - eww, the workspace file . . . . . 29
    - map, linker listing . . . . . 114
    - other than default . . . . . 114
  - Filename Extensions dialog box (Tools menu) . . . . . 168
  - Filename Extensions Overrides dialog box (Tools menu) . 169
  - files
    - editing . . . . . 76
    - navigating among. . . . . 34
  - \$FILE\_DIR\$ (argument variable) . . . . . 137
  - \$FILE\_FNAME\$ (argument variable) . . . . . 137
  - \$FILE\_PATH\$ (argument variable) . . . . . 137
  - filling, definition of. . . . . 180
  - Filter Files (Register filter option) . . . . . 163
  - Find All Declarations window (View menu) . . . . . 57, 96
  - Find All References window (View menu) . . . . . 56, 58, 97
  - Find dialog box (Edit menu) . . . . . 98
  - Find in Files dialog box (Edit menu) . . . . . 100
  - Find in Files window (View menu) . . . . . 95
  - Find Next (button) . . . . . 117
  - Find Previous (button) . . . . . 117
  - Find (button) . . . . . 117
  - Fixed width font (IDE option) . . . . . 141
  - flash loader applications . . . . . 109
  - flash (filename extension) . . . . . 112
  - flashdict (filename extension) . . . . . 112
  - floating windows . . . . . 29
  - fmt (filename extension) . . . . . 112
  - font
    - Editor . . . . . 152
    - Fixed width . . . . . 141
    - Proportional width . . . . . 142
  - format specifiers, definition of . . . . . 180
  - functions
    - intrinsic, definition of. . . . . 181
    - shortcut to in editor windows . . . . . 83, 90
- ## G
- general options, definition of . . . . . 180
  - Generate browse information (IDE Project options) . . . . 156
  - generic pointers, definition of . . . . . 180
  - Get Latest Version (Source code control menu) . . . . . 60
  - glossary. . . . . 175
  - Go to function (editor button) . . . . . 83, 90
  - Go to Line dialog box . . . . . 126
  - Go To (button) . . . . . 117
  - gray padlock (source code control icon) . . . . . 64
  - Group excluded from the build (Workspace window icon) . 46
  - Group members (Register filter option) . . . . . 163
  - Group of files (Workspace window icon) . . . . . 46
  - Groups (Register filter option) . . . . . 163
  - groups, definition of . . . . . 37
- ## H
- h (filename extension) . . . . . 112
  - Harvard architecture, definition of . . . . . 180
  - Header file (Workspace window icon) . . . . . 46
  - header files . . . . . 110
    - quick access to . . . . . 82
  - heap memory, definition of . . . . . 180

heap size, definition of . . . . .	180
Help menu . . . . .	173
helpfiles (filename extension) . . . . .	112
History (Source code control menu) . . . . .	60
host, definition of . . . . .	180
htm (filename extension) . . . . .	112
HTML text file (Workspace window icon) . . . . .	46
html (filename extension) . . . . .	112

## I

i (filename extension) . . . . .	112
iarbuild, building from the command line . . . . .	71
iarchive, definition of . . . . .	180
IarIdePm.exe . . . . .	28
icf (filename extension) . . . . .	112
icons	
in Workspace window . . . . .	46
SVN states . . . . .	65
icons, in this guide . . . . .	22
IDE	
definition of . . . . .	180
overview . . . . .	27
IDE internal file (Workspace window icon) . . . . .	46
ielddump, definition of . . . . .	181
ielftool, definition of . . . . .	181
ILINK, definition of . . . . .	181
inc (filename extension) . . . . .	112
include files. . . . .	110
definition of . . . . .	181
Incremental Search dialog box (Edit menu) . . . . .	102
inc, cpuname (subdirectory) . . . . .	110
Indent size (editor option) . . . . .	145
Indent with spaces (Tab Key Function setting) . . . . .	145
indentation, in editor . . . . .	78
inherited settings, overriding . . . . .	68
ini (filename extension) . . . . .	112
initialization in ILINK config file, definition of . . . . .	181
initialized sections, definition of . . . . .	181

inline assembler, definition of . . . . .	181
inlining, definition of . . . . .	181
Insert tab (Tab Key Function setting) . . . . .	145
insertion point, shortcut key for moving . . . . .	84
installation directory . . . . .	21
installation path, default . . . . .	109
installed files. . . . .	109
documentation . . . . .	110
executable . . . . .	110
include . . . . .	110
library . . . . .	110
instruction mnemonics, definition of . . . . .	181
Integrated Development Environment (IDE)	
definition of . . . . .	180
interrupt vector table, definition of . . . . .	181
interrupt vector, definition of . . . . .	181
interrupts	
definition of . . . . .	181
nested, definition of . . . . .	183
intrinsic functions, definition of . . . . .	181
intrinsic, definition of . . . . .	181
iojmanip, definition of . . . . .	181
italic style, in this guide . . . . .	21–22
ixx (filename extension) . . . . .	112
I/O register. <i>See</i> SFR	

## K

Key bindings (IDE Options dialog box) . . . . .	142
key bindings, definition of . . . . .	182
key summary, editor . . . . .	104
keyboard shortcuts. <i>See</i> shortcut keys	
keywords	
definition of . . . . .	182
specify syntax color for in editor . . . . .	84

## L

Label (c) (Configure auto indent option). . . . .	149
---	-----

language extensions, definition of . . . . . 182  
 Language (IDE Options dialog box) . . . . . 144  
 Language (Language option) . . . . . 144  
 layout, of Embedded Workbench . . . . . 29  
 library configuration file, definition of . . . . . 182  
 library files . . . . . 110  
 library functions, configurable . . . . . 110  
 library, definition of . . . . . 186  
 lib, cpuname (subdirectory) . . . . . 110  
 lightbulb icon, in this guide . . . . . 22  
 linker  
   command line version . . . . . 27  
   restrictions for in this guide . . . . . 18  
 linker command file. *See* linker configuration file  
 linker configuration file  
   definition of . . . . . 182  
   in directory . . . . . 109  
 \$LIST\_DIR\$ (argument variable) . . . . . 137  
 location counter, definition of . . . . . 185  
 -log (iarbuild command line option) . . . . . 71  
 log (filename extension) . . . . . 112  
 Log (Subversion control menu) . . . . . 65  
 logical address, definition of . . . . . 190  
 lst (filename extension) . . . . . 112  
 L-value, definition of . . . . . 182

## M

mac (filename extension) . . . . . 112  
 macros, definition of . . . . . 182  
 MAC, definition of . . . . . 182  
 mailbox (RTOS), definition of . . . . . 183  
 -make (iarbuild command line option) . . . . . 71  
 Make before debugging (IDE Project options) . . . . . 156  
 Make (Workspace window context menu) . . . . . 48  
 mangling, definition of . . . . . 183  
 map (filename extension) . . . . . 112  
   linker listing . . . . . 114  
 memory, definition of . . . . . 183

memory access cost, definition of . . . . . 183  
 memory area, definition of . . . . . 183  
 memory bank, definition of . . . . . 183  
 memory map, definition of . . . . . 183  
 memory model, definition of . . . . . 183  
 menu bar . . . . . 116  
 menu (filename extension) . . . . . 112  
 Menu (Key bindings option) . . . . . 142  
 menus . . . . . 121  
 Messages window, amount of output . . . . . 153  
 Messages (IDE Options dialog box) . . . . . 153  
 metadata (subdirectory) . . . . . 111  
 microcontroller, definition of . . . . . 183  
 microprocessor, definition of . . . . . 183  
 MISRA C, documentation . . . . . 20  
 modules, definition of . . . . . 183  
 Multiply and accumulate, definition of . . . . . 182  
 multitasking, definition of . . . . . 185  
 multi-file compilation, definition of . . . . . 183

## N

naming conventions . . . . . 22  
 Navigate Backward (button) . . . . . 117  
 Navigate Forward (button) . . . . . 117  
 NDEBUG, preprocessor symbol . . . . . 36  
 nested interrupts, definition of . . . . . 183  
 New Configuration dialog box (Project menu) . . . . . 51  
 New Document (button) . . . . . 117  
 New Group (Register filter option) . . . . . 163  
 Next Bookmark (button) . . . . . 117  
 No source browser and build status updates when the  
 IDE is not the foreground process (IDE Project options) . 157  
 non-banked memory, definition of . . . . . 184  
 non-initialized memory, definition of . . . . . 184  
 non-volatile storage, definition of . . . . . 184  
 NOP (assembler instruction), definition of . . . . . 184  
 no-init sections, definition of . . . . . 184

## O

o (filename extension) . . . . .	112
objcopy, definition of . . . . .	184
Object file or library (Workspace window icon) . . . . .	46
object file (absolute), definition of . . . . .	184
object file (relocatable), definition of . . . . .	184
object, definition of . . . . .	184
\$OBJ_DIR\$ (argument variable) . . . . .	137
online documentation	
available from Help menu . . . . .	173
target-specific, in directory . . . . .	110
Open Containing Folder (editor window context menu) . . . . .	89
Open Containing Folder (Workspace window context menu) . . . . .	48
Open Workspace (File menu) . . . . .	122
Opening Brace (a) (Configure auto indent option) . . . . .	149
operator precedence, definition of . . . . .	184
operators, definition of . . . . .	184
Option name (category option) . . . . .	51
options	
editor . . . . .	145
setup files for editor . . . . .	151
Options dialog box (Project menu) . . . . .	135
using . . . . .	68
Options (Workspace window context menu) . . . . .	48
options, definition of . . . . .	184
Other file (Workspace window icon) . . . . .	46
out (filename extension) . . . . .	113
output image. <i>See</i> executable image	
overlay, definition of . . . . .	184

## P

padlock (source code control icon) . . . . .	64
parameter hint, in editor . . . . .	76
parameters	
typographic convention . . . . .	21
when building from command line . . . . .	71

parentheses and brackets, matching (in editor) . . . . .	78
part number, of this guide . . . . .	2
Paste (button) . . . . .	117
paths	
relative, in Embedded Workbench . . . . .	37, 89
source files . . . . .	89
pbd (filename extension) . . . . .	113
pbi (filename extension) . . . . .	113
peripheral units, definition of . . . . .	184
peripherals register. <i>See</i> SFR	
pew (filename extension) . . . . .	113
pipeline, definition of . . . . .	184
placement, definition of . . . . .	185
Play a sound after build operations (IDE Project options). 156	
plugins	
common (subdirectory) . . . . .	111
cpuname (subdirectory) . . . . .	110
pointers	
definition of . . . . .	185
warn when stack pointer is out of range . . . . .	161
pop-up menu. <i>See</i> context menu	
#pragma directive, definition of . . . . .	185
precedence, definition of . . . . .	184
preemptive multitasking, definition of . . . . .	185
preprocessor	
definition of. <i>See</i> C-style preprocessor	
macros for initializing string variables . . . . .	70
NDEBUG symbol . . . . .	36
preprocessor directives	
definition of . . . . .	185
text style in editor . . . . .	84
prerequisites, programming experience. . . . .	17
Press shortcut key (Key bindings option) . . . . .	142
Previous Bookmark (button) . . . . .	117
Primary (Key bindings option) . . . . .	142
prj (filename extension) . . . . .	113
processor variant, definition of . . . . .	185
product overview	
directory structure . . . . .	109

file types . . . . . 111

program counter, definition of . . . . . 185

program location counter, definition of . . . . . 185

programming experience . . . . . 17

program, *see also* application

Project Make, options . . . . . 155

Project menu . . . . . 130

project model . . . . . 33

project options, definition of . . . . . 185

Project page (IDE Options dialog box) . . . . . 155

Project with multi-file compilation  
(Workspace window icon) . . . . . 46

Project (Workspace window icon) . . . . . 46

projects

- adding files to . . . . . 39, 130
- build configuration, creating . . . . . 39
- building . . . . . 69
  - in batches . . . . . 69
- creating . . . . . 39
- definition of . . . . . 35, 185
- excluding groups and files . . . . . 39
- files, moving . . . . . 39
- groups, creating . . . . . 39
- managing . . . . . 33
- organization . . . . . 34
- setting options . . . . . 67
- source code control . . . . . 38
- testing . . . . . 70
- version control systems . . . . . 38
- workspace, creating . . . . . 39

projects, removing items . . . . . 39

\$PROJ\_DIR\$ (argument variable) . . . . . 137

\$PROJ\_FNAME\$ (argument variable) . . . . . 137

\$PROJ\_PATH\$ (argument variable) . . . . . 137

PROM, definition of . . . . . 185

Properties (Source code control menu) . . . . . 60

Properties (Subversion control menu) . . . . . 65

Proportional width font (IDE option) . . . . . 142

publication date, of this guide . . . . . 2

## Q

qualifiers, definition of. *See* type qualifiers

Quick Search text box . . . . . 117

## R

range, definition of . . . . . 185

reading guidelines . . . . . 17

readme files, *See* release notes

read-only sections, definition of . . . . . 185

real-time operating system, definition of . . . . . 185

real-time system, definition of . . . . . 185

Rebuild All (Workspace window context menu) . . . . . 48

red padlock (source code control icon) . . . . . 64

Redo (button) . . . . . 117

reference information, typographic convention . . . . . 22

Refresh (Source code control menu) . . . . . 60

Refresh (Subversion control menu) . . . . . 65

region expression, definition of . . . . . 186

region literal, definition of . . . . . 186

register constant, definition of . . . . . 186

Register Filter (IDE Options dialog box) . . . . . 162

register locking, definition of . . . . . 186

register variables, definition of . . . . . 186

registered trademarks . . . . . 2

registers

- definition of . . . . . 186
- header files for in inc directory . . . . . 110

relative paths . . . . . 37, 89

relay, definition of . . . . . 186

release notes . . . . . 110

Release (Configuration factory setting) . . . . . 52

Reload last workspace at startup (IDE Project options) . . 156

relocatable segments, definition of . . . . . 186

Remove trailing blanks (editor option) . . . . . 148

Remove (Workspace window context menu) . . . . . 48

Rename Group dialog box . . . . . 48

Rename (Workspace window context menu) . . . . . 48

Replace dialog box (Edit menu) . . . . .	99
Replace (button) . . . . .	117
Reset All (Key bindings option) . . . . .	143
reset, definition of . . . . .	186
restoring default factory settings . . . . .	69
Revert (Subversion control menu) . . . . .	65
ROM-monitor, definition of . . . . .	186
root directory . . . . .	109
Round Robin, definition of . . . . .	186
RTOS, definition of . . . . .	185
runtime libraries, definition of . . . . .	186
runtime model attributes, definition of . . . . .	186
rxX (filename extension) . . . . .	113
R-value, definition of . . . . .	187

## S

s (filename extension) . . . . .	113
saturation arithmetics, definition of . . . . .	187
Save All (button) . . . . .	117
Save All (File menu) . . . . .	123
Save As (File menu) . . . . .	123
Save editor windows before building (IDE Project options) . . . . .	155
Save workspace and projects before building (IDE Project options) . . . . .	156
Save Workspace (File menu) . . . . .	122
Save (button) . . . . .	117
Save (File menu) . . . . .	123
Scan for changed files (editor option) . . . . .	147
SCC. <i>See</i> source code control systems	
scheduler (RTOS), definition of . . . . .	187
scope, definition of . . . . .	187
scrolling, shortcut key for . . . . .	84
searching in editor windows . . . . .	83
searching fragment, definition of . . . . .	187
section selection, definition of . . . . .	187
section, definition of . . . . .	187
segment map, definition of . . . . .	187

segment part, definition of . . . . .	187
segments, definition of . . . . .	187
Select SCC Provider dialog box (Project menu) . . . . .	61
selecting text, shortcut key for . . . . .	84
semaphores, definition of . . . . .	187
Service (External editor option) . . . . .	150
Set as Active (Workspace window context menu) . . . . .	49
settings (directory) . . . . .	113
severity level, definition of . . . . .	188
SFR	
definition of . . . . .	188
in header files . . . . .	110
sfr (filename extension) . . . . .	113
sharing, definition of . . . . .	188
short addressing, definition of . . . . .	188
shortcut keys . . . . .	84
customizing . . . . .	142
Show bookmarks (editor option) . . . . .	147
Show fold margin (editor option) . . . . .	147
Show line break characters (editor option) . . . . .	148
Show line numbers (editor option) . . . . .	147
Show right margin (editor option) . . . . .	146
side-effect, definition of . . . . .	188
signals, definition of . . . . .	188
Simple format, definition of . . . . .	188
simulator, definition of . . . . .	188
skeleton code, definition of . . . . .	188
Source Browser window . . . . .	52
using . . . . .	41
Source code color in Disassembly window (IDE option) . . . . .	158
source code control systems . . . . .	38
Source Code Control (IDE Options dialog box) . . . . .	157
source code, templates . . . . .	80
Source file excluded from the build (Workspace window icon) . . . . .	46
source files	
editing . . . . .	76
managing in projects . . . . .	37
paths to . . . . .	37, 89



special function registers (SFR)  
 definition of . . . . . 188  
 description files . . . . . 109  
 in header files. . . . . 110  
 src, cpuname (subdirectory) . . . . . 110  
 stack frames, definition of . . . . . 188  
 stack segment, definition of . . . . . 188  
 Stack (IDE Options dialog box) . . . . . 160  
 standard libraries, definition of . . . . . 188  
 static objects, definition of . . . . . 188  
 static overlay, definition of . . . . . 189  
 statically allocated memory, definition of . . . . . 188  
 status bar . . . . . 118  
 Step into functions (IDE option) . . . . . 159  
 stepping, definition of . . . . . 188  
 STL container expansion (IDE option) . . . . . 159  
 Stop build operation on (IDE Project options) . . . . . 155  
 Stop Build (Workspace window context menu) . . . . . 48  
 strings, text style in editor . . . . . 84  
 structure value, definition of . . . . . 189  
 Subversion states and corresponding icons . . . . . 65  
 suc (filename extension) . . . . . 113  
 sxx (filename extension) . . . . . 113  
 symbolic location, definition of . . . . . 189  
 symbols, definition of . . . . . 189  
 syntax coloring  
 configuration files . . . . . 109  
 in editor . . . . . 84  
 Syntax Coloring (Editor colors and fonts option) . . . . . 152  
 Syntax highlighting (editor option) . . . . . 147  
 syntax highlighting, in editor window . . . . . 84

## T

Tab Key Function (editor option) . . . . . 145  
 Tab size (editor option) . . . . . 145  
 \$TARGET\_BNAME\$ (argument variable) . . . . . 137  
 \$TARGET\_BPATH\$ (argument variable) . . . . . 137  
 \$TARGET\_DIR\$ (argument variable) . . . . . 137

\$TARGET\_FNAME\$ (argument variable) . . . . . 137  
 \$TARGET\_PATH\$ (argument variable) . . . . . 137  
 target, definition of . . . . . 189  
 task, definition of . . . . . 189  
 Template dialog box (Edit menu) . . . . . 103  
 templates for code, using . . . . . 80  
 tentative definition, definition of . . . . . 189  
 Terminal I/O window, definition of . . . . . 189  
 Terminal I/O (IDE Options dialog box) . . . . . 164  
 terminology . . . . . 21, 175  
 testing, of code . . . . . 70  
 Text file (Workspace window icon) . . . . . 46  
 thread, definition of . . . . . 189  
 timer, definition of . . . . . 189  
 timeslice, definition of . . . . . 189  
 Toggle Bookmark (button) . . . . . 117  
 Toggle Breakpoint (button) . . . . . 117  
 Tool Output window . . . . . 119  
 toolbar, IDE . . . . . 117  
 toolchain  
 extending . . . . . 72  
 overview . . . . . 27  
 \$TOOLKIT\_DIR\$ (argument variable) . . . . . 137  
 tools icon, in this guide . . . . . 22  
 Tools menu . . . . . 140  
 tools, user-configured . . . . . 165  
 touch, open-source command line utility . . . . . 70  
 trademarks . . . . . 2  
 translation unit, definition of . . . . . 189  
 trap, definition of . . . . . 189  
 tutor, cpuname (subdirectory) . . . . . 110  
 type qualifiers, definition of . . . . . 189  
 Type (External editor option) . . . . . 150  
 typographic conventions . . . . . 21

## U

UBROF, definition of . . . . . 189  
 Undo Checkout (Source code control menu) . . . . . 60

Undo (button) . . . . .	117
Update intervals (IDE option) . . . . .	159
Update (Subversion control menu) . . . . .	65
Use Code Templates (editor option) . . . . .	151
Use colors (IDE option) . . . . .	159
Use Custom Keyword File (editor option) . . . . .	151
Use External Editor (External editor option) . . . . .	149
Use register filter (Register filter option) . . . . .	163
\$USER_NAME\$ (argument variable) . . . . .	137

## V

value expressions, definition of . . . . .	190
variables, using in arguments . . . . .	167
vener, definition of . . . . .	190
Version Control System menu . . . . .	59, 64
Version Control System (Workspace window context menu) . . . . .	48
version control systems . . . . .	38
version number	
of Embedded Workbench . . . . .	173
of this guide . . . . .	2
View menu . . . . .	128
virtual address, definition of . . . . .	190
virtual space	
definition of . . . . .	190
enabling in the editor . . . . .	148
visualSTATE	
part of the tool chain . . . . .	27
project file . . . . .	113
volatile storage, definition of . . . . .	190
von Neumann architecture, definition of . . . . .	190
vsp (filename extension) . . . . .	113

## W

Warn when exceeding stack threshold (Stack option) . . . . .	161
Warn when stack pointer is out of bounds (Stack option) . . . . .	161
warnings icon, in this guide . . . . .	22

watchpoints, definition of . . . . .	190
web sites, recommended . . . . .	21
When source resolves to multiple function instances . . . . .	158
Window menu . . . . .	172
windows . . . . .	115
organizing on the screen . . . . .	29
word completion, in editor . . . . .	76
Workspace window . . . . .	45
drag-and-drop of files . . . . .	38
Workspace window icons . . . . .	46
Workspace (Workspace window icon) . . . . .	46
workspaces	
creating . . . . .	39
using . . . . .	39
wsdt (filename extension) . . . . .	113

## X

XAR, definition of . . . . .	190
xcl (filename extension) . . . . .	113
xmlb (filename extension) . . . . .	113
XLIB, definition of . . . . .	190
XLINK, definition of . . . . .	190
xx, used in this guide . . . . .	18

## Z

zero-initialized sections, definition of . . . . .	190
zero-overhead loop, definition of . . . . .	190
zone, definition of . . . . .	190

# Symbols

#pragma directive, definition of . . . . .	185
% stack usage threshold (Stack option) . . . . .	160
\$CONFIG_NAME\$ (argument variable) . . . . .	137
\$CUR_DIR\$ (argument variable) . . . . .	137
\$CUR_LINE\$ (argument variable) . . . . .	137

\$DATE\$ (argument variable) . . . . .	137
\$EW_DIR\$ (argument variable) . . . . .	137
\$EXE_DIR\$ (argument variable) . . . . .	137
\$FILE_DIR\$ (argument variable) . . . . .	137
\$FILE_FNAME\$ (argument variable) . . . . .	137
\$FILE_PATH\$ (argument variable) . . . . .	137
\$LIST_DIR\$ (argument variable) . . . . .	137
\$OBJ_DIR\$ (argument variable) . . . . .	137
\$PROJ_DIR\$ (argument variable) . . . . .	137
\$PROJ_FNAME\$ (argument variable) . . . . .	137
\$PROJ_PATH\$ (argument variable) . . . . .	137
\$TARGET_BNAME\$ (argument variable) . . . . .	137
\$TARGET_BPATH\$ (argument variable) . . . . .	137
\$TARGET_DIR\$ (argument variable) . . . . .	137
\$TARGET_FNAME\$ (argument variable) . . . . .	137
\$TARGET_PATH\$ (argument variable) . . . . .	137
\$TOOLKIT_DIR\$ (argument variable) . . . . .	137
\$USER_NAME\$ (argument variable) . . . . .	137