

IAR C/C++ Development Guide

Compiling and Linking

for Arm Limited's

Arm® Cores



COPYRIGHT NOTICE

© 1999–2017 IAR Systems AB.

No part of this document may be reproduced without the prior written consent of IAR Systems AB. The software described in this document is furnished under a license and may only be used or copied in accordance with the terms of such a license.

DISCLAIMER

The information in this document is subject to change without notice and does not represent a commitment on any part of IAR Systems. While the information contained herein is assumed to be accurate, IAR Systems assumes no responsibility for any errors or omissions.

In no event shall IAR Systems, its employees, its contractors, or the authors of this document be liable for special, direct, indirect, or consequential damage, losses, costs, charges, claims, demands, claim for lost profits, fees, or expenses of any nature or kind.

TRADEMARKS

IAR Systems, IAR Embedded Workbench, IAR Connect, C-SPY, C-RUN, C-STAT, IAR Visual State, visualSTATE, IAR KickStart Kit, I-jet, I-jet Trace, I-scope, IAR Academy, IAR, and the logotype of IAR Systems are trademarks or registered trademarks owned by IAR Systems AB.

Microsoft and Windows are registered trademarks of Microsoft Corporation.

Arm, Cortex, Thumb, and TrustZone are registered trademarks of Arm Limited. EmbeddedICE is a trademark of Arm Limited. uC/OS-II and uC/OS-III are trademarks of Micrium, Inc. CMX-RTX is a trademark of CMX Systems, Inc. ThreadX is a trademark of Express Logic. RTXC is a trademark of Quadros Systems. Fusion is a trademark of Unicoi Systems.

Adobe and Acrobat Reader are registered trademarks of Adobe Systems Incorporated.

All other product names are trademarks or registered trademarks of their respective owners.

EDITION NOTICE

Twenty-third edition: October 2017

Part number: DARM-23

This guide applies to version 8.20.x of IAR Embedded Workbench® for Arm.

Internal reference: BB2, csrct2010.1, V_110411, IMAE.

Brief contents

1 ables
Preface 41
Part I. Using the build tools49
Introduction to the IAR build tools
Developing embedded applications57
Data storage71
Functions
Linking using ILINK87
Linking your application105
The DLIB runtime environment119
Assembler language interface157
Using C
Using C++ 189
Application-related considerations199
Efficient coding for embedded applications219
Part 2. Reference information239
External interface details241
Compiler options251
Linker options
Data representation
Extended keywords

Pragma directives
Intrinsic functions
The preprocessor451
C/C++ standard library functions 463
The linker configuration file
Section reference 505
The stack usage control file 511
IAR utilities
Implementation-defined behavior for Standard C 565
Implementation-defined behavior for C89 585
Index 597

Contents

Preface		41
Wh	no should read this guide	41
	Required knowledge	
Ho	w to use this guide	41
Wh	nat this guide contains	42
	Part 1. Using the build tools	42
	Part 2. Reference information	42
Oth	ner documentation	43
	User and reference guides	44
	The online help system	44
	Further reading	45
	Web sites	45
Do	cument conventions	46
	Typographic conventions	46
	Naming conventions	47
Part I.	Using the build tools	
	21118 0112 24114 00015	49
Introduct	tion to the IAR build tools	
		51
	tion to the IAR build tools	51
	tion to the IAR build toolse IAR build tools—an overview	51 51
	tion to the IAR build tools	51 51 51
	IAR C/C++ Compiler IAR Assembler	51 51 51 52
	tion to the IAR build tools E IAR build tools—an overview IAR C/C++ Compiler IAR Assembler The IAR ILINK Linker	51 51 52 52
The	IAR build tools—an overview IAR C/C++ Compiler IAR Assembler The IAR ILINK Linker Specific ELF tools	51 51 52 52 52
The	IAR build tools IAR build tools—an overview IAR C/C++ Compiler IAR Assembler The IAR ILINK Linker Specific ELF tools External tools	51 51 52 52 52 52
The	tion to the IAR build tools e IAR build tools—an overview IAR C/C++ Compiler IAR Assembler The IAR ILINK Linker Specific ELF tools External tools R language overview	51 51 52 52 52 53
The	tion to the IAR build tools E IAR build tools—an overview IAR C/C++ Compiler IAR Assembler The IAR ILINK Linker Specific ELF tools External tools R language overview vice support	51 51 52 52 52 53 53
The	tion to the IAR build tools E IAR build tools—an overview IAR C/C++ Compiler IAR Assembler The IAR ILINK Linker Specific ELF tools External tools R language overview vice support Supported Arm devices	51 51 52 52 52 53 53 53

Special support for embedded systems	55
Extended keywords	55
Pragma directives	55
Predefined symbols	55
Accessing low-level features	55
Arm TrustZone®	56
Developing embedded applications	57
Developing embedded software using IAR build tools	57
Mapping of memory	57
Communication with peripheral units	58
Event handling	58
System startup	58
Real-time operating systems	58
Interoperability with other build tools	59
The build process—an overview	59
The translation process	60
The linking process	60
After linking	62
Application execution—an overview	62
The initialization phase	63
The execution phase	66
The termination phase	66
Building applications—an overview	67
Basic project configuration	67
Processor configuration	68
Optimization for speed and size	69
Data storage	71
Introduction	71
Different ways to store data	71
Storage of auto variables and parameters	72
The stack	72
Dynamic memory on the heap	73
Potential problems	73

Functions		75
Function-rela	ated extensions	75
Arm and Thu	umb code	75
Execution in	RAM	76
Interrupt fun	ctions for Cortex-M devices	77
Interrupts	s for Cortex-M	77
Interrupt fun	ctions for Arm7/9/11, Cortex-A, and Co	rtex-R
devices		78
Interrupt	functions	78
Installing	g exception functions	79
Interrupts	s and fast interrupts	80
Nested in	nterrupts	81
Software	interrupts	82
Interrupt	operations	83
Inlining funct	ions	83
C versus	C++ semantics	84
Features	controlling function inlining	84
Stack protect	tion	85
Stack pro	otection in the IAR C/C++ compiler	85
Using sta	ack protection in your application	86
Linking using ILIN	Κ	87
Linking—an c	overview	87
Modules and	sections	88
The linking p	rocess in detail	89
Placing code	and data—the linker configuration file	91
A simple	example of a configuration file	92
Initialization	at system startup	94
The initia	alization process	95
C++ dyna	amic initialization	96
Stack usage a	analysis	96
Introduct	tion to stack usage analysis	96
Performi	ng a stack usage analysis	97
	f an analysis—the map file contents	

	Specifying additional stack usage information	99
	Limitations	101
	Situations where warnings are issued	102
	Call graph log	102
	Call graph XML output	103
Arm	TrustZone	104
Linking yo	ur application	105
Linki	ng considerations	105
	Choosing a linker configuration file	105
	Defining your own memory areas	106
	Placing sections	107
	Reserving space in RAM	108
	Keeping modules	109
	Keeping symbols and sections	109
	Application startup	109
	Setting up stack memory	109
	Setting up heap memory	110
	Setting up the atexit limit	110
	Changing the default initialization	110
	Interaction between ILINK and the application	114
	Standard library handling	114
	Producing other output formats than ELF/DWARF	115
	Veneers	115
Hints	s for troubleshooting	115
	Relocation errors	115
Chec	king module consistency	117
	Runtime model attributes	117
	Using runtime model attributes	118
The DLIB	runtime environment	119
Intro	duction to the runtime environment	119
	Runtime environment functionality	
	Briefly about input and output (I/O)	
	Briefly about C-SPV emulated I/O	

	Briefly about retargeting	122
Setti	ng up the runtime environment	123
	Setting up your runtime environment	123
	Retargeting—Adapting for your target system	124
	Overriding library modules	126
	Customizing and building your own runtime library	127
Addi	tional information on the runtime environment	129
	Bounds checking functionality	129
	Runtime library configurations	129
	Prebuilt runtime libraries	130
	Formatters for printf	133
	Formatters for scanf	135
	The C-SPY emulated I/O mechanism	136
	The semihosting mechanism	137
	Math functions	137
	System startup and termination	139
	System initialization	142
	The DLIB low-level I/O interface	143
	abort	144
	aeabi_assert	144
	clock	145
	close	145
	exit	146
	getenv	146
	getzone	147
	_lseek	147
	open	148
	raise	148
	read	148
	remove	150
	rename	150
	signal	150
	system	151
	time 22 time 64	151

	write	151
	Configuration symbols for file input and output	153
	Locale	153
Man	aging a multithreaded environment	154
	Multithread support in the DLIB runtime environment	
	Enabling multithread support	
	C++ exceptions in threads	156
Assembler	· language interface	157
Mixi	ng C and assembler	157
	Intrinsic functions	157
	Mixing C and assembler modules	158
	Inline assembler	158
	Reference information for inline assembler	160
	An example of how to use clobbered memory	166
Calli	ng assembler routines from C	167
	Creating skeleton code	167
	Compiling the skeleton code	168
Calli	ng assembler routines from C++	169
Calli	ng convention	170
	Function declarations	170
	Using C linkage in C++ source code	170
	Preserved versus scratch registers	171
	Function entrance	172
	Function exit	174
	Examples	175
Call	frame information	176
	CFI directives	177
	Creating assembler source with CFI support	178
Using C		181
C laı	nguage overview	181
Exte	ensions overview	181
	Enabling language extensions	183

IAR	C language extensions	183
	Extensions for embedded systems programming	183
	Relaxations to Standard C	185
Using C++	+	189
Over	rview—Standard C++	189
	Modes for exceptions and RTTI support	189
	Exception handling	190
Enab	bling support for C++	192
C++	feature descriptions	192
	Using IAR attributes with Classes	192
	Templates	192
	Function types	192
	Using static class objects in interrupts	193
	Using New handlers	193
	Debug support in C-SPY	194
C++	language extensions	194
Port	ing code from EC++ or EEC++	197
Application	n-related considerations	199
Outp	put format considerations	199
Stac	k considerations	200
	Stack size considerations	200
	Stack alignment	200
	Exception stack	200
Heap	p considerations	201
	Advanced, basic, and no-free heap	201
	Heap size and standard I/O	202
Inter	raction between the tools and your application	202
Chec	cksum calculation for verifying image integrity	204
	Briefly about checksum calculation	204
	Calculating and verifying a checksum	206
	Troubleshooting checksum calculation	212
Link	er optimizations	213
	Virtual function elimination	213

Small function inlining	213
Duplicate section merging	213
AEABI compliance	214
Linking AEABI-compliant modules using the IAR ILINK linker	215
Linking AEABI-compliant modules using a third-party linker	215
Enabling AEABI compliance in the compiler	216
CMSIS integration	216
CMSIS DSP library	216
Customizing the CMSIS DSP library	217
Building with CMSIS on the command line	217
Building with CMSIS in the IDE	217
Efficient coding for embedded applications	219
Selecting data types	219
Using efficient data types	219
Floating-point types	220
Alignment of elements in a structure	220
Anonymous structs and unions	221
Controlling data and function placement in memory	222
Data placement at an absolute location	223
Data and function placement in sections	224
Data placement in registers	225
Controlling compiler optimizations	226
Scope for performed optimizations	227
Multi-file compilation units	227
Optimization levels	228
Speed versus size	229
Fine-tuning enabled transformations	229
Facilitating good code generation	232
Writing optimization-friendly source code	232
Saving stack space and RAM memory	233
Function prototypes	233
Integer types and bit negation	234
Protecting simultaneously accessed variables	234

	Accessing special function registers	235
	Passing values between C and assembler objects	237
	Non-initialized variables	237
Part 2.	. Reference information	239
External i	interface details	241
Inve	ocation syntax	241
	Compiler invocation syntax	241
	ILINK invocation syntax	242
	Passing options	242
	Environment variables	243
Incl	lude file search procedure	243
Cor	mpiler output	244
	Error return codes	245
ILIN	NK output	246
Tex	xt encodings	247
	Characters and string literals	248
Dia	agnostics	248
	Message format for the compiler	248
	Message format for the linker	249
	Severity levels	249
	Setting the severity level	250
	Internal error	250
Compiler	r options	251
Opt	otions syntax	251
-	Types of options	251
	Rules for specifying parameters	251
Sun	mmary of compiler options	253
Des	scriptions of compiler options	258
	aapcs	
	aeabi	259
	align_sp_on_irq	259

arm	. 260
c89	
char_is_signed	
char_is_unsigned	
cmse	
cpu	. 261
cpu_mode	. 262
c++	. 263
-D	. 263
debug, -r	. 264
dependencies	. 264
deprecated_feature_warnings	. 265
diag_error	. 266
diag_remark	. 266
diag_suppress	. 266
diag_warning	. 267
diagnostics_tables	. 267
discard_unused_publics	. 268
dlib_config	. 268
do_explicit_zero_opt_in_named_sections	. 269
-е	. 269
enable_hardware_workaround	. 270
enable_restrict	. 270
endian	. 270
enum_is_int	. 271
error_limit	. 271
-f	. 271
fpu	. 272
guard_calls	. 273
header_context	. 273
-I	. 273
-1	. 274
lock_regs	. 275
macro_positions_in_diagnostics	. 275

make_all_definitions_weak	275
max_cost_constexpr_call	276
max_depth_constexpr_call	276
mfc	276
no_alignment_reduction	277
no_bom	277
no_clustering	277
no_code_motion	278
no_const_align	278
no_cse	278
no_dwarf3_cfi	279
no_exceptions	279
no_fragments	279
no_inline	280
no_literal_pool	280
no_loop_align	280
no_mem_idioms	281
no_path_in_file_macros	281
no_rtti	281
no_rw_dynamic_init	282
no_scheduling	282
no_size_constraints	282
no_static_destruction	283
no_system_include	283
no_tbaa	283
no_typedefs_in_diagnostics	284
no_unaligned_access	284
no_uniform_attribute_syntax	285
no_unroll	285
no_var_align	285
no_warnings	286
no_wrap_diagnostics	286
-0	286
only etdout	287

output, -o	287
pending_instantiations	
predef_macros	
preinclude	
preprocess	
public_equ	
relaxed_fp	
remarks	
require_prototypes	
ropi	
ropi_cb	
rwpi	
rwpi_near	
section	
silent	
source_encoding	
stack_protection	
strict	
system_include_dir	
text_out	
thumb	296
uniform_attribute_syntax	296
use_c++_inline	296
use_unix_directory_separators	297
utf8_text_in	297
vectorize	297
version	298
vla	298
warn_about_c_style_casts	298
warnings_affect_exit_code	298
warnings_are_errors	299

inker options		301
Summary of linker	options	301
Descriptions of link	er options	305
advanced_heap		305
basic_heap		305
BE8		306
BE32		306
call_graph		306
config		307
config_def		307
config_search.		308
cpp_init_routin	e	308
cpu		309
default_to_com	plex_ranges	309
define_symbol		309
dependencies .		310
diag_error		311
diag_remark		311
diag_suppress		311
diag_warning .		312
diagnostics_tab	les	312
do_segment_pa	d	313
enable_hardwa	e_workaround	313
enable_stack_u	sage	313
entry		314
error_limit		314
exception_table	s	315
export_builtin_	config	315
extra_init		316
-f		316
force_exception	ns	316
force_output		317
fpu		317

image_input	318
import_cmse_lib_in	318
import_cmse_lib_out	319
inline	319
keep	320
log	320
log_file	321
mangled_names_in_messages	321
manual_dynamic_initialization	321
map	322
merge_duplicate_sections	322
no_bom	323
no_dynamic_rtti_elimination	323
no_entry	324
no_exceptions	324
no_fragments	324
no_free_heap	325
no_inline	325
no_library_search	325
no_literal_pool	326
no_locals	326
no_range_reservations	326
no_remove	327
no_vfe	327
no_warnings	327
no_wrap_diagnostics	328
only_stdout	328
output, -o	328
pi_veneers	328
place_holder	329
preconfig	329
printf_multibytes	330
redirect	330
	220

	scanf_multibytes	331
	search, -L	331
	semihosting	331
	silent	332
	skip_dynamic_initialization	332
	stack_usage_control	332
	strip	333
	text_out	333
	threaded_lib	334
	timezone_lib	334
	treat_rvct_modules_as_softfp	334
	use_full_std_template_names	334
	utf8_text_in	335
	version	335
	vfe	335
	warnings_affect_exit_code	336
	warnings_are_errors	. 336
	warmings_are_critors	
	whole_archive	
Data repre		337
•	whole_archive	337 . 339
•	whole_archivesentationment	337 . 339 339
Align	whole_archivesentation	337 339 339
Align Byte	whole_archivesentation ment	337 339 339 340
Align Byte	whole_archivesentation	337 339 340 341
Align Byte	whole_archive	337 339 340 340 341
Align Byte	whole_archive	337 339 340 340 341 341
Align Byte	whole_archive sentation ment Alignment on the Arm core order data types—integer types Integer types—an overview Bool	337 339 340 341 341 342
Align Byte	whole_archive	337 339 340 340 341 341 342
Align Byte	whole_archive	337 339 340 341 341 342 342
Align Byte	whole_archive sentation ment Alignment on the Arm core order data types—integer types Integer types—an overview Bool The enum type The char type The wchar_t type	337 339 340 341 341 342 342 342
Align Byte	whole_archive sentation ment Alignment on the Arm core order data types—integer types Integer types—an overview Bool The enum type The char type The wchar_t type The char16_t type The char16_t type	337 339 340 341 341 342 342 342
Align Byte Basic	whole_archive sentation ment Alignment on the Arm core order data types—integer types Integer types—an overview Bool The enum type The char type The wchar_t type The char16_t type The char32_t type	337 339 340 341 341 342 342 342 342 342

	32-bit floating-point format	347
	64-bit floating-point format	347
	Representation of special floating-point numbers	347
Poir	nter types	348
	Function pointers	348
	Data pointers	348
	Casting	348
Stru	ıcture types	349
	Alignment of structure types	349
	General layout	349
	Packed structure types	350
Тур	e qualifiers	351
	Declaring objects volatile	351
	Declaring objects volatile and const	352
	Declaring objects const	353
Dat	a types in C++	353
Extended	keywords	355
Gen	neral syntax rules for extended keywords	355
	Type attributes	355
	Object attributes	357
Sun	nmary of extended keywords	358
Des	criptions of extended keywords	359
	absolute	359
	arm	359
	big_endian	360
	cmse_nonsecure_call	360
	cmse_nonsecure_entry	361
	fiq	361
	interwork	361
	intrinsic	
	irq	362
	little_endian	362
	nested	362

	no_alloc,no_alloc16
	no_alloc_str,no_alloc_str16363
	no_init
	noreturn
	packed365
	ramfunc
	ro_placement367
	root367
	stackless367
	swi
	task369
	thumb369
	weak370
Supp	ported GCC attributes370
Pragma dii	rectives
Sum	mary of pragma directives373
Desc	riptions of pragma directives376
	bitfields
	bittleids
	calls
	calls
	calls
	calls 377 call_graph_root 378 data_alignment 378
	calls
	calls
	calls
	calls 377 call_graph_root 378 data_alignment 378 default_function_attributes 379 default_variable_attributes 380 deprecated 381 diag_default 381
	calls 377 call_graph_root 378 data_alignment 378 default_function_attributes 379 default_variable_attributes 380 deprecated 381 diag_default 381 diag_error 382
	calls 377 call_graph_root 378 data_alignment 378 default_function_attributes 379 default_variable_attributes 380 deprecated 381 diag_default 381 diag_error 382 diag_remark 382
	calls 377 call_graph_root 378 data_alignment 378 default_function_attributes 379 default_variable_attributes 380 deprecated 381 diag_default 381 diag_error 382 diag_remark 382 diag_suppress 383
	calls 377 call_graph_root 378 data_alignment 378 default_function_attributes 379 default_variable_attributes 380 deprecated 381 diag_default 381 diag_error 382 diag_remark 382 diag_suppress 383 diag_warning 383
	calls 377 call_graph_root 378 data_alignment 378 default_function_attributes 379 default_variable_attributes 380 deprecated 381 diag_default 381 diag_error 382 diag_remark 382 diag_suppress 383 diag_warning 383 error 383

	language	385
	location	386
	message	387
	no_stack_protect	388
	object_attribute	388
	optimize	389
	pack	390
	printf_args	391
	public_equ	391
	required	392
	rtmodel	392
	scanf_args	393
	section	393
	stack_protect	394
	STDC CX_LIMITED_RANGE	
	STDC FENV_ACCESS	395
	STDC FP_CONTRACT	395
	swi_number	395
	type_attribute	396
	unroll	397
	vectorize	397
	weak	398
Intrinsic fu	nctions	. 399
Sumi	mary of intrinsic functions	399
	Intrinsic functions for Neon instructions	408
Desc	riptions of intrinsic functions	409
	arm_cdp	409
	arm_cdp2	409
	arm_ldc	409
	arm_ldcl	409
	arm_ldc2	409
	arm_ldc2l	409
	arm mcr	410

arm_mcr2	410
arm_mcrr	410
arm_mcrr2	410
arm_mrc	411
arm_mrc2	411
arm_mrrc	411
arm_mrrc2	411
arm_rsr	411
arm_rsr64	411
arm_rsrp	411
arm_stc	412
arm_stcl	412
arm_stc2	412
arm_stc2l	412
CDP	413
CDP2	413
CLREX	413
CLZ	414
CRC32B	414
CRC32H	414
CRC32W	414
CRC32CB	111
	414
CRC32CH	
CRC32CH	414
	414 414
CRC32CW	414 414 415
CRC32CWcrc32b	414 414 415 415
CRC32CWcrc32bcrc32h	414 414 415 415 415
CRC32CWcrc32bcrc32hcrc32w	414 415 415 415 415
CRC32CWcrc32bcrc32hcrc32wcrc32dcrc32d	414 415 415 415 415 415
CRC32CWcrc32bcrc32hcrc32wcrc32dcrc32cb	414 415 415 415 415 415 415
CRC32CWcrc32b	414 415 415 415 415 415 415 415
CRC32CWcrc32bcrc32hcrc32wcrc32dcrc32cbcrc32chcrc32chcrc32cw	414 415 415 415 415 415 415 415

disable_irq	416
DMB	416
DSB	417
enable_fiq	417
enable_interrupt	417
enable_irq	417
fma	417
fmaf	417
get_BASEPRI	418
get_CONTROL	418
get_CPSR	418
get_FAULTMASK	418
get_FPSCR	419
get_interrupt_state	419
get_IPSR	419
get_LR	420
get_MSP	420
get_PRIMASK	420
get_PSP	420
get_PSR	420
get_SB	421
get_SP	421
ISB	421
LDC	421
LDCL	421
LDC2	421
LDC2L	421
LDC_noidx	422
LDCL_noidx	422
LDC2_noidx	422
LDC2L_noidx	422
LDREX	423
LDREXB	423
	423

LDREXH	423
MCR	423
MCR2	423
MCRR	424
MCRR2	424
MRC	425
MRC2	425
MRRC	425
MRRC2	425
no_operation	426
PKHBT	426
PKHTB	426
PLD	427
PLDW	427
PLI	427
QADD	427
QDADD	427
QDSUB	427
QSUB	427
QADD8	428
QADD16	428
QASX	428
QSAX	428
QSUB8	428
QSUB16	428
QCFlag	428
QDOUBLE	428
QFlag	429
RBIT	429
reset_Q_flag	429
reset_QC_flag	
REV	
REV16	430
RFVSH	430

rintn	430
rintnf	430
ROR	430
RRX	430
SADD8	431
SADD16	431
SASX	431
SSAX	431
SSUB8	431
SSUB16	431
SEL	431
set_BASEPRI	431
set_CONTROL	432
set_CPSR	432
set_FAULTMASK	432
set_FPSCR	432
set_interrupt_state	432
set_LR	433
set_MSP	433
set_PRIMASK	433
set_PSP	433
set_SB	433
set_SP	433
SEV	434
SHADD8	434
SHADD16	434
SHASX	434
SHSAX	434
SHSUB8	434
SHSUB16	434
SMLABB	435
 SMLABT	
 SMLATB	435
CMI ATT	125

SMLAWB	435
SMLAWT	435
SMLAD	435
SMLADX	435
SMLSD	435
SMLSDX	435
SMLALBB	436
SMLALBT	436
SMLALTB	436
SMLALTT	436
SMLALD	436
SMLALDX	436
SMLSLD	436
SMLSLDX	436
SMMLA	437
SMMLAR	437
SMMLS	437
SMMLSR	437
SMMUL	437
SMMULR	437
SMUAD	437
SMUADX	437
SMUSD	437
SMUSDX	437
SMUL	438
SMULBB	438
SMULBT	438
SMULTB	438
SMULTT	438
SMULWB	438
SMULWT	438
sqrt	438
sqrtf	438
CCAT	430

SSAT16	439
STC	439
STCL	439
STC2	439
STC2L	439
STC_noidx	440
STCL_noidx	440
STC2_noidx	440
STC2L_noidx	440
STREX	441
STREXB	441
STREXD	441
STREXH	441
SWP	441
SWPB	441
SXTAB	442
SXTAB16	442
SXTAH	442
SXTB16	442
TT	442
TTT	442
TTA	442
TTAT	442
UADD8	443
UADD16	443
UASX	443
USAX	443
USUB8	443
USUB16	443
UHADD8	443
UHADD16	443
UHASX	443
UHSAX	
IIHSIIR8	443

UHSUB16	443
UMAAL	444
UQADD8	444
UQADD16	444
UQASX	444
UQSAX	444
UQSUB8	444
UQSUB16	444
USAD8	444
USADA8	444
USAT	445
USAT16	445
UXTAB	445
UXTAB16	445
UXTAH	445
UXTB16	445
VFMA_F64	446
VFMS_F64	446
VFNMA_F64	446
VFNMS_F64	446
VFMA_F32	446
VFMS_F32	446
VFNMA_F32	446
VFNMS_F32	446
VMINNM_F64	447
VMAXNM_F64	447
VMINNM_F32	447
VMAXNM_F32	447
VRINTA_F64	448
VRINTM_F64	448
VRINTN_F64	448
VRINTP_F64	448
VRINTX_F64	448
VIDINTED ECA	4.40

VRINTZ_F64	448
VRINTA_F32	448
VRINTM_F32	448
VRINTN_F32	448
VRINTP_F32	448
VRINTX_F32	448
VRINTR_F32	448
VRINTZ_F32	448
VSQRT_F64	449
VSQRT_F32	449
WFE	450
WFI	450
YIELD	450
The preprocessor	451
Overview of the preprocessor	
Description of predefined preprocessor symbols	
AAPCS	
AAPCS_VFP	
ARM_ADVANCED_SIMD	
ARM_ARCH	
ARM_ARCH_ISA_ARM	
ARM_ARCH_ISA_THUMB	
ARM_ARCH_PROFILE	
ARM_BIG_ENDIAN	
ARM_FEATURE_CMSE	
ARM_FEATURE_CRC32	453
ARM_FEATURE_CRYPTO	454
ARM_FEATURE_DIRECTED_ROUNDING	
ARM_FEATURE_DSP	
ARM_FEATURE_FMA	454
ARM_FEATURE_IDIV	
ARM_FEATURE_NUMERIC_MAXMIN	454
ARM FEATURE UNALIGNED	455

ARM_FP	455
ARM_MEDIA	455
ARM_NEON	455
ARM_NEON_FP	455
ARM_PROFILE_M	455
ARMVFP	456
ARMVFP_D16	456
ARMVFP_FP16	456
ARMVFP_SP	456
BASE_FILE	456
BUILD_NUMBER	457
CORE	457
COUNTER	457
cplusplus	457
CPU_MODE	457
DATE	457
EXCEPTIONS	458
FILE	458
func	458
FUNCTION	458
IAR_SYSTEMS_ICC	458
ICC arm	459
LINE	459
LITTLE_ENDIAN	459
PRETTY_FUNCTION	459
	459
ROPI	
ROPI	459
RTTI	460
RTTI	460 460
RTTI	460 460
RTTIRWPISTDCSTDC_LIB_EXT1STDC_NO_ATOMICSSTDC_NO_THREADS	460 460 460 460
RTTIRWPISTDCSTDC_LIB_EXT1STDC_NO_ATOMICS	460 460 460 460

STDC_UTF32	461
STDC_VERSION	461
TIME	461
TIMESTAMP	461
VER	461
Descriptions of miscellaneous preprocessor exte	ensions 461
NDEBUG	461
STDC_WANT_LIB_EXT1	462
#warning message	462
C/C++ standard library functions	463
C/C++ standard library overview	463
Header files	463
Library object files	464
Alternative more accurate library functions	464
Reentrancy	464
The longjmp function	465
DLIB runtime environment—implementation de	etails 465
Briefly about the DLIB runtime environment	465
C header files	466
C++ header files	467
Library functions as intrinsic functions	470
Not supported C/C++ functionality	471
Atomic operations	471
Added C functionality	471
Non-standard implementations	474
Symbols used internally by the library	474
The linker configuration file	475
Overview	475
Defining memories and regions	476
define memory directive	477
define region directive	477
Regions	478
Region literal	478

	Region expression	479
	Empty region	480
	Section handling	481
	define block directive	482
	define section directive	484
	define overlay directive	486
	initialize directive	487
	do not initialize directive	490
	keep directive	490
	place at directive	491
	place in directive	492
	use init table directive	493
	Section selection	494
	section-selectors	494
	extended-selectors	497
	Using symbols, expressions, and numb	
	check that directive	499
	define symbol directive	500
	export directive	
	expressions	501
	numbers	502
	Structural configuration	502
	error directive	503
	if directive	503
	include directive	504
Section	on reference	505
	Summary of sections	505
	Descriptions of sections and blocks	
	.bss	506
	CSTACK	506
	.data	507
	.data_init	507
	.exc.text	507

	HEAP	507
	iar_tls.\$\$DATA	507
	iar.dynexit	508
	.init_array	508
	intvec	508
	IRQ_STACK	508
	.noinit	509
	.preinit_array	509
	.prepreinit_array	509
	.rodata	509
	.text	509
	.textrw	510
	.textrw_init	510
	Veneer\$\$CMSE	510
The stack i	usage control file	511
Over	view	511
	C++ names	511
Stack	c usage control directives	511
	call graph root directive	512
	exclude directive	512
	function directive	512
	max recursion depth directive	513
	no calls from directive	513
	possible calls directive	514
Synta	actic components	514
	category	515
	func-spec	515
	module-spec	515
	name	516
	call-info	516
	stack-size	516
	size	517

ıtilities	519
The IAR Archive Tool—iarchive	519
Invocation syntax	520
Summary of iarchive commands	520
Summary of iarchive options	521
Diagnostic messages	521
The IAR ELF Tool—ielftool	523
Invocation syntax	523
Summary of ielftool options	524
The IAR ELF Dumper—ielfdump	524
Invocation syntax	525
Summary of ielfdump options	525
The IAR ELF Object Tool—iobjmanip	526
Invocation syntax	526
Summary of iobjmanip options	527
Diagnostic messages	527
The IAR Absolute Symbol Exporter—isymexport	529
Invocation syntax	529
Summary of isymexport options	531
Steering files	531
Show directive	532
Show-weak directive	532
Hide directive	533
Rename directive	533
Diagnostic messages	534
The IAR ELF Relocatable Object Creator—iexe2obj	535
Invocation syntax	535
Building the input file	536
Summary of iexe2obj options	537
Descriptions of options	537
a	537
all	538
hin	538

checksum	. 538
code	. 541
create	.542
delete, -d	. 542
disasm_data	. 543
edit	. 543
extract, -x	. 543
-f	. 544
fill	. 545
front_headers	. 545
generate_vfe_header	. 546
hide_symbols	. 546
ihex	. 546
keep_mode_symbols	. 547
no_bom	. 547
no_header	. 547
no_rel_section	. 548
no_strtab	. 548
no_utf8_in	. 548
offset	. 549
output, -o	. 549
parity	. 550
prefix	.551
ram_reserve_ranges	. 552
range	. 552
raw	. 553
remove_file_path	. 553
remove_section	. 553
rename_section	. 554
rename_symbol	. 554
replace, -r	. 555
reserve_ranges	. 555
section, -s	. 556
seament -a	556

	self_reloc	557
	show_entry_as	557
	silent	557
	simple	558
	simple-ne	558
	source	558
	srec	559
	srec-len	559
	srec-s3only	559
	strip	560
	symbols	560
	text_out	561
	titxt	561
	toc, -t	561
	use_full_std_template_names	562
	utf8_text_in	562
	verbose, -V	563
	version	563
	wrap	563
Implement	ation-defined behavior for Standard C	565
Desci	riptions of implementation-defined behavior	565
	J.3.1 Translation	565
	J.3.2 Environment	566
	J.3.3 Identifiers	567
	J.3.4 Characters	567
	J.3.5 Integers	569
	J.3.6 Floating point	570
	J.3.7 Arrays and pointers	571
	J.3.8 Hints	571
	J.3.9 Structures, unions, enumerations, and bitfields	571
	J.3.10 Qualifiers	572
	J.3.11 Preprocessing directives	572
	J.3.12 Library functions	575

J.3.13 Architecture	580
J.4 Locale	581
Implementation-defined behavior for C89	585
Descriptions of implementation-defined behavior	585
Translation	585
Environment	585
Identifiers	586
Characters	586
Integers	587
Floating point	588
Arrays and pointers	589
Registers	589
Structures, unions, enumerations, and bitfields	589
Qualifiers	590
Declarators	590
Statements	590
Preprocessing directives	590
Library functions for the IAR DLIB Runtime Environment	592
Index	597

Tables

1: 7	Typographic conventions used in this guide	. 46
2: 1	Naming conventions used in this guide	. 47
3: \$	Sections holding initialized data	. 94
4: I	Description of a relocation error	116
5: I	Example of runtime model attributes	118
6: I	Library configurations	129
7: I	Formatters for printf	134
8: I	Formatters for scanf	135
9: I	Library objects using TLS	155
10:	Inline assembler operand constraints	161
11:	Supported constraint modifiers	163
12:	List of valid clobbers	165
13:	Operand modifiers and transformations	165
14:	Registers used for passing parameters	173
15:	Registers used for returning values	174
16:	Call frame information resources defined in a names block	177
17:	Language extensions	183
18:	Section operators and their symbols	185
19:	Exception stacks for Arm7/9/11, Cortex-A, and Cortex-R	200
20:	Compiler optimization levels	228
21:	Compiler environment variables	243
22:	ILINK environment variables	243
23:	Error return codes	245
24:	Compiler options summary	253
25:	Linker options summary	301
26:	Integer types	341
27:	Floating-point types	346
28:	Extended keywords summary	358
	Pragma directives summary	
30:	Intrinsic functions summary	399
31:	Traditional Standard C header files—DLIB	466

32:	C++ header files	67
33:	New Standard C header files—DLIB	69
34:	Examples of section selector specifications	96
35:	Section summary	05
36:	iarchive parameters	20
37:	iarchive commands summary	20
38:	iarchive options summary	21
39:	ielftool parameters	23
40:	ielftool options summary	24
41:	ielfdumparm parameters	25
42:	ielfdumparm options summary	25
43:	iobjmanip parameters	26
44:	iobjmanip options summary	27
45:	isymexport parameters	30
46:	isymexport options summary	31
47:	iexe2obj parameters	36
48:	iexe2obj options summary	37
49:	Execution character sets and their encodings	68
50:	Translation of multibyte characters in the extended source character set 58	81
51:	Message returned by strerror()—DLIB runtime environment	83
52:	Execution character sets and their encodings	86
53:	Message returned by strerror()—DLIB runtime environment	95

Preface

Welcome to the IAR C/C++ Development Guide for Arm. The purpose of this guide is to provide you with detailed reference information that can help you to use the build tools to best suit your application requirements. This guide also gives you suggestions on coding techniques so that you can develop applications with maximum efficiency.

Who should read this guide

Read this guide if you plan to develop an application using the C or C++ language for 32-bit Arm cores and need detailed reference information on how to use the build tools.

REQUIRED KNOWLEDGE

To use the tools in IAR Embedded Workbench, you should have working knowledge of:

- The architecture and instruction set of the Arm core you are using (refer to the chip manufacturer's documentation)
- The C or C++ programming language
- Application development for embedded systems
- The operating system of your host computer.

For more information about the other development tools incorporated in the IDE, refer to their respective documentation, see *Other documentation*, page 43.

How to use this guide

When you start using the IAR C/C++ compiler and linker for Arm, you should read *Part 1. Using the build tools* in this guide.

When you are familiar with the compiler and linker and have already configured your project, you can focus more on *Part 2. Reference information*.

If you are new to using this product, we suggest that you first read the guide *Getting Started with IAR Embedded Workbench*® for an overview of the tools and the features that the IDE offers. The tutorials, which you can find in IAR Information Center, will help you get started using IAR Embedded Workbench.

What this guide contains

Below is a brief outline and summary of the chapters in this guide.

PART I. USING THE BUILD TOOLS

- Introduction to the IAR build tools gives an introduction to the IAR build tools, which includes an overview of the tools, the programming languages, the available device support, and extensions provided for supporting specific features of the various Arm cores and devices.
- Developing embedded applications gives the information you need to get started developing your embedded software using the IAR build tools.
- Data storage describes how to store data in memory.
- Functions gives a brief overview of function-related extensions—mechanisms for controlling functions—and describes some of these mechanisms in more detail.
- Linking using ILINK describes the linking process using the IAR ILINK Linker and the related concepts.
- Linking your application lists aspects that you must consider when linking your
 application, including using ILINK options and tailoring the linker configuration
 file.
- The DLIB runtime environment describes the DLIB runtime environment in which
 an application executes. It covers how you can modify it by setting options,
 overriding default library modules, or building your own library. The chapter also
 describes system initialization introducing the file cstartup, how to use modules
 for locale, and file I/O.
- Assembler language interface contains information required when parts of an
 application are written in assembler language. This includes the calling convention.
- *Using C* gives an overview of the two supported variants of the C language and an overview of the compiler extensions, such as extensions to Standard C.
- Using C++ gives an overview of the level of C++ support.
- Application-related considerations discusses a selected range of application issues related to using the compiler and linker.
- Efficient coding for embedded applications gives hints about how to write code that compiles to efficient code for an embedded application.

PART 2. REFERENCE INFORMATION

 External interface details provides reference information about how the compiler and linker interact with their environment—the invocation syntax, methods for passing options to the compiler and linker, environment variables, the include file search procedure, and the different types of compiler and linker output. The chapter also describes how the diagnostic system works.

- *Compiler options* explains how to set options, gives a summary of the options, and contains detailed reference information for each compiler option.
- *Linker options* gives a summary of the options, and contains detailed reference information for each linker option.
- Data representation describes the available data types, pointers, and structure types.
 This chapter also gives information about type and object attributes.
- Extended keywords gives reference information about each of the Arm-specific keywords that are extensions to the standard C/C++ language.
- Pragma directives gives reference information about the pragma directives.
- Intrinsic functions gives reference information about functions to use for accessing Arm-specific low-level features.
- The preprocessor gives a brief overview of the preprocessor, including reference information about the different preprocessor directives, symbols, and other related information.
- *C/C++ standard library functions* gives an introduction to the C or C++ library functions, and summarizes the header files.
- The linker configuration file describes the purpose of the linker configuration file and describes its contents.
- Section reference gives reference information about the use of sections.
- The stack usage control file describes the syntax and semantics of stack usage control files.
- IAR utilities describes the IAR utilities that handle the ELF and DWARF object formats.
- Implementation-defined behavior for Standard C describes how the compiler handles the implementation-defined areas of Standard C.
- *Implementation-defined behavior for C89* describes how the compiler handles the implementation-defined areas of the C language standard C89.

Other documentation

User documentation is available as hypertext PDFs and as a context-sensitive online help system in HTML format. You can access the documentation from the Information Center or from the **Help** menu in the IAR Embedded Workbench IDE. The online help system is also available via the F1 key.

USER AND REFERENCE GUIDES

The complete set of IAR Systems development tools is described in a series of guides. Information about:

- System requirements and information about how to install and register the IAR Systems products, is available in the booklet Quick Reference (available in the product box) and the *Installation and Licensing Guide*.
- Using the IDE for project management and building, is available in the IDE Project Management and Building Guide for Arm.
- Using the IAR C-SPY® Debugger and C-RUN runtime error checking, is available in the C-SPY® Debugging Guide for Arm.
- Programming for the IAR C/C++ Compiler for Arm and linking using the IAR ILINK Linker, is available in the *IAR C/C++ Development Guide for Arm*.
- Programming for the IAR Assembler for Arm, is available in the IAR Assembler User Guide for Arm.
- Performing a static analysis using C-STAT and the required checks, is available in the *C-STAT*® *Static Analysis Guide*.
- Developing safety-critical applications using the MISRA C guidelines, is available
 in the IAR Embedded Workbench® MISRA C:2004 Reference Guide or the IAR
 Embedded Workbench® MISRA C:1998 Reference Guide.
- Using I-jet, refer to the IAR Debug probes User Guide for I-jet®, I-jet Trace, and I-scope.
- Using JTAGjet-Trace, refer to the JTAGjet-Trace User Guide for ARM.
- Using IAR J-Link and IAR J-Trace, refer to the *J-Link/J-Trace User Guide*.
- Porting application code and projects created with a previous version of the IAR Embedded Workbench for Arm, is available in the IAR Embedded Workbench® Migration Guide.

Note: Additional documentation might be available depending on your product installation.

THE ONLINE HELP SYSTEM

The context-sensitive online help contains information about:

- IDE project management and building
- Debugging using the IAR C-SPY® Debugger
- The IAR C/C++ Compiler
- The IAR Assembler

- Keyword reference information for the DLIB library functions. To obtain reference information for a function, select the function name in the editor window and press F1.
- C-STAT
- MISRA C

FURTHER READING

These books might be of interest to you when using the IAR Systems development tools:

- Seal, David, and David Jagger. ARM Architecture Reference Manual. Addison-Wesley.
- Barr, Michael, and Andy Oram, ed. *Programming Embedded Systems in C and C++*. O'Reilly & Associates.
- Furber, Steve. ARM System-on-Chip Architecture. Addison-Wesley.
- Harbison, Samuel P. and Guy L. Steele (contributor). C: A Reference Manual. Prentice Hall.
- Labrosse, Jean J. Embedded Systems Building Blocks: Complete and Ready-To-Use Modules in C. R&D Books.
- Mann, Bernhard. C für Mikrocontroller. Franzis-Verlag. [Written in German.]
- Meyers, Scott. Effective C++: 50 Specific Ways to Improve Your Programs and Designs. Addison-Wesley.
- Meyers, Scott. *More Effective C++*. Addison-Wesley.
- Meyers, Scott. Effective STL. Addison-Wesley.
- Sloss, Andrew N. et al, ARM System Developer's Guide: Designing and Optimizing System Software. Morgan Kaufmann.
- Sutter, Herb. Exceptional C++: 47 Engineering Puzzles, Programming Problems, and Solutions. Addison-Wesley.

The web site **isocpp.org** also has a list of recommended books about C++ programming.

WEB SITES

Recommended web sites:

- The Arm Limited web site, www.arm.com, that contains information and news about the Arm cores.
- The IAR Systems web site, www.iar.com, that holds application notes and other product information.
- The web site of the C standardization working group, www.open-std.org/jtc1/sc22/wg14.

- The web site of the C++ Standards Committee, www.open-std.org/jtc1/sc22/wg21.
- The C++ programming language web site, **isocpp.org**.

 This web site also has a list of recommended books about C++ programming.
- The C and C++ reference web site, en.cppreference.com.

Document conventions

When, in the IAR Systems documentation, we refer to the programming language C, the text also applies to C++, unless otherwise stated.

When referring to a directory in your product installation, for example arm\doc, the full path to the location is assumed, for example c:\Program Files\IAR Systems\Embedded Workbench N.n\arm\doc, where the initial digit of the version number reflects the initial digit of the version number of the IAR Embedded Workbench shared components.

TYPOGRAPHIC CONVENTIONS

The IAR Systems documentation set uses the following typographic conventions:

Style	Used for
computer	Source code examples and file paths.Text on the command line.Binary, hexadecimal, and octal numbers.
parameter	A placeholder for an actual value used as a parameter, for example filename.h where filename represents the name of the file.
[option]	An optional part of a directive, where [and] are not part of the actual directive, but any [,], {, or } are part of the directive syntax.
{option}	A mandatory part of a directive, where { and } are not part of the actual directive, but any [,], {, or } are part of the directive syntax.
[option]	An optional part of a command.
[a b c]	An optional part of a command with alternatives.
{a b c}	A mandatory part of a command with alternatives.
bold	Names of menus, menu commands, buttons, and dialog boxes that appear on the screen.
italic	A cross-reference within this guide or to another guide.Emphasis.
	An ellipsis indicates that the previous item can be repeated an arbitrary number of times.

Table 1: Typographic conventions used in this guide

Style	Used for
	Identifies instructions specific to the IAR Embedded Workbench® IDE
	interface.
>_	Identifies instructions specific to the command line interface.
	Identifies helpful tips and programming hints.
	Identifies warnings.

Table 1: Typographic conventions used in this guide (Continued)

NAMING CONVENTIONS

The following naming conventions are used for the products and tools from IAR Systems®, when referred to in the documentation:

Brand name	Generic term
IAR Embedded Workbench® for Arm	IAR Embedded Workbench®
IAR Embedded Workbench® IDE for Arm	the IDE
IAR C-SPY® Debugger for Arm	C-SPY, the debugger
IAR C-SPY® Simulator	the simulator
IAR C/C++ Compiler™ for Arm	the compiler
IAR Assembler™ for Arm	the assembler
IAR ILINK Linker™	ILINK, the linker
IAR DLIB Runtime Environment™	the DLIB runtime environment

Table 2: Naming conventions used in this guide

Document conventions

Part I. Using the build tools

This part of the IAR C/C++ Development Guide for Arm includes these chapters:

- Introduction to the IAR build tools
- Developing embedded applications
- Data storage
- Functions
- Linking using ILINK
- Linking your application
- The DLIB runtime environment
- Assembler language interface
- Using C
- Using C++
- Application-related considerations
- Efficient coding for embedded applications.



Introduction to the IAR build tools

- The IAR build tools—an overview
- IAR language overview
- Device support
- Special support for embedded systems
- Arm TrustZone®

The IAR build tools—an overview

In the IAR product installation you can find a set of tools, code examples, and user documentation, all suitable for developing software for Arm-based embedded applications. The tools allow you to develop your application in C, C++, or in assembler language.



IAR Embedded Workbench® is a very powerful Integrated Development Environment (IDE) that allows you to develop and manage complete embedded application projects. It provides an easy-to-learn and highly efficient development environment with maximum code inheritance capabilities, comprehensive and specific target support. IAR Embedded Workbench promotes a useful working methodology, and thus a significant reduction of the development time.

For information about the IDE, see the *IDE Project Management and Building Guide for Arm*.



The compiler, assembler, and linker can also be run from a command line environment, if you want to use them as external tools in an already established project environment.

IAR C/C++ COMPILER

The IAR C/C++ Compiler for Arm is a state-of-the-art compiler that offers the standard features of the C and C++ languages, plus extensions designed to take advantage of the Arm-specific facilities.

IAR ASSEMBLER

The IAR Assembler for Arm is a powerful relocating macro assembler with a versatile set of directives and expression operators. The assembler features a built-in C language preprocessor and supports conditional assembly.

The IAR Assembler for Arm uses the same mnemonics and operand syntax as the Arm Limited Arm Assembler, which simplifies the migration of existing code. For more information, see the *IAR Assembler User Guide for Arm*.

THE IAR ILINK LINKER

The IAR ILINK Linker for Arm is a powerful, flexible software tool for use in the development of embedded controller applications. It is equally well suited for linking small, single-file, absolute assembler programs as it is for linking large, relocatable input, multi-module, C/C++, or mixed C/C++ and assembler programs.

SPECIFIC ELF TOOLS

ILINK both uses and produces industry-standard ELF and DWARF as object format, additional IAR utilities that handle these formats are provided:

- The IAR Archive Tool—iarchive—creates and manipulates a library (archive) of several ELF object files
- The IAR ELF Tool—ielftool—performs various transformations on an ELF executable image (such as, fill, checksum, format conversion etc)
- The IAR ELF Dumper for ARM—ielfdumparm—creates a text representation of the contents of an ELF relocatable or executable image
- The IAR ELF Object Tool—iobjmanip—is used for performing low-level manipulation of ELF object files
- The IAR Absolute Symbol Exporter—isymexport—exports absolute symbols from a ROM image file, so that they can be used when linking an add-on application.

Note: These ELF utilities are well-suited for object files produced by the tools from IAR Systems. Thus, we recommend using them instead of the GNU binary utilities.

EXTERNAL TOOLS

For information about how to extend the tool chain in the IDE, see the *IDE Project Management and Building Guide for Arm*.

IAR language overview

The IAR C/C++ Compiler for Arm supports:

- C, the most widely used high-level programming language in the embedded systems industry. You can build freestanding applications that follow these standards:
 - Standard C—also known as C11. Hereafter, this standard is referred to as *Standard C* in this guide.
 - C89—also known as C94, C90, and ANSI C. This standard is required when MISRA C is enabled in the compiler.
- C++, a modern object-oriented programming language with a full-featured library well suited for modular programming:
 - Standard C++—also known as C++14—can be used with different levels of support for exceptions and runtime type information (RTTI).

Each of the supported languages can be used in *strict* or *relaxed* mode, or relaxed with IAR extensions enabled. The strict mode adheres to the standard, whereas the relaxed mode allows some common deviations from the standard. Both the strict and the relaxed mode might contain support for features in future versions of the C/C++ standards.

For more information about C, see the chapter Using C.

For more information about C++, see the chapter Using C++.

For information about how the compiler handles the implementation-defined areas of the languages, see the chapter *Implementation-defined behavior for Standard C*.

It is also possible to implement parts of the application, or the whole application, in assembler language. See the *IAR Assembler User Guide for Arm*.

Device support

To get a smooth start with your product development, the IAR product installation comes with a wide range of device-specific support.

SUPPORTED ARM DEVICES

The IAR C/C++ Compiler for Arm supports most 32-bit Arm cores and devices. The object code that the compiler generates is not always binary compatible between the

cores. Therefore it is crucial to specify a processor option to the compiler. The default core is Cortex-M3.

PRECONFIGURED SUPPORT FILES

The IAR product installation contains preconfigured files for supporting different devices. If you need additional files for device support, they can be created using one of the provided ones as a template.

Header files for I/O

Standard peripheral units are defined in device-specific I/O header files with the filename extension h. The product package supplies I/O files for all devices that are available at the time of the product release. You can find these files in the arm\inc\<vendor> directory. Make sure to include the appropriate include file in your application source files. If you need additional I/O header files, they can be created using one of the provided ones as a template. For detailed information about the header file format, see EWARM_HeaderFormat.pdf located in the arm\doc directory.

Linker configuration files

The arm\config directory contains ready-made linker configuration files for all supported devices. The files have the filename extension icf and contain the information required by the linker. For more information about the linker configuration file, see *Placing code and data—the linker configuration file*, page 91, and for reference information, the chapter *The linker configuration file*.

Device description files

The debugger handles several of the device-specific requirements, such as definitions of available memory areas, peripheral registers and groups of these, by using device description files. These files are located in the arm\config directory and they have the filename extension ddf. The peripheral registers and groups of these can be defined in separate files (filename extension sfr), which in that case are included in the ddf file. For more information about these files, see the *C-SPY® Debugging Guide for Arm* and EWARM_DDFFORMAT.pdf located in the arm\doc directory.

EXAMPLES FOR GETTING STARTED

Example applications are provided with IAR Embedded Workbench. You can use these examples to get started using the development tools from IAR Systems. You can also use the examples as a starting point for your application project.

The examples are ready to be used as is. They are supplied with ready-made workspace files, together with source code files and all other related files. For information about

how to run an example project, see the *IDE Project Management and Building Guide for Arm*.

Special support for embedded systems

This section briefly describes the extensions provided by the compiler to support specific features of the various Arm cores and devices.

EXTENDED KEYWORDS

The compiler provides a set of keywords that can be used for configuring how the code is generated. For example, there are keywords for controlling how to access and store data objects, as well as for controlling how a function should work internally and how it should be called/returned.

By default, language extensions are enabled in the IDE.

The command line option -e makes the extended keywords available, and reserves them so that they cannot be used as variable names. See, -e, page 269 for additional information.

For more information about the extended keywords, see the chapter *Extended keywords*. See also, *Data storage*, page 71 and *Functions*, page 75.

PRAGMA DIRECTIVES

The pragma directives control the behavior of the compiler, for example how it allocates memory, whether it allows extended keywords, and whether it issues warning messages.

The pragma directives are always enabled in the compiler. They are consistent with standard C, and are very useful when you want to make sure that the source code is portable.

For more information about the pragma directives, see the chapter *Pragma directives*.

PREDEFINED SYMBOLS

With the predefined preprocessor symbols, you can inspect your compile-time environment, for example time of compilation or the build number of the compiler.

For more information about the predefined symbols, see the chapter *The preprocessor*.

ACCESSING LOW-LEVEL FEATURES

For hardware-related parts of your application, accessing low-level features is essential. The compiler supports several ways of doing this: intrinsic functions, mixing C and

assembler modules, and inline assembler. For information about the different methods, see Mixing C and assembler, page 157.

Arm TrustZone®

The Arm TrustZone for ArmV8-M adds a security extension to the Armv8-M core. This extension includes two modes of execution—secure and non-secure. It also adds memory protection and instructions for validating memory access and controlled transition between the two modes.

To use TrustZone for Armv8-M, build two separate images—one for secure mode and one for non-secure mode. The secure image can export function entries that can be used by the non-secure image.

The IAR build tools support TrustZone by means of intrinsic functions, linker options, compiler options, predefined preprocessor symbols, extended keywords, and the section Veneer\$\$CMSE.

You can find the data types and utility functions needed for working with TrustZone in the header file arm cmse.h.

The function type attributes __cmse_nonsecure_call and __cmse_nonsecure_entry add code to clear the used registers when calling from secure code to non-secure code.

The IAR build tools follow the standard interface for development tools targeting Cortex-M Security Extensions (CMSE), with the following exceptions:

- Variadic secure entry functions are not allowed.
- Secure entry functions with parameters or return values that do not fit in registers are not allowed.
- Non-secure calls with parameters or return values that do not fit in registers are not allowed.
- Non-secure calls with parameters or return values in floating-point registers.
- The compiler option --cmse requires the architecture Armv8-M with security extensions, and is not supported when building ROPI (read-only position-independent) images or RWPI (read-write position-independent) images.

In the arm\src\ARMv8M_Secure directory, you can find an example project that demonstrates the use of Arm TrustZone and CMSE.

For more information about Arm TrustZone, see www.arm.com.

Developing embedded applications

- Developing embedded software using IAR build tools
- The build process—an overview
- Application execution—an overview
- Building applications—an overview
- Basic project configuration

Developing embedded software using IAR build tools

Typically, embedded software written for a dedicated microcontroller is designed as an endless loop waiting for some external events to happen. The software is located in ROM and executes on reset. You must consider several hardware and software factors when you write this kind of software. To your help, you have compiler options, extended keywords, pragma directives, etc.

MAPPING OF MEMORY

Embedded systems typically contain various types of memory, such as on-chip RAM, external DRAM or SRAM, ROM, EEPROM, or flash memory.

As an embedded software developer, you must understand the features of the different types of memory. For example, on-chip RAM is often faster than other types of memories, and variables that are accessed often would in time-critical applications benefit from being placed here. Conversely, some configuration data might be accessed seldom but must maintain their value after power off, so they should be saved in EEPROM or flash memory.

For efficient memory usage, the compiler provides several mechanisms for controlling placement of functions and data objects in memory. For more information, see *Controlling data and function placement in memory*, page 222. The linker places sections of code and data in memory according to the directives you specify in the linker configuration file, see *Placing code and data—the linker configuration file*, page 91.

COMMUNICATION WITH PERIPHERAL UNITS

If external devices are connected to the microcontroller, you might need to initialize and control the signaling interface, for example by using chip select pins, and detect and handle external interrupt signals. Typically, this must be initialized and controlled at runtime. The normal way to do this is to use special function registers (SFR). These are typically available at dedicated addresses, containing bits that control the chip configuration.

Standard peripheral units are defined in device-specific I/O header files with the filename extension h. See *Device support*, page 53. For an example, see *Accessing* special function registers, page 235.

EVENT HANDLING

In embedded systems, using *interrupts* is a method for handling external events immediately; for example, detecting that a button was pressed. In general, when an interrupt occurs in the code, the core immediately stops executing the code it runs, and starts executing an interrupt routine instead.

The compiler provides various primitives for managing hardware and software interrupts, which means that you can write your interrupt routines in C, see Interrupt functions for Cortex-M devices, page 77 and Interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices, page 78.

SYSTEM STARTUP

In all embedded systems, system startup code is executed to initialize the system—both the hardware and the software system—before the main function of the application is called. The CPU imposes this by starting execution from a fixed memory address.

As an embedded software developer, you must ensure that the startup code is located at the dedicated memory addresses, or can be accessed using a pointer from the vector table. This means that startup code and the initial vector table must be placed in non-volatile memory, such as ROM, EPROM, or flash.

A C/C++ application further needs to initialize all global variables. This initialization is handled by the linker and the system startup code in conjunction. For more information, see Application execution—an overview, page 62.

REAL-TIME OPERATING SYSTEMS

In many cases, the embedded application is the only software running in the system. However, using an RTOS has some advantages.

For example, the timing of high-priority tasks is not affected by other parts of the program which are executed in lower priority tasks. This typically makes a program more deterministic and can reduce power consumption by using the CPU efficiently and putting the CPU in a lower-power state when idle.

Using an RTOS can make your program easier to read and maintain, and in many cases smaller as well. Application code can be cleanly separated in tasks which are truly independent of each other. This makes teamwork easier, as the development work can be easily split into separate tasks which are handled by one developer or a group of developers.

Finally, using an RTOS reduces the hardware dependence and creates a clean interface to the application, making it easier to port the program to different target hardware.

See also Managing a multithreaded environment, page 154.

INTEROPERABILITY WITH OTHER BUILD TOOLS

The IAR compiler and linker provide support for AEABI, the Embedded Application Binary Interface for Arm. For more information about this interface specification, see the www.arm.com web site.

The advantage of this interface is the interoperability between vendors supporting it; an application can be built up of libraries of object files produced by different vendors and linked with a linker from any vendor, as long as they adhere to the AEABI standard.

AEABI specifies full compatibility for C and C++ object code, and for the C library. The AEABI does not include specifications for the C++ library.

For more information about the AEABI support in the IAR build tools, see *AEABI compliance*, page 214.

The IAR build tools for Arm with version numbers from 8.xx and up are not fully compatible with earlier versions of the product, see the *IAR Embedded Workbench*® *Migration Guide for ARM*® for more information.

For more information, see *Linker optimizations*, page 213.

The build process—an overview

This section gives an overview of the build process; how the various build tools—compiler, assembler, and linker—fit together, going from source code to an executable image.


To get familiar with the process in practice, you should run one or more of the tutorials available from the IAR Information Center.

THE TRANSLATION PROCESS

There are two tools in the IDE that translate application source files to intermediary object files. The IAR C/C++ Compiler and the IAR Assembler. Both produce relocatable object files in the industry-standard format ELF, including the DWARF format for debug information.

Note: The compiler can also be used for translating C source code into assembler source code. If required, you can modify the assembler source code which then can be assembled into object code. For more information about the IAR Assembler, see the *IAR Assembler User Guide for Arm.*

This illustration shows the translation process:



After the translation, you can choose to pack any number of modules into an archive, or in other words, a library. The important reason you should use libraries is that each module in a library is conditionally linked in the application, or in other words, is only included in the application if the module is used directly or indirectly by a module supplied as an object file. Optionally, you can create a library; then use the IAR utility iarchive.

THE LINKING PROCESS


The relocatable modules, in object files and libraries, produced by the IAR compiler and assembler cannot be executed as is. To become an executable application, they must be *linked*.

Note: Modules produced by a toolset from another vendor can be included in the build as well. Be aware that this also might require a compiler utility library from the same vendor.

The IAR ILINK Linker (ilinkarm.exe) is used for building the final application. Normally, the linker requires the following information as input:

- Several object files and possibly certain libraries
- A program start label (set by default)
- The linker configuration file that describes placement of code and data in the memory of the target system

This illustration shows the linking process:



Note: The Standard C/C++ library contains support routines for the compiler, and the implementation of the C/C++ standard library functions.

During the linking, the linker might produce error messages and logging messages on stdout and stderr. The log messages are useful for understanding why an application was linked the way it was, for example, why a module was included or a section removed.


For more information about the procedure performed by the linker, see *The linking process in detail*, page 89.

AFTER LINKING

The IAR ILINK Linker produces an absolute object file in ELF format that contains the executable image. After linking, the produced absolute executable image can be used for:

- Loading into the IAR C-SPY Debugger or any other compatible external debugger that reads ELF and DWARF.
- Programming to a flash/PROM using a flash/PROM programmer. Before this is
 possible, the actual bytes in the image must be converted into the standard Motorola
 32-bit S-record format or the Intel Hex-32 format. For this, use ielftool, see *The IAR ELF Tool—ielftool*, page 523.

This illustration shows the possible uses of the absolute output ELF/DWARF file:



Application execution—an overview

This section gives an overview of the execution of an embedded application divided into three phases, the:

- Initialization phase
- Execution phase
- Termination phase.

THE INITIALIZATION PHASE

• Application initialization

Initialization is executed when an application is started (the CPU is reset) but before the main function is entered. The initialization phase can for simplicity be divided into:


- Hardware initialization, which generally at least initializes the stack pointer.

 The hardware initialization is typically performed in the system startup code cstartup.s and if required, by an extra low-level routine that you provide. It might include resetting/starting the rest of the hardware, setting up the CPU, etc, in preparation for the software C/C++ system initialization.
- Software C/C++ system initialization
 Typically, this includes assuring that every global (statically linked) C/C++ symbol receives its proper initialization value before the main function is called.
 - This depends entirely on your application. It can include setting up an RTOS kernel and starting initial tasks for an RTOS-driven application. For a bare-bone application, it can include setting up various interrupts, initializing communication, initializing devices, etc.


For a ROM/flash-based system, constants and functions are already placed in ROM. All symbols placed in RAM must be initialized before the main function is called. The linker has already divided the available RAM into different areas for variables, stack, heap, etc.

The following sequence of illustrations gives a simplified overview of the different stages of the initialization.

When an application is started, the system startup code first performs hardware initialization, such as initialization of the stack pointer to point at the end of the predefined stack area:





2 Then, memories that should be zero-initialized are cleared, in other words, filled with zeros:



Typically, this is data referred to as *zero-initialized data*; variables declared as, for example, int i = 0;

3 For *initialized data*, data declared, for example, like int i = 6; the initializers are copied from ROM to RAM:





4 Finally, the main function is called:

For more information about each stage, see *System startup and termination*, page 139. For more information about initialization of data, see *Initialization at system startup*, page 94.

THE EXECUTION PHASE

The software of an embedded application is typically implemented as a loop which is either interrupt-driven or uses polling for controlling external interaction or internal events. For an interrupt-driven system, the interrupts are typically initialized at the beginning of the main function.

In a system with real-time behavior and where responsiveness is critical, a multi-task system might be required. This means that your application software should be complemented with a real-time operating system. In this case, the RTOS and the different tasks must also be initialized at the beginning of the main function.

THE TERMINATION PHASE

Typically, the execution of an embedded application should never end. If it does, you must define a proper end behavior.

To terminate an application in a controlled way, either call one of the Standard C library functions exit, _Exit, quick_exit, or abort, or return from main. If you return from main, the exit function is executed, which means that C++ destructors for static and global variables are called (C++ only) and all open files are closed.

Of course, in case of incorrect program logic, the application might terminate in an uncontrolled and abnormal way—a system crash.

For more information about this, see System termination, page 141.

Building applications—an overview

In the command line interface, this line compiles the source file myfile.c into the object file myfile.o using the default settings:

iccarm myfile.c

You must also specify some critical options, see *Basic project configuration*, page 67.

On the command line, this line can be used for starting the linker:

ilinkarm myfile.o myfile2.o -o a.out --config my_configfile.icf

In this example, myfile.o and myfile.o are object files, and my_configfile.icf is the linker configuration file. The option -o specifies the name of the output file.

Note: By default, the label where the application starts is __iar_program_start. You can use the --entry command line option to change this.



When building a project, the IAR Embedded Workbench IDE can produce extensive build information in the **Build** messages window. This information can be useful, for example, as a base for producing batch files for building on the command line. You can copy the information and paste it in a text file. To activate extensive build information, right-click in the **Build** messages window and select **All** on the context menu.

Basic project configuration

This section gives an overview of the basic settings for the project setup that are needed to make the compiler and linker generate the best code for the Arm device you are using. You can specify the options either from the command line interface or in the IDE.

You need to make settings for:

- Processor configuration, that is processor variant, CPU mode, VFP and floating-point arithmetic, and byte order
- Optimization settings
- Runtime environment, see Setting up the runtime environment, page 123
- Customizing the ILINK configuration, see the chapter *Linking your application*.

In addition to these settings, many other options and settings can fine-tune the result even further. For information about how to set options and for a list of all available options, see the chapters *Compiler options*, *Linker options*, and the *IDE Project Management and Building Guide for Arm*, respectively.

PROCESSOR CONFIGURATION

To make the compiler generate optimum code, you should configure it for the Arm core you are using.

Processor variant

The IAR C/C++ Compiler for Arm supports most 32-bit Arm cores and devices. All supported cores support Thumb instructions and 64-bit multiply instructions. The object code that the compiler generates is not always binary compatible between the cores. Therefore it is crucial to specify a processor option to the compiler. The default core is Cortex-M3.



See the *IDE Project Management and Building Guide for Arm*, for information about setting the **Processor variant** option in the IDE.



Use the --cpu option to specify the Arm core; see --arm, page 260 and --thumb, page 296, for syntax information.

VFP and floating-point arithmetic

If you are using an Arm core that contains a Vector Floating Point (VFP) coprocessor, you can use the --fpu option to generate code that carries out floating-point operations utilizing the coprocessor, instead of using the software floating-point library routines.



See the *IDE Project Management and Building Guide for Arm*, for information about setting the **FPU** option in the IDE.



Use the --fpu option to specify the Arm core; see --fpu, page 272 for syntax information.

Byte order

The compiler supports the big-endian and little-endian byte order. All user and library modules in your application must use the same byte order.



See the *IDE Project Management and Building Guide for Arm* for information about setting the **Endian mode** option in the IDE.



Use the --endian option to specify the byte order for your project; see --endian, page 270, for syntax information.

OPTIMIZATION FOR SPEED AND SIZE

The compiler's optimizer performs, among other things, dead-code elimination, constant propagation, inlining, common sub-expression elimination, static clustering, instruction scheduling, and precision reduction. It also performs loop optimizations, such as unrolling and induction variable elimination.

You can choose between several optimization levels, and for the highest level you can choose between different optimization goals—*size*, *speed*, or *balanced*. Most optimizations will make the application both smaller and faster. However, when this is not the case, the compiler uses the selected optimization goal to decide how to perform the optimization.

The optimization level and goal can be specified for the entire application, for individual files, and for individual functions. In addition, some individual optimizations, such as function inlining, can be disabled.

For information about compiler optimizations and for more information about efficient coding techniques, see the chapter *Efficient coding for embedded applications*.

Basic project configuration

Data storage

- Introduction
- Storage of auto variables and parameters
- Dynamic memory on the heap

Introduction

An Arm core can address 4 Gbytes of continuous memory, ranging from 0x00000000 to 0xffffffff. Different types of physical memory can be placed in the memory range. A typical application will have both read-only memory (ROM) and read/write memory (RAM). In addition, some parts of the memory range contain processor control registers and peripheral units.

DIFFERENT WAYS TO STORE DATA

In a typical application, data can be stored in memory in three different ways:

- Auto variables
 - All variables that are local to a function, except those declared static, are stored either in registers or on the stack. These variables can be used as long as the function executes. When the function returns to its caller, the memory space is no longer valid. For more information, see *Storage of auto variables and parameters*, page 72.
- Global variables, module-static variables, and local variables declared static
 In this case, the memory is allocated once and for all. The word static in this context means that the amount of memory allocated for this kind of variables does not change while the application is running. The Arm core has one single address space and the compiler supports full memory addressing.
- Dynamically allocated data.
 - An application can allocate data on the *heap*, where the data remains valid until it is explicitly released back to the system by the application. This type of memory is useful when the number of objects is not known until the application executes. Note that there are potential risks connected with using dynamically allocated data in systems with a limited amount of memory, or systems that are expected to run for a long time. For more information, see *Dynamic memory on the heap*, page 73.

Storage of auto variables and parameters

Variables that are defined inside a function—and not declared static—are named auto variables by the C standard. A few of these variables are placed in processor registers; the rest are placed on the stack. From a semantic point of view, this is equivalent. The main differences are that accessing registers is faster, and that less memory is required compared to when variables are located on the stack.

Auto variables can only live as long as the function executes; when the function returns, the memory allocated on the stack is released.

THE STACK

The stack can contain:

- Local variables and parameters not stored in registers
- Temporary results of expressions
- The return value of a function (unless it is passed in registers)
- Processor state during interrupts
- Processor registers that should be restored before the function returns (callee-save registers).

The stack is a fixed block of memory, divided into two parts. The first part contains allocated memory used by the function that called the current function, and the function that called it, etc. The second part contains free memory that can be allocated. The borderline between the two areas is called the top of stack and is represented by the stack pointer, which is a dedicated processor register. Memory is allocated on the stack by moving the stack pointer.

A function should never refer to the memory in the area of the stack that contains free memory. The reason is that if an interrupt occurs, the called interrupt function can allocate, modify, and—of course—deallocate memory on the stack.

See also Stack considerations, page 200 and Setting up stack memory, page 109.

Advantages

The main advantage of the stack is that functions in different parts of the program can use the same memory space to store their data. Unlike a heap, a stack will never become fragmented or suffer from memory leaks.

It is possible for a function to call itself either directly or indirectly—a recursive function—and each invocation can store its own data on the stack.

Potential problems

The way the stack works makes it impossible to store data that is supposed to live after the function returns. The following function demonstrates a common programming mistake. It returns a pointer to the variable \times , a variable that ceases to exist when the function returns.

```
int *MyFunction()
{
  int x;
  /* Do something here. */
  return &x; /* Incorrect */
}
```

Another problem is the risk of running out of stack space. This will happen when one function calls another, which in turn calls a third, etc., and the sum of the stack usage of each function is larger than the size of the stack. The risk is higher if large data objects are stored on the stack, or when recursive functions are used.

Dynamic memory on the heap

Memory for objects allocated on the heap will live until the objects are explicitly released. This type of memory storage is very useful for applications where the amount of data is not known until runtime.

In C, memory is allocated using the standard library function malloc, or one of the related functions calloc and realloc. The memory is released again using free.

In C++, a special keyword, new, allocates memory and runs constructors. Memory allocated with new must be released using the keyword delete.

For information about how to set up the size for heap memory, see *Setting up heap memory*, page 110.

POTENTIAL PROBLEMS

Applications that use heap-allocated data objects must be very carefully designed, because it is easy to end up in a situation where it is not possible to allocate objects on the heap.

The heap can become exhausted if your application uses too much memory. It can also become full if memory that no longer is in use was not released.

For each allocated memory block, a few bytes of data for administrative purposes is required. For applications that allocate a large number of small blocks, this administrative overhead can be substantial.

There is also the matter of fragmentation; this means a heap where small sections of free memory is separated by memory used by allocated objects. It is not possible to allocate a new object if no piece of free memory is large enough for the object, even though the sum of the sizes of the free memory exceeds the size of the object.

Unfortunately, fragmentation tends to increase as memory is allocated and released. For this reason, applications that are designed to run for a long time should try to avoid using memory allocated on the heap.

Functions

- Function-related extensions
- Arm and Thumb code
- Execution in RAM
- Interrupt functions for Cortex-M devices
- Interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices
- Inlining functions
- Stack protection

Function-related extensions

In addition to supporting Standard C, the compiler provides several extensions for writing functions in C. Using these, you can:

- Generate code for the different CPU modes Arm and Thumb Typically, this refers to target-specific keywords, such as __arm, __thumb.
- Execute functions in RAM
- Write interrupt functions for the different devices
- Control function inlining
- Facilitate function optimization
- Access hardware features.

The compiler uses compiler options, extended keywords, pragma directives, and intrinsic functions to support this.

For more information about optimizations, see *Efficient coding for embedded applications*, page 219. For information about the available intrinsic functions for accessing hardware operations, see the chapter *Intrinsic functions*.

Arm and Thumb code

The IAR C/C++ Compiler for Arm can generate code for either the 32-bit Arm, or the 16-bit Thumb or Thumb2 instruction set. Use the --cpu_mode option, alternatively the

--arm or --thumb options, to specify which instruction set should be used for your project. For individual functions, it is possible to override the project setting by using the extended keywords __arm and __thumb. You can freely mix Arm and Thumb code in the same application.

When performing function calls, the compiler always attempts to generate the most efficient assembler language instruction or instruction sequence available. As a result, 4 Gbytes of continuous memory in the range 0x0-0xfffffffff can be used for placing code. There is a limit of 4 Mbytes per code module.

The size of all code pointers is 4 bytes. There are restrictions to implicit and explicit casts from code pointers to data pointers or integer types or vice versa. For further information about the restrictions, see *Pointer types*, page 348.

In the chapter *Assembler language interface*, the generated code is studied in more detail in the description of calling C functions from assembler language and vice versa.

Execution in RAM

The __ramfunc keyword makes a function execute in RAM. In other words it places the function in a section that has read/write attributes. The function is copied from ROM to RAM at system startup just like any initialized variable, see *System startup and termination*, page 139.

The keyword is specified before the return type:

```
__ramfunc void foo(void);
```

If a function declared __ramfunc tries to access ROM, the compiler will issue a warning.

If the whole memory area used for code and constants is disabled—for example, when the whole flash memory is being erased—only functions and data stored in RAM may be used. Interrupts must be disabled unless the interrupt vector and the interrupt service routines are also stored in RAM.

String literals and other constants can be avoided by using initialized variables. For example, the following lines:

```
__ramfunc void test()
{
   /* myc: initializer in ROM */
   const int myc[] = { 10, 20 };

   /* string literal in ROM */
   msg("Hello");
}
```

can be rewritten to:

```
__ramfunc void test()
{
    /* myc: initialized by cstartup */
    static int myc[] = { 10, 20 };

    /* hello: initialized by cstartup */
    static char hello[] = "Hello";

    msg(hello);
}
```

For more information, see *Initializing code—copying ROM to RAM*, page 113.

Interrupt functions for Cortex-M devices

Cortex-M has a different interrupt mechanism than previous Arm architectures, which means the primitives provided by the compiler are also different.

INTERRUPTS FOR CORTEX-M

On Cortex-M, an interrupt service routine enters and returns in the same way as a normal function, which means no special keywords are required. Thus, the keywords <code>__irq</code>, <code>__fiq</code>, and <code>__nested</code> are not available when you compile for Cortex-M.

These exception function names are defined in $cstartup_M.c$ and $cstartup_M.s$. They are referred to by the library exception vector code:

```
NMI_Handler
HardFault_Handler
MemManage_Handler
BusFault_Handler
UsageFault_Handler
SVC_Handler
DebugMon_Handler
PendSV_Handler
SysTick_Handler
```

The vector table is implemented as an array. It should always have the name __vector_table, because the C-SPY debugger looks for that symbol when determining where the vector table is located.

The predefined exception functions are defined as weak symbols. A weak symbol is only included by the linker as long as no duplicate symbol is found. If another symbol is defined with the same name, it will take precedence. Your application can therefore simply define its own exception function by just defining it using the correct name from

the list above. If you need other interrupts or other exception handlers, you must make a copy of the <code>cstartup_M.c</code> or <code>cstartup_M.s</code> file and make the proper addition to the vector table.

The intrinsic functions __get_CPSR and __set_CPSR are not available when you compile for Cortex-M. Instead, if you need to get or set values of these or other registers, you can use inline assembler. For more information, see *Passing values between C and assembler objects*, page 237.

Interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices

The IAR C/C++ Compiler for Arm provides the following primitives related to writing interrupt functions for Arm7/9/11, Cortex-A, and Cortex-R devices:

- The extended keywords: __irq, __fiq, __swi , __nested,
- The intrinsic functions: __enable_interrupt, __disable_interrupt, __get_interrupt_state, __set_interrupt_state.

Note: Cortex-M has a different interrupt mechanism than other Arm devices, and for these devices a different set of primitives is available. For more information, see *Interrupt functions for Cortex-M devices*, page 77.

INTERRUPT FUNCTIONS

In embedded systems, using interrupts is a method for handling external events immediately; for example, detecting that a button was pressed.

Interrupt service routines

In general, when an interrupt occurs in the code, the core immediately stops executing the code it runs, and starts executing an interrupt routine instead. It is important that the environment of the interrupted function is restored after the interrupt is handled (this includes the values of processor registers and the processor status register). This makes it possible to continue the execution of the original code after the code that handled the interrupt was executed.

The compiler supports interrupts, software interrupts, and fast interrupts. For each interrupt type, an interrupt routine can be written.

All interrupt functions must be compiled in Arm mode; if you are using Thumb mode, use the __arm extended keyword or the #pragma type_attribute=__arm directive to override the default behavior. This is not applicable for Cortex-M devices.

Interrupt vectors and the interrupt vector table

Each interrupt routine is associated with a vector address/instruction in the exception vector table, which is specified in the Arm cores documentation. The interrupt vector is the address in the exception vector table. For the Arm cores, the exception vector table starts at address 0×0.

By default, the vector table is populated with a *default interrupt handler* which loops indefinitely. For each interrupt source that has no explicit interrupt service routine, the default interrupt handler will be called. If you write your own service routine for a specific vector, that routine will override the default interrupt handler.

Defining an interrupt function—an example

To define an interrupt function, the <code>__irq</code> or the <code>__fiq</code> keyword can be used. For example:

```
__irq __arm void IRQ_Handler(void)
{
   /* Do something */
}
```

See the Arm cores documentation for more information about the interrupt vector table.

Note: An interrupt function must have the return type void, and it cannot specify any parameters.

Interrupt and C++ member functions

Only static member functions can be interrupt functions. When a non-static member function is called, it must be applied to an object. When an interrupt occurs and the interrupt function is called, there is no object available to apply the member function to.

INSTALLING EXCEPTION FUNCTIONS

All interrupt functions and software interrupt handlers must be installed in the vector table. This is done in assembler language in the system startup file cstartup.s.

The default implementation of the Arm exception vector table in the standard runtime library jumps to predefined functions that implement an infinite loop. Any exception that occurs for an event not handled by your application will therefore be caught in the infinite loop (B.).

The predefined functions are defined as weak symbols. A weak symbol is only included by the linker as long as no duplicate symbol is found. If another symbol is defined with the same name, it will take precedence. Your application can therefore simply define its own exception function by just defining it using the correct name.

These exception function names are defined in cstartup.s and referred to by the library exception vector code:

```
Undefined_Handler
SWI_Handler
Prefetch_Handler
Abort_Handler
IRQ_Handler
FIQ_Handler
```

To implement your own exception handler, define a function using the appropriate exception function name from the list above.

For example to add an interrupt function in C, it is sufficient to define an interrupt function named IRO Handler:

```
__irq __arm void IRQ_Handler()
{
}
```

An interrupt function must have C linkage, read more in Calling convention, page 170.

If you use C++, an interrupt function could look, for example, like this:

```
extern "C"
{
    __irq __arm void IRQ_Handler(void);
}
    __irq __arm void IRQ_Handler(void)
{
}
```

No other changes are needed.

INTERRUPTS AND FAST INTERRUPTS

The interrupt and fast interrupt functions are easy to handle as they do not accept parameters or have a return value. Use any of these keywords:

- To declare an interrupt function, use the __irq extended keyword or the #pragma type_attribute=__irq directive. For syntax information, see__irq, page 362 and type_attribute, page 396, respectively.
- To declare a fast interrupt function, use the __fiq extended keyword or the #pragma type_attribute=__fiq directive. For syntax information, see __fiq, page 361, and type attribute, page 396, respectively.

Note: An interrupt function (irq) and a fast interrupt function (fiq) must have a return type of void and cannot have any parameters. A software interrupt function (swi) may

have parameters and return values. By default, only four registers, RO-R3, can be used for parameters and only the registers RO-R1 can be used for return values.

NESTED INTERRUPTS

Interrupts are automatically disabled by the Arm core prior to entering an interrupt handler. If an interrupt handler re-enables interrupts, calls functions, and another interrupt occurs, then the return address of the interrupted function—stored in LR—is overwritten when the second IRQ is taken. In addition, the contents of SPSR will be destroyed when the second interrupt occurs. The <code>__irq</code> keyword itself does not save and restore LR and SPSR. To make an interrupt handler perform the necessary steps needed when handling nested interrupts, the keyword <code>__nested</code> must be used in addition to <code>__irq</code>. The function prolog—function entrance sequence—that the compiler generates for nested interrupt handlers will switch from IRQ mode to system mode. Make sure that both the IRQ stack and system stack is set up. If you use the default <code>cstartup.s</code> file, both stacks are correctly set up.

Compiler-generated interrupt handlers that allow nested interrupts are supported for IRQ interrupts only. The FIQ interrupts are designed to be serviced quickly, which in most cases mean that the overhead of nested interrupts would be too high.

This example shows how to use nested interrupts with the Arm vectored interrupt controller (VIC):

```
__irq __nested __arm void interrupt_handler(void)
{
  void (*interrupt_task)();
  unsigned int vector;

  /* Get interrupt vector. */
  vector = VICVectAddr;

  interrupt_task = (void(*)()) vector;

  /* Allow other IRQ interrupts to be serviced. */
  __enable_interrupt();

  /* Execute the task associated with this interrupt. */
  (*interrupt_task)();
}
```

Note: The __nested keyword requires the processor mode to be in either User or System mode.

SOFTWARE INTERRUPTS

Software interrupt functions are slightly more complex than other interrupt functions, in the way that they need a software interrupt handler (a dispatcher), are invoked (called) from running application software, and that they accept arguments and have return values. The mechanisms for calling a software interrupt function and how the software interrupt handler dispatches the call to the actual software interrupt function is described here.

Calling a software interrupt function

To call a software interrupt function from your application source code, the assembler instruction SVC #immed is used, where immed is an integer value that is referred to as the software interrupt number—or swi_number—in this guide. The compiler provides an easy way to implicitly generate this instruction from C/C++ source code, by using the __swi keyword and the #pragma swi_number directive when declaring the function.

A __swi function can for example be declared like this:

```
#pragma swi_number=0x23
__swi int swi_function(int a, int b);
```

In this case, the assembler instruction SVC 0x23 will be generated where the function is called.

Software interrupt functions follow the same calling convention regarding parameters and return values as an ordinary function, except for the stack usage, see *Calling convention*, page 170.

For more information, see *swi*, page 368, and *swi number*, page 395, respectively.

The software interrupt handler and functions

The interrupt handler, for example SWI_Handler works as a dispatcher for software interrupt functions. It is invoked from the interrupt vector and is responsible for retrieving the software interrupt number and then calling the proper software interrupt function. The SWI_Handler must be written in assembler as there is no way to retrieve the software interrupt number from C/C++ source code.

The software interrupt functions

The software interrupt functions can be written in C or C++. Use the __swi keyword in a function definition to make the compiler generate a return sequence suited for a specific software interrupt function. The #pragma swi_number directive is not needed in the interrupt function definition.

For more information, see __swi, page 368.

Setting up the software interrupt stack pointer

If software interrupts will be used in your application, then the software interrupt stack pointer (SVC_STACK) must be set up and some space must be allocated for the stack. The SVC_STACK pointer can be set up together with the other stacks in the cstartup.s file. As an example, see the set up of the interrupt stack pointer. Relevant space for the SVC_STACK pointer is set up in the linker configuration file, see *Setting up stack memory*, page 109.

INTERRUPT OPERATIONS

An interrupt function is called when an external event occurs. Normally it is called immediately while another function is executing. When the interrupt function has finished executing, it returns to the original function. It is imperative that the environment of the interrupted function is restored; this includes the value of processor registers and the processor status register.

When an interrupt occurs, the following actions are performed:

- The operating mode is changed corresponding to the particular exception
- The address of the instruction following the exception entry instruction is saved in R14 of the new mode
- The old value of the CPSR is saved in the SPSR of the new mode
- Interrupt requests are disabled by setting bit 7 of the CPSR and, if the exception is a
 fast interrupt, further fast interrupts are disabled by setting bit 6 of the CPSR
- The PC is forced to begin executing at the relevant vector address.

For example, if an interrupt for vector 0x18 occurs, the processor will start to execute code at address 0x18. The memory area that is used as start location for interrupts is called the interrupt vector table. The content of the interrupt vector is normally a branch instruction jumping to the interrupt routine.

Note: If the interrupt function enables interrupts, the special processor registers needed to return from the interrupt routine must be assumed to be destroyed. For this reason they must be stored by the interrupt routine to be restored before it returns. This is handled automatically if the __nested keyword is used.

Inlining functions

Function inlining means that a function, whose definition is known at compile time, is integrated into the body of its caller to eliminate the overhead of the function call. This optimization, which is performed at optimization level High, normally reduces execution time, but might increase the code size. The resulting code might become more

difficult to debug. Whether the inlining actually occurs is subject to the compiler's heuristics.

The compiler heuristically decides which functions to inline. Different heuristics are used when optimizing for speed, size, or when balancing between size and speed. Normally, code size does not increase when optimizing for size.

C VERSUS C++ SEMANTICS

In C++, all definitions of a specific inline function in separate translation units must be exactly the same. If the function is not inlined in one or more of the translation units, then one of the definitions from these translation units will be used as the function implementation.

In C, you must manually select one translation unit that includes the non-inlined version of an inline function. You do this by explicitly declaring the function as extern in that translation unit. If you declare the function as extern in more than one translation unit, the linker will issue a *multiple definition* error. In addition, in C, inline functions cannot refer to static variables or functions.

For example:

```
// In a header file.
static int sX;
inline void F(void)
{
    //static int sY; // Cannot refer to statics.
    //sX; // Cannot refer to statics.
}

// In one source file.
// Declare this F as the non-inlined version to use.
extern inline void F();
```

FEATURES CONTROLLING FUNCTION INLINING

There are several mechanisms for controlling function inlining:

The inline keyword advises the compiler that the function defined immediately
after the directive should be inlined.

If you compile your function in C or C++ mode, the keyword will be interpreted according to its definition in Standard C or Standard C++, respectively.

The main difference in semantics is that in Standard C you cannot (in general) simply supply an inline definition in a header file. You must supply an external definition in one of the compilation units, by designating the inline definition as being external in that compilation unit.

- #pragma inline is similar to the inline keyword, but with the difference that the compiler always uses C++ inline semantics.
 - By using the #pragma inline directive you can also disable the compiler's heuristics to either force inlining or completely disable inlining. For more information, see *inline*, page 385.
- --use_c++_inline forces the compiler to use C++ semantics when compiling a Standard C source code file.
- --no_inline, #pragma optimize=no_inline, and #pragma inline=never all disable function inlining. By default, function inlining is enabled at optimization level High.

The compiler can only inline a function if the definition is known. Normally, this is restricted to the current translation unit. However, when the --mfc compiler option for multi-file compilation is used, the compiler can inline definitions from all translation units in the multi-file compilation unit. For more information, see *Multi-file compilation units*, page 227.

For more information about the function inlining optimization, see *Function inlining*, page 230.

Stack protection

In software, a stack buffer overflow occurs when a program writes to a memory address on the program's call stack outside of the intended data structure, which is usually a fixed-length buffer. The result is, almost always, corruption of nearby data, and it can even change which function to return to. If it is deliberate, it is often called stack smashing. One method to guard against stack buffer overflow is to use stack canaries, named for their analogy to the use of canaries in coal mines.

STACK PROTECTION IN THE IAR C/C++ COMPILER

The IAR C/C++ compiler for Arm supports stack protection.



To enable stack protection for functions considered needing it, use the compiler option --stack_protection. For more information, see --stack protection, page 294.

The IAR Systems implementation of stack protection uses a heuristic to determine whether a function needs stack protection or not. If any defined local variable has the array type or a structure type that contains a member of array type, the function will need stack protection. In addition, if the address of any local variable is propagated outside of a function, such a function will also need stack protection.

If a function needs stack protection, the local variables are sorted to let the variables with array type to be placed as high as possible in the function stack block. After those

variables, a canary element is placed. The canary is initialized at function entrance. The initialization value is taken from the global variable __stack_chk_guard. At function exit, the code verifies that the canary element still contains the initialization value. If not, the function __stack_chk_fail is called.

USING STACK PROTECTION IN YOUR APPLICATION

To use stack protection, you must define these objects in your application:

- extern uint32_t __stack_chk_guard The global variable __stack_chk_guard must be initialized prior to first use. If the initialization value is randomized, it will be more secure.
- __interwork __nounwind __noreturn void __stack_chk_fail(void) The purpose of the function __stack_chk_fail is to notify about the problem and then terminate the application.

Note that the return address from this function will point into the function that failed.

The file stack_protection.c in the directory arm\src\lib\runtime can be used as a template for both __stack_chk_guard and __stack_chk_fail.

Linking using ILINK

- Linking—an overview
- Modules and sections
- The linking process in detail
- Placing code and data—the linker configuration file
- Initialization at system startup
- Stack usage analysis
- Arm TrustZone

Linking—an overview

The IAR ILINK Linker is a powerful, flexible software tool for use in the development of embedded applications. It is equally well suited for linking small, single-file, absolute assembler programs as it is for linking large, relocatable, multi-module, C/C++, or mixed C/C++ and assembler programs.

The linker combines one or more relocatable object files—produced by the IAR Systems compiler or assembler—with selected parts of one or more object libraries to produce an executable image in the industry-standard format *Executable and Linking Format* (ELF).

The linker will automatically load only those library modules—user libraries and Standard C or C++ library variants—that are actually needed by the application you are linking. Further, the linker eliminates duplicate sections and sections that are not required.

ILINK can link both Arm and Thumb code, as well as a combination of them. By automatically inserting additional instructions (veneers), ILINK will assure that the destination will be reached for any calls and branches, and that the processor state is switched when required. For more details about how to generate veneers, see *Veneers*, page 115.

The linker uses a *configuration file* where you can specify separate locations for code and data areas of your target system memory map. This file also supports automatic handling of the application's initialization phase, which means initializing global

variable areas and code areas by copying initializers and possibly decompressing them as well.

The final output produced by ILINK is an absolute object file containing the executable image in the ELF (including DWARF for debug information) format. The file can be downloaded to C-SPY or any other compatible debugger that supports ELF/DWARF, or it can be stored in EPROM or flash.

To handle ELF files, various tools are included. For information about included utilities, see *Specific ELF tools*, page 52.

Modules and sections

Each relocatable object file contains one module, which consists of:

- Several sections of code or data
- Runtime attributes specifying various types of information, for example the version
 of the runtime environment
- Optionally, debug information in DWARF format
- A symbol table of all global symbols and all external symbols used.

A *section* is a logical entity containing a piece of data or code that should be placed at a physical location in memory. A section can consist of several *section fragments*, typically one for each variable or function (symbols). A section can be placed either in RAM or in ROM. In a normal embedded application, sections that are placed in RAM do not have any content, they only occupy space.

Each section has a name and a type attribute that determines the content. The type attribute is used (together with the name) for selecting sections for the ILINK configuration. The most commonly used attributes are:

code Executable code
readonly Constant variables
readwrite Initialized variables

zeroinit Zero-initialized variables

Note: In addition to these section types—sections that contain the code and data that are part of your application—a final object file will contain many other types of sections, for example sections that contain debugging information or other type of meta information.

A section is the smallest linkable unit; but if possible, ILINK can exclude smaller units—section fragments—from the final application. For more information, see *Keeping modules*, page 109, and *Keeping symbols and sections*, page 109.

At compile time, data and functions are placed in different sections. At link time, one of the most important functions of the linker is to assign addresses to the various sections used by the application.

The IAR build tools have many predefined section names. See the chapter *Section reference* for more information about each section.

You can group sections together for placement by using blocks. See *define block directive*, page 482.

The linking process in detail

The relocatable modules in object files and libraries, produced by the IAR compiler and assembler, cannot be executed as is. To become an executable application, they must be *linked*.


Note: Modules produced by a toolset from another vendor can be included in the build as well, as long as the module is AEABI (Arm Embedded Application Binary Interface) compliant. Be aware that this also might require a compiler utility library from the same vendor.

The linker is used for the link process. It normally performs the following procedure (note that some of the steps can be turned off by command line options or by directives in the linker configuration file):

- Determine which modules to include in the application. Modules provided in object
 files are always included. A module in a library file is only included if it provides a
 definition for a global symbol that is referenced from an included module.
- Select which standard library files to use. The selection is based on attributes of the included modules. These libraries are then used for satisfying any still outstanding undefined symbols.
- Handle symbols with more than one definition. If there is more than one non-weak definition, an error is emitted. Otherwise, one of the definitions is picked (the non-weak one, if there is one) and the others are suppressed. Weak definitions are typically used for inline and template functions. If you need to override some of the non-weak definitions from a library module, you must ensure that the library module is not included (typically by providing alternate definitions for all the symbols your application uses in that library module).
- Determine which sections/section fragments from the included modules to include in the application. Only those sections/section fragments that are actually needed by

the application are included. There are several ways to determine of which sections/section fragments that are needed, for example, the __root object attribute, the #pragma required directive, and the keep linker directive. In case of duplicate sections, only one is included.

- Where appropriate, arrange for the initialization of initialized variables and code in RAM. The initialize directive causes the linker to create extra sections to enable copying from ROM to RAM. Each section that will be initialized by copying is divided into two sections, one for the ROM part and one for the RAM part. If manual initialization is not used, the linker also arranges for the startup code to perform the initialization.
- Determine where to place each section according to the section placement directives in the *linker configuration file*. Sections that are to be initialized by copying appear twice in the matching against placement directives, once for the ROM part and once for the RAM part, with different attributes. During the placement, the linker also adds any required veneers to make a code reference reach its destination or to switch CPU modes.
- Produce an absolute file that contains the executable image and any debug information provided. The contents of each needed section in the relocatable input files is calculated using the relocation information supplied in its file and the addresses determined when placing sections. This process can result in one or more relocation failures if some of the requirements for a particular section are not met, for instance if placement resulted in the destination address for a PC-relative jump instruction being out of range for that instruction.
- Optionally, produce a map file that lists the result of the section placement, the address of each global symbol, and finally, a summary of memory usage for each module and library.



This illustration shows the linking process:

During the linking, ILINK might produce error messages and logging messages on stdout and stderr. The log messages are useful for understanding why an application was linked as it was. For example, why a module or section (or section fragment) was included.

Note: To see the actual content of an ELF object file, use ielfdumparm. See *The IAR ELF Dumper—ielfdump*, page 524.

Placing code and data—the linker configuration file

The placement of sections in memory is performed by the IAR ILINK Linker. It uses the *linker configuration file* where you can define how ILINK should treat each section and how they should be placed into the available memories.

A typical linker configuration file contains definitions of:

- Available addressable memories
- Populated regions of those memories
- How to treat input sections
- Created sections

• How to place sections into the available regions.

The file consists of a sequence of declarative directives. This means that the linking process will be governed by all directives at the same time.

To use the same source code with different derivatives, just rebuild the code with the appropriate configuration file.

A SIMPLE EXAMPLE OF A CONFIGURATION FILE

Assume a simple 32-bit architecture that has these memory prerequisites:

- There are 4 Gbytes of addressable memory.
- There is ROM memory in the address range 0x0000-0x10000.
- There is RAM memory in the range 0x20000-0x30000.
- The stack has an alignment of 8.
- The system startup code must be located at a fixed address.

A simple configuration file for this assumed architecture can look like this:

```
/* The memory space denoting the maximum possible amount
   of addressable memory */
define memory Mem with size = 4G;
/* Memory regions in an address space */
define region ROM = Mem:[from 0x00000 size 0x10000];
define region RAM = Mem: [from 0x20000 size 0x10000];
/* Create a stack */
define block STACK with size = 0x1000, alignment = 8 { };
/* Handle initialization */
initialize by copy { readwrite }; /* Initialize RW sections */
/* Place startup code at a fixed address */
place at start of ROM { readonly section .cstartup };
/* Place code and data */
place in ROM { readonly }; /* Place constants and initializers in
                             ROM: .rodata and .data init */
place in RAM { readwrite, /* Place .data, .bss, and .noinit */
               block STACK }; /* and STACK
```

This configuration file defines one addressable memory Mem with the maximum of 4 Gbytes of memory. Further, it defines a ROM region and a RAM region in Mem, namely ROM and RAM. Each region has the size of 64 Kbytes.


The file then creates an empty block called STACK with a size of 4 Kbytes in which the application stack will reside. To create a *block* is the basic method which you can use to get detailed control of placement, size, etc. It can be used for grouping sections, but also as in this example, to specify the size and placement of an area of memory.

Next, the file defines how to handle the initialization of variables, read/write type (readwrite) sections. In this example, the initializers are placed in ROM and copied at startup of the application to the RAM area. By default, ILINK may compress the initializers if this appears to be advantageous.

The last part of the configuration file handles the actual placement of all the sections into the available regions. First, the startup code—defined to reside in the read-only (readonly) section .cstartup—is placed at the start of the ROM region, that is at address 0x10000. Note that the part within {} is referred to as section selection and it selects the sections for which the directive should be applied to. Then the rest of the read-only sections are placed in the ROM region. Note that the section selection { readonly section .cstartup } takes precedence over the more generic section selection { readonly }.

Finally, the read/write (readwrite) sections and the STACK block are placed in the RAM region.

This illustration gives a schematic overview of how the application is placed in memory:

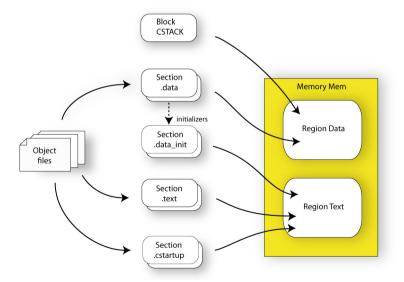

In addition to these standard directives, a configuration file can contain directives that define how to:

- Map a memory that can be addressed in multiple ways
- Handle conditional directives
- Create symbols with values that can be used in the application
- More in detail, select the sections a directive should be applied to
- More in detail, initialize code and data.

For more details and examples about customizing the linker configuration file, see the chapter *Linking your application*.

For more information about the linker configuration file, see the chapter *The linker configuration file*.

Initialization at system startup

In Standard C, all static variables—variables that are allocated at a fixed memory address—must be initialized by the runtime system to a known value at application startup. This value is either an explicit value assigned to the variable, or if no value is given, it is cleared to zero. In the compiler, there are exceptions to this rule, for example variables declared __no_init, which are not initialized at all.

The compiler generates a specific type of section for each type of variable initialization:

Categories of declared data	Source	Section type	Section name	Section content
Zero-initialized data	int i;	Read/write data, zero-init	.bss	None
Zero-initialized data	int i = 0;	Read/write data, zero-init	.bss	None
Initialized data (non-zero)	int i = 6;	Read/write data	.data	The initializer
Non-initialized data	no_init int i;	Read/write data, zero-init	.noinit	None
Constants	<pre>const int i = 6;</pre>	Read-only data	.rodata	The constant
Code	<pre>ramfunc void myfunc() {}</pre>	Read/write code	.textrw	The code

Table 3: Sections holding initialized data

Note: Clustering of static variables might group zero-initialized variables together with initialized data in .data. The compiler can decide to place constants in the .text section to avoid loading the address of a constant from a constant table.

For information about all supported sections, see the chapter Section reference.

THE INITIALIZATION PROCESS

Initialization of data is handled by ILINK and the system startup code in conjunction.

To configure the initialization of variables, you must consider these issues:

- Sections that should be zero-initialized, or not initialized at all (__no_init) are handled automatically by ILINK.
- Sections that should be initialized, except for zero-initialized sections, should be listed in an initialize directive.

Normally during linking, a section that should be initialized is split into two sections, where the original initialized section will keep the name. The contents are placed in the new initializer section, which will get the original name suffixed with <code>_init</code>. The initializers should be placed in ROM and the initialized sections in RAM, by means of placement directives. The most common example is the <code>.data</code> section which the linker splits into <code>.data</code> and <code>.data_init</code>.

 Sections that contains constants should not be initialized; they should only be placed in flash/ROM.

In the linker configuration file, it can look like this:

Note: When compressed initializers are used (see *initialize directive*, page 487), the contents sections (that is, sections with the _init suffix) are not listed as separate sections in the map file. Instead, they are combined into aggregates of "initializer bytes". You can place the contents sections the usual way in the linker configuration file; however, this affects the placement (and possibly the number) of the "initializer bytes" aggregates.

For more information about and examples of how to configure the initialization, see *Linking considerations*, page 105.

C++ DYNAMIC INITIALIZATION

The compiler places subroutine pointers for performing C++ dynamic initialization into sections of the ELF section types SHT_PREINIT_ARRAY and SHT_INIT_ARRAY. By default, the linker will place these into a linker-created block, ensuring that all sections of the section type SHT_PREINIT_ARRAY are placed before those of the type SHT_INIT_ARRAY. If any such sections were included, code to call the routines will also be included.

The linker-created blocks are only generated if the linker configuration does not contain section selector patterns for the preinit_array and init_array section types. The effect of the linker-created blocks will be very similar to what happens if the linker configuration file contains this:

If you put this into your linker configuration file, you must also mention the CPP_INIT block in one of the section placement directives. If you wish to select where the linker-created block is placed, you can use a section selector with the name ".init_array".

See also section-selectors, page 494.

Stack usage analysis

This section describes how to perform a stack usage analysis using the linker.

In the arm\src directory, you can find an example project that demonstrates stack usage analysis.

INTRODUCTION TO STACK USAGE ANALYSIS

Under the right circumstances, the linker can accurately calculate the maximum stack usage for each call graph, starting from the program start, interrupt functions, tasks etc. (each function that is not called from another function, in other words, the root).

If you enable stack usage analysis, a stack usage chapter will be added to the linker map file, listing for each call graph root the particular call chain which results in the maximum stack depth.

The analysis is only accurate if there is accurate stack usage information for each function in the application.

In general, the compiler will generate this information for each C function, but if there are indirect calls (calls using function pointers) in your application, you must supply a list of possible functions that can be called from each calling function.

If you use a stack usage control file, you can also supply stack usage information for functions in modules that do not have stack usage information.

You can use the check that directive in your stack usage control file to check that the stack usage calculated by the linker does not exceed the stack space you have allocated.

PERFORMING A STACK USAGE ANALYSIS

- I Enable stack usage analysis:
- In the IDE, choose Project>Options>Linker>Advanced>Enable stack usage analysis
- On the command line, use the linker option --enable_stack_usage See --enable_stack_usage, page 313.
 - **2** Enable the linker map file:
- In the IDE, choose Project>Options>Linker>List>Generate linker map file
- On the command line, use the linker option --map
 - **3** Link your project. Note that the linker will issue warnings related to stack usage under certain circumstances, see *Situations where warnings are issued*, page 102.
 - **4** Review the linker map file, which now contains a stack usage chapter with a summary of the stack usage for each call graph root. For more information, see *Result of an analysis—the map file contents*, page 98.
 - **5** For more details, analyze the call graph log, see *Call graph log*, page 102.

Note that there are limitations and sources of inaccuracy in the analysis, see *Limitations*, page 101.

You might need to specify more information to the linker to get a more representative result. See *Specifying additional stack usage information*, page 99

In the IDE, choose Project>Options>Linker>Advanced>Enable stack usage analysis>Control file



On the command line, use the linker option --stack_usage_control

See --stack usage control, page 332.

To add an automatic check that you have allocated memory enough for the stack, use the check that directive in your linker configuration file. For example, assuming a stack block named MY_STACK, you can write like this:

When linking, the linker emits an error if the check fails. In this example, an error will be emitted if the sum of the following exceeds the size of the MY_STACK block:

- The maximum stack usage in the category Program entry (the main program).
- The sum of each individual maximum stack usage in the category interrupt (assuming that all interrupt routines need space at the same time).
- A safety margin of 100 bytes (to account for stack usage not visible to the analysis).

See also check that directive, page 499 and Stack considerations, page 200.

RESULT OF AN ANALYSIS—THE MAP FILE CONTENTS

When stack usage analysis is enabled, the linker map file contains a stack usage chapter with a summary of the stack usage for each call graph root category, and lists the call chain that results in the maximum stack depth for each call graph root. This is an example of what the stack usage chapter in the map file might look like:

```
"__iar_program_start"
                                             0
    "__cmain"
                                             0
    "main"
                                             8
    "printf"
                                            2.4
    "_PrintfTiny"
                                            56
    "_Prout"
                                            16
    "putchar"
                                            16
    " write"
                                             0
    " dwrite"
                                             0
    " iar sh stdout"
                                            24
                                            2.4
    "___iar_get_ttio"
                                             0
    "__iar_lookup_ttioh"
interrupt.
  "FaultHandler": 0x00008434
 Maximum call chain
                                            32 bytes
    "FaultHandler"
                                            32
interrupt
  "IROHandler": 0x00008424
 Maximum call chain
                                           104 bytes
    "IROHandler"
                                            24
    "do_something" in suexample.o [1]
                                            80
```

The summary contains the depth of the deepest call chain in each category as well as the sum of the depths of the deepest call chains in that category.

Each call graph root belongs to a call graph root category to enable convenient calculations in check that directives.

SPECIFYING ADDITIONAL STACK USAGE INFORMATION

To specify additional stack usage information you can use either a stack usage control file (suc) where you specify stack usage control directives or annotate the source code.

You can:

 Specify complete stack usage information (call graph root category, stack usage, and possible calls) for a function, by using the stack usage control directive function. Typically, you do this if stack usage information is missing, for example in an assembler module. In your suc file you can for example write like this:

```
function MyFunc: 32,
  calls MyFunc2,
  calls MyFunc3, MyFunc4: 16;
function [interrupt] MyInterruptHandler: 44;
See also function directive, page 512.
```

 Exclude certain functions from stack usage analysis, by using the stack usage control directive exclude. In your suc file you can for example write like this:

```
exclude MyFunc5, MyFunc6;
```

See also exclude directive, page 512.

 Specify a list of possible destinations for indirect calls in a function, by using the stack usage control directive possible calls. Use this for functions which are known to perform indirect calls and where you know exactly which functions that might be called in this particular application. In your suc file you can for example write like this:

```
possible calls MyFunc7: MyFunc8, MyFunc9;
```

If the information about which functions that might be called is available at compile time, consider using the #pragma calls directive instead.

See also possible calls directive, page 514 and calls, page 377.

Specify that functions are call graph roots, including an optional call graph root
category, by using the stack usage control directive call graph root or the
#pragma call_graph_root directive. In your suc file you can for example write
like this:

```
call graph root [task]: MyFunc10, MyFunc11;
```

If your interrupt functions have not already been designated as call graph roots by the compiler, you must do so manually. You can do this either by using the #pragma call_graph_root directive in your source code or by specifying a directive in your suc file, for example:

```
call graph root [interrupt]: Irq1Handler, Irq2Handler;
See also call graph root directive, page 512 and call graph root, page 378.
```

 Specify a maximum number of iterations through any of the cycles in the recursion nest of which the function is a member. In your suc file you can for example write like this:

```
max recursion depth MyFunc12: 10;
```

 Selectively suppress the warning about unmentioned functions referenced by a module for which you have supplied stack usage information in the stack usage control file. Use the no calls from directive in your suc file, for example like this:

no calls from [file.o] to MyFunc13, MyFunc14;

 Instead of specifying stack usage information about assembler modules in a stack usage control file, you can annotate the assembler source with call frame information. For more information, see the IAR Assembler User Guide for Arm.

For more information, see the chapter *The stack usage control file*.

LIMITATIONS

Apart from missing or incorrect stack usage information, there are also other sources of inaccuracy in the analysis:

- The linker cannot always identify all functions in object modules that lack stack usage information. In particular, this might be a problem with object modules written in assembly language or produced by non-IAR tools. You can provide stack usage information for such modules using a stack usage control file, and for assembly language modules you can also annotate the assembler source code with CFI directives to provide stack usage information. See the IAR Assembler User Guide for Arm.
- If you use inline assembler to change the frame size or to perform function calls, this will not be reflected in the analysis.
- Extra space consumed by other sources (the processor, an operating system, etc) is not accounted for.
- Source code that uses exceptions is not supported.
- If you use other forms of function calls, like software interrupts, they will not be reflected in the call graph.
- Using multi-file compilation (--mfc) can interfere with using a stack usage control
 file to specify properties of module-local functions in the involved files.

Note that stack usage analysis produces a worst case result. The program might not actually ever end up in the maximum call chain, by design, or by coincidence. In particular, the set of possible destinations for a virtual function call in C++ might sometimes include implementations of the function in question which cannot, in fact, be called from that point in the code.



Stack usage analysis is only a complement to actual measurement. If the result is important, you need to perform independent validation of the results of the analysis.

SITUATIONS WHERE WARNINGS ARE ISSUED

When stack usage analysis is enabled in the linker, warnings will be generated in the following circumstances:

- There is a function without stack usage information.
- There is an indirect call site in the application for which a list of possible called functions has not been supplied.
- There are no known indirect calls, but there is an uncalled function that is not known to be a call graph root.
- The application contains recursion (a cycle in the call graph) for which no maximum recursion depth has been supplied, or which is of a form for which the linker is unable to calculate a reliable estimate of stack usage.
- There are calls to a function declared as a call graph root.
- You have used the stack usage control file to supply stack usage information for functions in a module that does not have such information, and there are functions referenced by that module which have not been mentioned as being called in the stack usage control file.

CALL GRAPH LOG

To help you interpret the results of the stack usage analysis, there is a log output option that produces a simple text representation of the call graph (--log call_graph).

Example output:

```
Program entry:
0 __iar_program_start [168]
 0 __cmain [168]
    0 iar data init3 [16]
      8 __iar_zero_init3 [8]
       16 - [0]
      8 __iar_copy_init3 [8]
        16 - [0]
    0 __low_level_init [0]
    0 main [168]
      8 printf [160]
        32 _PrintfTiny [136]
          88 _Prout [80]
            104 putchar [64]
              120 write [48]
                120 dwrite [48]
                  120 __iar_sh_stdout [48]
                    144 __iar_get_ttio [24]
                      168 iar lookup ttioh [0]
                  120 ___iar_sh_write [24]
                    144 - [0]
          88 __aeabi_uidiv [0]
            88 __aeabi_idiv0 [0]
          88 strlen [0]
    0 exit [8]
      0 _exit [8]
        0 __exit [8]
          0 __iar_close_ttio [8]
            8 __iar_lookup_ttioh [0] ***
    0 __exit [8] ***
```

Each line consists of this information:

- The stack usage at the point of call of the function
- The name of the function, or a single '-' to indicate usage in a function at a point with no function call (typically in a leaf function)
- The stack usage along the deepest call chain from that point. If no such value could
 be calculated, "[---]" is output instead. "***" marks functions that have already
 been shown.

CALL GRAPH XML OUTPUT

The linker can also produce a call graph file in XML format. This file contains one node for each function in your application, with the stack usage and call information relevant

to that function. It is intended to be input for post-processing tools and is not particularly human-readable.

For more information about the XML format used, see the callGraph.txt file in your product installation.

Arm TrustZone

The Arm TrustZone® technology is a System on Chip (SOC) and CPU system-wide approach to security.

The IAR build tools support this by means of intrinsic functions, linker options, compiler options, predefined preprocessor symbols, extended keywords, and the section Veneer\$\$CMSE.

In the arm\src\ARMv8M_Secure directory, you can find an example project that demonstrates the use of Arm TrustZone and Cortex-M Security Extensions (CMSE).

The IAR build tools follow the standard interface for development tools targeting CMSE, with the following exceptions:

- Variadic secure entry functions are not allowed.
- Secure entry functions with parameters or return values that do not fit in registers are not allowed.
- Non-secure calls with parameters or return values that do not fit in registers are not allowed.
- The compiler option --cmse requires the architecture Armv8-M with security extensions, and is not supported when building ROPI (read-only position-independent) images and RWPI (read-write position-independent) images.

For more information about Arm TrustZone, see www.arm.com.

Linking your application

- Linking considerations
- Hints for troubleshooting
- Checking module consistency

Linking considerations

Before you can link your application, you must set up the configuration required by ILINK. Typically, you must consider:

- Choosing a linker configuration file
- Defining your own memory areas
- · Placing sections
- Reserving space in RAM
- Keeping modules
- Keeping symbols and sections
- Application startup
- Setting up stack memory
- Setting up heap memory
- Setting up the atexit limit
- Changing the default initialization
- Interaction between ILINK and the application
- Standard library handling
- Producing other output formats than ELF/DWARF

CHOOSING A LINKER CONFIGURATION FILE

The config directory contains two ready-made templates for the linker configuration files:

- generic.icf, designed for all cores except for Cortex-M cores
- generic_cortex.icf, designed for all Cortex-M cores.

The files contain the information required by ILINK. The only change, if any, you will normally have to make to the supplied configuration file is to customize the start and end addresses of each region so they fit the target system memory map. If, for example, your

application uses additional external RAM, you must also add details about the external RAM memory area.

For some devices, device-specific configuration files are automatically selected.

To edit a linker configuration file, use the editor in the IDE, or any other suitable editor. Alternatively, choose **Project>Options>Linker** and click the **Edit** button on the **Config** page to open the dedicated linker configuration file editor.

Do not change the original template file. We recommend that you make a copy in the working directory, and modify the copy instead. If you are using the linker configuration file editor in the IDE, the IDE will make a copy for you.

Each project in the IDE should have a reference to one, and only one, linker configuration file. This file can be edited, but for the majority of all projects it is sufficient to configure the vital parameters in **Project>Options>Linker>Config.**

DEFINING YOUR OWN MEMORY AREAS

The default configuration file that you selected has predefined ROM and RAM regions. This example will be used as a starting-point for all further examples in this chapter:

```
/* Define the addressable memory */
define memory Mem with size = 4G;

/* Define a region named ROM with start address 0 and to be 64
Kbytes large */
define region ROM = Mem:[from 0 size 0x10000];

/* Define a region named RAM with start address 0x20000 and to be 64 Kbytes large */
define region RAM = Mem:[from 0x20000 size 0x10000];
```

Each region definition must be tailored for the actual hardware.

To find out how much of each memory that was filled with code and data after linking, inspect the memory summary in the map file (command line option --map).

Adding an additional region

To add an additional region, use the define region directive, for example:

```
/* Define a 2nd ROM region to start at address 0x80000 and to be
128 Kbytes large */
define region ROM2 = Mem:[from 0x80000 size 0x20000];
```

Merging different areas into one region

If the region is comprised of several areas, use a region expression to merge the different areas into one region, for example:

PLACING SECTIONS

The default configuration file that you selected places all predefined sections in memory, but there are situations when you might want to modify this. For example, if you want to place the section that holds constant symbols in the CONSTANT region instead of in the default place. In this case, use the place in directive, for example:

```
/* Place sections with readonly content in the ROM region */
place in ROM {readonly};

/* Place the constant symbols in the CONSTANT region */
place in CONSTANT {readonly section .rodata};
```

Note: Placing a section—used by the IAR build tools—in a different memory which use a different way of referring to its content, will fail.

For the result of each placement directive after linking, inspect the placement summary in the map file (the command line option --map).

Placing a section at a specific address in memory

To place a section at a specific address in memory, use the place at directive, for example:

```
/* Place section .vectors at address 0 */
place at address Mem:0x0 {readonly section .vectors};
```

Placing a section first or last in a region

To place a section first or last in a region is similar, for example:

```
/* Place section .vectors at start of ROM */
place at start of ROM {readonly section .vectors};
```

Declare and place your own sections

To declare new sections—in addition to the ones used by the IAR build tools—to hold specific parts of your code or data, use mechanisms in the compiler and assembler. For example:

```
/* Place a variable in that section. */
const short MyVariable @ "MYOWNSECTION" = 0xF0F0;
```

This is the corresponding example in assembler language:

To place your new section, the original place in ROM {readonly}; directive is sufficient.

However, to place the section MyOwnSection explicitly, update the linker configuration file with a place in directive, for example:

```
/* Place MyOwnSection in the ROM region */
place in ROM {readonly section MyOwnSection};
```

RESERVING SPACE IN RAM

Often, an application must have an empty uninitialized memory area to be used for temporary storage, for example a heap or a stack. It is easiest to achieve this at link time. You must create a block with a specified size and then place it in a memory.

In the linker configuration file, it can look like this:

```
define block TempStorage with size = 0x1000, alignment = 4 { };
place in RAM { block TempStorage };
```

To retrieve the start of the allocated memory from the application, the source code could look like this:

```
/* Define a section for temporary storage. */
#pragma section = "TempStorage"
char *GetTempStorageStartAddress()
{
    /* Return start address of section TempStorage. */
    return __section_begin("TempStorage");
}
```

KEEPING MODULES

If a module is linked as an object file, it is always kept. That is, it will contribute to the linked application. However, if a module is part of a library, it is included only if it is symbolically referred to from other parts of the application. This is true, even if the library module contains a root symbol. To assure that such a library module is always included, use <code>iarchive</code> to extract the module from the library, see *The LAR Archive Tool—iarchive*, page 519.

For information about included and excluded modules, inspect the log file (the command line option --log modules).

For more information about modules, see *Modules and sections*, page 88.

KEEPING SYMBOLS AND SECTIONS

By default, ILINK removes any sections, section fragments, and global symbols that are not needed by the application. To retain a symbol that does not appear to be needed—or actually, the section fragment it is defined in—you can either use the root attribute on the symbol in your C/C++ or assembler source code, or use the ILINK option --keep. To retain sections based on attribute names or object names, use the directive keep in the linker configuration file.

To prevent ILINK from excluding sections and section fragments, use the command line options --no_remove or --no_fragments, respectively.

For information about included and excluded symbols and sections, inspect the log file (the command line option --log sections).

For more information about the linking procedure for keeping symbols and sections, see *The linking process*, page 60.

APPLICATION STARTUP

By default, the point where the application starts execution is defined by the __iar_program_start label, which is defined to point at the start of the cstartup.s file. The label is also communicated via ELF to any debugger that is used.

To change the start point of the application to another label, use the ILINK option --entry; see *--entry*, page 314.

SETTING UP STACK MEMORY

The size of the CSTACK block is defined in the linker configuration file. To change the allocated amount of memory, change the block definition for CSTACK:

```
define block CSTACK with size = 0x2000, alignment = 8{ };
```

Specify an appropriate size for your application.

For more information about the stack, see *Stack considerations*, page 200.

SETTING UP HEAP MEMORY

The size of the heap is defined in the linker configuration file as a block:

```
define block HEAP with size = 0x1000, alignment = 8{ };
place in RAM {block HEAP};
```

Specify the appropriate size for your application. If you use a heap, you must allocate at least 50 bytes for it.

SETTING UP THE ATEXIT LIMIT

By default, the atexit function can be called a maximum of 32 times from your application. To either increase or decrease this number, add a line to your configuration file. For example, to reserve room for 10 calls instead, write:

```
define symbol __iar_maximum_atexit_calls = 10;
```

CHANGING THE DEFAULT INITIALIZATION

By default, memory initialization is performed during application startup. ILINK sets up the initialization process and chooses a suitable packing method. If the default initialization process does not suit your application and you want more precise control over the initialization process, these alternatives are available:

- Suppressing initialization
- Choosing the packing algorithm
- Manual initialization
- Initializing code—copying ROM to RAM.

For information about the performed initializations, inspect the log file (the command line option --log initialization).

Suppressing initialization

If you do not want the linker to arrange for initialization by copying, for some or all sections, make sure that those sections do not match a pattern in an initialize by copy directive (or use an except clause to exclude them from matching). If you do not want any initialization by copying at all, you can omit the initialize by copy directive entirely.

This can be useful if your application, or just your variables, are loaded into RAM by some other mechanism before application startup.

Choosing a packing algorithm

To override the default packing algorithm, write for example:

```
initialize by copy with packing = lz77 { readwrite };
```

For more information about the available packing algorithms, see *initialize directive*, page 487.

Manual initialization

In the usual case, the initialize by copy directive is used for making the linker arrange for initialization by copying (with or without packing) of sections with content at application startup. The linker achieves this by logically creating an initialization section for each such section, holding the content of the section, and turning the original section into a section without content. Then, the linker adds table elements to the initialization table so that the initialization will be performed at application startup. You can use initialize manually to suppress the creation of table elements to take control over when and how the elements are copied. This is useful for overlays, but also in a number of other circumstances.

For sections without content (zero-initialized sections), the situation is reversed. The linker arranges for zero initialization of all such sections at application startup, except for those that are mentioned in a do not initialize directive.

Simple copying example with an implicit block

Assume that you have some initialized variables in MYSECTION. If you add this directive to your linker configuration file:

```
initialize manually { section MYSECTION };
```

you can use this source code example to initialize the section:

```
#pragma section = "MYSECTION"
#pragma section = "MYSECTION_init"

void DoInit()
{
   char * from = __section_begin("MYSECTION_init");
   char * to = __section_begin("MYSECTION");
   memcpy(to, from, __section_size("MYSECTION"));
}
```

This piece of source code takes advantage of the fact that if you use __section_begin (and related operators) with a section name, a synthetic block is created by the linker for those sections.

Example with explicit blocks

Assume that you instead of needing manual initialization for variables in a specific section, you need it for all initialized variables from a particular library. In that case, you must create explicit blocks for both the variables and the content. Like this:

```
initialize manually { section .data object mylib.a };
define block MYBLOCK { section .data object mylib.a };
define block MYBLOCK_init { section .data_init object mylib.a };
```

You must also place the two new blocks using one of the section placement directives, the block MYBLOCK in RAM and the block MYBLOCK_init in ROM.

Then you can initialize the sections using the same source code as in the previous example, only with MYBLOCK instead of MYSECTION.

Overlay example

This is a simple overlay example that takes advantage of automatic block creation:

```
initialize manually { section MYOVERLAY* };
define overlay MYOVERLAY { section MYOVERLAY1 };
define overlay MYOVERLAY { section MYOVERLAY2 };
```

You must also place overlay MYOVERLAY somewhere in RAM. The copying could look like this:

```
#pragma section = "MYOVERLAY"
#pragma section = "MYOVERLAY1_init"
#pragma section = "MYOVERLAY2_init"

void SwitchToOverlay1()
{
   char * from = __section_begin("MYOVERLAY1_init");
   char * to = __section_begin("MYOVERLAY1_init"));
   memcpy(to, from, __section_size("MYOVERLAY1_init"));
}

void SwitchToOverlay2()
{
   char * from = __section_begin("MYOVERLAY2_init");
   char * to = __section_begin("MYOVERLAY2_init");
   memcpy(to, from, __section_size("MYOVERLAY2_init"));
}
```

Initializing code—copying ROM to RAM

Sometimes, an application copies pieces of code from flash/ROM to RAM. You can direct the linker to arrange for this to be done automatically at application startup, or do it yourself at some later time using the techniques described in *Manual initialization*, page 111.

You need to list the code sections that should be copied in an initialize by copy directive. The easiest way is usually to place the relevant functions in a particular section (for example, RAMCODE), and add section RAMCODE to your initialize by copy directive. For example:

```
initialize by copy { rw, section RAMCODE };
```

If you need to place the RAMCODE functions in some particular location, you must mention them in a placement directive, otherwise they will be placed together with other read/write sections.

If you need to control the manner and/or time of copying, you must use an initialize manually directive instead. See *Manual initialization*, page 111.

If the functions need to run without accessing the flash/ROM, you can use the __ramfunc keyword when compiling. See *Execution in RAM*, page 76.

Running all code from RAM

If you want to copy the entire application from ROM to RAM at program startup, use the initilize by copy directive, for example:

```
initialize by copy { readonly, readwrite };
```

The readwrite pattern will match all statically initialized variables and arrange for them to be initialized at startup. The readonly pattern will do the same for all read-only code and data, except for code and data needed for the initialization.

Because the function __low_level_init, if present, is called before initialization, it and anything it needs, will not be copied from ROM to RAM either. In some circumstances—for example, if the ROM contents are no longer available to the program after startup—you might need to avoid using the same functions during startup and in the rest of the code.

If anything else should not be copied, include it in an except clause. This can apply to, for example, the interrupt vector table.

It is also recommended to exclude the C++ dynamic initialization table from being copied to RAM, as it is typically only read once and then never referenced again. For example, like this:

INTERACTION BETWEEN ILINK AND THE APPLICATION

ILINK provides the command line options --config_def and --define_symbol to define symbols which can be used for controlling the application. You can also use symbols to represent the start and end of a continuous memory area that is defined in the linker configuration file. For more information, see *Interaction between the tools and your application*, page 202.

To change a reference to one symbol to another symbol, use the ILINK command line option --redirect. This is useful, for example, to redirect a reference from a non-implemented function to a stub function, or to choose one of several different implementations of a certain function, for example, how to choose the DLIB formatter for the standard library functions printf and scanf.

The compiler generates mangled names to represent complex C/C++ symbols. If you want to refer to these symbols from assembler source code, you must use the mangled names.

For information about the addresses and sizes of all global (statically linked) symbols, inspect the entry list in the map file (the command line option --map).

For more information, see *Interaction between the tools and your application*, page 202.

STANDARD LIBRARY HANDLING

By default, ILINK determines automatically which variant of the standard library to include during linking. The decision is based on the sum of the runtime attributes available in each object file and the library options passed to ILINK.

To disable the automatic inclusion of the library, use the option --no_library_search. In this case, you must explicitly specify every library file to be included. For information about available library files, see *Prebuilt runtime libraries*, page 130.

PRODUCING OTHER OUTPUT FORMATS THAN ELF/DWARF

ILINK can only produce an output file in the ELF/DWARF format. To convert that format into a format suitable for programming PROM/flash, see *The IAR ELF Tool—ielftool*, page 523.

VENEERS

Veneers are small sequences of code inserted by the linker to bridge the gap when a call instruction does not reach its destination or cannot switch to the correct mode.

Code for veneers can be inserted between any caller and called function. As a result, the R12 register must be treated as a scratch register at function calls, including functions written in assembler. This also applies to jumps.

Hints for troubleshooting

ILINK has several features that can help you manage code and data placement correctly, for example:

- Messages at link time, for examples when a relocation error occurs
- The --log option that makes ILINK log information to stdout, which can be useful to understand why an executable image became the way it is, see --log, page 320
- The --map option that makes ILINK produce a memory map file, which contains the result of the linker configuration file, see --map, page 322.

RELOCATION ERRORS

For each instruction that cannot be relocated correctly, ILINK will generate a *relocation error*. This can occur for instructions where the target is out of reach or is of an incompatible type, or for many other reasons.

A relocation error produced by ILINK can look like this:

The message entries are described in this table:

Message entry	Description
Kind	The relocation directive that failed. The directive depends on the instruction used.
Location	The location where the problem occurred, described with the following details: • The instruction address, expressed both as a hexadecimal value and as a label with an offset. In this example, 0x40000448 and "myfunc" + 0x2c. • The module, and the file. In this example, the module somecode.o. • The section number and section name. In this example, section number 7 with the name .text. • The offset, specified in number of bytes, in the section. In this example, 0x2c.
Destination	 The target of the instruction, described with the following details: The instruction address, expressed both as a hexadecimal value and as a label with an offset. In this example, 0x9000000c and "read" (thus, no offset). The module, and when applicable the library. In this example, the module read.o and the library iolib.a. The section number and section name. In this example, section number 6 with the name .text. The offset, specified in number of bytes, in the section. In this example, 0x0.

Table 4: Description of a relocation error

Possible solutions

In this case, the distance from the instruction in myfunc to __read is too long for the branch instruction.

Possible solutions include ensuring that the two .text sections are allocated closer to each other or using some other calling mechanism that can reach the required distance. It is also possible that the referring function tried to refer to the wrong target and that this caused the range error.

Different range errors have different solutions. Usually, the solution is a variant of the ones presented above, in other words modifying either the code or the section placement.

Checking module consistency

This section introduces the concept of runtime model attributes, a mechanism used by the tools provided by IAR Systems to ensure that modules that are linked into an application are compatible, in other words, are built using compatible settings. The tools use a set of predefined runtime model attributes. In addition to these, you can define your own that you can use to ensure that incompatible modules are not used together.

Note: In addition to the predefined attributes, compatibility is also checked against the AEABI runtime attributes. These attributes deal mainly with object code compatibility, etc. They reflect compilation settings and are not user-configurable.

RUNTIME MODEL ATTRIBUTES

A runtime attribute is a pair constituted of a named key and its corresponding value. In general, two modules can only be linked together if they have the same value for each key that they both define.

There is one exception: if the value of an attribute is *, then that attribute matches any value. The reason for this is that you can specify this in a module to show that you have considered a consistency property, and this ensures that the module does not rely on that property.

Note: For IAR predefined runtime model attributes, the linker checks them in several ways.

Example

In this table, the object files could (but do not have to) define the two runtime attributes color and taste:

Object file	Color	Taste
file1	blue	not defined
file2	red	not defined
file3	red	*
file4	red	spicy
file5	red	lean

Table 5: Example of runtime model attributes

In this case, file1 cannot be linked with any of the other files, since the runtime attribute color does not match. Also, file4 and file5 cannot be linked together, because the taste runtime attribute does not match.

On the other hand, file2 and file3 can be linked with each other, and with either file4 or file5, but not with both.

USING RUNTIME MODEL ATTRIBUTES

To ensure module consistency with other object files, use the #pragma rtmodel directive to specify runtime model attributes in your C/C++ source code. For example, if you have a UART that can run in two modes, you can specify a runtime model attribute, for example uart. For each mode, specify a value, for example mode1 and mode2. Declare this in each module that assumes that the UART is in a particular mode. This is how it could look like in one of the modules:

```
#pragma rtmodel="uart", "mode1"
```

Alternatively, you can also use the rtmodel assembler directive to specify runtime model attributes in your assembler source code. For example:

```
rtmodel "uart", "model"
```

Note that key names that start with two underscores are reserved by the compiler. For more information about the syntax, see *rtmodel*, page 392 and the *IAR Assembler User Guide for Arm*, respectively.

At link time, the IAR ILINK Linker checks module consistency by ensuring that modules with conflicting runtime attributes will not be used together. If conflicts are detected, an error is issued.

The DLIB runtime environment

- Introduction to the runtime environment
- Setting up the runtime environment
- Additional information on the runtime environment
- Managing a multithreaded environment

Introduction to the runtime environment

A runtime environment is the environment in which your application executes.

This section contains information about:

- Runtime environment functionality, page 119
- Briefly about input and output (I/O), page 120
- Briefly about C-SPY emulated I/O, page 121
- Briefly about retargeting, page 122

RUNTIME ENVIRONMENT FUNCTIONALITY

The *DLIB runtime environment* supports Standard C and C++ and consists of:

- The *C/C++ standard library*, both its interface (provided in the system header files) and its implementation.
- Startup and exit code.
- Low-level I/O interface for managing input and output (I/O).
- Special compiler support, for instance functions for switch handling or integer arithmetics.
- Support for hardware features:
 - Direct access to low-level processor operations by means of *intrinsic* functions, such as functions for interrupt mask handling
 - Peripheral unit registers and interrupt definitions in include files
 - The Vector Floating Point (VFP) coprocessor.

Runtime environment functions are provided in a runtime library.

The runtime library is delivered both as a prebuilt library and (depending on your product package) as source files. The prebuilt libraries are available in different *configurations* to meet various needs, see *Runtime library configurations*, page 129. You can find the libraries in the product subdirectories arm\lib and arm\src\lib, respectively.


For more information about the library, see the chapter C/C++ standard library functions.

BRIEFLY ABOUT INPUT AND OUTPUT (I/O)

Every application must communicate with its environment. The application might for example display information on an LCD, read a value from a sensor, get the current date from the operating system, etc. Typically, your application performs I/O via the C/C++ standard library or some third-party library.

There are many functions in the C/C++ standard library that deal with I/O, including functions for: standard character streams, file system access, time and date, miscellaneous system actions, and termination and assert. This set of functions is referred to as the *standard I/O interface*.

On a desktop computer or a server, the operating system is expected to provide I/O functionality to the application via the standard I/O interface in the runtime environment. However, in an embedded system, the runtime library cannot assume that such functionality is present, or even that there is an operating system at all. Therefore, the low-level part of the standard I/O interface is not completely implemented by default:




To make the standard I/O interface work, you can:

- Let the C-SPY debugger emulate I/O operations on the host computer, see Briefly about C-SPY emulated I/O, page 121
- *Retarget* the standard I/O interface to your target system by providing a suitable implementation of the interface, see *Briefly about retargeting*, page 122.

It is possible to mix these two approaches. You can, for example, let debug printouts and asserts be emulated by the C-SPY debugger, but implement your own file system. The debug printouts and asserts are useful during debugging, but no longer needed when running the application stand-alone (not connected to the C-SPY debugger).

BRIEFLY ABOUT C-SPY EMULATED I/O

C-SPY emulated I/O is a mechanism which lets the runtime environment interact with the C-SPY debugger to emulate I/O actions on the host computer:



For example, when C-SPY emulated I/O is enabled:

- Standard character streams are directed to the C-SPY Terminal I/O window
- File system operations are performed on the host computer
- Time and date functions return the time and date of the host computer
- Termination and failed asserts break execution and notify the C-SPY debugger.

This behavior can be valuable during the early development of an application, for example in an application that uses file I/O before any flash file system I/O drivers are implemented, or if you need to debug constructions in your application that use stdin and stdout without the actual hardware device for input and output being available.


See Setting up your runtime environment, page 123 and The semihosting mechanism, page 137.

BRIEFLY ABOUT RETARGETING

Retargeting is the process where you adapt the runtime environment so that your application can execute I/O operations on your target system.

The standard I/O interface is large and complex. To make retargeting easier, the DLIB runtime environment is designed so that it performs all I/O operations through a small set of simple functions, which is referred to as the *DLIB low-level I/O interface*. By default, the functions in the low-level interface lack usable implementations. Some are unimplemented, others have stub implementations that do not perform anything except returning error codes.

To retarget the standard I/O interface, all you have to do is to provide implementations for the functions in the DLIB low-level I/O interface.

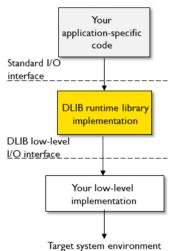

For example, if your application calls the functions printf and fputc in the standard I/O interface, the implementations of those functions both call the low-level function __write to output individual characters. To make them work, you just need to provide an implementation of the __write function—either by implementing it yourself, or by using a third-party implementation.

For information about how to override library modules with your own implementations, see *Overriding library modules*, page 126. See also *The DLIB low-level I/O interface*, page 143 for information about the functions that are part of the interface.

Setting up the runtime environment

This section contains these tasks:

- Setting up your runtime environment, page 123
 A runtime environment with basic project settings to be used during the initial phase of development.
- Retargeting—Adapting for your target system, page 124
- Overriding library modules, page 126
- Customizing and building your own runtime library, page 127

See also:

 Managing a multithreaded environment, page 154 for information about how to adapt the runtime environment to treat all library objects according to whether they are global or local to a thread.

SETTING UP YOUR RUNTIME ENVIRONMENT

You can set up the runtime environment based on some basic project settings. It is also often convenient to let the C-SPY debugger manage things like standard streams, file I/O, and various other system interactions. This basic runtime environment can be used for simulation before you have any target hardware.

To set up the runtime environment:

- Before you build your project, choose Project>Options>General Options to open the Options dialog box.
- 2 On the **Library Configuration** page, verify the following settings:
 - Library: choose which library configuration to use. Typically, choose None, Normal, Full, or Custom.
 - For information about the various library configurations, see *Runtime library configurations*, page 129.
- **3** On the **Library Options** page, select **Auto with multibyte support** or **Auto without multibyte support** for both **Printf formatter** and **Scanf formatter**. This means that the linker will automatically choose the appropriate formatters based on information from the compiler. For more information about the available formatters and how to choose one manually, see *Formatters for printf*, page 133 and *Formatters for scanf*, page 135, respectively.
- **4** To enable C-SPY emulated I/O, choose **Project>Options>General Options>Library Configuration** and choose **Semihosted** (--semihosted) or **IAR breakpoint** (--semihosting=iar_breakpoint).

Note that for some Cortex-M devices it is also possible to direct stdout/stderr via SWO. This can significantly improve stdout/stderr performance compared to semihosting. For hardware requirements, see the *C-SPY® Debugging Guide for Arm*.



To enable stdout via SWO on the command line, use the linker option --redirect __iar_sh_stdout=__iar_sh_stdout_swo.



To enable stdout via SWO in the IDE, select the **Semihosted** option and the **stdout/stderr via SWO** option.

See Briefly about C-SPY emulated I/O, page 121 and The semihosting mechanism, page 137.

5 On some systems, terminal output might be slow because the host computer and the target system must communicate for each character.

For this reason, a replacement for the __write function called __write_buffered is included in the runtime library. This module buffers the output and sends it to the debugger one line at a time, speeding up the output. Note that this function uses about 80 bytes of RAM memory.



To use this feature in the IDE, choose Project>Options>General Options>Library Options 1 and select the option Buffered terminal output.



To enable this function on the command line, add this to the linker command line:

```
--redirect __write=__write_buffered
```

6 Some math functions are available in different versions: default versions, smaller than the default versions, and larger but more accurate than default versions. Consider which versions you should use.

For more information, see *Math functions*, page 137.

7 When you build your project, a suitable prebuilt library and library configuration file are automatically used based on the project settings you made.

For information about which project settings affect the choice of library file, see *Runtime library configurations*, page 129.

You have now set up a runtime environment that can be used while developing your application source code.

RETARGETING—ADAPTING FOR YOUR TARGET SYSTEM

Before you can run your application on your target system, you must adapt some parts of the runtime environment, typically the system initialization and the DLIB low-level I/O interface functions.

To adapt your runtime environment for your target system:

I Adapt system initialization.

It is likely that you must adapt the system initialization, for example, your application might need to initialize interrupt handling, I/O handling, watchdog timers, etc. You do this by implementing the routine __low_level_init, which is executed before the data sections are initialized. See *System startup and termination*, page 139 and *System initialization*, page 142. Note that you can find device-specific examples on this in the example projects provided in the product installation; see the Information Center.

2 Adapt the runtime library for your target system. To implement such functions, you need a good understanding of the DLIB low-level I/O interface, see *Briefly about retargeting*, page 122.

Typically, you must implement your own functions if your application uses:

• Standard streams for input and output

If any of these streams are used by your application, for example by the functions printf and scanf, you must implement your versions of the low-level functions __read and __write.

The low-level functions identify I/O streams, such as an open file, with a file handle that is a unique integer. The I/O streams normally associated with stdin, stdout, and stderr have the file handles 0, 1, and 2, respectively. When the handle is -1, all streams should be flushed. Streams are defined in stdio.h.

• File input and output

The library contains a large number of powerful functions for file I/O operations, such as fopen, fclose, fprintf, fputs, etc. All these functions call a small set of low-level functions, each designed to accomplish one particular task; for example, __open opens a file, and __write outputs characters. Implement your version of these low-level functions.

• signal and raise

If the default implementation of these functions does not provide the functionality you need, you can implement your own versions.

• Time and date

To make the time and date functions work, you must implement the functions clock, __time32, __time64, and __getzone. Whether you use __time32 or __time64 depends on which interface you use for time_t, see *time.h*, page 473.

- Assert, see *aeabi assert*, page 144.
- Environment interaction

If the default implementation of system or getenv does not provide the functionality you need, you can implement your own versions.

For more information about the functions, see *The DLIB low-level I/O interface*, page 143.

The library files that you can override with your own versions are located in the arm\src\lib directory.

3 When you have implemented your functions of the low-level I/O interface, you must add your version of these functions to your project. For information about this, see *Overriding library modules*, page 126.

Note: If you have implemented a DLIB low-level I/O interface function and added it to a project that you have built with support for C-SPY emulated I/O, your low-level function will be used and not the functions provided with C-SPY emulated I/O. For example, if you implement your own version of __write, output to the C-SPY **Terminal I/O** window will not be supported. See *Briefly about C-SPY emulated I/O*, page 121.

4 Before you can execute your application on your target system, you must rebuild your project with a Release build configuration. This means that the linker will not include the C-SPY emulated I/O mechanism and the low-level I/O functions it provides. If your application calls any of the low-level functions of the standard I/O interface, either directly or indirectly, and your project does not contain these, the linker will issue an error for every missing low-level function. Also, note that the NDEBUG symbol is defined in a Release build configuration, which means asserts will no longer be generated. For more information, see *aeabi assert*, page 144.

OVERRIDING LIBRARY MODULES

To override a library function and replace it with your own implementation:

Use a template source file—a library source file or another template—and place a copy of it in your project directory.

The library files that you can override with your own versions are located in the arm\src\lib directory.

2 Modify the file.

Note: To override the functions in a module, you must provide alternative implementations for all the needed symbols in the overridden module. Otherwise you will get error messages about duplicate definitions.

3 Add the modified file to your project, like any other source file.

Note: If you have implemented a DLIB low-level I/O interface function and added it to a project that you have built with support for C-SPY emulated I/O, your low-level function will be used and not the functions provided with C-SPY emulated I/O. For

example, if you implement your own version of __write, output to the C-SPY **Terminal I/O** window will not be supported. See *Briefly about C-SPY emulated I/O*, page 121.

You have now finished the process of overriding the library module with your version.

CUSTOMIZING AND BUILDING YOUR OWN RUNTIME LIBRARY

If the prebuilt library configurations do not meet your requirements, you can customize your own library configuration, but that requires that you *rebuild* relevant parts of the library.

Building a customized library is a complex process. Therefore, consider carefully whether it is really necessary. You must build your own runtime library when:

You want to define your own library configuration with support for locale, file
descriptors, multibyte characters, etc. This will include or exclude certain parts of
the DLIB runtime environment.

In those cases, you must:

- Make sure that you have installed the library source code (src\lib). If not already
 installed, you can install it using the IAR License Manager, see the *Installation and*Licensing Guide.
- Set up a library project
- Make the required library customizations
- Build your customized runtime library
- Finally, make sure your application project will use the customized runtime library. Note that the customized library only replaces the part of the DLIB runtime environment implemented in the libraries for C and C++ library functions. Rebuilding libraries for the following is not supported:
 - math functions
 - runtime support functions
 - thread support functions
 - timezone and daylight saving time functions
 - debug support functions

To set up a library project:

In the IDE, choose **Project>Create New Project** and use the library project template which can be used for customizing the runtime environment configuration. There is a library template for the Full library configuration, see *Runtime library configurations*, page 129

Note that when you create a new library project from a template, the majority of the files included in the new project are the original installation files. If you are going to modify these files, make copies of them first and replace the original files in the project with these copies.

To customize the library functionality:

I The library functionality is determined by a set of *configuration symbols*. The default values of these symbols are defined in the file DLib_Defaults.h which you can find in arm\inc\c. This read-only file describes the configuration possibilities. Note that you should not modify this file.

In addition, your custom library has its own *library configuration file* dlarmCustom.h—which you can find in the newly created library project—and which sets up that specific library with the required library configuration. Customize this file by setting the values of the configuration symbols according to the application requirements.

For information about configuration symbols that you might want to customize, see:

- Configuration symbols for file input and output, page 153
- Locale, page 153
- Managing a multithreaded environment, page 154
- **2** When you are finished, build your library project with the appropriate project options.

After you build your library, you must make sure to use it in your application project.



To build IAR Embedded Workbench projects from the command line, use the IAR Command Line Build Utility (iarbuild.exe). However, no make or batch files for building the library from the command line are provided. For information about the build process and the IAR Command Line Build Utility, see the *IDE Project Management and Building Guide for Arm*.

To use the customized runtime library in your application project:

- In the IDE, choose Project>Options>General Options and click the Library Configuration tab.
- **2** From the **Library** drop-down menu, choose **Custom**.
- **3** In the **Configuration file** text box, locate your library configuration file.
- 4 Click the **Library** tab, also in the **Linker** category. Use the **Additional libraries** text box to locate your library file.

Additional information on the runtime environment

This section gives additional information on the runtime environment:

- Bounds checking functionality, page 129
- Runtime library configurations, page 129
- Prebuilt runtime libraries, page 130
- Formatters for printf, page 133
- Formatters for scanf, page 135
- The C-SPY emulated I/O mechanism, page 136
- The semihosting mechanism, page 137
- Math functions, page 137
- System startup and termination, page 139
- System initialization, page 142
- The DLIB low-level I/O interface, page 143
- Configuration symbols for file input and output, page 153
- Locale, page 153

BOUNDS CHECKING FUNCTIONALITY

To enable the bounds checking functions specified in Annex K (*Bounds-checking interfaces*) of the C standard, define the preprocessor symbol __STDC_WANT_LIB_EXT1__ to 1 prior to including any system headers.

RUNTIME LIBRARY CONFIGURATIONS

The runtime library is provided with different *library configurations*, where each configuration is suitable for different application requirements.

The runtime library configuration is defined in the *library configuration file*. It contains information about what functionality is part of the runtime environment. The less functionality you need in the runtime environment, the smaller the environment becomes.

These predefined library configurations are available:

Library configuration	Description
Normal DLIB (default)	C locale, but no locale interface, no file descriptor support, no
	multibyte characters in printf and scanf.

Table 6: Library configurations

Library configuration	Description
Full DLIB	Full locale interface, C locale, file descriptor support, and optionally
	multibyte characters in printf and scanf.

Table 6: Library configurations (Continued)

Note: In addition to these predefined library configurations, you can provide your own configuration, see *Customizing and building your own runtime library*, page 127

If you do not specify a library configuration explicitly you will get the default configuration. If you use a prebuilt runtime library, a configuration file that matches the runtime library file will automatically be used. See *Setting up your runtime environment*, page 123.

To override the default library configuration, use one of these methods:

Use a prebuilt configuration of your choice—to specify a runtime configuration explicitly:



Choose **Project>Options>General Options>Library Configuration>Library** and change the default setting.



Use the --dlib_config compiler option, see --dlib config, page 268.

The prebuilt libraries are based on the default configurations, see *Runtime library configurations*, page 129.

2 If you have built your own customized library, choose **Project>Options>Library Configuration>Library** and choose **Custom** to use your own configuration. For more information, see *Customizing and building your own runtime library*, page 127.

PREBUILT RUNTIME LIBRARIES

The prebuilt runtime libraries are configured for different combinations of these options:

• Library configuration—Normal or Full.

The linker will automatically include the correct library object file and library configuration file. To explicitly specify a library configuration, use the --dlib_config compiler option.

Library filename syntax

The names of the libraries are constructed from these elements:

{architecture} Specifies the CPU architecture: 4t = Armv4T5E = Armv5E6M or 6Mx = Armv6M (6Mx is built with)--no literal pool) 7M or 7Mx = Armv7M (7Mx is built with--no_literal_pool) 7Sx = Armv7-A and Armv7-R, built with --no literal pool 4as = Generic Armv4, built with bounds-checking 7as = Generic Armv7, built with bounds-checking {cpu-mode} Specifies the default processor mode: a = Arm modet. = Thumb mode {byte-order} Specifies the byte order: 1 = little-endian b = big-endian{lib-config} Specifies the library configuration: n = Normalf = Full{rwpi} Specifies whether the library supports RWPI: s = RWPI supported not present = no RWPI support {fp-implementation} Specifies how floating-point operations are implemented: v = VFPs = VFP for single precision only not present = software implementation {debug-interface} Specifies a semihosting mechanism: s = SVCb = BKPTi = IAR-breakpoint

You can find the library files in the subdirectory arm\lib\ and the library configuration files in the arm\inc\ subdirectory.

Groups of library files

The libraries are delivered in groups of library functions:

Library files for C library functions

These are the functions defined by Standard C, for example functions like printf and scanf. Note that this library does not include math functions.

The names of the library files are constructed in the following way:

```
\label{lib-config} $$ [rwpi]. a$ which more specifically means $$ d1{4t|5E|6M|6Mx|7M|7Mx|7Sx}_{a|t}{1|b}{n|f}[s].a$
```

Library files for C++ library functions

These are the functions defined by C++, compiled with support for Standard C++.

The names of the library files are constructed in the following way:

```
\label{lib-config} $$ dlpp{architecture}_{cpu-mode}{byte-order}_{lib-config}c[rwpi].a$$ which more specifically means $$ dlpp{4t|5E|6M|6Mx|7M|7Mx|7Sx|4as|7as}_{a|t}{1|b}_{n|f}c[s].a$$
```

Library files for math functions

These are the functions for floating-point arithmetic and functions with a floating-point type in its signature as defined by Standard C, for example functions like sqrt.

The names of the library files are constructed in the following way:

```
\label{lem:marchitecture} $$ m\{architecture\}_{cpu-mode}\{byte-order\}\{fp-implementation\}. a $$ which more specifically means $$ m\{4t|5E|6M|6Mx|7M|7Mx|7Sx\}_{a|t}\{1|b\}\{|v|s\}. a $$
```

Library files for thread support functions

These are the functions for thread support.

The names of the library files are constructed in the following way:

```
\verb|th{architecture}|_{\{cpu-mode\}\{byte-order\}\{lib-config\}.a}|
```

which more specifically means

```
th\{4t|5E|6M|6Mx|7M|7Mx|7Sx\}_{a|t}\{1|b\}\{n|f\}.a
```

Library files for timezone and daylight saving time support functions

These are the functions with support for timezone and daylight saving time functionality.

The names of the library files are constructed in the following way:

```
\label{total conditions} $$tz{architecture}_{cpu-mode}{byte-order}[rwpi].a$$ which more specifically means $$tz{4t|5E|6M|6Mx|7Mx|7Sx}_{a|t}{1|b}[s].a$
```

Library files for runtime support functions

These are functions for system startup, initialization, non floating-point AEABI support routines, and some of the functions that are part of Standard C and C++.

The names of the library files are constructed in the following way:

Library files for debug support functions

These are functions for debug support for the semihosting interface. The names of the library files are constructed in the following way:

```
sh\{debug-interface\}_\{byte-order\}. a or sh\{architecture\}_\{byte-order\}. a which more specifically means sh\{s|b|i\}_{\{1|b\}.a} or sh\{6Mx|7Mx|7Sx\}_{\{1|b\}.a}
```

FORMATTERS FOR PRINTF

The printf function uses a formatter called _Printf. The full version is quite large, and provides facilities not required in many embedded applications. To reduce the

memory consumption, three smaller, alternative versions are also provided. Note that the wprintf variants are not affected.

This table summarizes the capabilities of the different formatters:

Formatting capabilities		Small/ SmallNoMb†	Large/ LargeNoMb†	Full/ FullNoMb†
Basic specifiers c, d, i, o, p, s, u, X, x, and %	Yes	Yes	Yes	Yes
Multibyte support	No	Yes/No	Yes/No	Yes/No
Floating-point specifiers a, and A	No	No	No	Yes
Floating-point specifiers e, E, f, F, g, and ${\tt G}$	No	No	Yes	Yes
Conversion specifier n	No	No	Yes	Yes
Format flag +, -, #, 0, and space	No	Yes	Yes	Yes
Length modifiers h, 1, L, s, t, and ${\tt Z}$	No	Yes	Yes	Yes
Field width and precision, including *	No	Yes	Yes	Yes
long long support	No	No	Yes	Yes
wchar_t support	No	No	No	Yes

Table 7: Formatters for printf


The compiler can automatically detect which formatting capabilities are needed in a direct call to printf, if the formatting string is a string literal. This information is passed to the linker, which combines the information from all modules to select a suitable formatter for the application. However, if the formatting string is a variable, or if the call is indirect through a function pointer, the compiler cannot perform the analysis, forcing the linker to select the Full formatter. In this case, you might want to override the automatically selected printf formatter.



To override the automatically selected printf formatter in the IDE:

- I Choose Project>Options>General Options to open the Options dialog box.
- 2 On the Library Options page, select the appropriate formatter.

[†] NoMb means without multibytes.



I Use one of these ILINK command line options:

```
--redirect _Printf=_PrintfFull
--redirect _Printf=_PrintfFullNoMb
--redirect _Printf=_PrintfLarge
--redirect _Printf=_PrintfLargeNoMb
--redirect _Printf=_PrintfSmall
--redirect _Printf=_PrintfSmallNoMb
--redirect _Printf=_PrintfTiny
--redirect _Printf=_PrintfTinyNoMb
```

If the compiler does not recognize multibyte support, you can enable it:



Select Project>Options>General Options>Library Options 1>Enable multibyte support.



Use the linker option --printf_multibytes.

FORMATTERS FOR SCANF

In a similar way to the printf function, scanf uses a common formatter, called _Scanf. The full version is quite large, and provides facilities that are not required in many embedded applications. To reduce the memory consumption, two smaller, alternative versions are also provided. Note that the wscanf versions are not affected.

This table summarizes the capabilities of the different formatters:

Formatting capabilities	Small/ SmallNoMb†	Large/ LargeNoMb†	Full/ FullNoMb†
Basic specifiers c, d, i, o, p, s, u, X, x, and %	Yes	Yes	Yes
Multibyte support	Yes/No	Yes/No	Yes/No
Floating-point specifiers a, and A	No	No	Yes
Floating-point specifiers e, E, f, F, g, and ${\tt G}$	No	No	Yes
Conversion specifier n	No	No	Yes
Scan set [and]	No	Yes	Yes
Assignment suppressing *	No	Yes	Yes
long long support	No	No	Yes
wchar_t support	No	No	Yes

Table 8: Formatters for scanf

[†] Nomb means without multibytes.

The compiler can automatically detect which formatting capabilities are needed in a direct call to <code>scanf</code>, if the formatting string is a string literal. This information is passed to the linker, which combines the information from all modules to select a suitable formatter for the application. However, if the formatting string is a variable, or if the call is indirect through a function pointer, the compiler cannot perform the analysis, forcing the linker to select the full formatter. In this case, you might want to override the automatically selected <code>scanf</code> formatter.



To manually specify the scanf formatter in the IDE:

- Choose Project>Options>General Options to open the Options dialog box.
- 2 On the **Library Options** page, select the appropriate formatter.



I Use one of these ILINK command line options:

```
--redirect _Scanf=_ScanfFull
--redirect _Scanf=_ScanfFullNoMb
--redirect _Scanf=_ScanfLarge
--redirect _Scanf=_ScanfLargeNoMb
--redirect _Scanf=_ScanfSmall
--redirect Scanf=_ScanfSmallNoMb
```

If the compiler does not recognize multibyte support, you can enable it:



Select Project>Options>General Options>Library Options 1>Enable multibyte support.



Use the linker option --scanf_multibytes.

THE C-SPY EMULATED I/O MECHANISM

- 1 The debugger will detect the presence of the function __DebugBreak, which will be part of the application if you linked it with the linker option for C-SPY emulated I/O.
- 2 In this case, the debugger will automatically set a breakpoint at the __DebugBreak function.
- 3 When your application calls a function in the DLIB low-level I/O interface, for example, open, the __DebugBreak function is called, which will cause the application to stop at the breakpoint and perform the necessary services.
- 4 The execution will then resume.

See also Briefly about C-SPY emulated I/O, page 121.

THE SEMIHOSTING MECHANISM

C-SPY emulated I/O is compatible with the semihosting interface provided by Arm Limited. When an application invokes a semihosting call, the execution stops at a debugger breakpoint. The debugger then handles the call, performs any necessary actions on the host computer and then resumes the execution.

There are three variants of semihosting mechanisms available:

- For Cortex-M, the interface uses BKPT instructions to perform semihosting calls
- For other Arm cores, SVC instructions are used for the semihosting calls
- IAR breakpoint, which is an IAR-specific alternative to semihosting that uses SVC.

To support semihosting via SVC, the debugger must set its semihosting breakpoint on the Supervisor Call vector to catch SVC calls. If your application uses SVC calls for other purposes than semihosting, the handling of this breakpoint will cause a severe performance penalty for each such call. IAR breakpoint is a way to get around this. By using a special function call instead of an SVC instruction to perform semihosting, the semihosting breakpoint can be set on that special function instead. This means that semihosting will not interfere with other uses of the Supervisor Call vector.

Note that IAR breakpoint is an IAR-specific extension of the semihosting standard. If you link your application with libraries built with toolchains from other vendors than IAR Systems and use IAR breakpoint, semihosting calls made from code in those libraries will not work.

MATH FUNCTIONS

Some C/C++ standard library math functions are available in different versions:

- The default versions
- Smaller versions (but less accurate)
- More accurate versions (but larger).

Smaller versions

The functions cos, exp, log, log2, log10, pow, sin, and tan exist in additional, smaller versions in the library. They are about 20% smaller and about 20% faster than the default versions. The functions handle INF and NaN values. The drawbacks are that they almost always lose some precision and they do not have the same input range as the default versions.

The names of the functions are constructed like:

```
__iar_xxx_small<f|1>
```

where f is used for float variants, 1 is used for long double variants, and no suffix is used for double variants.



To specify individual math functions from the command line:

Redirect the default function names to these names when linking, using these options:

```
--redirect sin=__iar_sin_small
--redirect cos=__iar_cos_small
--redirect tan= iar tan small
--redirect log=__iar_log_small
--redirect log2=__iar_log2_small
--redirect log10= iar log10 small
--redirect exp=__iar_exp_small
--redirect pow=__iar_pow_small
--redirect sinf=__iar_sin_smallf
--redirect cosf=__iar_cos_smallf
--redirect tanf=__iar_tan_smallf
--redirect logf=__iar_log_smallf
--redirect log2f=__iar_log2_smallf
--redirect log10f= iar log10 smallf
--redirect expf= iar exp smallf
--redirect powf=__iar_pow_smallf
--redirect sinl= iar sin smalll
--redirect cosl=__iar_cos_small1
--redirect tanl=__iar_tan_small1
--redirect log1=__iar_log_small1
--redirect log21=__iar_log2_small1
--redirect log101=__iar_log10_small1
--redirect expl=__iar_exp_small1
--redirect powl=__iar_pow_small1
```

More accurate versions

The functions cos, pow, sin, and tan exist in versions in the library that are more exact and can handle larger argument ranges. The drawback is that they are larger and slower than the default versions.

The names of the functions are constructed like:

```
__iar_xxx_accurate<f|1>
```

where f is used for float variants, 1 is used for long double variants, and no suffix is used for double variants.



To specify individual math functions from the command line:

Redirect the default function names to these names when linking, using these options:

```
--redirect sin=__iar_sin_accurate
--redirect cos=__iar_cos_accurate
--redirect tan=__iar_tan_accurate
--redirect pow=__iar_pow_accurate

--redirect sinf=__iar_sin_accuratef
--redirect cosf=__iar_cos_accuratef
--redirect tanf=__iar_tan_accuratef
--redirect powf=__iar_pow_accuratef
--redirect sinl=__iar_sin_accuratef
--redirect cosl=__iar_cos_accuratel
--redirect tanl=__iar_tan_accuratel
--redirect tanl=__iar_tan_accuratel
--redirect powl=__iar_pow_accuratel
```

SYSTEM STARTUP AND TERMINATION


This section describes the runtime environment actions performed during startup and termination of your application.

The code for handling startup and termination is located in the source files cstartup.s, cmain.s, cexit.s located in the arm\src\lib\arm or arm\src\lib\thumb directory (thumb for Cortex-M), and low_level_init.c located in the arm\src\lib\runtime directory.

For information about how to customize the system startup code, see *System initialization*, page 142.

System startup


During system startup, an initialization sequence is executed before the main function is entered. This sequence performs initializations required for the target hardware and the C/C++ environment.



For the hardware initialization, it looks like this:

- When the CPU is reset it will start executing at the program entry label __iar_program_start in the system startup code.
- The stack pointer is initialized to the end of the CSTACK block
- For Arm7/9/11, Cortex-A, and Cortex-R devices, exception stack pointers are initialized to the end of each corresponding section
- The function __low_level_init is called if you defined it, giving the application
 a chance to perform early initializations.

For the C/C++ initialization, it looks like this:

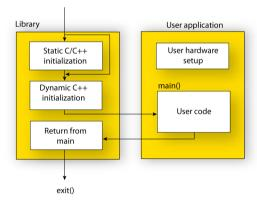


• Static and global variables are initialized. That is, zero-initialized variables are cleared and the values of other initialized variables are copied from ROM to RAM memory. This step is skipped if __low_level_init returns zero. For more information, see *Initialization at system startup*, page 94.

- Static C++ objects are constructed
- The main function is called, which starts the application.

For information about the initialization phase, see *Application execution—an overview*, page 62.

System termination

This illustration shows the different ways an embedded application can terminate in a controlled way:



An application can terminate normally in two different ways:

- Return from the main function
- Call the exit function.

Because the C standard states that the two methods should be equivalent, the system startup code calls the exit function if main returns. The parameter passed to the exit function is the return value of main.

The default exit function is written in C. It calls a small assembler function _exit that will:

- Call functions registered to be executed when the application ends. This includes C++ destructors for static and global variables, and functions registered with the standard function atexit. See also *Setting up the atexit limit*, page 110.
- Close all open files
- Call __exit
- When __exit is reached, stop the system.

An application can also exit by calling the abort, the _Exit, or the quick_exit function. The abort function just calls __exit to halt the system, and does not perform any type of cleanup. The _Exit function is equivalent to the abort function, except for the fact that _Exit takes an argument for passing exit status information. The quick_exit function is equivalent to the _Exit function, except that it calls each function passed to at_quick_exit before calling __exit.

If you want your application to do anything extra at exit, for example resetting the system (and if using atexit is not sufficient), you can write your own implementation of the __exit(int) function.

The library files that you can override with your own versions are located in the arm\src\lib directory. See *Overriding library modules*, page 126.

C-SPY debugging support for system termination

If you have enabled C-SPY emulated I/O during linking, the normal __exit function is replaced with a special one. C-SPY will then recognize when this function is called and can take appropriate actions to emulate program termination. For more information, see *Briefly about C-SPY emulated I/O*, page 121.

SYSTEM INITIALIZATION

It is likely that you need to adapt the system initialization. For example, your application might need to initialize memory-mapped special function registers (SFRs), or omit the default initialization of data sections performed by the system startup code.

You can do this by implementing your own version of the routine <code>__low_level_init</code>, which is called from the file <code>cmain.s</code> before the data sections are initialized. Modifying the file <code>cstartup.s</code> directly should be avoided.

For Cortex-M, the code for handling system startup is located in the source files cstartup_M.s and low_level_init.c, located in the arm\src\lib directory.

For other Arm devices, the code for handling system startup is located in the source files cstartup.s and low_level_init.c, located in the arm\src\lib directory.

Note: Normally, you do not need to customize either of the files cmain.s or cexit.s.

Note: Regardless of whether you implement your own version of __low_level_init or the file cstartup.s, you do not have to rebuild the library.

Customizing low level init

A skeleton low-level initialization file is supplied with the product: low_level_init.c. Note that static initialized variables cannot be used within the file, because variable initialization has not been performed at this point.

The value returned by __low_level_init determines whether or not data sections should be initialized by the system startup code. If the function returns 0, the data sections will not be initialized.

Modifying the cstartup file

As noted earlier, you should not modify the file cstartup.s if implementing your own version of __low_level_init is enough for your needs. However, if you do need to modify the file cstartup.s, we recommend that you follow the general procedure for creating a modified copy of the file and adding it to your project, see *Overriding library modules*, page 126.

Note that you must make sure that the linker uses the start label used in your version of cstartup.s. For information about how to change the start label used by the linker, see --entry, page 314.

For Cortex-M, you must create a modified copy of cstartup_M.s or cstartup_M.c to use interrupts or other exception handlers.

THE DLIB LOW-LEVEL I/O INTERFACE

The runtime library uses a set of low-level functions—which are referred to as the *DLIB low-level I/O interface*—to communicate with the target system. Most of the low-level functions have no implementation.

For more information about this, see *Briefly about input and output (I/O)*, page 120.

These are the functions in the DLIB low-level I/O interface:

aport
aeabi_assert
clock
close
exit
getenv
getzone
lseek
open
raise
read

remove
rename
signal
system
__time32, __time64
__write

Note: You should normally not use the low-level functions prefixed with __ directly in your application. Instead you should use the standard library functions that use these functions. For example, to write to stdout, you should use standard library functions like printf or puts, which in turn calls the low-level function __write. If you have forgot to implement a low-level function and your application calls that function via a standard library function, the linker issues an error when you link in release build configuration.

Note: If you implement your own variants of the functions in this interface, your variants will be used even though you have enabled C-SPY emulated I/O, see *Briefly about C-SPY emulated I/O*, page 121.

abort

Source file arm\src\lib\runtime\abort.c

Declared in stdlib.h

Description Standard C library function that aborts execution.

C-SPY debug action Exits the application.

Default implementation Calls __exit(EXIT_FAILURE).

See also *Briefly about retargeting*, page 122

System termination, page 141.

__aeabi_assert

Source file arm\src\lib\runtime\assert.c

Declared in assert.h

Description Low-level function that handles a failed assert.

C-SPY debug action Notifies the C-SPY debugger about the failed assert.

Default implementation Failed asserts are reported by the function __aeabi_assert. By default, it prints an

error message and calls abort. If this is not the behavior you require, you can

implement your own version of the function.

The assert macro is defined in the header file assert.h. To turn off assertions, define

the symbol NDEBUG.

ΠË

In the IDE, the symbol NDEBUG is by default defined in a Release project and *not* defined in a Debug project. If you build from the command line, you must explicitly define the symbol according to your needs. See *NDEBUG*, page 461.

See also *Briefly about retargeting*, page 122.

clock

Source file arm\src\lib\time\clock.c

Declared in time.h

Description Standard C library function that accesses the processor time.

C-SPY debug action Returns the clock on the host computer.

Default implementation Returns -1 to indicate that processor time is not available.

See also *Briefly about retargeting*, page 122.

close

Source file arm\src\lib\file\close.c

Declared in LowLevelIOInterface.h

Description Low-level function that closes a file.

C-SPY debug action Closes the associated host file on the host computer.

Default implementation None.

See also *Briefly about retargeting*, page 122.

exit

Source file arm\src\lib\runtime\xxexit.c

Declared in LowLevelIOInterface.h

Description Low-level function that halts execution.

C-SPY debug action Notifies that the end of the application was reached.

Default implementation Loops forever.

See also *Briefly about retargeting*, page 122

System termination, page 141.

getenv

Source file arm\src\lib\runtime\getenv.c

arm\src\lib\runtime\environ.c

Declared in Stdlib.h and LowLevelIOInterface.h

C-SPY debug action Accesses the host environment.

Default implementation The getenv function in the library searches the string pointed to by the global variable

__environ, for the key that was passed as argument. If the key is found, the value of it

is returned, otherwise 0 (zero) is returned. By default, the string is empty.

To create or edit keys in the string, you must create a sequence of null-terminated strings

where each string has the format:

key=value\0

End the string with an extra null character (if you use a C string, this is added automatically). Assign the created sequence of strings to the __environ variable.

For example:

const char MyEnv[] = "Key=Value\0Key2=Value2\0";

__environ = MyEnv;

If you need a more sophisticated environment variable handling, you should implement

your own getenv, and possibly putenv function.

Note: The putenv function is not required by the standard, and the library does not

provide an implementation of it.

See also *Briefly about retargeting*, page 122.

__getzone

Source file arm\src\lib\time\getzone.c

Declared in LowLevelIOInterface.h

Description Low-level function that returns the current time zone.

Note: You must enable the time zone functionality in the library by using the linker

option --timezone_lib.

C-SPY debug action Not applicable.

Default implementation Returns ":".

See also *Briefly about retargeting*, page 122 and *--timezone lib*, page 334.

For more information, see the source file getzone.c.

lseek

Source file arm\src\lib\file\lseek.c

Declared in LowLevelIOInterface.h

Description Low-level function for changing the location of the next access in an open file.

C-SPY debug action Searches in the associated host file on the host computer.

Default implementation None.

See also *Briefly about retargeting*, page 122.

__open

Source file arm\src\lib\file\open.c

Declared in LowLevelIOInterface.h

Description Low-level function that opens a file.

C-SPY debug action Opens a file on the host computer.

Default implementation None.

See also *Briefly about retargeting*, page 122.

raise

Source file arm\src\lib\runtime\raise.c

Declared in signal.h

Description Standard C library function that raises a signal.

C-SPY debug action Not applicable.

Default implementation Calls the signal handler for the raised signal, or terminates with call to

__exit(EXIT_FAILURE).

See also *Briefly about retargeting*, page 122.

read

Source file arm\src\lib\file\read.c

Declared in LowLevelIOInterface.h

Description Low-level function that reads characters from stdin and from files.

C-SPY debug action Directs stdin to the Terminal I/O window. All other files will read the associated host

file.

Default implementation None.

Example

The code in this example uses memory-mapped I/O to read from a keyboard, whose port is assumed to be located at 0x1000:

```
#include <stddef.h>
#include <LowLevelIOInterface.h>
__no_init volatile unsigned char kbIO @ 0x1000;
size_t __read(int handle,
              unsigned char *buf,
              size t bufSize)
 size_t nChars = 0;
  /* Check for stdin
     (only necessary if FILE descriptors are enabled) */
 if (handle != 0)
   return -1;
 for (/*Empty*/; bufSize > 0; --bufSize)
   unsigned char c = kbIO;
   if (c == 0)
     break;
    *buf++ = c;
    ++nChars;
 }
 return nChars;
}
```

For information about the handles associated with the streams, see *Retargeting—Adapting for your target system*, page 124.

For information about the @ operator, see *Controlling data and function placement in memory*, page 222.

See also

Briefly about retargeting, page 122.

remove

Source file arm\src\lib\file\remove.c

Declared in stdio.h

Description Standard C library function that removes a file.

C-SPY debug action Removes a file on the host computer.

Default implementation Returns 0 to indicate success, but without removing a file.

See also *Briefly about retargeting*, page 122.

rename

Source file arm\src\lib\file\rename.c

Declared in stdio.h

Description Standard C library function that renames a file.

C-SPY debug action Renames a file on the host computer.

Default implementation Returns -1 to indicate failure.

See also *Briefly about retargeting*, page 122.

signal

Source file arm\src\lib\runtime\signal.c

Declared in signal.h

Description Standard C library function that changes signal handlers.

C-SPY debug action Not applicable.

Default implementation As specified by Standard C. You might want to modify this behavior if the environment

supports some kind of asynchronous signals.

See also *Briefly about retargeting*, page 122.

system

Source file arm\src\lib\runtime\system.c

Declared in stdlib.h

Description Standard C library function that executes commands.

C-SPY debug action Notifies the C-SPY debugger that system has been called and then returns -1.

Default implementation The system function available in the library returns 0 if a null pointer is passed to it to

indicate that there is no command processor; otherwise it returns -1 to indicate failure. If this is not the functionality that you require, you can implement your own version.

This does not require that you rebuild the library.

See also *Briefly about retargeting*, page 122.

__time32, __time64

Source file arm\src\lib\time\time.c

arm\src\lib\time\time64.c

Declared in time.h

Description Low-level functions that return the current calendar time.

C-SPY debug action Returns the time on the host computer.

Default implementation Returns -1 to indicate that calendar time is not available.

See also *Briefly about retargeting*, page 122.

write

Source file arm\src\lib\file\write.c

Declared in LowLevelIOInterface.h

Description Low-level function that writes to stdout, stderr, or a file.

C-SPY debug action Directs stdout and stderr to the Terminal I/O window. All other files will write to

the associated host file.

Default implementation

None.

Example

The code in this example uses memory-mapped I/O to write to an LCD display, whose port is assumed to be located at address 0x1000:

```
#include <stddef.h>
#include <LowLevelIOInterface.h>
no init volatile unsigned char lcdIO @ 0x1000;
size_t __write(int handle,
               const unsigned char *buf,
               size_t bufSize)
 size_t nChars = 0;
  /* Check for the command to flush all handles */
 if (handle == -1)
   return 0;
  }
  /* Check for stdout and stderr
     (only necessary if FILE descriptors are enabled.) */
 if (handle != 1 && handle != 2)
   return -1;
 }
 for (/* Empty */; bufSize > 0; --bufSize)
   lcdI0 = *buf;
   ++buf;
   ++nChars;
  }
 return nChars;
```

For information about the handles associated with the streams, see *Retargeting—Adapting for your target system*, page 124.

See also

Briefly about retargeting, page 122.

CONFIGURATION SYMBOLS FOR FILE INPUT AND OUTPUT

File I/O is only supported by libraries with the Full library configuration, see *Runtime library configurations*, page 129, or in a customized library when the configuration symbol __DLIB_FILE_DESCRIPTOR is defined. If this symbol is not defined, functions taking a FILE * argument cannot be used.

To customize your library and rebuild it, see *Customizing and building your own runtime library*, page 127.

LOCALE

Locale is a part of the C language that allows language- and country-specific settings for several areas, such as currency symbols, date and time, and multibyte character encoding.

Depending on which library configuration you are using, you get different levels of locale support. However, the more locale support, the larger your code will get. It is therefore necessary to consider what level of support your application needs. See *Runtime library configurations*, page 129.

The DLIB runtime library can be used in two main modes:

- Using a full library configuration that has a locale interface, which makes it possible to switch between different locales during runtime
 - The application starts with the C locale. To use another locale, you must call the setlocale function or use the corresponding mechanisms in C++. The locales that the application can use are set up at linkage.
- Using a normal library configuration that does not have a locale interface, where the C locale is hardwired into the application.

Note: If multibytes are to be printed, you must make sure that the implementation of __write in the DLIB low-level I/O interface can handle them.

Specifying which locales that should be available in your application



Choose Project>Options>General Options>Library Options 2>Locale support.



Use the linker option --keep with the tag of the locale as the parameter, for example:

```
--keep Locale cs CZ iso8859 2
```

The available locales are listed in the file SupportedLocales.json in the arm\config directory, for example:

```
['Czech language locale for Czech Republic', 'iso8859-2',
'cs_CZ.iso8859-2', '_Locale_cs_CZ_iso8859_2'],
```

The line contains the full locale name, the encoding for the locale, the abbreviated locale name, and the tag to be used as parameter to the linker option --keep.

Changing locales at runtime

The standard library function setlocale is used for selecting the appropriate portion of the application's locale when the application is running.

The setlocale function takes two arguments. The first one is a locale category that is constructed after the pattern LC_CATEGORY. The second argument is a string that describes the locale. It can either be a string previously returned by setlocale, or it can be a string constructed after the pattern:

```
lang_REGION
or
lang REGION.encoding
```

The *lang* part specifies the language code, and the *REGION* part specifies a region qualifier, and *encoding* specifies the multibyte character encoding that should be used. The available encodings are ISO-8859-1, ISO-8859-2, ISO-8859-4, ISO-8859-5, ISO-8859-7, ISO-8859-8, ISO-8859-9, ISO-8859-15, CP932, and UTF-8.

For a complete list of the available locales and their respective encoding, see the file SupportedLocales.json in the arm\config directory.

Example

This example sets the locale configuration symbols to Swedish to be used in Finland and UTF8 multibyte character encoding:

```
setlocale (LC_ALL, "sv_FI.UTF8");
```

Managing a multithreaded environment

This section contains information about:

- Multithread support in the DLIB runtime environment, page 155
- Enabling multithread support, page 156
- C++ exceptions in threads, page 156

In a multithreaded environment, the standard library must treat all library objects according to whether they are global or local to a thread. If an object is a true global object, any updates of its state must be guarded by a locking mechanism to make sure that only one thread can update it at any given time. If an object is local to a thread, the

static variables containing the object state must reside in a variable area local to that thread. This area is commonly named *thread-local storage* (TLS).

The low-level implementations of locks and TLS are system-specific, and is not included in the DLIB runtime environment. If you are using an RTOS, check if it provides some or all of the required functions. Otherwise, you must provide your own.

MULTITHREAD SUPPORT IN THE DLIB RUNTIME ENVIRONMENT

The DLIB runtime environment uses two kinds of locks—system locks and file stream locks. The file stream locks are used as guards when the state of a file stream is updated, and are only needed in the Full library configuration. The following objects are guarded with system locks:

- The heap (in other words when malloc, new, free, delete, realloc, or calloc is used).
- The C file system (only available in the Full library configuration), but not the file streams themselves. The file system is updated when a stream is opened or closed, in other words when fopen, fclose, fdopen, fflush, or freopen is used.
- The signal system (in other words when signal is used).
- The temporary file system (in other words when tmpnam is used).
- C++ dynamically initialized function-local objects with static storage duration.
- C++ locale facet handling
- C++ regular expression handling
- C++ terminate and unexpected handling

These library objects use TLS:

Library objects using TLS	When these functions are used
Error functions	errno, strerror
C++ exception engine	Not applicable

Table 9: Library objects using TLS

Note: If you are using printf/scanf (or any variants) with formatters, each individual formatter will be guarded, but the complete printf/scanf invocation will not be guarded.

If one of the C++ variants is used together with the DLIB runtime environment with multithread support, the compiler option --guard_calls must be used to make sure that function-static variables with dynamic initializers are not initialized simultaneously by several threads.

ENABLING MULTITHREAD SUPPORT

To configure multithread support for use with threaded applications:

I To enable multithread support:



On the command line, use the linker option --threaded_lib.

If one of the C++ variants is used, the compiler option --guard_calls should be used as well to make sure that function-static variables with dynamic initializers are not initialized simultaneously by several threads.



In the IDE, choose Project>Options>General Options>Library
Configuration>Enable thread support in the library. This will invoke the linker option --threaded_lib and if one of the C++ variants is used, the IDE will automatically use the compiler option --guard_calls to make sure that function-static variables with dynamic initializers are not initialized simultaneously by several threads.

- **2** To complement the built-in multithread support in the runtime library, you must also:
 - Implement code for the library's system locks interface.
 - If file streams are used, implement code for the library's file stream locks interface.
 - Implement code that handles thread creation, thread destruction, and TLS access methods for the library.

You can find the required declaration of functions in the DLib_Threads.h file. There you will also find more information.

3 Build your project.

Note: If you are using a third-party RTOS, check their guidelines for how to enable multithread support with IAR Systems tools.

C++ EXCEPTIONS IN THREADS

Using exceptions in threads works as long as the main function for the thread has the noexcept exception specification. Otherwise non-caught exceptions will not correctly terminate the application.

Assembler language interface

- Mixing C and assembler
- Calling assembler routines from C
- Calling assembler routines from C++
- Calling convention
- Call frame information

Mixing C and assembler

The IAR C/C++ Compiler for Arm provides several ways to access low-level resources:

- Modules written entirely in assembler
- Intrinsic functions (the C alternative)
- Inline assembler.

It might be tempting to use simple inline assembler. However, you should carefully choose which method to use.

INTRINSIC FUNCTIONS

The compiler provides a few predefined functions that allow direct access to low-level processor operations without having to use the assembler language. These functions are known as intrinsic functions. They can be very useful in, for example, time-critical routines.

An intrinsic function looks like a normal function call, but it is really a built-in function that the compiler recognizes. The intrinsic functions compile into inline code, either as a single instruction, or as a short sequence of instructions.

For more information about the available intrinsic functions, see the chapter *Intrinsic functions*.

MIXING C AND ASSEMBLER MODULES

It is possible to write parts of your application in assembler and mix them with your C or C++ modules

This causes some overhead in the form of function call and return instruction sequences, and the compiler will regard some registers as scratch registers. In many cases, the overhead of the extra instructions can be removed by the optimizer.

An important advantage is that you will have a well-defined interface between what the compiler produces and what you write in assembler. When using inline assembler, you will not have any guarantees that your inline assembler lines do not interfere with the compiler generated code.

When an application is written partly in assembler language and partly in C or C++, you are faced with several questions:

- How should the assembler code be written so that it can be called from C?
- Where does the assembler code find its parameters, and how is the return value passed back to the caller?
- How should assembler code call functions written in C?
- How are global C variables accessed from code written in assembler language?
- Why does not the debugger display the call stack when assembler code is being debugged?

The first question is discussed in the section *Calling assembler routines from C*, page 167. The following two are covered in the section *Calling convention*, page 170.

The answer to the final question is that the call stack can be displayed when you run assembler code in the debugger. However, the debugger requires information about the call frame, which must be supplied as annotations in the assembler source file. For more information, see *Call frame information*, page 176.

The recommended method for mixing C or C++ and assembler modules is described in *Calling assembler routines from C*, page 167, and *Calling assembler routines from C*++, page 169, respectively.

INLINE ASSEMBLER

Inline assembler can be used for inserting assembler instructions directly into a C or C++ function. Typically, this can be useful if you need to:

- Access hardware resources that are not accessible in C (in other words, when there is no definition for an SFR or there is no suitable intrinsic function available).
- Manually write a time-critical sequence of code that if written in C will not have the right timing.

 Manually write a speed-critical sequence of code that if written in C will be too slow.

An inline assembler statement is similar to a C function in that it can take input arguments (input operands), have return values (output operands), and read or write to C symbols (via the operands). An inline assembler statement can also declare *clobbered resources* (that is, values in registers and memory that have been overwritten).

Limitations

Most things you can to do in normal assembler language are also possible with inline assembler, with the following differences:

- Alignment cannot be controlled; this means, for example, that DC32 directives might be misaligned.
- The only accepted register synonyms are SP (for R13), LR (for R14), and PC (for R15).
- In general, assembler directives will cause errors or have no meaning. However, data definition directives will work as expected.
- Resources used (registers, memory, etc) that are also used by the C compiler must be declared as operands or clobbered resources.
- If you do not want to risk that the inline assembler statement to be optimized away by the compiler, you must declare it volatile.
- Accessing a C symbol or using a constant expression requires the use of operands.
- Dependencies between the expressions for the operands might result in an error.
- The pseudo-instruction LDR Rd, =expr is not available from inline assembler.

Risks with inline assembler

Without operands and clobbered resources, inline assembler statements have no interface with the surrounding C source code. This makes the inline assembler code fragile, and might also become a maintenance problem if you update the compiler in the future. There are also several limitations to using inline assembler without operands and clobbered resources:

- The compiler's various optimizations will disregard any effects of the inline statements, which will not be optimized at all.
- Inlining of functions with assembler statements without declared side-effects will not be done.
- The inline assembler statement will be volatile and clobbered memory is not
 implied. This means that the compiler will not remove the assembler statement. It
 will simply be inserted at the given location in the program flow. The consequences
 or side-effects that the insertion might have on the surrounding code are not taken

into consideration. If, for example, registers or memory locations are altered, they might have to be restored within the sequence of inline assembler instructions for the rest of the code to work properly.



The following example (for Arm mode) demonstrates the risks of using the asm keyword without operands and clobbers:

```
int Add(int term1, int term2)
{
   asm("adds r0,r0,r1");
   return term1;
}
```

In this example:

- The function Add assumes that values are passed and returned in registers in a way that they might not always be, for example if the function is inlined.
- The s in the adds instruction implies that the condition flags are updated, which
 you specify using the cc clobber operand. Otherwise, the compiler will assume that
 the condition flags are not modified.

Inline assembler without using operands or clobbered resources is therefore often best avoided. The compiler will issue a remark for them.

Reference information for inline assembler

The asm and __asm keywords both insert inline assembler instructions. However, when you compile C source code, the asm keyword is not available when the option --strict is used. The __asm keyword is always available.

Syntax

The syntax of an inline assembler statement is (similar to the one used by GNU GCC):

```
asm [volatile]( string [assembler-interface])
```

string can contain one or more valid assembler instructions or data definition assembler directives, separated by \n.

For example:

Note that any labels you define in the inline assembler statement will be local to that statement. You can use this for loops or conditional code.

If you define a label in an inline assembler statement using two colons (for example: "label:: nop\n") instead of one, the label will be public, not only in the inline assembler statement, but in the module as well. This feature is intended for testing only.

An assembler statement without declared side-effects will be treated as a volatile assembler statement, which means it cannot be optimized at all. The compiler will issue a remark for such an assembler statement.

assembler-interface is:

Operands

An inline assembler statement can have one input and one output comma-separated list of operands. Each operand consists of an optional symbolic name in brackets, a quoted constraint, followed by a C expression in parentheses.

Syntax of operands

```
[[ symbolic-name ]] "[modifiers]constraint" (expr)
```

For example:

In this example, the assembler instruction uses one output operand, sum, two input operands, term1 and term2, and no clobbered resources.

It is possible to omit any list by leaving it empty. For example:

```
int matrix[M][N];
void MatrixPreloadRow(int row)
{
   asm volatile ("pld [%0]" : : "r" (&matrix[row][0]));
}
```

Operand constraints

Constraint	Description
r	Uses a general purpose register for the expression:
	R0-R12, R14 (for Arm and Thumb2)
	R0-R7 (for Thumbl)
1	R0-R7 (only valid for Thumb1)

Table 10: Inline assembler operand constraints

Constraint	Description
Rp	Uses a pair of general purpose registers, for example R0, R1
i	An immediate integer operand with a constant value. Symbolic constants are allowed.
j	A 16-bit constant suitable for a \mathtt{MOVW} instruction (valid for Arm and Thumb2).
n	An immediate operand, alias for i.
I	An immediate constant valid for a data processing instruction (for Arm and Thumb2), or a constant in the range 0 to 255 (for Thumb1).
J	An immediate constant in the range -4095 to 4095 (for Arm and Thumb2), or a constant in the range -255 to -1 (for Thumb1).
K	An immediate constant that satisfies the $\mathbb I$ constraint if inverted (for Arm and Thumb2), or a constant that satisfies the $\mathbb I$ constraint multiplied by any power of 2 (for Thumb1).
L	An immediate constant that satisfies the $\ \ \ \ \ \ \ \ \ \ \ \ \ $
М	An immediate constant that is a multiple of 4 in the range 0 to 1020 (only valid for Thumb I).
N	An immediate constant in the range 0 to 31 (only valid for Thumb I).
0	An immediate constant that is a multiple of 4 in the range -508 to 508 (only valid for Thumb I).
t	An S register.
W	A D register.
đ	A Q register.
Dv	A 32-bit floating-point immediate constant for the \mathtt{VMOV} . $\mathtt{F32}$ instruction.
Dy	A 64-bit floating-point immediate constant for the \mathtt{VMOV} . $\mathtt{F64}$ instruction.
v2S v4Q	A vector of 2, 3, or 4 consecutive S , D , or Q registers. For example, $v4Q$ is a vector of four Q registers. The vectors do not overlap, so the available $v4Q$ register vectors are $Q0-Q3$, $Q4-Q7$, $Q8-Q11$, and $Q12-Q15$.

Table 10: Inline assembler operand constraints (Continued)

Constraint modifiers

Constraint modifiers can be used together with a constraint to modify its meaning. This table lists the supported constraint modifiers:

Modifier	Desciption
=	Write-only operand
+	Read-write operand
&	Early clobber output operand which is written to before the instruction has processed all the input operands.

Table 11: Supported constraint modifiers

Referring to operands

Assembler instructions refer to operands by prefixing their order number with %. The first operand has order number 0 and is referred to by %0.

If the operand has a symbolic name, you can refer to it using the syntax <code>%[operand.name]</code>. Symbolic operand names are in a separate namespace from C/C++ code and can be the same as a C/C++ variable names. Each operand name must however be unique in each assembler statement. For example:

```
int Add(int term1, int term2)
{
   int sum;

   asm("add %[Rd],%[Rn],%[Rm]"
      : [Rd]"=r"(sum)
      : [Rn]"r" (term1), [Rm]"r" (term2));

   return sum;
}
```

Input operands

Input operands cannot have any constraint modifiers, but they can have any valid C expression as long as the type of the expression fits the register.

The C expression will be evaluated just before any of the assembler instructions in the inline assembler statement and assigned to the constraint, for example a register.

Output operands

Output operands must have = as a constraint modifier and the C expression must be an l-value and specify a writable location. For example, =r for a write-only general purpose register. The constraint will be assigned to the evaluated C expression (as an l-value) immediately after the last assembler instruction in the inline assembler statement. Input operands are assumed to be consumed before output is produced and the compiler may use the same register for an input and output operand. To prohibit this, prefix the output constraint with α to make it an early clobber resource, for example $=\alpha$ r. This will ensure that the output operand will be allocated in a different register than the input operands.

Input/output operands

An operand that should be used both for input and output must be listed as an output operand and have the + modifier. The C expression must be an l-value and specify a writable location. The location will be read immediately before any assembler instructions and it will be written to right after the last assembler instruction.

This is an example of using a read-write operand:

```
int Double(int value)
{
  asm("add %0,%0,%0" : "+r"(value));
  return value;
}
```

In the example above, the input value for value will be placed in a general purpose register. After the assembler statement, the result from the ADD instruction will be placed in the same register.

Clobbered resources

An inline assembler statement can have a list of clobbered resources.

```
"resource1", "resource2", ...
```

Specify clobbered resources to inform the compiler about which resources the inline assembler statement destroys. Any value that resides in a clobbered resource and that is needed after the inline assembler statement will be reloaded.

Clobbered resources will not be used as input or output operands.

This is an example of how to use clobbered resources:

In this example the condition codes will be modified by the ADDS instruction. Therefore, "cc" must be listed in the clobber list.

This table lists valid clobbered resources:

Clobber	Description
R0-R12, R14for Arm mode and Thumb2 R0-R7, R12, R14 for Thumb I	General purpose registers
S0-S31, D0-D31, Q0-Q15	Floating-point registers
cc	The condition flags (N, \mathbb{Z} , \mathbb{V} , and \mathbb{C})
memory	To be used if the instructions modify any memory. This will avoid keeping memory values cached in registers across the inline assembler statement.

Table 12: List of valid clobbers

Operand modifiers

An operand modifier is a single letter between the % and the operand number, which is used for transforming the operand.

In the example below, the modifiers L and H are used for accessing the least and most significant 16 bits, respectively, of an immediate operand:

```
int Mov32()
{
  int a;
  asm("movw %0,%L1 \n"
        "movt %0,%H1 \n" : "=r"(a) : "i"(0x12345678UL));
  return a;
}
```

Some operand modifiers can be combined, in which case each letter will transform the result from the previous modifier. This table describes the transformation performed by each valid modifier:

Modifier	Description
L	The lowest-numbered register of a register pair, or the low 16 bits of an immediate constant.
Н	The highest-numbered register of a register pair, or the high 16 bits of an immediate constant.
С	For an immediate operand, an integer or symbol address without a preceding # sign. Cannot be transformed by additional operand modifiers.

Table 13: Operand modifiers and transformations

Modifier	Description
В	For an immediate operand, the bitwise inverse of integer or symbol without a preceding # sign. Cannot be transformed by additional operand modifiers.
Q	The least significant register of a register pair.
R	The most significant register of a register pair.
М	For a register or a register pair, the register list suitable for $1\mathrm{dm}$ or stm. Cannot be transformed by additional operand modifiers.
a	Transforms a register Rn into a memory operand $[Rn, \#0]$ suitable for pld.
b	The low ${\mathtt S}$ register part of a ${\mathtt D}$ register.
р	The high ${\mathbb S}$ register part of a ${\mathbb D}$ register.
е	The low ${\mathbb D}$ register part of a ${\mathbb Q}$ register, or the low register in a vector of Neon registers.
f	The high ${\mathbb D}$ register part of a ${\mathbb Q}$ register, or the high register in a vector of Neon registers.
h	For a (vector of) $\mathbb D$ or $\mathbb Q$ registers, the corresponding list of $\mathbb D$ registers within curly braces. For example, $\mathbb Q0$ becomes $\{\mathbb D0$, $\mathbb D1\}$. Cannot be transformed by additional operand modifiers.
У	${\rm S}$ register as indexed ${\rm D}$ register, for example ${\rm S7}$ becomes ${\rm D3}[1]$. Cannot be transformed by additional operand modifiers.

Table 13: Operand modifiers and transformations

AN EXAMPLE OF HOW TO USE CLOBBERED MEMORY

Calling assembler routines from C

An assembler routine that will be called from C must:

- Conform to the calling convention
- Have a PUBLIC entry-point label
- Be declared as external before any call, to allow type checking and optional promotion of parameters, as in these examples:

```
extern int foo(void);
or
extern int foo(int i, int j);
```

One way of fulfilling these requirements is to create skeleton code in C, compile it, and study the assembler list file.

CREATING SKELETON CODE

The recommended way to create an assembler language routine with the correct interface is to start with an assembler language source file created by the C compiler. Note that you must create skeleton code for each function prototype.

The following example shows how to create skeleton code to which you can easily add the functional body of the routine. The skeleton source code only needs to declare the variables required and perform simple accesses to them. In this example, the assembler routine takes an int and a char, and then returns an int:

```
extern int gInt;
extern char gChar;

int Func(int arg1, char arg2)
{
   int locInt = arg1;
   gChar = arg2;
   return locInt;
}

int main()
{
   int locInt = gInt;
   gInt = Func(locInt, gChar);
   return 0;
}
```

Note: In this example we use a low optimization level when compiling the code to show local and global variable access. If a higher level of optimization is used, the required

references to local variables could be removed during the optimization. The actual function declaration is not changed by the optimization level.

COMPILING THE SKELETON CODE



In the IDE, specify list options on file level. Select the file in the workspace window. Then choose **Project>Options**. In the C/C++ Compiler category, select **Override inherited settings**. On the **List** page, deselect **Output list file**, and instead select the **Output assembler file** option and its suboption **Include source**. Also, be sure to specify a low level of optimization.



Use these options to compile the skeleton code:

iccarm skeleton.c -lA . -On -e

The -1A option creates an assembler language output file including C or C++ source lines as assembler comments. The . (period) specifies that the assembler file should be named in the same way as the C or C++ module (skeleton), but with the filename extension s. The -0n option means that no optimization will be used and -e enables language extensions. In addition, make sure to use relevant compiler options, usually the same as you use for other C or C++ source files in your project.

The result is the assembler source output file skeleton.s.

Note: The -1A option creates a list file containing call frame information (CFI) directives, which can be useful if you intend to study these directives and how they are used. If you only want to study the calling convention, you can exclude the CFI directives from the list file.



In the IDE, choose **Project>Options>C/C++ Compiler>List** and deselect the suboption **Include call frame information**.



On the command line, use the option -1B instead of -lA. Note that CFI information must be included in the source code to make the C-SPY Call Stack window work.

The output file

The output file contains the following important information:

- The calling convention
- The return values
- The global variables
- The function parameters
- How to create space on the stack (auto variables)
- Call frame information (CFI).

The CFI directives describe the call frame information needed by the **Call Stack** window in the debugger. For more information, see *Call frame information*, page 176.

Calling assembler routines from C++

The C calling convention does not apply to C++ functions. Most importantly, a function name is not sufficient to identify a C++ function. The scope and the type of the function are also required to guarantee type-safe linkage, and to resolve overloading.

Another difference is that non-static member functions get an extra, hidden argument, the this pointer.

However, when using C linkage, the calling convention conforms to the C calling convention. An assembler routine can therefore be called from C++ when declared in this manner:

```
extern "C"
{
  int MyRoutine(int);
}
```

The following example shows how to achieve the equivalent to a non-static member function, which means that the implicit this pointer must be made explicit. It is also possible to "wrap" the call to the assembler routine in a member function. Use an inline member function to remove the overhead of the extra call—this assumes that function inlining is enabled:

```
class MyClass;
extern "C"
{
  void DoIt(MyClass *ptr, int arg);
}
class MyClass
{
public:
  inline void DoIt(int arg)
  {
    ::DoIt(this, arg);
  }
};
```

Calling convention

A calling convention is the way a function in a program calls another function. The compiler handles this automatically, but, if a function is written in assembler language, you must know where and how its parameters can be found, how to return to the program location from where it was called, and how to return the resulting value.

It is also important to know which registers an assembler-level routine must preserve. If the program preserves too many registers, the program might be ineffective. If it preserves too few registers, the result would be an incorrect program.

This section describes the calling convention used by the compiler. These items are examined:

- Function declarations
- C and C++ linkage
- Preserved versus scratch registers
- Function entrance
- Function exit
- Return address handling

At the end of the section, some examples are shown to describe the calling convention in practice.

The calling convention used by the compiler adheres to the Procedure Call Standard for the Arm architecture, AAPCS, a part of AEABI; see *AEABI compliance*, page 214. AAPCS is not fully described here. For example, the use of floating-point coprocessor registers when using the VFP calling convention is not covered.

FUNCTION DECLARATIONS

In C, a function must be declared in order for the compiler to know how to call it. A declaration could look as follows:

```
int MyFunction(int first, char * second);
```

This means that the function takes two parameters: an integer and a pointer to a character. The function returns a value, an integer.

In the general case, this is the only knowledge that the compiler has about a function. Therefore, it must be able to deduce the calling convention from this information.

USING C LINKAGE IN C++ SOURCE CODE

In C++, a function can have either C or C++ linkage. To call assembler routines from C++, it is easiest if you make the C++ function have C linkage.

This is an example of a declaration of a function with C linkage:

```
extern "C"
{
  int F(int);
}
```

It is often practical to share header files between C and C++. This is an example of a declaration that declares a function with C linkage in both C and C++:

```
#ifdef __cplusplus
extern "C"
{
#endif
int F(int);
#ifdef __cplusplus
}
#endif
```

PRESERVED VERSUS SCRATCH REGISTERS

The general Arm CPU registers are divided into three separate sets, which are described in this section.

Scratch registers

Any function is permitted to destroy the contents of a scratch register. If a function needs the register value after a call to another function, it must store it during the call, for example on the stack.

Any of the registers R0 to R3, and R12, can be used as a scratch register by the function. Note that R12 is a scratch register also when calling between assembler functions only because of automatically inserted instructions for veneers.

Preserved registers

Preserved registers, on the other hand, are preserved across function calls. The called function can use the register for other purposes, but must save the value before using the register and restore it at the exit of the function.

The registers R4 through to R11 are preserved registers. They are preserved by the called function.

Special registers

For some registers, you must consider certain prerequisites:

- The stack pointer register, R13/SP, must at all times point to or below the last element on the stack. In the eventuality of an interrupt, everything below the point the stack pointer points to, can be destroyed. At function entry and exit, the stack pointer must be 8-byte aligned. In the function, the stack pointer must always be word aligned. At exit, SP must have the same value as it had at the entry.
- The register R15/PC is dedicated for the Program Counter.
- The link register, R14/LR, holds the return address at the entrance of the function.

FUNCTION ENTRANCE

Parameters can be passed to a function using one of these basic methods:

- In registers
- On the stack

It is much more efficient to use registers than to take a detour via memory, so the calling convention is designed to use registers as much as possible. Only a limited number of registers can be used for passing parameters; when no more registers are available, the remaining parameters are passed on the stack. These exceptions to the rules apply:

- Interrupt functions cannot take any parameters, except software interrupt functions that accept parameters and have return values
- Software interrupt functions cannot use the stack in the same way as ordinary
 functions. When an SVC instruction is executed, the processor switches to
 supervisor mode where the supervisor stack is used. Arguments can therefore not be
 passed on the stack if your application is not running in supervisor mode previous to
 the interrupt.

Hidden parameters

In addition to the parameters visible in a function declaration and definition, there can be hidden parameters:

- If the function returns a structure larger than 32 bits, the memory location where the structure is to be stored is passed as an extra parameter. Notice that it is always treated as the *first parameter*.
- If the function is a non-static C++ member function, then the this pointer is passed as the first parameter (but placed after the return structure pointer, if there is one). For more information, see *Calling assembler routines from C*, page 167.

Register parameters

Parameters	Passed in registers
Scalar and floating-point values no larger than 32 bits,	Passed using the first free register:
and single-precision (32-bits) floating-point values	R0-R3
long long and double-precision (64-bit) values	Passed in the first available register pair:
	R0:R1 or R2:R3


Table 14: Registers used for passing parameters

The assignment of registers to parameters is a straightforward process. Traversing the parameters from left to right, the first parameter is assigned to the available register or registers. Should there be no more available registers, the parameter is passed on the stack in reverse order.

When functions that have parameters smaller than 32 bits are called, the values are sign or zero extended to ensure that the unused bits have consistent values. Whether the values will be sign or zero extended depends on their type—signed or unsigned.

Stack parameters and layout

Stack parameters are stored in memory, starting at the location pointed to by the stack pointer. Below the stack pointer (towards low memory) there is free space that the called function can use. The first stack parameter is stored at the location pointed to by the stack pointer. The next one is stored at the next location on the stack that is divisible by four, etc. It is the responsibility of the caller to clean the stack after the called function has returned.



This figure illustrates how parameters are stored on the stack:

FUNCTION EXIT

A function can return a value to the function or program that called it, or it can have the return type void.

The return value of a function, if any, can be scalar (such as integers and pointers), floating-point, or a structure.

Registers used for returning values

The registers available for returning values are RO and RO:R1.

Return values	Passed in registers
Scalar and structure return values no larger than 32 bits, and single-precision (32-bit) floating-point return values	R0
The memory address of a structure return value larger than 32 bits	R0
long long and double-precision (64-bit) return values	R0:R1

Table 15: Registers used for returning values

If the returned value is smaller than 32 bits, the value is sign- or zero-extended to 32 bits.

Stack layout at function exit

It is the responsibility of the caller to clean the stack after the called function has returned.

Return address handling

A function written in assembler language should, when finished, return to the caller, by jumping to the address pointed to by the register LR.

At function entry, non-scratch registers and the LR register can be pushed with one instruction. At function exit, all these registers can be popped with one instruction. The return address can be popped directly to PC.

The following example shows what this can look like:

```
name call
section .text:CODE
extern func

push {r4-r6,lr} ; Preserve stack alignment 8
bl func
; Do something here.

pop {r4-r6,pc} ; return
end
```

EXAMPLES

The following section shows a series of declaration examples and the corresponding calling conventions. The complexity of the examples increases toward the end.

Example I

Assume this function declaration:

```
int add1(int);
```

This function takes one parameter in the register R0, and the return value is passed back to its caller in the register R0.

This assembler routine is compatible with the declaration; it will return a value that is one number higher than the value of its parameter:

```
name return
section .text:CODE
add r0, r0, #1
bx lr
end
```

Example 2

This example shows how structures are passed on the stack. Assume these declarations:

```
struct MyStruct
{
    short a;
    short b;
    short c;
    short d;
    short e;
};
int MyFunction(struct MyStruct x, int y);
```

The values of the structure members a, b, c, and d are passed in registers R0-R3. The last structure member e and the integer parameter y are passed on the stack. The calling function must reserve eight bytes on the top of the stack and copy the contents of the two stack parameters to that location. The return value is passed back to its caller in the register R0.

Example 3

The function below will return a structure of type struct MyStruct.

```
struct MyStruct
{
   int mA[20];
};
struct MyStruct MyFunction(int x);
```

It is the responsibility of the calling function to allocate a memory location for the return value and pass a pointer to it as a hidden first parameter. The pointer to the location where the return value should be stored is passed in $\mathbb{R}0$. The parameter x is passed in $\mathbb{R}1$.

Assume that the function instead was declared to return a pointer to the structure:

```
struct MyStruct *MyFunction(int x);
```

In this case, the return value is a scalar, so there is no hidden parameter. The parameter x is passed in R0, and the return value is returned in R0.

Call frame information

When you debug an application using C-SPY, you can view the *call stack*, that is, the chain of functions that called the current function. To make this possible, the compiler

supplies debug information that describes the layout of the call frame, in particular information about where the return address is stored.

If you want the call stack to be available when debugging a routine written in assembler language, you must supply equivalent debug information in your assembler source using the assembler directive CFI. This directive is described in detail in the *IAR Assembler User Guide for Arm*.

CFI DIRECTIVES

The CFI directives provide C-SPY with information about the state of the calling function(s). Most important of this is the return address, and the value of the stack pointer at the entry of the function or assembler routine. Given this information, C-SPY can reconstruct the state for the calling function, and thereby unwind the stack.

A full description about the calling convention might require extensive call frame information. In many cases, a more limited approach will suffice.

When describing the call frame information, the following three components must be present:

- A names block describing the available resources to be tracked
- A common block corresponding to the calling convention
- A *data block* describing the changes that are performed on the call frame. This typically includes information about when the stack pointer is changed, and when permanent registers are stored or restored on the stack.

Resource	Description
CFA R13	The call frames of the stack
R0-R12	Processor general-purpose 32-bit registers
R13	Stack pointer, SP
R14	Link register, LR
D0-D31	Vector Floating Point (VFP) 64-bit coprocessor register
CPSR	Current program status register
SPSR	Saved program status register

Table 16: Call frame information resources defined in a names block

CREATING ASSEMBLER SOURCE WITH CFI SUPPORT

The recommended way to create an assembler language routine that handles call frame information correctly is to start with an assembler language source file created by the compiler.

I Start with suitable C source code, for example:

```
int F(int);
int cfiExample(int i)
{
   return i + F(i);
}
```

2 Compile the C source code, and make sure to create a list file that contains call frame information—the CFI directives.



On the command line, use the option -lA.



In the IDE, choose **Project>Options>C/C++ Compiler>List** and make sure the suboption **Include call frame information** is selected.

For the source code in this example, the list file looks like this:

```
NAME Cfi
        RTMODEL "__SystemLibrary", "DLib"
        EXTERN F
        PUBLIC cfiExample
        CFI Names cfiNames0
        CFI StackFrame CFA R13 DATA
        CFI Resource R0:32, R1:32, R2:32, R3:32, R4:32, R5:32,
R6:32, R7:32
        CFI Resource R8:32, R9:32, R10:32, R11:32, R12:32,
R13:32, R14:32
        CFI EndNames cfiNames0
        CFI Common cfiCommon0 Using cfiNames0
        CFI CodeAlign 4
        CFI DataAlign 4
        CFI ReturnAddress R14 CODE
        CFT CFA R13+0
        CFI R0 Undefined
        CFI R1 Undefined
        CFI R2 Undefined
        CFI R3 Undefined
        CFI R4 SameValue
        CFI R5 SameValue
        CFI R6 SameValue
        CFI R7 SameValue
        CFI R8 SameValue
        CFI R9 SameValue
        CFI R10 SameValue
        CFI R11 SameValue
        CFI R12 Undefined
        CFI R14 SameValue
        CFI EndCommon cfiCommon0
        SECTION `.text`:CODE:NOROOT(2)
        CFI Block cfiBlock0 Using cfiCommon0
        CFI Function cfiExample
        ARM
cfiExample:
        PUSH
                 {R4,LR}
        CFI R14 Frame (CFA, -4)
        CFI R4 Frame(CFA, -8)
```

```
CFI CFA R13+8

MOVS R4,R0

MOVS R0,R4

BL F

ADDS R0,R0,R4

POP {R4,PC} ;; return

CFI EndBlock cfiBlock0
```

Note: The header file <code>Common.i</code> contains the macros <code>CFI_NAMES_BLOCK</code>, <code>CFI_COMMON_ARM</code>, and <code>CFI_COMMON_Thumb</code>, which declare a typical names block and a typical common block. These two macros declare several resources, both concrete and virtual.

Using C

- C language overview
- Extensions overview
- IAR C language extensions

C language overview

The IAR C/C++ Compiler for Arm supports the INCITS/ISO/IEC 9899:2012 standard, also known as C11. In this guide, this standard is referred to as *Standard C* and is the default standard used in the compiler. This standard is stricter than C89.

The compiler will accept source code written in the C11 standard or a superset thereof.

In addition, the compiler also supports the ISO 9899:1990 standard (including all technical corrigenda and addenda), also known as C94, C90, C89, and ANSI C. In this guide, this standard is referred to as *C89*. Use the --c89 compiler option to enable this standard.

With C11 enabled, the IAR C/C++ Compiler for Arm can compile all C11 source code files, except for those that depend on thread-related system header files.

The C11 standard adds features like these:

- VLA (variable length arrays) must be explicitly enabled with the compiler option
 --vla
- Inline assembler using the asm or the __asm keyword, see Inline assembler, page 158.
- Atomic operations (for cores where the instruction set supports it), see Atomic operations, page 471.

Annex K (*Bounds-checking interfaces*) of the C standard is supported. See *Bounds checking functionality*, page 129.

Extensions overview

The compiler offers the features of Standard C and a wide set of extensions, ranging from features specifically tailored for efficient programming in the embedded industry to the relaxation of some minor standards issues.

This is an overview of the available extensions:

• IAR C language extensions

For information about available language extensions, see *IAR C language extensions*, page 183. For more information about the extended keywords, see the chapter *Extended keywords*. For information about C++, the two levels of support for the language, and C++ language extensions; see the chapter *Using C++*.

Pragma directives

The #pragma directive is defined by Standard C and is a mechanism for using vendor-specific extensions in a controlled way to make sure that the source code is still portable.

The compiler provides a set of predefined pragma directives, which can be used for controlling the behavior of the compiler, for example how it allocates memory, whether it allows extended keywords, and whether it outputs warning messages. Most pragma directives are preprocessed, which means that macros are substituted in a pragma directive. The pragma directives are always enabled in the compiler. For several of them there is also a corresponding C/C++ language extension. For information about available pragma directives, see the chapter *Pragma directives*.

Preprocessor extensions

The preprocessor of the compiler adheres to Standard C. The compiler also makes several preprocessor-related extensions available to you. For more information, see the chapter *The preprocessor*.

Intrinsic functions

The intrinsic functions provide direct access to low-level processor operations and can be very useful in, for example, time-critical routines. The intrinsic functions compile into inline code, either as a single instruction or as a short sequence of instructions. For more information about using intrinsic functions, see *Mixing C and assembler*, page 157. For information about available functions, see the chapter *Intrinsic functions*.

Library functions

The DLIB runtime environment provides the C and C++ library definitions in the C/C++ standard library that apply to embedded systems. For more information, see *DLIB runtime environment—implementation details*, page 465.

Note: Any use of these extensions, except for the pragma directives, makes your source code inconsistent with Standard C.

ENABLING LANGUAGE EXTENSIONS

You can choose different levels of language conformance by means of project options:

Command line	IDE*	Description
strict	Strict	All IAR C language extensions are disabled; errors are issued for anything that is not part of Standard C.
None	Standard	All extensions to Standard C are enabled, but no extensions for embedded systems programming. For information about extensions, see IAR C language extensions, page 183.
-e	Standard with IAR extensions	All IAR C language extensions are enabled.

Table 17: Language extensions

IAR C language extensions

The compiler provides a wide set of C language extensions. To help you to find the extensions required by your application, they are grouped like this in this section:

- Extensions for embedded systems programming—extensions specifically tailored for efficient embedded programming for the specific core you are using, typically to meet memory restrictions
- Relaxations to Standard C—that is, the relaxation of some minor Standard C issues
 and also some useful but minor syntax extensions, see Relaxations to Standard C,
 page 185.

EXTENSIONS FOR EMBEDDED SYSTEMS PROGRAMMING

The following language extensions are available both in the C and the C++ programming languages and they are well suited for embedded systems programming:

- Type attributes and object attributes
 For information about the related concepts, the general syntax rules, and for reference information, see the chapter Extended keywords.
- Placement at an absolute address or in a named section
 The @ operator or the directive #pragma location can be used for placing global and static variables at absolute addresses, or placing a variable or function in a named

^{*} In the IDE, choose **Project>Options>C/C++ Compiler>Language 1>Language conformance** and select the appropriate option. Note that language extensions are enabled by default.

section. For more information about using these features, see *Controlling data and function placement in memory*, page 222, and *location*, page 386.

• Alignment control

Each data type has its own alignment; for more information, see *Alignment*, page 339. If you want to change the alignment, the __packed data type attribute, the #pragma pack, and the #pragma data_alignment directives are available. If you want to check the alignment of an object, use the __ALIGNOF__() operator.

The __ALIGNOF__ operator is used for accessing the alignment of an object. It takes one of two forms:

- __ALIGNOF__ (type)
- __ALIGNOF__ (expression)

In the second form, the expression is not evaluated.

See also the C11 file stdalign.h.

Bitfields and non-standard types

In Standard C, a bitfield must be of the type int or unsigned int. Using IAR C language extensions, any integer type or enumeration can be used. The advantage is that the struct will sometimes be smaller. For more information, see *Bitfields*, page 342.

Dedicated section operators

The compiler supports getting the start address, end address, and size for a section with these built-in section operators:

```
__section_begin Returns the address of the first byte of the named section or block.

__section_end Returns the address of the first byte after the named section or block.

__section_size Returns the size of the named section or block in bytes.
```

```
Note: The aliases __segment_begin/__sfb, __segment_end/__sfe, and __segment_size/__sfs can also be used.
```

The operators can be used on named sections or on named blocks defined in the linker configuration file.

These operators behave syntactically as if declared like:

```
void * __section_begin(char const * section)
void * __section_end(char const * section)
size_t __section_size(char const * section)
```

When you use the @ operator or the #pragma location directive to place a data object or a function in a user-defined section, or when you use named blocks in the linker configuration file, the section operators can be used for getting the start and end address of the memory range where the sections or blocks were placed.

The named *section* must be a string literal and it must have been declared earlier with the #pragma *section* directive. The type of the __section_begin operator is a pointer to void. Note that you must enable language extensions to use these operators.

The operators are implemented in terms of *symbols* with dedicated names, and will appear in the linker map file under these names:

Operator	Symbol
section_begin(sec)	sec\$\$Base
section_end(sec)	sec\$\$Limit
section_size(sec)	sec\$\$Length

Table 18: Section operators and their symbols

Note that the linker will not necessarily place sections with the same name consecutively when these operators are not used. Using one of these operators (or the equivalent symbols) will cause the linker to behave as if the sections were in a named block. This is to assure that the sections are placed consecutively, so that the operators can be assigned meaningful values. If this is in conflict with the section placement as specified in the linker configuration file, the linker will issue an error.

Example

```
In this example, the type of the __section_begin operator is void *.
#pragma section="MYSECTION"
...
section_start_address = __section_begin("MYSECTION");
```

See also section, page 393, and location, page 386.

RELAXATIONS TO STANDARD C

This section lists and briefly describes the relaxation of some Standard C issues and also some useful but minor syntax extensions:

Arrays of incomplete types

An array can have an incomplete struct, union, or enum type as its element type. The types must be completed before the array is used (if it is), or by the end of the compilation unit (if it is not).

• Forward declaration of enum types

The extensions allow you to first declare the name of an enum and later resolve it by specifying the brace-enclosed list.

• Accepting missing semicolon at the end of a struct or union specifier

A warning—instead of an error—is issued if the semicolon at the end of a struct or union specifier is missing.

• Null and void

In operations on pointers, a pointer to void is always implicitly converted to another type if necessary, and a null pointer constant is always implicitly converted to a null pointer of the right type if necessary. In Standard C, some operators allow this kind of behavior, while others do not allow it.

• Casting pointers to integers in static initializers

In an initializer, a pointer constant value can be cast to an integral type if the integral type is large enough to contain it. For more information about casting pointers, see *Casting*, page 348.

• Taking the address of a register variable

In Standard C, it is illegal to take the address of a variable specified as a register variable. The compiler allows this, but a warning is issued.

• long float means double

The type long float is accepted as a synonym for double.

• Repeated typedef declarations

Redeclarations of typedef that occur in the same scope are allowed, but a warning is issued.

• Mixing pointer types

Assignment and pointer difference is allowed between pointers to types that are interchangeable but not identical; for example, unsigned char * and char *. This includes pointers to integral types of the same size. A warning is issued.

Assignment of a string constant to a pointer to any kind of character is allowed, and no warning is issued.

Non-lvalue arrays

A non-lvalue array expression is converted to a pointer to the first element of the array when it is used.

• Comments at the end of preprocessor directives

This extension, which makes it legal to place text after preprocessor directives, is enabled unless the strict Standard C mode is used. The purpose of this language extension is to support compilation of legacy code; we do not recommend that you write new code in this fashion.

An extra comma at the end of enum lists

Placing an extra comma is allowed at the end of an enum list. In strict Standard C mode, a warning is issued.

• A label preceding a }

In Standard C, a label must be followed by at least one statement. Therefore, it is illegal to place the label at the end of a block. The compiler allows this, but issues a warning.

Note that this also applies to the labels of switch statements.

• Empty declarations

An empty declaration (a semicolon by itself) is allowed, but a remark is issued (provided that remarks are enabled).

• Single-value initialization

Standard C requires that all initializer expressions of static arrays, structs, and unions are enclosed in braces.

Single-value initializers are allowed to appear without braces, but a warning is issued. The compiler accepts this expression:

```
struct str
{
   int a;
} x = 10;
```

• Declarations in other scopes

External and static declarations in other scopes are visible. In the following example, the variable y can be used at the end of the function, even though it should only be visible in the body of the if statement. A warning is issued.

```
int test(int x)
{
   if (x)
   {
     extern int y;
     y = 1;
   }
   return y;
}
```

• Static functions in function and block scopes

Static functions may be declared in function and block scopes. Their declarations are moved to the file scope.

• Numbers scanned according to the syntax for numbers

Numbers are scanned according to the syntax for numbers rather than the pp-number syntax. Thus, 0x123e+1 is scanned as three tokens instead of one valid token. (If the --strict option is used, the pp-number syntax is used instead.)

Empty translation unit

A translation unit (input file) might be empty of declarations.

• Assignment of pointer types

Assignment of pointer types is allowed in cases where the destination type has added type qualifiers that are not at the top level (for example int ** to const int **). Comparisons and pointer difference of such pairs of pointer types are also allowed. A warning is issued.

Pointers to different function types

Pointers to different function types might be assigned or compared for equality (==) or inequality (!=) without an explicit type cast. A warning is issued. This extension is not allowed in C++ mode.

Assembler statements

Assembler statements are accepted. This is disabled in strict C mode because it conflicts with the C standard for a call to the implicitly declared asm function.

• #include next

The non-standard preprocessing directive #include_next is supported. This is a variant of the #include directive. It searches for the named file only in the directories on the search path that follow the directory in which the current source file (the one containing the #include_next directive) is found. This is an extension found in the GNU C compiler.

• #warning

The non-standard preprocessing directive #warning is supported. It is similar to the #error directive, but results in a warning instead of a catastrophic error when processed. This directive is not recognized in strict mode. This is an extension found in the GNU C compiler.

Concatenating strings

Mixed string concatenations are accepted.

```
wchar_t * str="a" L "b";
```

Using C++

- Overview—Standard C++
- Enabling support for C++
- C++ feature descriptions
- C++ language extensions
- Porting code from EC++ or EEC++

Overview—Standard C++

The IAR C++ implementation fully complies with the ISO/IEC 14882:2015 C++ standard, also known as C++14. In this guide, this standard is referred to as Standard C++.

The IAR C/C++ compiler accepts source code written in the C++14 standard or a superset thereof.

The IAR C/C++ compiler does not support source code that depends on thread-related system headers.

Atomic operations are available for cores where the instruction set supports them. See *Atomic operations*, page 471.

MODES FOR EXCEPTIONS AND RTTI SUPPORT

Both exceptions and runtime type information result in increased code size simply by being included in your application. You might want to disable either or both of these features to avoid this increase:

- Support for runtime type information constructs can be disabled by using the compiler option --no_rtti
- Support for exceptions can be disabled by using the compiler option
 --no_exceptions

Even if support is enabled while compiling, the linker can avoid including the extra code and tables in the final application. If no part of your application actually throws an exception, the code and tables supporting the use of exceptions are not included in the application code image. Also, if dynamic runtime type information constructs (dynamic_cast/typeid) are not used with polymorphic types, the objects needed to

support them are not included in the application code image. To control this behavior, use the linker options --no_exceptions, --force_exceptions, and --no_dynamic_rtti_elimination.

Disabling exception support

When you use the compiler option --no_exceptions, the following will generate a compiler error:

- throw expressions
- try-catch statements
- Exception specifications on function definitions.

In addition, the extra code and tables needed to handle destruction of objects with auto storage duration when an exception is propagated through a function will not be generated when the compiler option --no_exceptions is used.

All functionality in system header files not directly involving exceptions is supported when the compiler option --no_exceptions is used.

The linker will produce an error if you try to link C++ modules compiled with exception support with modules compiled without exception support

For more information, see *--no_exceptions*, page 279.

Disabling RTTI support

When you use the compiler option --no_rtti, the following will generate a compiler error:

- The typeid operator
- The dynamic_cast operator.

Note: If --no_rtti is used but exception support is enabled, most RTTI support is still included in the compiler output object file because it is needed for exceptions to work.

For more information, see --no rtti, page 281.

EXCEPTION HANDLING

Exception handling can be divided into three parts:

- Exception raise mechanisms—in C++ they are the throw and rethrow expressions.
- Exception catch mechanisms—in C++ they are the try-catch statements, the
 exception specifications for a function, and the implicit catch to prevent an
 exception leaking out from main.

Information about currently active functions—if they have try-catch statements
and the set of auto objects whose destructors need to be run if an exception is
propagated through the function.

When an exception is raised, the function call stack is unwound, function by function, block by block. For each function or block, the destructors of auto objects that need destruction are run, and a check is made whether there is a catch handler for the exception. If there is, the execution will continue from that catch handler.

An application that mixes C++ code with assembler and C code, and that throws exceptions from one C++ function to another via assembler routines and C functions must use the linker option --exception_tables with the argument unwind.

The implementation of exceptions

Exceptions are implemented using a table method. For each function, the tables describe:

- How to unwind the function, that is, how to find its caller on the stack and restore registers that need restoring
- Which catch handlers that exist in the function
- Whether the function has an exception specification and which exceptions it allows to propagate
- The set of auto objects whose destructors must be run.

When an exception is raised, the runtime will proceed in two phases. The first phase will use the exception tables to search the stack for a function invocation containing a catch handler or exception specification that would cause stack unwinding to halt at that point. Once this point is found, the second phase is entered, doing the actual unwinding, and running the destructors of auto objects where that is needed.

The table method results in virtually no overhead in execution time or RAM usage when an exception is not actually thrown. It does incur a significant penalty in read-only memory usage for the tables and the extra code, and throwing and catching an exception is a relatively expensive operation.

The destruction of auto objects when the stack is being unwound as a result of an exception is implemented in code separated from the code that handles the normal operation of a function. This code, together with the code in catch handlers, is placed in a separate section (.exc.text) from the normal code (normally placed in .text). In some cases, for instance when there is fast and slow ROM memory, it can be advantageous to select on this difference when placing sections in the linker configuration file.

Enabling support for C++



In the compiler, the default language is C.

To compile files written in Standard C++, use the --c++ compiler option. See --c++, page 263.



To enable C++ in the IDE, choose **Project>Options>**C/C++ **Compiler>Language** 1>Language>C++.

C++ feature descriptions

When you write C++ source code for the IAR C/C++ Compiler for Arm, you must be aware of some benefits and some possible quirks when mixing C++ features—such as classes, and class members—with IAR language extensions, such as IAR-specific attributes.

USING IAR ATTRIBUTES WITH CLASSES

Static data members of C++ classes are treated the same way global variables are, and can have any applicable IAR type and object attribute.

Member functions are in general treated the same way free functions are, and can have any applicable IAR type and object attributes. Virtual member functions can only have attributes that are compatible with default function pointers, and constructors and destructors cannot have any such attributes.

The location operator @ and the #pragma location directive can be used on static data members and with all member functions.

TEMPLATES

C++ supports templates according to the C++ standard. The implementation uses a two-phase lookup which means that the keyword typename must be inserted wherever needed. Furthermore, at each use of a template, the definitions of all possible templates must be visible. This means that the definitions of all templates must be in include files or in the actual source file.

FUNCTION TYPES

A function type with extern "C" linkage is compatible with a function that has C++ linkage.

Example

USING STATIC CLASS OBJECTS IN INTERRUPTS

If interrupt functions use static class objects that need to be constructed (using constructors) or destroyed (using destructors), your application will not work properly if the interrupt occurs before the objects are constructed, or, during or after the objects are destroyed.

To avoid this, make sure that these interrupts are not enabled until the static objects have been constructed, and are disabled when returning from main or calling exit. For information about system startup, see *System startup and termination*, page 139.

Function local static class objects are constructed the first time execution passes through their declaration, and are destroyed when returning from main or when calling exit.

USING NEW HANDLERS

To handle memory exhaustion, you can use the set_new_handler function.

New handlers in Standard C++ with exceptions enabled

If you do not call <code>set_new_handler</code>, or call it with a NULL new handler, and operator new fails to allocate enough memory, operator new will throw <code>std::bad_alloc</code> if exceptions are enabled. If exceptions are not enabled, operator new will instead call abort.

If you call set_new_handler with a non-NULL new handler, the provided new handler will be called by operator new if the operator new fails to allocate enough memory. The new handler must then make more memory available and return, or abort execution in some manner. If exceptions are enabled, the new handler can also throw a

std::bad_alloc exception. The nothrow variant of operator new will only return NULL in the presence of a new handler if exceptions are enabled and the new handler throws std::bad_alloc.

DEBUG SUPPORT IN C-SPY

C-SPY® has built-in display support for the STL containers. The logical structure of containers is presented in the watch views in a comprehensive way that is easy to understand and follow.

Using C++, you can make C-SPY stop at a throw statement or if a raised exception does not have any corresponding catch statement.

For more information about this, see the *C-SPY® Debugging Guide for Arm*.

C++ language extensions

When you use the compiler in C++ mode and enable IAR language extensions, the following C++ language extensions are available in the compiler:

• In a friend declaration of a class, the class keyword can be omitted, for example:

• In the declaration of a class member, a qualified name can be used, for example:

```
struct A
{
  int A::F(); // Possible when using IAR language extensions
  int G(); // According to the standard
};
```

It is permitted to use an implicit type conversion between a pointer to a function
with C linkage (extern "C") and a pointer to a function with C++ linkage
(extern "C++"), for example:

According to the standard, the pointer must be explicitly converted.

• If the second or third operands in a construction that contains the ? operator are string literals or wide string literals (which in C++ are constants), the operands can be implicitly converted to char * or wchar_t *, for example:

- Default arguments can be specified for function parameters not only in the top-level function declaration, which is according to the standard, but also in typedef declarations, in pointer-to-function function declarations, and in pointer-to-member function declarations.
- In a function that contains a non-static local variable and a class that contains a non-evaluated expression (for example a sizeof expression), the expression can reference the non-static local variable. However, a warning is issued.
- An anonymous union can be introduced into a containing class by a typedef name.
 It is not necessary to first declare the union. For example:

```
typedef union
{
  int i,j;
} U; // U identifies a reusable anonymous union.

class A
{
public:
  U; // OK -- references to A::i and A::j are allowed.
};
```

In addition, this extension also permits *anonymous classes* and *anonymous structs*, as long as they have no C++ features (for example, no static data members or member functions, and no non-public members) and have no nested types other than other anonymous classes, structs, or unions. For example:

```
struct A
{
   struct
   {
     int i,j;
   }; // OK -- references to A::i and A::j are allowed.
};
```

• The friend class syntax allows nonclass types as well as class types expressed through a typedef without an elaborated type name. For example:

It is allowed to specify an array with no size or size 0 as the last member of a struct.
 For example:

```
typedef struct
{
   int i;
   char ir[0]; // Zero-length array
};

typedef struct
{
   int i;
   char ir[]; // Zero-length array
};
```

• Arrays of incomplete types

An array can have an incomplete struct, union, enum, or class type as its element type. The types must be completed before the array is used (if it is), or by the end of the compilation unit (if it is not).

• Concatenating strings

Mixed string literal concatenations are accepted.

```
wchar_t * str = "a" L "b";
```

Trailing comma

A trailing comma in the definition of an enumeration type is silently accepted.

Except where noted, all of the extensions described for C are also allowed in C++ mode.

Note: If you use any of these constructions without first enabling language extensions, errors are issued.

Porting code from EC++ or EEC++

Apart from the fact that Standard C++ is a much larger language than EC++ or EEC++, there are two issues that might prevent EC++ and EEC++ code from compiling:

• The library is placed in namespace std.

There are two remedy options:

- Prefix each used library symbol with std::.
- Insert using namespace std; after the last include directive for a C++ system header file.
- Some library symbols have changed names or parameter passing.

To resolve this, look up the new names and parameter passing.

Porting code from EC++ or EEC++

Application-related considerations

- Output format considerations
- Stack considerations
- Heap considerations
- Interaction between the tools and your application
- Checksum calculation for verifying image integrity
- Linker optimizations
- AEABI compliance
- CMSIS integration

Output format considerations

The linker produces an absolute executable image in the ELF/DWARF object file format.

You can use the IAR ELF Tool—ielftool—to convert an absolute ELF image to a format more suitable for loading directly to memory, or burning to a PROM or flash memory etc.

ielftool can produce these output formats:

- Plain binary
- Motorola S-records
- Intel hex.

For a complete list of supported output formats, run ielftool without options.

Note: ielftool can also be used for other types of transformations, such as filling and calculating checksums in the absolute image.

The source code for ielftool is provided in the arm/src directory. For more information about ielftool, see *The IAR ELF Tool—ielftool*, page 523.

Stack considerations

To make your application use stack memory efficiently, there are some considerations to be made.

STACK SIZE CONSIDERATIONS

The required stack size depends heavily on the application's behavior. If the given stack size is too large, RAM will be wasted. If the given stack size is too small, one of two things can happen, depending on where in memory you located your stack:

- Variable storage will be overwritten, leading to undefined behavior
- The stack will fall outside of the memory area, leading to an abnormal termination of your application.

Both alternatives are likely to result in application failure. Because the second alternative is easier to detect, you should consider placing your stack so that it grows toward the end of the memory.

For more information about the stack size, see *Setting up stack memory*, page 109, and *Saving stack space and RAM memory*, page 233.

STACK ALIGNMENT

The default cstartup code automatically initializes all stacks to an 8-byte aligned address.

For more information about aligning the stack, see *Calling convention*, page 170 and more specifically *Special registers*, page 172 and *Stack parameters and layout*, page 173.

EXCEPTION STACK

Cortex-M does not have individual exception stacks. By default, all exception stacks are placed in the CSTACK section.

The Arm7/9/11, Cortex-A, and Cortex-R devices support five exception modes which are entered when different exceptions occur. Each exception mode has its own stack to avoid corrupting the System/User mode stack.

The table shows proposed stack names for the various exception stacks, but any name can be used:

Processor mode	Proposed stack section name	Description
Supervisor	SVC_STACK	Operation system stack.

Table 19: Exception stacks for Arm7/9/11, Cortex-A, and Cortex-R

Processor mode	Proposed stack section name	Description
IRQ	IRQ_STACK	Stack for general-purpose (IRQ) interrupt handlers.
FIQ	FIQ_STACK	Stack for high-speed (FIQ) interrupt handlers.
Undefined	UND_STACK	Stack for undefined instruction interrupts. Supports software emulation of hardware coprocessors and instruction set extensions.
Abort	ABT_STACK	Stack for instruction fetch and data access memory abort interrupt handlers.

Table 19: Exception stacks for Arm7/9/11, Cortex-A, and Cortex-R

For each processor mode where a stack is needed, a separate stack pointer must be initialized in your startup code, and section placement should be done in the linker configuration file. The IRQ and FIQ stacks are the only exception stacks which are preconfigured in the supplied cstartup.s and lnkarm.icf files, but other exception stacks can easily be added.



To view any of these stacks in the Stack window available in the IDE, these preconfigured section names must be used instead of user-defined section names.

Heap considerations

The heap contains dynamic data allocated by use of the C function malloc (or a corresponding function) or the C++ operator new.

If your application uses dynamic memory allocation, you should be familiar with:

- The use of advanced, basic, and no-free heap memory allocation
- Linker sections used for the heap
- Allocating the heap size, see Setting up heap memory, page 110.

ADVANCED, BASIC, AND NO-FREE HEAP

The system library contains three separate heap memory handlers—the *basic*, the *advanced*, and the *no-free* heap handler. If there are no calls to free or realloc in your application, the linker automatically chooses the no-free heap. The advanced heap is chosen if there are calls to memory allocation routines in your code. Otherwise, the basic heap is used.

Note: If your product has a code size limitation, the basic heap is automatically chosen.

You can use a linker option to explicitly specify which handler you want to use:

- The basic heap (--basic_heap) is a very simple heap allocator, suitable for use in applications that do not use the heap very much. In particular, it can be used in applications that only allocate heap memory and never free it. The basic heap is not particularly speedy, and using it in applications that repeatedly free memory is quite likely to lead to unneeded fragmentation of the heap. The code for the basic heap is significantly smaller than that for the advanced heap. See --basic_heap, page 305.
- The advanced heap (--advanced_heap) provides efficient memory management for applications that use the heap extensively. In particular, applications that repeatedly allocate and free memory will likely get less overhead in both space and time. The code for the advanced heap is significantly larger than that for the basic heap. See --advanced_heap, page 305. For information about the definition, see iar dlmalloc.h, page 472.
- The no-free heap (--no_free_heap) is the smallest possible heap implementation.
 This heap does not support free or realloc. See --no free heap, page 325.

HEAP SIZE AND STANDARD I/O



If you excluded FILE descriptors from the DLIB runtime environment, as in the Normal configuration, there are no input and output buffers at all. Otherwise, as in the Full configuration, be aware that the size of the input and output buffers is set to 512 bytes in the stdio library header file. If the heap is too small, I/O will not be buffered, which is considerably slower than when I/O is buffered. If you execute the application using the simulator driver of the IAR C-SPY® Debugger, you are not likely to notice the speed penalty, but it is quite noticeable when the application runs on an Arm core. If you use the standard I/O library, you should set the heap size to a value which accommodates the needs of the standard I/O buffer.

Interaction between the tools and your application

The linking process and the application can interact symbolically in four ways:

- Creating a symbol by using the linker command line option --define_symbol.
 The linker will create a public absolute constant symbol that the application can use as a label, as a size, as setup for a debugger, etc.
- Creating an exported configuration symbol by using the command line option
 --config_def or the configuration directive define symbol, and exporting the symbol using the export symbol directive. ILINK will create a public absolute constant symbol that the application can use as a label, as a size, as setup for a debugger, etc.

One advantage of this symbol definition is that this symbol can also be used in expressions in the configuration file, for example to control the placement of sections into memory ranges.

- Using the compiler operators __section_begin, __section_end, or __section_size, or the assembler operators SFB, SFE, or SIZEOF on a named section or block. These operators provide access to the start address, end address, and size of a contiguous sequence of sections with the same name, or of a linker block specified in the linker configuration file.
- The command line option --entry informs the linker about the start label of the
 application. It is used by the linker as a root symbol and to inform the debugger
 where to start execution.

The following lines illustrate how to use -D to create a symbol. If you need to use this mechanism, add these options to your command line like this:

```
--define_symbol NrOfElements=10
--config_def HEAP_SIZE=1024
The linker configuration file can look like this:
define memory Mem with size = 4G;
define region ROM = Mem:[from 0x00000 size 0x10000];
define region RAM = Mem: [from 0x20000 size 0x10000];
/* Export of symbol */
export symbol MY_HEAP_SIZE;
/* Setup a heap area with a size defined by an ILINK option */
define block MyHEAP with size = MY_HEAP_SIZE, alignment = 8 {};
place in RAM { block MyHEAP };
Add these lines to your application source code:
#include <stdlib.h>
/* Use symbol defined by ILINK option to dynamically allocate an
array of elements with specified size. The value takes the form
of a label.
* /
extern int NrOfElements;
typedef char Elements;
Elements *GetElementArray()
 return malloc(sizeof(Elements) * (long) &NrOfElements);
```

```
/* Use a symbol defined by ILINK option, a symbol that in the
  * configuration file was made available to the application.
  */
extern char MY_HEAP_SIZE;

/* Declare the section that contains the heap. */
#pragma section = "MYHEAP"

char *MyHeap()
{
  /* First get start of statically allocated section, */
  char *p = __section_begin("MYHEAP");

  /* ...then we zero it, using the imported size. */
  for (int i = 0; i < (int) &MY_HEAP_SIZE; ++i)
  {
    p[i] = 0;
  }
  return p;
}</pre>
```

Checksum calculation for verifying image integrity

This section contains information about checksum calculation:

- Briefly about checksum calculation, page 204
- Calculating and verifying a checksum, page 206
- Troubleshooting checksum calculation, page 212

For more information, see also *The IAR ELF Tool—ielftool*, page 523.

BRIEFLY ABOUT CHECKSUM CALCULATION

You can use a checksum to verify that the image is the same at runtime as when the image's original checksum was generated. In other words, to verify that the image has not been corrupted.

This works as follows:

You need an initial checksum.

You can either use the IAR ELF Tool—ielftool—to generate an initial checksum or you might have a third-party checksum available.

• You must generate a second checksum during runtime.

You can either add specific code to your application source code for calculating a checksum during runtime or you can use some dedicated hardware on your device for calculating a checksum during runtime.

You must add specific code to your application source code for comparing the two
checksums and take an appropriate action if they differ.

If the two checksums have been calculated in the same way, and if there are no errors in the image, the checksums should be identical. If not, you should first suspect that the two checksums were not generated in the same way.

No matter which solutions you use for generating the two checksum, you must make sure that both checksums are calculated *in the exact same way*. If you use <code>ielftool</code> for the initial checksum and use a software-based calculation during runtime, you have full control of the generation for both checksums. However, if you are using a third-party checksum for the initial checksum or some hardware support for the checksum calculation during runtime, there might be additional requirements that you must consider.

For the two checksums, there are some choices that you must always consider and there are some choices to make only if there are additional requirements. Still, all of the details must be the same for both checksums.

Details always to consider:

Checksum range

The memory range (or ranges) that you want to verify by means of checksums. Typically, you might want to calculate a checksum for all ROM memory. However, you might want to calculate a checksum only for specific ranges. Remember that:

- It is OK to have several ranges for one checksum.
- The checksum must be calculated from the lowest to the highest address for every memory range.
- Each memory range must be verified in the same order as defined (for example, 0x100-0x1FF,0x400-0x4FF is not the same as 0x400-0x4FF,0x100-0x1FF).
- If several checksums are used, you should place them in sections with unique names and use unique symbol names.
- A checksum should never be calculated on a memory range that contains a checksum or a software breakpoint.

Algorithm and size of checksum

You should consider which algorithm is most suitable in your case. There are two basic choices, Sum (a simple arithmetic algorithm) or CRC (which is the most commonly used algorithm). For CRC there are different sizes to choose for the checksum, 2, 4, or 8 bytes where the predefined polynomials are wide enough to suit

the size, for more error detecting power. The predefined polynomials work well for most, but possibly not for all data sets. If not, you can specify your own polynomial. If you just want a decent error detecting mechanism, use the predefined CRC algorithm for your checksum size, typically CRC16 or CRC32.

Note that for an *n*-bit polynomial, the *n*:th bit is always considered to be set. For a 16-bit polynomial (for example, CRC16) this means that 0x11021 is the same as 0x1021.

For more information about selecting an appropriate polynomial for data sets with non-uniform distribution, see for example section 3.5.3 in *Tannenbaum*, A.S., Computer Networks," Prentice Hall 1981, ISBN: 0131646990.

• Fill

Every byte in the checksum range must have a well-defined value before the checksum can be calculated. Typically, bytes with unknown values are *pad bytes* that have been added for alignment. This means that you must specify which fill pattern to be used during calculation, typically 0xFF or 0x00.

Initial value

The checksum must always have an explicit initial value.

In addition to these mandatory details, there might be other details to consider. Typically, this might happen when you have a third-party checksum, you want the checksum be compliant with the RocksoftTM checksum model, or when you use hardware support for generating a checksum during runtime. ielftool provides support for also controlling alignment, complement, bit order, byte order within words, and checksum unit size.

CALCULATING AND VERIFYING A CHECKSUM

In this example procedure, a checksum is calculated for ROM memory from 0x8002 up to 0x8FFF and the 2-byte calculated checksum is placed at 0x8000.

I If you are using ielftool from the command line, you must first allocate a memory location for the calculated checksum.

Note: If you instead are using the IDE (and not the command line), the __checksum, __checksum_begin, and __checksum_end symbols, and the . checksum section are automatically allocated when you calculate the checksum, which means that you can skip this step.

You can allocate the memory location in two ways:


- By creating a global C/C++ or assembler constant symbol with a proper size, residing in a specific section (in this example .checksum)
- By using the linker option --place_holder.

For example, to allocate a 2-byte space for the symbol __checksum in the section .checksum, with alignment 4, specify:

```
--place holder checksum, 2, .checksum, 4
```

The .checksum section will only be included in your application if the section appears to be needed. If the checksum is not needed by the application itself, use the linker option --keep=__checksum (or the linker directive keep) to force the section to be included.

Alternatively, choose Project>Options>Linker>Output and specify __checksum:



3 To control the placement of the .checksum section, you must modify the linker configuration file. For example, it can look like this (note the handling of the block CHECKSUM):

```
define block CHECKSUM { ro section .checksum };
place in ROM region { ro, first block CHECKSUM };
```

Note: It is possible to skip this step, but in that case the .checksum section will automatically be placed with other read-only data.

- **4** When configuring ielftool to calculate a checksum, there are some basic choices to make:
 - Checksum algorithm

Choose which checksum algorithm you want to use. In this example, the CRC16 algorithm is used.

Memory range

Using the IDE, you can specify one memory range for which the checksum should be calculated. From the command line, you can specify any ranges.


• Fill pattern

Specify a fill pattern—typically 0xFF or 0x00—for bytes with unknown values. The fill pattern will be used in all checksum ranges.

For more information, see *Briefly about checksum calculation*, page 204.



To run ielftool from the IDE, choose **Project>Options>Linker>Checksum** and make your settings, for example:



In the simplest case, you can ignore (or leave with default settings) these options: Complement, Bit order, Reverse byte order within word, and Checksum unit size.



To run ielftool from the command line, specify the command, for example, like this:

ielftool --fill=0x00;0x8002-0x8FFF
--checksum=__checksum:2,crc16;0x8002-0x8FFF sourceFile.out
destinationFile.out

Note that ielftool needs an unstripped input ELF image. If you use the linker option --strip, remove it and use the ielftooloption --strip instead.

The checksum will be created later on when you build your project and will be automatically placed in the specified symbol __checksum in the section .checksum.

5 You can specify several ranges instead of only one range.




If you are using the IDE, perform these steps:

- Choose Project>Options>Linker>Checksum and make sure to deselect Fill unused code memory.
- Choose Project>Options>Build Actions and specify the ranges together with the
 rest of the required commands in the Post-build command line text field, for
 example like this:

\$TOOLKIT_DIR\$\bin\ielftool \$PROJ_DIR\$\debug\exe\output.out
\$PROJ_DIR\$\debug\exe\output.out
--fill 0x0;0x0-0x3FF;0x8002-0x8FFF
--checksum=__checksum:2,crc16;0x0-0x3FF;0x8002-0x8FFF

In your example, replace output.out with the name of your output file.

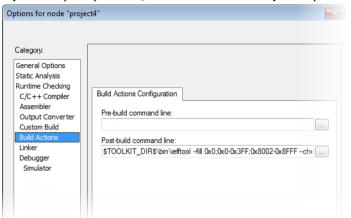

>_

If you are using the command line, specify the ranges, for example like this:

ielftool output.out output.out --fill 0x0;0x0-0x3FF;0x8002-0x8FFF
--checksum=__checksum:2,crc16;0x0-0x3FF;0x8002-0x8FFF

In your example, replace output.out with the name of your output file.

6 Add a function for checksum calculation to your source code. Make sure that the function uses the same algorithm and settings as for the checksum calculated by ielftool. For example, a slow variant of the crc16 algorithm but with small memory footprint (in contrast to the fast variant that uses more memory):

```
unsigned short SmallCrc16(uint16_t
sum,
                         unsigned char *p,
                         unsigned int len)
 while (len--)
   int i;
   unsigned char byte = *(p++);
    for (i = 0; i < 8; ++i)
      unsigned long oSum = sum;
      sum <<= 1;
      if (byte & 0x80)
        sum |= 1;
      if (oSum & 0x8000)
        sum ^= 0x1021;
      byte <<= 1;
    }
 }
 return sum;
}
```

You can find the source code for this checksum algorithm in the arm\src\linker directory of your product installation.

7 Make sure that your application also contains a call to the function that calculates the checksum, compares the two checksums, and takes appropriate action if the checksum values do not match. This code gives an example of how the checksum can be calculated for your application and to be compared with the ielftool generated checksum:

```
/* The calculated checksum */
/* Linker generated symbols */
extern unsigned short const __checksum;
extern int __checksum_begin;
extern int __checksum_end;
void TestChecksum()
 unsigned short calc = 0;
 unsigned char zeros[2] = {0, 0};
  /* Run the checksum algorithm */
 calc = SmallCrc16(0,
                  (unsigned char *) &__checksum_begin,
                  ((unsigned char *) &__checksum_end -
                  ((unsigned char *) &__checksum_begin)+1));
  /* Fill the end of the byte sequence with zeros. */
 calc = SmallCrc16(calc, zeros, 2);
  /* Test the checksum */
  if (calc != __checksum)
   printf("Incorrect checksum!\n");
    abort(); /* Failure */
  /* Checksum is correct */
```

8 Build your application project and download it.

During the build, ielftool creates a checksum and places it in the specified symbol __checksum in the section .checksum.

9 Choose **Download and Debug** to start the C-SPY debugger.

During execution, the checksum calculated by ielftool and the checksum calculated by your application should be identical.

TROUBLESHOOTING CHECKSUM CALCULATION

If the two checksums do not match, there are several possible causes. These are some troubleshooting hints:

- If possible, start with a small example when trying to get the checksums to match.
- Verify that the exact same memory range or ranges are used in both checksum calculations.

To help you do this, ielftool lists the ranges for which the checksum is calculated on stdout about the exact addresses that were used and the order in which they were accessed.

- Make sure that all checksum symbols are excluded from all checksum calculations.
 Compare the checksum placement with the checksum range and make sure they do not overlap. You can find information in the Build message window after ielftool has generated a checksum.
- Verify that the checksum calculations use the same polynomial.
- Verify that the bits in the bytes are processed in the same order in both checksum calculations, from the least to the most significant bit or the other way around. You control this with the Bit order option (or from the command line, the -m parameter of the --checksum option).
- If you are using the small variant of CRC, check whether you need to feed additional bytes into the algorithm.
 - The number of zeros to add at the end of the byte sequence must match the size of the checksum, in other words, one zero for a 1-byte checksum, two zeros for a 2-byte checksum, four zeros for a 4-byte checksum, and eight zeros for an 8-byte checksum.
- Any breakpoints in flash memory change the content of the flash. This means that the checksum which is calculated by your application will no longer match the initial checksum calculated by ielftool. To make the two checksums match again, you must disable all your breakpoints in flash and any breakpoints set in flash by C-SPY internally. The stack plugin and the debugger option **Run to** both require C-SPY to set breakpoints. Read more about possible breakpoint consumers in the *C-SPY® Debugging Guide for Arm*.
- By default, a symbol that you have allocated in memory by using the linker option
 --place_holder is considered by C-SPY to be of the type int. If the size of the
 checksum is different than the size of an int, you can change the display format of
 the checksum symbol to match its size.
 - In the C-SPY **Watch** window, select the symbol and choose **Show As** from the context menu. Choose the display format that matches the size of the checksum symbol.

Linker optimizations

This section contains information about:

- Virtual function elimination, page 213
- Small function inlining, page 213
- Duplicate section merging, page 213

VIRTUAL FUNCTION ELIMINATION

Virtual Function Elimination (VFE) is a linker optimization that removes unneeded virtual functions and dynamic runtime type information.

In order for Virtual Function Elimination to work, all relevant modules must provide information about virtual function table layout, which virtual functions are called, and for which classes dynamic runtime type information is needed. If one or more modules do not provide this information, a warning is generated by the linker and Virtual Function Elimination is not performed.



If you know that modules that lack such information do not perform any virtual function calls and do not define any virtual function tables, you can use the --vfe=forced linker option to enable Virtual Function Elimination anyway.



In the IDE, select **Project>Options>Linker>Optimizations>Perform** C+++ **Virtual Function Elimination** to enable this optimization.

Note that you can disable Virtual Function Elimination entirely by using the --no_vfe linker option. In this case, no warning will be issued for modules that lack VFE information.

For more information, see --vfe, page 335 and --no vfe, page 327.

SMALL FUNCTION INLINING

Small function inlining is a linker optimization that replaces some calls to very small functions with the body of the function. This requires the body to fit in the space of the instruction that calls the function.



In the IDE, select **Project>Options>Linker>Optimizations>Inline small routines** to enable this optimization.



Use the linker option --inline.

DUPLICATE SECTION MERGING

The linker can detect read-only sections with identical contents and keep only one copy of each such section, redirecting all references to any of the duplicate sections to the retained section.



In the IDE, select **Project>Options>Linker>Optimizations>Merge duplicate sections** to enable this optimization.



Use the linker option --merge_duplicate_sections.

Note that this optimization can cause different functions or constants to have the same address, so if your application depends on the addresses being different, for example by using the addresses as keys into a table, you should not enable this optimization.

AEABI compliance

The IAR build tools for Arm support the Embedded Application Binary Interface for Arm, AEABI, defined by Arm Limited. This interface is based on the Intel IA64 ABI interface. The advantage of adhering to AEABI is that any such module can be linked with any other AEABI-compliant module, even modules produced by tools provided by other vendors.

The IAR build tools for Arm support the following parts of the AEABI:

AAPCS Procedure Call Standard for the Arm architecture

CPPABI C++ ABI for the Arm architecture

AAELF ELF for the Arm architecture

AADWARF DWARF for the Arm architecture

RTABI Runtime ABI for the Arm architecture

CLIBABI C library ABI for the Arm architecture

The IAR build tools only support a *bare metal* platform, that is a ROM-based system that lacks an explicit operating system.

Note that:

- The AEABI is specified for C89 only
- The AEABI does not specify C++ library compatibility
- Neither the size of an enum or of wchar_t is constant in the AEABI.

If AEABI compliance is enabled, certain preprocessor constants become real constant variables instead.

LINKING AEABI-COMPLIANT MODULES USING THE IAR ILINK LINKER

When building an application using the IAR ILINK Linker, the following types of modules can be combined:

- Modules produced using IAR build tools, both AEABI-compliant modules as well as modules that are not AEABI-compliant
- AEABI-compliant modules produced using build tools from another vendor.

Note: To link a module produced by a compiler from another vendor, extra support libraries from that vendor might be required.

The IAR ILINK Linker automatically chooses the appropriate standard C/C++ libraries to use based on attributes from the object files. Imported object files might not have all these attributes. Therefore, you might need to help ILINK choose the standard library by verifying one or more of the following details:

- Include at least one module built with the IAR C/C++ Compiler for Arm.
- The used CPU by specifying the --cpu linker option
- If full I/O is needed; make sure to link with a Full library configuration in the standard library

Potential incompatibilities include but are not limited to:

- The size of enum
- The size of wchar_t
- The calling convention
- The instruction set used.

When linking AEABI-compliant modules, also consider the information in the chapters *Linking using ILINK* and *Linking your application*.

LINKING AEABI-COMPLIANT MODULES USING A THIRD-PARTY LINKER

If you have a module produced using the IAR C/C++ Compiler and you plan to link that module using a linker from a different vendor, that module must be AEABI-compliant, see *Enabling AEABI compliance in the compiler*, page 216.

In addition, if that module uses any of the IAR-specific compiler extensions, you must make sure that those features are also supported by the tools from the other vendor. Note specifically:

 Support for the following extensions must be verified: #pragma pack, __no_init, __root, and __ramfunc The following extensions are harmless to use: #pragma location/@, __arm, __thumb, __swi, __irq, __fiq, and __nested.

ENABLING AEABI COMPLIANCE IN THE COMPILER

You can enable AEABI compliance in the compiler by setting the --aeabi option. In this case, you must also use the --guard_calls option.



In the IDE, use the **Project>Options>C/C++ Compiler>Extra Options** page to specify the --aeabi and --guard_calls options.



On the command line, use the options --aeabi and --guard_calls to enable AEABI support in the compiler.

Alternatively, to enable support for AEABI for a specific system header file, you must define the preprocessor symbol _AEABI_PORTABILITY_LEVEL to non-zero prior to including a system header file, and make sure that the symbol AEABI_PORTABLE is set to non-zero after the inclusion of the header file:

```
#define _AEABI_PORTABILITY_LEVEL 1
#undef _AEABI_PORTABLE
#include <header.h>
#ifndef _AEABI_PORTABLE
    #error "header.h not AEABI compatible"
#endif
```

CMSIS integration

The arm\CMSIS subdirectory contains CMSIS (Cortex Microcontroller Software Interface Standard) and CMSIS DSP header and library files, and documentation. For more information about CMSIS, see http://www.arm.com/cmsis.

The special header file inc\c\cmsis_iar.h is provided as a CMSIS adaptation of the current version of the IAR C/C++ Compiler.

CMSIS DSP LIBRARY

IAR Embedded Workbench comes with prebuilt CMSIS DSP libraries in the $arm\CMSIS\Lib\IAR$ directory. The names of the library files are constructed in this way:

```
iar\_cortexM<0|3|4><1|b>[f]\_math.a
```

where <0 | 3 | 4> selects the Cortex–M variant, <1 | b> selects the byte order, and [f] indicates that the library is built for FPU (Cortex–M4 only).

The libraries for Cortex-M4 are applicable also to Cortex-M7.

CUSTOMIZING THE CMSIS DSP LIBRARY

The source code of the CMSIS DSP library is provided in the arm\CMSIS\DSP_Lib\Source directory. You can find an IAR Embedded Workbench project which is prepared for building a customized DSP library in the arm\CMSIS\DSP_Lib\Source\IAR directory.



BUILDING WITH CMSIS ON THE COMMAND LINE

This section contains examples of how to build your CMSIS-compatible application on the command line.

CMSIS only (that is without the DSP library)

iccarm -I \$EW_DIR\$\arm\CMSIS\Include

With the DSP library, for Cortex-M4, little-endian, and with FPU

iccarm --endian=little --cpu=Cortex-M4 --fpu=VFPv4_sp -I
\$EW_DIR\$\arm\CMSIS\Include -D ARM_MATH_CM4

ilinkarm \$EW_DIR\$\arm\CMSIS\Lib\IAR\iar_cortexM3l_math.a



BUILDING WITH CMSIS IN THE IDE

Choose **Project>Options>General Options>Library Configuration** to enable CMSIS support.

When enabled, CMSIS include paths and the DSP library will automatically be used. For more information, see the *IDE Project Management and Building Guide for Arm*.

CMSIS integration

Efficient coding for embedded applications

- Selecting data types
- Controlling data and function placement in memory
- Controlling compiler optimizations
- Facilitating good code generation

Selecting data types

For efficient treatment of data, you should consider the data types used and the most efficient placement of the variables.

USING EFFICIENT DATA TYPES

The data types you use should be considered carefully, because this can have a large impact on code size and code speed.

- Use int or long instead of char or short whenever possible, to avoid sign extension or zero extension. In particular, loop indexes should always be int or long to minimize code generation. Also, in Thumb mode, accesses through the stack pointer (SP) is restricted to 32-bit data types, which further emphasizes the benefits of using one of these data types.
- Use unsigned data types, unless your application really requires signed values.
- Be aware of the costs of using 64-bit data types, such as double and long long.
- Bitfields and packed structures generate large and slow code.
- Using floating-point types on a microprocessor without a math co-processor is very inefficient, both in terms of code size and execution speed.
- Declaring a pointer to const data tells the calling function that the data pointed to will not change, which opens for better optimizations.

For information about representation of supported data types, pointers, and structures types, see the chapter *Data representation*.

FLOATING-POINT TYPES

Using floating-point types on a microprocessor without a math coprocessor is very inefficient, both in terms of code size and execution speed. Thus, you should consider replacing code that uses floating-point operations with code that uses integers, because these are more efficient.

The compiler supports two floating-point formats—32 and 64 bits. The 32-bit floating-point type float is more efficient in terms of code size and execution speed. However, the 64-bit format double supports higher precision and larger numbers.

In the compiler, the floating-point type float always uses the 32-bit format, and the type double always uses the 64-bit format.

Unless the application requires the extra precision that 64-bit floating-point numbers give, we recommend using 32-bit floating-point numbers instead.

By default, a *floating-point constant* in the source code is treated as being of the type double. This can cause innocent-looking expressions to be evaluated in double precision. In the example below a is converted from a float to a double, the double constant 1.0 is added and the result is converted back to a float:

```
double Test(float a)
{
    return a + 1.0;
}
```

To treat a floating-point constant as a float rather than as a double, add the suffix f to it, for example:

```
double Test(float a)
{
    return a + 1.0f;
}
```

For more information about floating-point types, see *Basic data types—floating-point types*, page 346.

ALIGNMENT OF ELEMENTS IN A STRUCTURE

Some Arm cores require that when accessing data in memory, the data must be aligned. Each element in a structure must be aligned according to its specified type requirements. This means that the compiler might need to insert *pad bytes* to keep the alignment correct.

There are situations when this can be a problem:

 There are external demands; for example, network communication protocols are usually specified in terms of data types with no padding in between • You need to save data memory.

For information about alignment requirements, see *Alignment*, page 339.

Use the #pragma pack directive or the __packed data type attribute for a tighter layout of the structure. The drawback is that each access to an unaligned element in the structure will use more code.

Alternatively, write your own customized functions for *packing* and *unpacking* structures. This is a more portable way, which will not produce any more code apart from your functions. The drawback is the need for two views on the structure data—packed and unpacked.

For more information about the #pragma pack directive, see pack, page 390.

ANONYMOUS STRUCTS AND UNIONS

When a structure or union is declared without a name, it becomes anonymous. The effect is that its members will only be seen in the surrounding scope.

Example

In this example, the members in the anonymous union can be accessed, in function F, without explicitly specifying the union name:

```
struct S
{
   char mTag;
   union
   {
     long mL;
     float mF;
   };
} St;
void F(void)
{
   St.mL = 5;
}
```

The member names must be unique in the surrounding scope. Having an anonymous struct or union at file scope, as a global, external, or static variable is also allowed. This could for instance be used for declaring I/O registers, as in this example:

```
__no_init volatile
union
{
   unsigned char IOPORT;
   struct
   {
      unsigned char way: 1;
      unsigned char out: 1;
   };
} @ 0x1000;

/* The variables are used here. */
void Test(void)
{
   IOPORT = 0;
   way = 1;
   out = 1;
}
```

This declares an I/O register byte IOPORT at address 0x1000. The I/O register has 2 bits declared, Way and Out. Note that both the inner structure and the outer union are anonymous.

Anonymous structures and unions are implemented in terms of objects named after the first field, with a prefix _A_ to place the name in the implementation part of the namespace. In this example, the anonymous union will be implemented through an object named _A_IOPORT.

Controlling data and function placement in memory

The compiler provides different mechanisms for controlling placement of functions and data objects in memory. To use memory efficiently, you should be familiar with these mechanisms and know which one is best suited for different situations. You can use:

• The @ operator and the #pragma location directive for absolute placement.

Using the @ operator or the #pragma location directive, you can place individual global and static variables at absolute addresses. Note that it is not possible to use this notation for absolute placement of individual functions. For more information, see Data placement at an absolute location, page 223.

- The @ operator and the #pragma location directive for section placement.

 Using the @ operator or the #pragma location directive, you can place individual functions, variables, and constants in named sections. The placement of these sections can then be controlled by linker directives. For more information, see *Data and function placement in sections*, page 224.
- The @ operator and the #pragma location directive for register placement

 Use the @ operator or the #pragma location directive to place individual global and static variables in registers. The variables must be declared __no_init. This is useful for individual data objects that must be located in a specific register.
- Using the --section option, you can set the default segment for functions, variables, and constants in a particular module. For more information, see --section, page 293.

DATA PLACEMENT AT AN ABSOLUTE LOCATION

The @ operator, alternatively the #pragma location directive, can be used for placing global and static variables at absolute addresses.

To place a variable at an absolute address, the argument to the @ operator and the #pragma location directive should be a literal number, representing the actual address. The absolute location must fulfill the alignment requirement for the variable that should be located.

Note: All declarations of __no_init variables placed at an absolute address are *tentative definitions*. Tentatively defined variables are only kept in the output from the compiler if they are needed in the module being compiled. Such variables will be defined in all modules in which they are used, which will work as long as they are defined in the same way. The recommendation is to place all such declarations in header files that are included in all modules that use the variables.

Other variables placed at an absolute address use the normal distinction between declaration and definition. For these variables, you must provide the definition in only one module, normally with an initializer. Other modules can refer to the variable by using an extern declaration, with or without an explicit address.

Examples

In this example, a __no_init declared variable is placed at an absolute address. This is useful for interfacing between multiple processes, applications, etc:

```
__no_init volatile char alpha @ 0xFF2000;/* OK */
```

The next example contains two const declared objects. The first one is not initialized, and the second one is initialized to a specific value. Both objects are placed in ROM. This is useful for configuration parameters, which are accessible from an external

interface. Note that in the second case, the compiler is not obliged to actually read from the variable, because the value is known.

In the first case, the value is not initialized by the compiler; the value must be set by other means. The typical use is for configurations where the values are loaded to ROM separately, or for special function registers that are read-only.

```
no init int epsilon @ 0xFF2007; /* Error, misaligned. */
```

C++ considerations

In C++, module scoped const variables are static (module local), whereas in C they are global. This means that each module that declares a certain const variable will contain a separate variable with this name. If you link an application with several such modules all containing (via a header file), for instance, the declaration:

the linker will report that more than one variable is located at address 0x100.

To avoid this problem and make the process the same in C and C++, you should declare these variables extern, for example:

```
/* The extern keyword makes x public. */
extern volatile const __no_init int x @ 0x100;
```

Note: C++ static member variables can be placed at an absolute address just like any other static variable.

DATA AND FUNCTION PLACEMENT IN SECTIONS

The following method can be used for placing data or functions in named sections other than default:

- The @ operator, alternatively the #pragma location directive, can be used for
 placing individual variables or individual functions in named sections. The named
 section can either be a predefined section, or a user-defined section.
- The --section option can be used for placing variables and functions, which are parts of the whole compilation unit, in named sections.

C++ static member variables can be placed in named sections just like any other static variable.

If you use your own sections, in addition to the predefined sections, the sections must also be defined in the linker configuration file.

Note: Take care when explicitly placing a variable or function in a predefined section other than the one used by default. This is useful in some situations, but incorrect placement can result in anything from error messages during compilation and linking to a malfunctioning application. Carefully consider the circumstances; there might be strict requirements on the declaration and use of the function or variable.

The location of the sections can be controlled from the linker configuration file.

For more information about sections, see the chapter Section reference.

Examples of placing variables in named sections

In the following examples, a data object is placed in a user-defined section. Note that you must as always ensure that the section is placed in the appropriate memory area when linking.

```
__no_init int alpha @ "MY_NOINIT"; /* OK */

#pragma location="MY_CONSTANTS"

const int beta = 42; /* OK */

const int gamma @ "MY_CONSTANTS" = 17;/* OK */

int theta @ "MY_ZEROS"; /* OK */

int phi @ "MY_INITED" = 4711; /* OK */
```

The linker will normally arrange for the correct type of initialization for each variable. If you want to control or suppress automatic initialization, you can use the initialize and do not initialize directives in the linker configuration file.

Examples of placing functions in named sections

```
void f(void) @ "MY_FUNCTIONS";

void g(void) @ "MY_FUNCTIONS"
{
}

#pragma location="MY_FUNCTIONS"
void h(void);
```

DATA PLACEMENT IN REGISTERS

The @ operator, alternatively the #pragma location directive, can be used for placing global and static variables in a register.

To place a variable in a register, the argument to the @ operator and the #pragma location directive should be an identifier that corresponds to an Arm core register in

the range R4-R11 (R9 cannot be specified in combination with the --rwpi command line option).

A variable can be placed in a register only if it is declared as __no_init, has file scope, and its size is four bytes. A variable placed in a register does not have a memory address, so the address operator & cannot be used.

Within a module where a variable is placed in a register, the specified register will only be used for accessing that variable. The value of the variable is preserved across function calls to other modules because the registers R4-R11 are callee saved, and as such they are restored when execution returns. However, the value of a variable placed in a register is not always preserved as expected:

- In an exception handler or library callback routine (such as the comparator function
 passed to qsort) the value might not be preserved. The value will be preserved if
 the command line option --lock_regs is used for locking the register in all
 modules of the application, including library modules.
- In a fast interrupt handler, the value of a variable in R8-R11 is not preserved from outside the handler, because these registers are banked.
- The longjmp function and C++ exceptions might restore variables placed in registers to old values, unlike other variables with static storage duration which are not restored.

The linker does not prevent modules from placing different variables in the same register. Variables in different modules can be placed in the same register, and another module could use the register for other purposes.

Note: A variable placed in a register should be defined in an include file, to be included in every module that uses the variable. An unused definition in a module will cause the register to not be used in that module.

Controlling compiler optimizations

The compiler performs many transformations on your application to generate the best possible code. Examples of such transformations are storing values in registers instead of memory, removing superfluous code, reordering computations in a more efficient order, and replacing arithmetic operations by cheaper operations.

The linker should also be considered an integral part of the compilation system, because some optimizations are performed by the linker. For instance, all unused functions and variables are removed and not included in the final output.

SCOPE FOR PERFORMED OPTIMIZATIONS

You can decide whether optimizations should be performed on your whole application or on individual files. By default, the same types of optimizations are used for an entire project, but you should consider using different optimization settings for individual files. For example, put code that must execute very quickly into a separate file and compile it for minimal execution time, and the rest of the code for minimal code size. This will give a small program, which is still fast enough where it matters.

You can also exclude individual functions from the performed optimizations. The #pragma optimize directive allows you to either lower the optimization level, or specify another type of optimization to be performed. See *optimize*, page 389, for information about the pragma directive.

MULTI-FILE COMPILATION UNITS

In addition to applying different optimizations to different source files or even functions, you can also decide what a compilation unit consists of—one or several source code files.

By default, a compilation unit consists of one source file, but you can also use multi-file compilation to make several source files in a compilation unit. The advantage is that interprocedural optimizations such as inlining and cross jump have more source code to work on. Ideally, the whole application should be compiled as one compilation unit. However, for large applications this is not practical because of resource restrictions on the host computer. For more information, see --mfc, page 276.

Note: Only one object file is generated, and thus all symbols will be part of that object file.

If the whole application is compiled as one compilation unit, it is very useful to make the compiler also discard unused public functions and variables before the interprocedural optimizations are performed. Doing this limits the scope of the optimizations to functions and variables that are actually used. For more information, see *--discard_unused_publics*, page 268.

OPTIMIZATION LEVELS

The compiler supports different levels of optimizations. This table lists optimizations that are typically performed on each level:

Optimization level	Description
None (Best debug support)	Variables live through their entire scope
Low	Same as above but variables only live for as long as they are needed, not necessarily through their entire scope
Medium	Same as above, and: Live-dead analysis and optimization Dead code elimination Redundant label elimination Redundant branch elimination Code hoisting Peephole optimization Some register content analysis and optimization Common subexpression elimination Code motion Static clustering
High (Balanced)	Same as above, and: Instruction scheduling Cross jumping Advanced register content analysis and optimization Loop unrolling Function inlining Type-based alias analysis

Table 20: Compiler optimization levels

Note: Some of the performed optimizations can be individually enabled or disabled. For more information about these, see *Fine-tuning enabled transformations*, page 229.

A high level of optimization might result in increased compile time, and will most likely also make debugging more difficult, because it is less clear how the generated code relates to the source code. For example, at the low, medium, and high optimization levels, variables do not live through their entire scope, which means processor registers used for storing variables can be reused immediately after they were last used. Due to this, the C-SPY Watch window might not be able to display the value of the variable throughout its scope, or even occasionally display an incorrect value. At any time, if you experience difficulties when debugging your code, try lowering the optimization level.

SPEED VERSUS SIZE

At the high optimization level, the compiler balances between size and speed optimizations. However, it is possible to fine-tune the optimizations explicitly for either size or speed. They only differ in what thresholds that are used; speed will trade size for speed, whereas size will trade speed for size. Note that one optimization sometimes enables other optimizations to be performed, and an application might in some cases become smaller even when optimizing for speed rather than size.

If you use the optimization level High speed, the --no_size_constraints compiler option relaxes the normal restrictions for code size expansion and enables more aggressive optimizations.

You can choose an optimization goal for each module, or even individual functions, using command line options and pragma directives (see -O, page 286 and *optimize*, page 389). For a small embedded application, this makes it possible to achieve acceptable speed performance while minimizing the code size: Typically, only a few places in the application need to be fast, such as the most frequently executed inner loops, or the interrupt handlers.

Rather than compiling the whole application with High (Balanced) optimization, you can use High (Size) in general, but override this to get High (Speed) optimization only for those functions where the application needs to be fast.

Because of the unpredictable way in which different optimizations interact, where one optimization can enable other optimizations, sometimes a function becomes smaller when compiled with High (Speed) optimization than if High (Size) is used. Also, using multi-file compilation (see --mfc, page 276) can enable many optimizations to improve both speed and size performance. It is recommended that you experiment with different optimization settings so that you can pick the best ones for your project.

FINE-TUNING ENABLED TRANSFORMATIONS

At each optimization level you can disable some of the transformations individually. To disable a transformation, use either the appropriate option, for instance the command line option --no_inline, alternatively its equivalent in the IDE **Function inlining**, or the #pragma optimize directive. These transformations can be disabled individually:

- Common subexpression elimination
- Loop unrolling
- Function inlining
- Code motion
- Type-based alias analysis
- Static clustering
- Instruction scheduling.

Common subexpression elimination

Redundant re-evaluation of common subexpressions is by default eliminated at optimization levels Medium and High. This optimization normally reduces both code size and execution time. However, the resulting code might be difficult to debug.

Note: This option has no effect at optimization levels None and Low.

For more information about the command line option, see *--no cse*, page 278.

Loop unrolling

Loop unrolling means that the code body of a loop, whose number of iterations can be determined at compile time, is duplicated. Loop unrolling reduces the loop overhead by amortizing it over several iterations.

This optimization is most efficient for smaller loops, where the loop overhead can be a substantial part of the total loop body.

Loop unrolling, which can be performed at optimization level High, normally reduces execution time, but increases code size. The resulting code might also be difficult to debug.

The compiler heuristically decides which loops to unroll. Only relatively small loops where the loop overhead reduction is noticeable will be unrolled. Different heuristics are used when optimizing for speed, size, or when balancing between size and speed.

Note: This option has no effect at optimization levels None, Low, and Medium.

To disable loop unrolling, use the command line option --no_unroll, see --no_unroll, page 285.

Function inlining

Function inlining means that a function, whose definition is known at compile time, is integrated into the body of its caller to eliminate the overhead of the call. This optimization normally reduces execution time, but might increase the code size.

For more information, see *Inlining functions*, page 83.

Code motion

Evaluation of loop-invariant expressions and common subexpressions are moved to avoid redundant re-evaluation. This optimization, which is performed at optimization level Medium and above, normally reduces code size and execution time. The resulting code might however be difficult to debug.

Note: This option has no effect at optimization levels below Medium.

For more information about the command line option, see --no code motion, page 278.

Type-based alias analysis

When two or more pointers reference the same memory location, these pointers are said to be *aliases* for each other. The existence of aliases makes optimization more difficult because it is not necessarily known at compile time whether a particular value is being changed.

Type-based alias analysis optimization assumes that all accesses to an object are performed using its declared type or as a char type. This assumption lets the compiler detect whether pointers can reference the same memory location or not.

Type-based alias analysis is performed at optimization level High. For application code conforming to standard C or C++ application code, this optimization can reduce code size and execution time. However, non-standard C or C++ code might result in the compiler producing code that leads to unexpected behavior. Therefore, it is possible to turn this optimization off.

Note: This option has no effect at optimization levels None, Low, and Medium.

For more information about the command line option, see --no tbaa, page 283.

Example

```
short F(short *p1, long *p2)
{
    *p2 = 0;
    *p1 = 1;
    return *p2;
}
```

With type-based alias analysis, it is assumed that a write access to the short pointed to by p1 cannot affect the long value that p2 points to. Thus, it is known at compile time that this function returns 0. However, in non-standard-conforming C or C++ code these pointers could overlap each other by being part of the same union. If you use explicit casts, you can also force pointers of different pointer types to point to the same memory location.

Static clustering

When static clustering is enabled, static and global variables that are defined within the same module are arranged so that variables that are accessed in the same function are stored close to each other. This makes it possible for the compiler to use the same base pointer for several accesses.

Note: This option has no effect at optimization levels None and Low.

For more information about the command line option, see --no clustering, page 277.

Instruction scheduling

The compiler features an instruction scheduler to increase the performance of the generated code. To achieve that goal, the scheduler rearranges the instructions to minimize the number of pipeline stalls emanating from resource conflicts within the microprocessor.

For more information about the command line option, see --no scheduling, page 282.

Facilitating good code generation

This section contains hints on how to help the compiler generate good code:

- Writing optimization-friendly source code, page 232
- Saving stack space and RAM memory, page 233
- Function prototypes, page 233
- Integer types and bit negation, page 234
- Protecting simultaneously accessed variables, page 234
- Accessing special function registers, page 235
- Passing values between C and assembler objects, page 237
- Non-initialized variables, page 237

WRITING OPTIMIZATION-FRIENDLY SOURCE CODE

The following is a list of programming techniques that will, when followed, enable the compiler to better optimize the application.

- Local variables—auto variables and parameters—are preferred over static or global variables. The reason is that the optimizer must assume, for example, that called functions can modify non-local variables. When the life spans for local variables end, the previously occupied memory can then be reused. Globally declared variables will occupy data memory during the whole program execution.
- Avoid taking the address of local variables using the & operator. This is inefficient
 for two main reasons. First, the variable must be placed in memory, and thus cannot
 be placed in a processor register. This results in larger and slower code. Second, the
 optimizer can no longer assume that the local variable is unaffected over function
 calls.
- Module-local variables—variables that are declared static—are preferred over global variables (non-static). Also avoid taking the address of frequently accessed static variables.
- The compiler is capable of inlining functions, see Function inlining, page 230. To
 maximize the effect of the inlining transformation, it is good practice to place the

definitions of small functions called from more than one module in the header file rather than in the implementation file. Alternatively, you can use multi-file compilation. For more information, see *Multi-file compilation units*, page 227.

 Avoid using inline assembler without operands and clobbered resources. Instead, use SFRs or intrinsic functions if available. Otherwise, use inline assembler with operands and clobbered resources or write a separate module in assembler language. For more information, see Mixing C and assembler, page 157.

SAVING STACK SPACE AND RAM MEMORY

The following is a list of programming techniques that save memory and stack space:

- If stack space is limited, avoid long call chains and recursive functions.
- Avoid using large non-scalar types, such as structures, as parameters or return type.
 To save stack space, you should instead pass them as pointers or, in C++, as references.

FUNCTION PROTOTYPES

It is possible to declare and define functions using one of two different styles:

- Prototyped
- Kernighan & Ritchie C (K&R C)

Both styles are valid C, however it is strongly recommended to use the prototyped style, and provide a prototype declaration for each public function in a header that is included both in the compilation unit defining the function and in all compilation units using it.

The compiler will not perform type checking on parameters passed to functions declared using K&R style. Using prototype declarations will also result in more efficient code in some cases, as there is no need for type promotion for these functions.

To make the compiler require that all function definitions use the prototyped style, and that all public functions have been declared before being defined, use the **Project>Options>C/C++ Compiler>Language 1>Require prototypes** compiler option (--require_prototypes).

Prototyped style

In prototyped function declarations, the type for each parameter must be specified.

```
int Test(char, int); /* Declaration */
int Test(char ch, int i) /* Definition */
{
   return i + ch;
}
```

Kernighan & Ritchie style

In K&R style—pre-Standard C—it is not possible to declare a function prototyped. Instead, an empty parameter list is used in the function declaration. Also, the definition looks different

For example:

```
int Test();    /* Declaration */
int Test(ch, i) /* Definition */
char ch;
int i;
{
    return i + ch;
}
```

INTEGER TYPES AND BIT NEGATION

In some situations, the rules for integer types and their conversion lead to possibly confusing behavior. Things to look out for are assignments or conditionals (test expressions) involving types with different size, and logical operations, especially bit negation. Here, *types* also includes types of constants.

In some cases there might be warnings (for example, for constant conditional or pointless comparison), in others just a different result than what is expected. Under certain circumstances the compiler might warn only at higher optimizations, for example, if the compiler relies on optimizations to identify some instances of constant conditionals. In this example an 8-bit character, a 32-bit integer, and two's complement is assumed:

```
void F1(unsigned char c1)
{
   if (c1 == ~0x80)
   ;
}
```

Here, the test is always false. On the right hand side, 0x80 is 0x00000080, and ~0x00000080 becomes 0xffffffff. On the left hand side, c1 is an 8-bit unsigned character, so it cannot be larger than 255. It also cannot be negative, which means that the integral promoted value can never have the topmost 24 bits set.

PROTECTING SIMULTANEOUSLY ACCESSED VARIABLES

Variables that are accessed asynchronously, for example by interrupt routines or by code executing in separate threads, must be properly marked and have adequate protection. The only exception to this is a variable that is always *read-only*.

To mark a variable properly, use the volatile keyword. This informs the compiler, among other things, that the variable can be changed from other threads. The compiler will then avoid optimizing on the variable (for example, keeping track of the variable in registers), will not delay writes to it, and be careful accessing the variable only the number of times given in the source code.

For more information about the volatile type qualifier and the rules for accessing volatile objects, see *Declaring objects volatile*, page 351.

ACCESSING SPECIAL FUNCTION REGISTERS

Specific header files for several Arm devices are included in the IAR product installation. The header files are named iodevice.h and define the processor-specific special function registers (SFRs).

Note: Each header file contains one section used by the compiler, and one section used by the assembler.

SFRs with bitfields are declared in the header file. This example is from

```
ioks32c5000a.h:
__no_init volatile union
 unsigned short mwctl2;
 struct
   unsigned short edr: 1;
   unsigned short edw: 1;
   unsigned short lee: 2;
   unsigned short lemd: 2;
   unsigned short lepl: 2;
 } mwctl2bit;
} @ 0x1000;
/* By including the appropriate include file in your code,
 * it is possible to access either the whole register or any
 * individual bit (or bitfields) from C code as follows.
 * /
void Test()
  /* Whole register access */
 mwct12 = 0x1234;
 /* Bitfield accesses */
 mwctl2bit.edw = 1;
 mwctl2bit.lepl = 3;
```

You can also use the header files as templates when you create new header files for other Arm devices.

PASSING VALUES BETWEEN C AND ASSEMBLER OBJECTS

The following example shows how you in your C source code can use inline assembler to set and get values from a special purpose register:

```
static unsigned long get_APSR( void )
{
  unsigned long value;
  asm volatile( "MRS %0, APSR" : "=r"(value) );
  return value;
}
static void set_APSR( unsigned long value)
{
  asm volatile( "MSR APSR, %0" :: "r"(value) );
}
```

The general purpose register is used for getting and setting the value of the special purpose register APSR. The same method can be used also for accessing other special purpose registers and specific instructions.

To read more about inline assembler, see *Inline assembler*, page 158.

NON-INITIALIZED VARIABLES

Normally, the runtime environment will initialize all global and static variables when the application is started.

The compiler supports the declaration of variables that will not be initialized, using the __no_init type modifier. They can be specified either as a keyword or using the #pragma object_attribute directive. The compiler places such variables in a separate section.

For __no_init, the const keyword implies that an object is read-only, rather than that the object is stored in read-only memory. It is not possible to give a __no_init object an initial value.

Variables declared using the __no_init keyword could, for example, be large input buffers or mapped to special RAM that keeps its content even when the application is turned off.

For more information, see __no_init, page 364. Note that to use this keyword, language extensions must be enabled; see -e, page 269. For more information, see also *object attribute*, page 388.

Facilitating good code generation

Part 2. Reference information

This part of the IAR C/C++ Development Guide for Arm contains these chapters:

- External interface details
- Compiler options
- Linker options
- Data representation
- Extended keywords
- Pragma directives
- Intrinsic functions
- The preprocessor
- C/C++ standard library functions
- The linker configuration file
- Section reference
- The stack usage control file
- IAR utilities
- Implementation-defined behavior for Standard C
- Implementation-defined behavior for C89.



External interface details

- Invocation syntax
- Include file search procedure
- Compiler output
- ILINK output
- Text encodings
- Diagnostics

Invocation syntax

You can use the compiler and linker either from the IDE or from the command line. See the *IDE Project Management and Building Guide for Arm* for information about using the build tools from the IDE.

COMPILER INVOCATION SYNTAX

The invocation syntax for the compiler is:

```
iccarm [options] [sourcefile] [options]
```

For example, when compiling the source file prog.c, use this command to generate an object file with debug information:

```
iccarm prog.c --debug
```

The source file can be a C or C++ file, typically with the filename extension c or cpp, respectively. If no filename extension is specified, the file to be compiled must have the extension c.

Generally, the order of options on the command line, both relative to each other and to the source filename, is not significant. There is, however, one exception: when you use the -I option, the directories are searched in the same order as they are specified on the command line.

If you run the compiler from the command line without any arguments, the compiler version number and all available options including brief descriptions are directed to stdout and displayed on the screen.

ILINK INVOCATION SYNTAX

The invocation syntax for ILINK is:

```
ilinkarm [arguments]
```

Each argument is either a command-line option, an object file, or a library.

For example, when linking the object file prog. o, use this command:

```
ilinkarm prog.o --config configfile
```

If no filename extension is specified for the linker configuration file, the configuration file must have the extension icf.

Generally, the order of arguments on the command line is not significant. There is, however, one exception: when you supply several libraries, the libraries are searched in the same order that they are specified on the command line. The default libraries are always searched last.

The output executable image will be placed in a file named a .out, unless the -o option is used.

If you run ILINK from the command line without any arguments, the ILINK version number and all available options including brief descriptions are directed to stdout and displayed on the screen.

PASSING OPTIONS

There are three different ways of passing options to the compiler and to ILINK:

- Directly from the command line
 Specify the options on the command line after the iccarm or ilinkarm commands;
 see *Invocation syntax*, page 241.
- Via environment variables

The compiler and linker automatically append the value of the environment variables to every command line; see *Environment variables*, page 243.

• Via a text file, using the -f option; see -f, page 271.

For general guidelines for the option syntax, an options summary, and a detailed description of each option, see the chapter *Compiler options*.

ENVIRONMENT VARIABLES

These environment variables can be used with the compiler:

Environment variable	Description
C_INCLUDE	Specifies directories to search for include files; for example:
	<pre>C_INCLUDE=c:\program files\iar systems\embedded</pre>
	<pre>workbench 8.n\arm\inc;c:\headers</pre>
QCCARM	Specifies command line options; for example: QCCARM=-1A asm.lst

Table 21: Compiler environment variables

This environment variable can be used with ILINK:

Environment variable	Description
ILINKARM_CMD_LINE	Specifies command line options; for example:
	ILINKARM_CMD_LINE=config full.icf
	silent

Table 22: ILINK environment variables

Include file search procedure

This is a detailed description of the compiler's #include file search procedure:

- If the name of the #include file is an absolute path specified in angle brackets or double quotes, that file is opened.
- If the compiler encounters the name of an #include file in angle brackets, such as: #include <stdio.h>

it searches these directories for the file to include:

- 1 The directories specified with the -I option, in the order that they were specified, see -I, page 273.
- 2 The directories specified using the C_INCLUDE environment variable, if any; see *Environment variables*, page 243.
- 3 The automatically set up library system include directories. See --dlib_config, page 268.
- If the compiler encounters the name of an #include file in double quotes, for example:

```
#include "vars.h"
```

it searches the directory of the source file in which the #include statement occurs, and then performs the same sequence as for angle-bracketed filenames.

If there are nested #include files, the compiler starts searching the directory of the file that was last included, iterating upwards for each included file, searching the source file directory last. For example:

```
src.c in directory dir\src
    #include "src.h"
    ...
src.h in directory dir\include
    #include "config.h"
```

When dir\exe is the current directory, use this command for compilation:

```
iccarm ..\src\src.c -I..\include -I..\debugconfig
```

Then the following directories are searched in the order listed below for the file config.h, which in this example is located in the dir\debugconfig directory:

dir\src Current file is src.h.

dir\src File including current file (src.c).

dir\include As specified with the first -I option.

dir\debugconfig As specified with the second -I option.

Use angle brackets for standard header files, like stdio.h, and double quotes for files that are part of your application.

Note: Both \ and / can be used as directory delimiters.

For more information, see *Overview of the preprocessor*, page 451.

Compiler output

The compiler can produce the following output:

• A linkable object file

The object files produced by the compiler use the industry-standard format ELF. By default, the object file has the filename extension o.

· Optional list files

Various kinds of list files can be specified using the compiler option -1, see -*l*, page 274. By default, these files will have the filename extension lst.

Optional preprocessor output files

A preprocessor output file is produced when you use the --preprocess option; by default, the file will have the filename extension i.

• Diagnostic messages

Diagnostic messages are directed to the standard error stream and displayed on the screen, and printed in an optional list file. For more information about diagnostic messages, see *Diagnostics*, page 248.

• Error return codes

These codes provide status information to the operating system which can be tested in a batch file, see *Error return codes*, page 245.

Size information

Information about the generated amount of bytes for functions and data for each memory is directed to the standard output stream and displayed on the screen. Some of the bytes might be reported as *shared*.

Shared objects are functions or data objects that are shared between modules. If any of these occur in more than one module, only one copy is retained. For example, in some cases inline functions are not inlined, which means that they are marked as shared, because only one instance of each function will be included in the final application. This mechanism is sometimes also used for compiler-generated code or data not directly associated with a particular function or variable, and when only one instance is required in the final application.

ERROR RETURN CODES

The compiler and linker return status information to the operating system that can be tested in a batch file.

These command line error codes are supported:

Code	Description
0	Compilation or linking successful, but there might have been warnings.
1	Warnings were produced and the optionwarnings_affect_exit_code was used.
2	Errors occurred.
3	Fatal errors occurred, making the tool abort.
4	Internal errors occurred, making the tool abort.

Table 23: Error return codes

ILINK output

ILINK can produce the following output:

• An absolute executable image

The final output produced by the IAR ILINK Linker is an absolute object file containing the executable image that can be put into an EPROM, downloaded to a hardware emulator, or executed on your PC using the IAR C-SPY Debugger Simulator. By default, the file has the filename extension out. The output format is always in ELF, which optionally includes debug information in the DWARF format.

• Optional logging information

During operation, ILINK logs its decisions on stdout, and optionally to a file. For example, if a library is searched, whether a required symbol is found in a library module, or whether a module will be part of the output. Timing information for each ILINK subsystem is also logged.

Optional map files

A linker map file—containing summaries of linkage, runtime attributes, memory, and placement, as well as an entry list—can be generated by the ILINK option --map, see --map, page 322. By default, the map file has the filename extension map.

Diagnostic messages

Diagnostic messages are directed to stderr and displayed on the screen, as well as printed in the optional map file. For more information about diagnostic messages, see *Diagnostics*, page 248.

• Error return codes

ILINK returns status information to the operating system which can be tested in a batch file, see *Error return codes*, page 245.

- Size information about used memory and amount of time
 Information about the generated amount of bytes for functions and data for each memory is directed to stdout and displayed on the screen.
- An import library for use when building a non-secure image, a relocatable ELF
 object module containing symbols and their addresses. See the linker option
 --import cmse lib out, page 319.

Text encodings

Text files read or written by IAR tools can use a variety of text encodings:

Raw

This is a backward-compatibility mode for C/C++ source files. Only 7-bit ASCII characters can be used in symbol names. Other characters can only be used in comments, literals, etc.

This is the default source file encoding if there is no Byte Order Mark (BOM).

- The system default locale
 The locale that you have configured your Windows OS to use.
- UTF-8
 Unicode encoded as a sequence of 8-bit bytes, with or without a Byte Order Mark.
- UTF-16

Unicode encoded as a sequence of 16-bit words using a big-endian or little-endian representation. These files always start with a Byte Order Mark.

In any encoding other than Raw, you can use Unicode characters of the appropriate kind (alphabetic, numeric, etc) in the names of symbols.

When an IAR tool reads a text file with a Byte Order Mark, it will use the appropriate Unicode encoding, regardless of the any options set for input file encoding.

For source files without a Byte Order Mark, the compiler will use the Raw encoding, unless you specify the compiler option --source_encoding. See --source_encoding, page 294.

For source files without a Byte Order Mark, the assembler will use the Raw encoding unless you specify the assembler option --source encoding.

For other text input files, like the extended command line (.xcl files), without a Byte Order Mark, the IAR tools will use the system default locale unless you specify the compiler option --utf8_text_in, in which case UTF-8 will be used. See --utf8_text_in, page 297.

For compiler list files and preprocessor output, the same encoding as the main source file will be used by default. Other tools that generate text output will use the UTF-8 encoding by default. You can change this by using the compiler options --text_out and --no_bom. See --text out, page 295 and --no bom, page 277.

CHARACTERS AND STRING LITERALS

When you compile source code, characters (x) and string literals (xx) will be handled as follows:

'X', "XX"	Characters in untyped character and string literals are copied verbatim, using the same encoding as in the source file.
u8" <i>xx</i> "	Characters in UTF-8 string literals are converted to UTF-8.
u'x',u"xx"	Characters in UTF-16 character and string literals are converted to UTF-16.
U'x', U"xx"	Characters in UTF-32 character and string literals are converted to UTF-32.
L'x', L"xx"	Characters in wide character and string literals are converted to UTF-32.

Diagnostics

This section describes the format of the diagnostic messages and explains how diagnostic messages are divided into different levels of severity.

MESSAGE FORMAT FOR THE COMPILER

All diagnostic messages are issued as complete, self-explanatory messages. A typical diagnostic message from the compiler is produced in the form:

filename,linenumber level[tag]: message

with these elements:

filename	The name of the source file in which the issue was encountered
linenumber	The line number at which the compiler detected the issue
level	The level of seriousness of the issue
tag	A unique tag that identifies the diagnostic message
message	An explanation, possibly several lines long

Diagnostic messages are displayed on the screen, as well as printed in the optional list file.

Use the option --diagnostics_tables to list all possible compiler diagnostic messages.

MESSAGE FORMAT FOR THE LINKER

All diagnostic messages are issued as complete, self-explanatory messages. A typical diagnostic message from ILINK is produced in the form:

level[tag]: message

with these elements:

1evel The level of seriousness of the issue

tag A unique tag that identifies the diagnostic message

message An explanation, possibly several lines long

Diagnostic messages are displayed on the screen, as well as printed in the optional map file.

Use the option --diagnostics_tables to list all possible linker diagnostic messages.

SEVERITY LEVELS

The diagnostic messages are divided into different levels of severity:

Remark

A diagnostic message that is produced when the compiler or linker finds a construct that can possibly lead to erroneous behavior in the generated code. Remarks are by default not issued, but can be enabled, see *--remarks*, page 290.

Warning

A diagnostic message that is produced when the compiler or linker finds a potential problem which is of concern, but which does not prevent completion of the compilation or linking. Warnings can be disabled by use of the command line option --no_warnings, see --no warnings, page 286.

Error

A diagnostic message that is produced when the compiler or linker finds a serious error. An error will produce a non-zero exit code.

Fatal error

A diagnostic message that is produced when the compiler finds a condition that not only prevents code generation, but which makes further processing pointless. After the message is issued, compilation terminates. A fatal error will produce a non-zero exit code.

SETTING THE SEVERITY LEVEL

The diagnostic messages can be suppressed or the severity level can be changed for all diagnostics messages, except for fatal errors and some of the regular errors.

See the chapter *Compiler options*, for information about the compiler options that are available for setting severity levels.

For the compiler see also the chapter *Pragma directives*, for information about the pragma directives that are available for setting severity levels.

INTERNAL ERROR

An internal error is a diagnostic message that signals that there was a serious and unexpected failure due to a fault in the compiler or linker. It is produced using this form:

Internal error: message

where *message* is an explanatory message. If internal errors occur, they should be reported to your software distributor or IAR Systems Technical Support. Include enough information to reproduce the problem, typically:

- The product name
- The version number of the compiler or of ILINK, which can be seen in the header of the list or map files generated by the compiler or by ILINK, respectively
- Your license number
- The exact internal error message text
- The files involved of the application that generated the internal error
- A list of the options that were used when the internal error occurred.

Compiler options

- Options syntax
- Summary of compiler options
- Descriptions of compiler options

Options syntax

Compiler options are parameters you can specify to change the default behavior of the compiler. You can specify options from the command line—which is described in more detail in this section—and from within the IDE.



See the online help system for information about the compiler options available in the IDE and how to set them.

TYPES OF OPTIONS

There are two *types of names* for command line options, *short* names and *long* names. Some options have both.

- A short option name consists of one character, and it can have parameters. You specify it with a single dash, for example -e
- A long option name consists of one or several words joined by underscores, and it can have parameters. You specify it with double dashes, for example
 --char_is_signed.

For information about the different methods for passing options, see *Passing options*, page 242.

RULES FOR SPECIFYING PARAMETERS

There are some general syntax rules for specifying option parameters. First, the rules depending on whether the parameter is *optional* or *mandatory*, and whether the option has a short or a long name, are described. Then, the rules for specifying filenames and directories are listed. Finally, the remaining rules are listed.

Rules for optional parameters

For options with a short name and an optional parameter, any parameter should be specified without a preceding space, for example:

-0 or -0h

For options with a long name and an optional parameter, any parameter should be specified with a preceding equal sign (=), for example:

```
--misrac2004=n
```

Rules for mandatory parameters

For options with a short name and a mandatory parameter, the parameter can be specified either with or without a preceding space, for example:

```
-I..\src or -I ..\src\
```

For options with a long name and a mandatory parameter, the parameter can be specified either with a preceding equal sign (=) or with a preceding space, for example:

```
--diagnostics_tables=MyDiagnostics.lst
or
--diagnostics_tables MyDiagnostics.lst
```

Rules for options with both optional and mandatory parameters

For options taking both optional and mandatory parameters, the rules for specifying the parameters are:

- For short options, optional parameters are specified without a preceding space
- For long options, optional parameters are specified with a preceding equal sign (=)
- For short and long options, mandatory parameters are specified with a preceding space.

For example, a short option with an optional parameter followed by a mandatory parameter:

```
-lA MyList.1st
```

For example, a long option with an optional parameter followed by a mandatory parameter:

```
--preprocess=n PreprocOutput.1st
```

Rules for specifying a filename or directory as parameters

These rules apply for options taking a filename or directory as parameters:

• Options that take a filename as a parameter can optionally take a file path. The path can be relative or absolute. For example, to generate a listing to the file List.lst in the directory ..\listings\:

```
iccarm prog.c -1 ..\listings\List.lst
```

• For options that take a filename as the destination for output, the parameter can be specified as a path without a specified filename. The compiler stores the output in that directory, in a file with an extension according to the option. The filename will be the same as the name of the compiled source file, unless a different name was specified with the option -o, in which case that name is used. For example:

```
iccarm prog.c -1 ..\listings\
```

The produced list file will have the default name ..\listings\prog.lst

• The *current directory* is specified with a period (.). For example:

```
iccarm prog.c -1 .
```

- / can be used instead of \ as the directory delimiter.
- By specifying -, input files and output files can be redirected to the standard input and output stream, respectively. For example:

```
iccarm prog.c -1 -
```

Additional rules

These rules also apply:

When an option takes a parameter, the parameter cannot start with a dash (-)
followed by another character. Instead, you can prefix the parameter with two
dashes; this example will create a list file called -r:

```
iccarm prog.c -l ---r
```

 For options that accept multiple arguments of the same type, the arguments can be provided as a comma-separated list (without a space), for example:

```
--diag warning=Be0001,Be0002
```

Alternatively, the option can be repeated for each argument, for example:

- --diag_warning=Be0001
- --diag_warning=Be0002

Summary of compiler options

This table summarizes the compiler command line options:

Command line option	Description
aapcs	Specifies the calling convention
aeabi	Enables AEABI-compliant code generation
align_sp_on_irq	Generates code to align SP on entry to $__irq$ functions
arm	Sets the default function mode to Arm

Table 24: Compiler options summary

Command line option	Description
c89	Specifies the C89 dialect
char_is_signed	Treats char as signed
char_is_unsigned	Treats char as unsigned
cmse	Enables CMSE secure object generation
cpu	Specifies a processor variant
cpu_mode	Specifies the default CPU mode for functions
C++	Specifies Standard C++
-D	Defines preprocessor symbols
debug	Generates debug information
dependencies	Lists file dependencies
deprecated_feature_warnings	Enables/disables warnings for deprecated features
diag_error	Treats these as errors
diag_remark	Treats these as remarks
diag_suppress	Suppresses these diagnostics
diag_warning	Treats these as warnings
diagnostics_tables	Lists all diagnostic messages
discard_unused_publics	Discards unused public symbols
dlib_config	Uses the system include files for the DLIB library and determines which configuration of the library to use
do_explicit_zero_opt_in_nam ed_sections	For user-named sections, treats explicit initializations to zero as zero initializations
-е	Enables language extensions
enable_hardware_workaround	Enables a specific hardware workaround
enable_restrict	Enables the Standard C keyword restrict
endian	Specifies the byte order of the generated code and data
enum_is_int	Sets the minimum size on enumeration types
error_limit	Specifies the allowed number of errors before compilation stops
-f	Extends the command line
fpu	Selects the type of floating-point unit

Table 24: Compiler options summary (Continued)

Command line option	Description
generate_entries_without_bo unds	Generates extra functions for use from non-instrumented code. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
guard_calls	Enables guards for function static variable initialization
header_context	Lists all referred source files and header files
-I	Specifies include file path
ignore_uninstrumented_point ers	Disables checking of accesses via pointers from non-instrumented code. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
-1	Creates a list file
lock_regs	Prevents the compiler from using specified registers
macro_positions_in _diagnostics	Obtains positions inside macros in diagnostic messages
make_all_definitions_weak	Turns all variable and function definitions into weak definitions.
max_cost_constexpr_call	Specifies the limit for constexpr evaluation cost
max_depth_constexpr_call	Specifies the limit for constexpr recursion depth
mfc	Enables multi-file compilation
misrac	Enables error messages specific to MISRA-C:1998. This option is a synonym ofmisrac1998 and is only available for backwards compatibility.
misrac1998	Enables error messages specific to MISRA-C:1998. See the IAR Embedded Workbench® MISRA C:1998 Reference Guide.
misrac2004	Enables error messages specific to MISRA-C:2004. See the IAR Embedded Workbench® MISRA C:2004 Reference Guide.
misrac_verbose	IAR Embedded Workbench® MISRA C:1998 Reference Guide or the IAR Embedded Workbench® MISRA C:2004 Reference Guide.

Table 24: Compiler options summary (Continued)

Command line option	Description
no_alignment_reduction	Disables alignment reduction for simple Thumb
	functions
no_bom	Omits the Byte Order Mark for UTF-8 output files
no_clustering	Disables static clustering optimizations
no_code_motion	Disables code motion optimization
no_const_align	Disables the alignment optimization for constants.
no_cse	Disables common subexpression elimination
no_dwarf_cfi	Suppresses generation of DWARF3 call frame information instructions
no_exceptions	Disables C++ exception support
no_fragments	Disables section fragment handling
no_inline	Disables function inlining
no_literal_pool	Generates code that should run from a memory
	region where it is not allowed to read data, only to execute code
no_loop_align	Disables the alignment of labels in loops
no_mem_idioms	Makes the compiler not optimize certain memory access patterns
no_path_in_file_macros	Removes the path from the return value of the symbolsFILE andBASE_FILE
no_rtti	Disables C++ RTTI support
no_rw_dynamic_init	Disables runtime initialization of static C variables.
no_scheduling	Disables the instruction scheduler
no_size_constraints	Relaxes the normal restrictions for code size expansion when optimizing for speed.
no_static_destruction	Disables destruction of C++ static variables at program exit
no_system_include	Disables the automatic search for system include files
no_tbaa	Disables type-based alias analysis
no_typedefs_in_diagnostics	Disables the use of typedef names in diagnostics
no_unaligned_access	Avoids unaligned accesses
no_uniform_attribute_syntax	Specifies the default syntax rules for IAR type attributes

Table 24: Compiler options summary (Continued)

Command line option	Description
no_unroll	Disables loop unrolling
no_var_align	Aligns variable objects based on the alignment of their type.
no_warnings	Disables all warnings
no_wrap_diagnostics	Disables wrapping of diagnostic messages
-0	Sets the optimization level
-0	Sets the object filename. Alias foroutput.
only_stdout	Uses standard output only
output	Sets the object filename
pending_instantiations	Sets the maximum number of instantiations of a given C++ template.
predef_macros	Lists the predefined symbols.
preinclude	Includes an include file before reading the source file
preprocess	Generates preprocessor output
public_equ	Defines a global named assembler label
-r	Generates debug information. Alias fordebug.
relaxed_fp	Relaxes the rules for optimizing floating-point expressions
remarks	Enables remarks
require_prototypes	Verifies that functions are declared before they are defined
ropi	Generates code that uses PC-relative references to address code and read-only data.
ropi_cb	Makes all accesses to constant data, base-addressed relative to the register R8
runtime_checking	Enables runtime error checking. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
rwpi	Generates code that uses an offset from the static base register to address-writable data.
rwpi_near	Generates code that uses an offset from the static base register to address-writable data. Addresses max 64 Kbytes of memory.

Table 24: Compiler options summary (Continued)

Command line option	Description
section	Changes a section name
silent	Sets silent operation
source_encoding	Specifies the encoding for source files
stack_protection	Enables stack protection
strict	Checks for strict compliance with Standard C/C++
system_include_dir	Specifies the path for system include files
text_out	Specifies the encoding for text output files
thumb	Sets default function mode to Thumb
uniform_attribute_syntax	Specifies the same syntax rules for IAR type attributes as for const and volatile
use_c++_inline	Uses C++ inline semantics in C99
use_unix_directory_	Uses / as directory separator in paths
separators	
utf8_text_in	Uses the UTF-8 encoding for text input files
vectorize	Enables generation of NEON vector instructions
version	Sends compiler output to the console and then exits.
vla	Enables C99 VLA support
warn_about_c_style_casts	Makes the compiler warn when C-style casts are used in C++ source code
warnings_affect_exit_code	Warnings affect exit code
warnings_are_errors	Warnings are treated as errors

Table 24: Compiler options summary (Continued)

Descriptions of compiler options

The following section gives detailed reference information about each compiler option.



Note that if you use the options page **Extra Options** to specify specific command line options, the IDE does not perform an instant check for consistency problems like conflicting options, duplication of options, or use of irrelevant options.

--aapcs

Syntax aapcs={std|vfp}

Parameters

std Processor registers are used for floating-point parameters and

return values in function calls according to standard AAPCS. std is the default when the software FPU is selected.

vfp VFP registers are used for floating-point parameters and

return values. The generated code is not compatible with AEABI code. vfp is the default when a VFP unit is used.

Description Use this option to specify the floating-point calling convention.

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--aeabi

Syntax --aeabi

Description Use this option to generate AEABI-compliant object code. Note that this option must be

used together with the --guard_calls option.

See also AEABI compliance, page 214 and --guard calls, page 273.

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--align_sp_on_irq

Syntax --align_sp_on_irq

Description Use this option to align the stack pointer (SP) on entry to __irq declared functions.

This is especially useful for nested interrupts, where the interrupted code uses the same SP as the interrupt handler. This means that the stack might only have 4-byte alignment, instead of the 8-byte alignment required by AEABI (and some instructions generated by

the compiler for some cores).

See also *irq*, page 362.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--arm

Syntax --arm

Description Use this option to set default function mode to Arm.

Note: This option has the same effect as the --cpu_mode=arm option.



Project>Options>C/C++ Compiler>Code>Processor mode>Arm

--c89

Syntax --c89

Description Use this option to enable the C89 C dialect instead of Standard C.

Note: This option is mandatory when the MISRA C checking is enabled.

See also *C language overview*, page 181.

ΠË

Project>Options>C/C++ Compiler>Language 1>C dialect>C89

--char_is_signed

Syntax --char_is_signed

Description By default, the compiler interprets the plain char type as unsigned. Use this option to make the compiler interpret the plain char type as signed instead. This can be useful

when you, for example, want to maintain compatibility with another compiler.

Note: The runtime library is compiled without the --char_is_signed option and cannot be used with code that is compiled with this option.

Project>Options>C/C++ Compiler>Language 2>Plain 'char' is

--char_is_unsigned

Syntax --char_is_unsigned

Description

Use this option to make the compiler interpret the plain char type as unsigned. This is the default interpretation of the plain char type.

Project>Options>C/C++ Compiler>Language 2>Plain 'char' is

ΠË

--cmse

Syntax --cmse

Description This option enables language extensions for TrustZone for Armv8-M. Use this option for object files that are to be linked in a secure image. The option allows the use of

instructions, keywords, and types that are not available for non-secure code:

• The function attributes _cmse_nonsecure_call and _cmse_nonsecure_entry.

 The functions for CMSE have names with the prefix cmse_, and are defined in the header file arm_cmse.h.

See also Arm TrustZone®, page 56 and ARMv8-M Security Extensions: Requirements on Development Tools (ARM-ECM-0359818)

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--cpu

Syntax --cpu=core|list

Parameters

core Specifies a specific processor variant

list Lists all supported values for the option --cpu

Description Use this option to select the architecture or processor variant for which the code is to be

generated.

The default core is Cortex-M3.

Some of the supported values for the --cpu option are:

(floating-point unit with support for double precision)	(floating-point unit with support for single precision)	
Cortex-M7.fp.dp	Cortex-M7.fp.sp	
Cortex-R52	Cortex-R52.no_neon	Cortex-R7
Cortex-M7	Cortex-R4	Cortex-R5
Cortex-M33	Cortex-M4	Cortex-M4F
Cortex-M0+	Cortex-M23	Cortex-M3
Cortex-A15	Cortex-A17	Cortex-M0
Cortex-A8	Cortex-A9	Cortex-A12
8-R.AArch32	Cortex-A5	Cortex-A7
8-A.AArch32	8-M.baseline	8-M.mainline
7-M	7-R	7-S
6-M	7-A	7E-M

See also

Processor variant, page 68



Project>Options>General Options>Target>Processor configuration

--cpu_mode

Parameters

arm, a (default) Selects the arm mode as the default mode for functions

thumb, t Selects the thumb mode as the default mode for functions

Description Use this option to select the default mode for functions.

Project>Options>General Options>Target>Processor mode

--c++

Syntax --c++

Description By default, the language supported by the compiler is C. If you use Standard C++, you

must use this option to set the language the compiler uses to C++.

See also Using C++, page 189.

Project>Options>C/C++ Compiler>Language 1>C++

and

Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++

-D

Syntax -D symbol[=value]

Parameters

symbol The name of the preprocessor symbol

value The value of the preprocessor symbol

Description Use this option to define a preprocessor symbol. If no value is specified, 1 is used. This

option can be used one or more times on the command line.

The option -D has the same effect as a #define statement at the top of the source file:

-Dsymbol

is equivalent to:

#define symbol 1

To get the equivalence of:

#define FOO

specify the = sign but nothing after, for example:

-DFOO=

Project>Options>C/C++ Compiler>Preprocessor>Defined symbols

--debug, -r

Syntax --debug

Description

Use the --debug or -r option to make the compiler include information in the object modules required by the IAR C-SPY® Debugger and other symbolic debuggers.

Note: Including debug information will make the object files larger than otherwise.



Project>Options>C/C++ Compiler>Output>Generate debug information

--dependencies

Syntax --dependencies[=[i|m|n][s]] {filename|directory|+}

Parameters

i (default)

Lists only the names of files

Lists in makefile style (multiple rules)

Lists in makefile style (one rule)

Suppresses system files

Gives the same output as -0, but with the filename extension d

•

See also Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to make the compiler list the names of all source and header files opened for input into a file with the default filename extension i.

Example

If --dependencies or --dependencies=i is used, the name of each opened input file, including the full path, if available, is output on a separate line. For example:

```
c:\iar\product\include\stdio.h
d:\myproject\include\foo.h
```

If --dependencies=m is used, the output is in makefile style. For each input file, one line containing a makefile dependency rule is produced. Each line consists of the name of the object file, a colon, a space, and the name of an input file. For example:

```
foo.o: c:\iar\product\include\stdio.h
foo.o: d:\myproject\include\foo.h
```

An example of using --dependencies with a popular make utility, such as gmake (GNU make):

I Set up the rule for compiling files to be something like:

```
%.0 : %.c
    $(ICC) $(ICCFLAGS) $< --dependencies=m $*.d</pre>
```

That is, in addition to producing an object file, the command also produces a dependency file in makefile style (in this example, using the extension .d).

2 Include all the dependency files in the makefile using, for example:

```
-include $(sources:.c=.d)
```

Because of the dash (-) it works the first time, when the .d files do not yet exist.



This option is not available in the IDE.

--deprecated_feature_warnings

Syntax --deprecated_feature_warnings=[+|-] feature[,[+|-] feature,...]

Parameters

feature A feature can be attribute_syntax or

segment_pragmas.

Description

Use this option to disable or enable warnings for the use of a deprecated feature. The deprecated features are:

• attribute_syntax

See --uniform_attribute_syntax, page 296, --no_uniform_attribute_syntax, page 285, and Syntax for type attributes used on data objects, page 356.

segment_pragmas

See the pragma directives dataseg, constseg, and memory. Use the #pragma location and #pragma default_variable_attributes directives instead.

Because the deprecated features will be removed in a future version of the IAR C/C++ compiler, it is prudent to remove the use of them in your source code. To do this, enable warnings for a deprecated feature. For each warning, rewrite your code so that the deprecated feature is no longer used.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--diag_error

Syntax --diag_error=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Pe117

Description

Use this option to reclassify certain diagnostic messages as errors. An error indicates a violation of the C or C++ language rules, of such severity that object code will not be generated. The exit code will be non-zero. This option may be used more than once on the command line.



Project>Options>C/C++ Compiler>Diagnostics>Treat these as errors

--diag_remark

Syntax --diag_remark=tag[,tag,...]

Parameters

The number of a diagnostic message, for example the

message number Pe177

Description

Use this option to reclassify certain diagnostic messages as remarks. A remark is the least severe type of diagnostic message and indicates a source code construction that may cause strange behavior in the generated code. This option may be used more than once on the command line.

Note: By default, remarks are not displayed; use the --remarks option to display them.



Project>Options>C/C++ Compiler>Diagnostics>Treat these as remarks

--diag_suppress

Syntax --diag_suppress=tag[,tag,...]

Parameters

The number of a diagnostic message, for example the

message number Pe117

Description

Use this option to suppress certain diagnostic messages. These messages will not be displayed. This option may be used more than once on the command line.



Project>Options>C/C++ Compiler>Diagnostics>Suppress these diagnostics

--diag_warning

Syntax --diag_warning=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Pe826

Description

Use this option to reclassify certain diagnostic messages as warnings. A warning indicates an error or omission that is of concern, but which will not cause the compiler to stop before compilation is completed. This option may be used more than once on the command line.



Project>Options>C/C++ Compiler>Diagnostics>Treat these as warnings

--diagnostics_tables

Syntax --diagnostics_tables {filename | directory}

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to list all possible diagnostic messages to a named file. This can be convenient, for example, if you have used a pragma directive to suppress or change the severity level of any diagnostic messages, but forgot to document why.

Typically, this option cannot be given together with other options.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--discard_unused_publics

Syntax --discard_unused_publics

Description

Use this option to discard unused public functions and variables when compiling with the --mfc compiler option.

Note: Do not use this option only on parts of the application, as necessary symbols might be removed from the generated output. Use the object attribute __root to keep symbols that are used from outside the compilation unit, for example interrupt handlers. If the symbol does not have the __root attribute and is defined in the library, the library

definition will be used instead.

See also --mfc, page 276 and Multi-file compilation units, page 227.



Project>Options>C/C++ Compiler>Discard unused publics

--dlib_config

Syntax --dlib_config filename.h|config

Parameters

filename A DLIB configuration header file, see Rules for specifying a

filename or directory as parameters, page 252.

config The default configuration file for the specified configuration

will be used. Choose between:

none, no configuration will be used

normal, the normal library configuration will be used

(default)

full, the full library configuration will be used.

Description

Use this option to specify which library configuration to use, either by specifying an explicit file or by specifying a library configuration—in which case the default file for that library configuration will be used. Make sure that you specify a configuration that corresponds to the library you are using. If you do not specify this option, the default library configuration file will be used.

All prebuilt runtime libraries are delivered with corresponding configuration files. You can find the library object files and the library configuration files in the directory

arm\lib. For examples and information about prebuilt runtime libraries, see *Prebuilt runtime libraries*, page 130.

If you build your own customized runtime library, you should also create a corresponding customized library configuration file, which must be specified to the compiler. For more information, see *Customizing and building your own runtime library*, page 127.



To set related options, choose:

Project>Options>General Options>Library Configuration

--do_explicit_zero_opt_in_named_sections

Syntax

```
--do_explicit_zero_opt_in_named_sections
```

Description

By default, the compiler treats static initialization of variables explicitly and implicitly initialized to zero the same, except for variables which are to be placed in user-named sections. For these variables, an explicit zero initialization is treated as a copy initialization, that is the same way as variables statically initialized to something other than zero.

Use this option to disable the exception for variables in user-named sections, and thus treat explicit initializations to zero as zero initializations, not copy initializations.

Example



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

-е

Syntax --

Description

In the command line version of the compiler, language extensions are disabled by default. If you use language extensions such as extended keywords and anonymous structs and unions in your source code, you must use this option to enable them.

Note: The -e option and the --strict option cannot be used at the same time.

See also

Enabling language extensions, page 183.



Project>Options>C/C++ Compiler>Language 1>Standard with IAR extensions

Note: By default, this option is selected in the IDE.

--enable_hardware_workaround

Parameters

waid The ID number of the workaround to enable. For a list of

available workarounds to enable, see the release notes.

Description Use this option to make the compiler generate a workaround for a specific hardware

problem.

See also The release notes for the compiler for a list of available parameters.

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--enable_restrict

Syntax --enable_restrict

Description Enables the Standard C keyword restrict in C89 and C++. By default, restrict is

recognized in Standard C and __restrict is always recognized.

This option can be useful for improving analysis precision during optimization.

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra options**

--endian

Syntax --endian=

Parameters

big, b Specifies big-endian as the default byte order

little, 1 (default) Specifies little-endian as the default byte order

Description

Use this option to specify the byte order of the generated code and data. By default, the compiler generates code in little-endian byte order.

See also

Byte order, page 340.



Project>Options>General Options>Target>Endian mode

--enum_is_int

Syntax --enum_is_int

Description Use this option to force the size of all enumeration types to be at least 4 bytes.

Note: This option will not consider the fact that an ${\tt enum}$ type can be larger than an

integer type.

See also The enum type, page 342.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--error_limit

Syntax --error_limit=n

n

Parameters

The number of errors before the compiler stops the

compilation. n must be a positive integer; 0 indicates no

limit.

Description

Use the --error_limit option to specify the number of errors allowed before the

compiler stops the compilation. By default, 100 errors are allowed.

ΠË

This option is not available in the IDE.

-f

Syntax -f filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to make the compiler read command line options from the named file, with the default filename extension xcl.

In the command file, you format the items exactly as if they were on the command line itself, except that you may use multiple lines, because the newline character acts just as a space or tab character.

Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--fpu

Syntax --fpu={name|list|none}

Parameters

name The target FPU architecture.

list Lists all supported values for the --fpu option.

none (default) No FPU.

Description

Use this option to generate code that performs floating-point operations using a Floating Point Unit (FPU). By selecting an FPU, you will override the use of the software floating-point library for all supported floating-point operations.

The name of a target FPU is constructed in one of these ways:

- none: No FPU (default)
- fp-architecture: Base variant of the specified architecture
- fp-architecture-SP: Single-precision variant
- fp-architecture_D16: Variant with 16 D registers
- fp_architecture_Fp16: Variant with half-precision extensions

The available combinations include:

- {VFPv2 | VFPv3 | VFPv4 | VFPv5}
- {VFPv3|FPv4|FPv5}_D16
- {FPv4|FPv5}-SP
- VFPv3_Fp16
- VFPv3_D16_Fp16

See also

VFP and floating-point arithmetic, page 68.



Project>Options>General Options>Target>FPU

--guard_calls

Syntax --guard_calls

Description Use this option to enable guards for function static variable initialization. This option

should be used in a threaded C++ environment.

See also Managing a multithreaded environment, page 154.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--header_context

Syntax --header_context

Description Occasionally, to find the cause of a problem it is necessary to know which header file

that was included from which source line. Use this option to list, for each diagnostic message, not only the source position of the problem, but also the entire include stack at

that point.

ΠË

This option is not available in the IDE.

-1

Syntax -I path

Parameters

path The search path for #include files

Description Use this option to specify the search paths for #include files. This option can be used

more than once on the command line.

See also *Include file search procedure*, page 243.



Project>Options>C/C++ Compiler>Preprocessor>Additional include directories

-1

Syntax -1[a|A|b|B|c|C|D][N][H] {filename|directory}

Parameters

a (default)	Assembler list file
A	Assembler list file with C or C++ source as comments
b	Basic assembler list file. This file has the same contents as a list file produced with -la, except that no extra compiler-generated information (runtime model attributes, call frame information, frame size information) is included *
В	Basic assembler list file. This file has the same contents as a list file produced with -1A, except that no extra compiler generated information (runtime model attributes, call frame information, frame size information) is included *
С	C or C++ list file
C (default)	C or C++ list file with assembler source as comments
D	C or C++ list file with assembler source as comments, but without instruction offsets and hexadecimal byte values
N	No diagnostics in file
Н	Include source lines from header files in output. Without this option, only source lines from the primary source file are included

^{*} This makes the list file less useful as input to the assembler, but more useful for reading by a human.

See also Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to generate an assembler or C/C++ listing to a file. Note that this option can be used one or more times on the command line.



To set related options, choose:

Project>Options>C/C++ Compiler>List

--lock_regs

Syntax --lock_regs=register

Parameters

registers A comma-separated list of register names and register

intervals to be locked, in the range R4-R11.

Description Use this option to prevent the compiler from generating code that uses the specified

registers.

Example --lock_regs=R4

--lock_regs=R8-R11 --lock_regs=R4,R8-R11

ΠË

To set this option, use Project>Options>C/C++ Compiler>Extra Options.

--macro_positions_in_diagnostics

Syntax --macro_positions_in_diagnostics

Description Use this option to obtain position references inside macros in diagnostic messages. This

is useful for detecting incorrect source code constructs in macros.

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--make_all_definitions_weak

Syntax --make_all_definitions_weak

Description Turns all variable and function definitions in the compilation unit into weak definitions.

Note: Normally, it is better to use extended keywords or pragma directives to turn

individual variable and function definitions into weak definitions.

See also __weak, page 370.

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--max_cost_constexpr_call

Syntax --max_cost_constexpr_call=limit

Parameters

1 The number of calls and loop iterations. The default is 2000000.

Description Use this option to specify an upper limit for the *cost* for folding a top-level constexpr

call (function or constructor). The cost is a combination of the number of calls interpreted and the number of loop iterations preformed during the interpretation of a

top-level call.

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--max_depth_constexpr_call

Syntax --max_depth_constexpr_call=limit

Parameters

1 Imit The depth of recursion. The default is 1000.

Description Use this option to specify the maximum depth of recursion for folding a top-level

constexpr call (function or constructor).

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--mfc

Syntax --mfc

Description Use this option to enable *multi-file compilation*. This means that the compiler compiles

one or several source files specified on the command line as one unit, which enhances

interprocedural optimizations.

Note: The compiler will generate one object file per input source code file, where the first object file contains all relevant data and the other ones are empty. If you want only the first file to be produced, use the -o compiler option and specify a certain output file.

Example iccarm myfile1.c myfile2.c myfile3.c --mfc

See also

--discard_unused_publics, page 268, --output, -o, page 287, and Multi-file compilation units, page 227.



Project>Options>C/C++ Compiler>Multi-file compilation

--no_alignment_reduction

Syntax --no_alignment_reduction

Description Some simple Thumb/Thumb2 functions can be 2-byte aligned. Use this option to keep

those functions 4-byte aligned.

This option has no effect when compiling for Arm mode.

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no_bom

Syntax --no_bom

Description Use this option to omit the Byte Order Mark (BOM) when generating a UTF-8 output

file.

See also --text out, page 295 and Text encodings, page 247.

ΠË

Project>Options>C/C++ Compiler>Encodings>Text output file encoding

--no_clustering

Syntax --no_clustering

Description Use this option to disable static clustering optimizations.

Note: This option has no effect at optimization levels below Medium.

See also Static clustering, page 231.

Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Static clustering

--no_code_motion

Syntax --no_code_motion

Description Use this option to disable code motion optimizations.

Note: This option has no effect at optimization levels below Medium.

See also *Code motion*, page 230.

ΠË

 $\label{lem:complex} Project \!\!>\!\! Options \!\!>\!\! C/C \!\!+\!\!\!+ Compiler \!\!>\!\! Optimizations \!\!>\!\! Enable$

transformations>Code motion

--no_const_align

Syntax --no_const_align

Description By default, the compiler uses alignment 4 for objects with a size of 4 bytes or more. Use

this option to make the compiler align const objects based on the alignment of their

type.

For example, a string literal will get alignment 1, because it is an array with elements of the type const char which has alignment 1. Using this option might save ROM space,

possibly at the expense of processing speed.

See also *Alignment*, page 339.

ШÄ

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no cse

Syntax --no_cse

Description Use this option to disable common subexpression elimination.

Note: This option has no effect at optimization levels below Medium.

See also Common subexpression elimination, page 230.

ΠË

Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Common subexpression elimination

--no_dwarf3_cfi

Syntax

--no_dwarf3_cfi

Description

Use this option to suppress the generation of DWARF3 call frame information instructions. Note that this can affect the quality of the call frame information.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no_exceptions

Syntax --no_exceptions

Description

Use this option to disable exception support in the C++ language. Exception statements like throw and try-catch, and exception specifications on function definitions will generate an error message. Exception specifications on function declarations are ignored. The option is only valid when used together with the --c++ compiler option.

If exceptions are not used in your application, it is recommended to disable support for them by using this option, because exceptions cause a rather large increase in code size.

See also

Exception handling, page 190 and __EXCEPTIONS__, page 458.



Project>Options>C/C++ Compiler>Language 1>C++

and

Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++>With exceptions

--no_fragments

Syntax --no_fragments

Description

Use this option to disable section fragment handling. Normally, the toolset uses IAR proprietary information for transferring section fragment information to the linker. The linker uses this information to remove unused code and data, and thus further minimize the size of the executable image. When you use this option, this information is not output in the object files.

See also

Keeping symbols and sections, page 109.



To set this option, use Project>Options>C/C++ Compiler>Extra Options

--no inline

Syntax --no_inline

Description Use this option to disable function inlining.

See also *Inlining functions*, page 83.

ΠË

Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Function inlining

--no_literal_pool

Syntax --no_literal_pool

Description

Use this option to generate code that should run from a memory region where it is not allowed to read data, only to execute code.

When this option is used, the compiler will construct addresses and large constants with the MOV32 pseudo instruction instead of using a literal pool: switch statements are no longer translated using tables, and constant data is placed in the .rodata section.

This option also affects the automatic library selection performed by the linker. An IAR-specific ELF attribute is used for determining whether libraries compiled with this option should be used.

This option is only allowed for Armv6-M and Armv7 cores, and can be combined with the options --ropi or --rwpi only for Armv7 cores.

See also --no literal pool, page 326.



Project>Options>C/C++ Compiler>Code>No data reads in code memory

--no_loop_align

Syntax --no_loop_align

Description

Use this option to disable the 4-byte alignment of labels in loops. This option is only useful in Thumb2 mode.

In Arm/Thumb1 mode, this option is enabled but does not perform anything.

See also Alignment, page 339



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no mem idioms

Syntax --no_mem_idioms

Description Use this option to make the compiler not optimize code sequences that clear, set, or copy

a memory region. These memory access patterns (idioms) can otherwise be aggressively optimized, in some cases using calls to the runtime library. In principle, the

transformation can involve more than a library call.



To set this option, use Project>Options>C/C++ Compiler>Extra Options.

--no_path_in_file_macros

Syntax --no_path_in_file_macros

Description Use this option to exclude the path from the return value of the predefined preprocessor

symbols __FILE__ and __BASE_FILE__.

See also Description of predefined preprocessor symbols, page 452.

ΠË

This option is not available in the IDE.

--no_rtti

Syntax --no_rtti

Description Use this option to disable the runtime type information (RTTI) support in the C++

language. RTTI statements like dynamic_cast and typeid will generate an error message. This option is only valid when used together with the --c++ compiler option.

See also Using C++, page 189 and RTTI, page 459.



Project>Options>C/C++ Compiler>Language 1>C++

and

Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++>With RTTI

--no_rw_dynamic_init

Syntax --no_rw_dynamic_init

Description Use this option to disable runtime initialization of static C variables.

C source code that is compiled with --ropi or --rwpi cannot have static pointer variables and constants initialized to addresses of objects that do not have a known address at link time. To solve this for writable static variables, the compiler generates code that performs the initialization at program startup (in the same way as dynamic initialization in C(+))

initialization in C++).

See also --ropi, page 291 and --rwpi, page 292.



Project>Options>C/C++ Compiler>Code>No dynamic read/write/initialization

--no_scheduling

Syntax --no_scheduling

Description Use this option to disable the instruction scheduler.

Note: This option has no effect at optimization levels below High.

See also *Instruction scheduling*, page 232.

ΠË

 $\label{lem:constraints} Project > Options > C/C ++ Compiler > Optimizations > Enable$

transformations>Instruction scheduling

--no_size_constraints

Syntax --no_size_constraints

Description Use this option to relax the normal restrictions for code size expansion when optimizing

for high speed.

Note: This option has no effect unless used with -Ohs.

See also Speed versus size, page 229.



Project>Options>C/C++ Compiler>Optimizations>Enable transformations>No size constraints

--no_static_destruction

Syntax --no_static_destruction

Description Normally, the compiler emits code to destroy C++ static variables that require

destruction at program exit. Sometimes, such destruction is not needed.

Use this option to suppress the emission of such code.

See also Setting up the atexit limit, page 110.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no_system_include

Syntax --no_system_include

Description By default, the compiler automatically locates the system include files. Use this option

to disable the automatic search for system include files. In this case, you might need to

set up the search path by using the -I compiler option.

See also --dlib config, page 268, and --system include dir, page 295.



Project>Options>C/C++ Compiler>Preprocessor>Ignore standard include directories

--no_tbaa

Syntax --no_tbaa

Description Use this option to disable type-based alias analysis.

Note: This option has no effect at optimization levels below High.

See also *Type-based alias analysis*, page 231.



Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Type-based alias analysis

--no_typedefs_in_diagnostics

Syntax --no_typedefs_in_diagnostics

Description Use this option to disable the use of typedef names in diagnostics. Normally, when a

type is mentioned in a message from the compiler, most commonly in a diagnostic message of some kind, the typedef names that were used in the original declaration are

used whenever they make the resulting text shorter.

Example typedef int (*MyPtr)(char const *);

MyPtr p = "My text string";

will give an error message like this:

Error[Pe144]: a value of type "char *" cannot be used to

initialize an entity of type "MyPtr" $\,$

If the --no_typedefs_in_diagnostics option is used, the error message will be like

this:

Error[Pe144]: a value of type "char *" cannot be used to initialize an entity of type "int (*)(char const *)"



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no_unaligned_access

Syntax --no_unaligned_access

Description

Use this option to make the compiler avoid unaligned accesses. Data accesses are usually performed aligned for improved performance. However, some accesses, most notably when reading from or writing to packed data structures, might be unaligned. When using this option, all such accesses will be performed using a smaller data size to avoid any unaligned accesses. This option is only useful for Armv6 architectures and higher.

For the architectures Armv7-M and Armv8-M.mainline, the hardware support for unaligned access can be controlled by software. There are variants of library routines for these architectures that are faster when unaligned access is supported in hardware (symbols with the prefix __iar_unaligned_). The IAR linker will not use these variants if any of the input modules does not allow unaligned access.

See also *Alignment*, page 339.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no_uniform_attribute_syntax

Syntax --no_uniform_attribute_syntax

Description Use this option to apply the default syntax rules to IAR type attributes specified before

a type specifier.

See also --uniform_attribute_syntax, page 296 and Syntax for type attributes used on data

objects, page 356

ΙË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no_unroll

Syntax --no_unroll

Description Use this option to disable loop unrolling.

Note: This option has no effect at optimization levels below High.

See also Loop unrolling, page 230.

ΠË

Project>Options>C/C++ Compiler>Optimizations>Enable

transformations>Loop unrolling

--no_var_align

Syntax --no_var_align

Description By default, the compiler uses alignment 4 for variable objects with a size of 4 bytes or

more. Use this option to make the compiler align variable objects based on the alignment

of their type.

For example, a char array will get alignment 1, because its elements of the type char have alignment 1. Using this option might save RAM space, possibly at the expense of

processing speed.

See also Alignment, page 339 and --no const align, page 278.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--no_warnings

Syntax --no_warnings

Description By default, the compiler issues warning messages. Use this option to disable all warning messages.



This option is not available in the IDE.

--no_wrap_diagnostics

Syntax --no_wrap_diagnostics

Description By default, long lines in diagnostic messages are broken into several lines to make the message easier to read. Use this option to disable line wrapping of diagnostic messages.



This option is not available in the IDE.

-0

Syntax -O[n|1|m|h|hs|hz]

Parameters

n	None* (Best debug support)
1 (default)	Low*
m	Medium
h	High, balanced
hs	High, favoring speed
hz	High, favoring size

^{*}The most important difference between None and Low is that at None, all non-static variables will live during their entire scope.

Description

Use this option to set the optimization level to be used by the compiler when optimizing the code. If no optimization option is specified, the optimization level is used by default. If only -0 is used without any parameter, the optimization level High balanced is used.

A low level of optimization makes it relatively easy to follow the program flow in the debugger, and, conversely, a high level of optimization makes it relatively hard.

At high optimization levels, when favoring speed or size (-Ohs or -Ohz), the compiler will emit AEABI attributes indicating the requested optimization goal. This information can be used by the linker to select smaller or faster variants of DLIB library functions.

- If a module referencing a function is compiled with -Ohs, and the DLIB library contains a fast variant, that variant is used.
- If all modules referencing a function are compiled with -Ohz, and the DLIB library contains a small variant, that variant is used.

For example, using -Ohz for Cortex-M0 will result in the use of a smaller AEABI library routine for integer division.

See also

Controlling compiler optimizations, page 226.



Project>Options>C/C++ Compiler>Optimizations

--only_stdout

Syntax

--only_stdout

Description

Use this option to make the compiler use the standard output stream (stdout) also for messages that are normally directed to the error output stream (stderr).



This option is not available in the IDE.

--output, -o

Syntax

--output {filename|directory}
-o {filename|directory}

Parameters

See Rules for specifying a filename or directory as parameters, page 252.

Description

By default, the object code output produced by the compiler is located in a file with the same name as the source file, but with the extension o. Use this option to explicitly specify a different output filename for the object code output.



This option is not available in the IDE.

--pending_instantiations

Syntax --pending_instantiations number

Parameters

number An integer that specifies the limit, where 64 is default. If 0

is used, there is no limit.

Description Use this option to specify the maximum number of instantiations of a given C++

template that is allowed to be in process of being instantiated at a given time. This is

used for detecting recursive instantiations.



Project>Options>C/C++ Compiler>Extra Options

--predef_macros

Syntax --predef_macros {filename|directory}

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description Use this option to list the predefined symbols. When using this option, make sure to also

use the same options as for the rest of your project.

If a filename is specified, the compiler stores the output in that file. If a directory is specified, the compiler stores the output in that directory, in a file with the predef

filename extension.

Note that this option requires that you specify a source file on the command line.



This option is not available in the IDE.

--preinclude

Syntax --preinclude includefile

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to make the compiler read the specified include file before it starts to read the source file. This is useful if you want to change something in the source code for the entire application, for instance if you want to define a new symbol.



Project>Options>C/C++ Compiler>Preprocessor>Preinclude file

--preprocess

Syntax --preprocess[=[c][n][s]] {filename|directory}

Parameters

c Include comments

n Preprocess only

s Suppress #line directives

See also Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to generate preprocessed output to a named file.



Project>Options>C/C++ Compiler>Preprocessor>Preprocessor output to file

--public_equ

Syntax --public_equ symbol[=value]

Parameters

symbol The name of the assembler symbol to be defined

value An optional value of the defined assembler symbol

Description

This option is equivalent to defining a label in assembler language using the EQU directive and exporting it using the PUBLIC directive. This option can be used more than once on the command line.



This option is not available in the IDE.

--relaxed_fp

Syntax

--relaxed_fp

Description

Use this option to allow the compiler to relax the language rules and perform more aggressive optimization of floating-point expressions. This option improves performance for floating-point expressions that fulfill these conditions:

- The expression consists of both single- and double-precision values
- The double-precision values can be converted to single precision without loss of accuracy
- The result of the expression is converted to single precision.

Note that performing the calculation in single precision instead of double precision might cause a loss of accuracy.

Example

```
float F(float a, float b)
{
  return a + b * 3.0;
}
```

The C standard states that 3.0 in this example has the type double and therefore the whole expression should be evaluated in double precision. However, when the --relaxed_fp option is used, 3.0 will be converted to float and the whole expression can be evaluated in float precision.



To set related options, choose:

Project>Options>C/C++ Compiler>Language 2>Floating-point semantics

--remarks

Syntax

--remarks

Description

The least severe diagnostic messages are called remarks. A remark indicates a source code construct that may cause strange behavior in the generated code. By default, the compiler does not generate remarks. Use this option to make the compiler generate remarks.

See also

Severity levels, page 249.



Project>Options>C/C++ Compiler>Diagnostics>Enable remarks

--require_prototypes

Syntax

--require prototypes

Description

Use this option to force the compiler to verify that all functions have proper prototypes. Using this option means that code containing any of the following will generate an error:

- A function call of a function with no declaration, or with a Kernighan & Ritchie C declaration
- A function definition of a public function with no previous prototype declaration
- An indirect function call through a function pointer with a type that does not include a prototype.



Project>Options>C/C++ Compiler>Language 1>Require prototypes

--ropi

Syntax

--ropi

Description

Use this option to make the compiler generate code that uses PC-relative references to address code and read-only data.

When this option is used, these limitations apply:

- C++ constructions cannot be used
- The object attribute __ramfunc cannot be used
- Pointer constants cannot be initialized with the address of another constant, a string literal, or a function. However, writable variables can be initialized to constant addresses at runtime.

See also

--no_rw_dynamic_init, page 282, and Description of predefined preprocessor symbols, page 452.



Project>Options>C/C++ Compiler>Code>Code and read-only data (ropi)

--ropi_cb

Syntax

--ropi_cb

Description

Use this option to make all accesses to constant data, base-addressed relative to the register R8.

Use --ropi_cb together with --ropi to activate a variant of ROPI that uses the Arm core register R8 as the base address for read-only data, instead of using the PC. This is useful, for example, when using ROPI in code that runs from execute-only memory, which is enabled if you compile and link with --no_literal_pool.

Note:

- The use of --ropi_cb is not AEABI-compliant.
- There is no provided setup of the register R8. This must be handled by your application.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--rwpi

Syntax

--rwpi

Description

Use this option to make the compiler generate code that uses the offset from the static base register (R9) to address-writable data.

When this option is used, these limitations apply:

- The object attribute __ramfunc cannot be used
- Pointer constants cannot be initialized with the address of a writable variable.
 However, static writable variables can be initialized to writable addresses at runtime.

See also

--no_rw_dynamic_init, page 282, and Description of predefined preprocessor symbols, page 452.



Project>Options>C/C++ Compiler>Code>Read/write data (rwpi)

--rwpi_near

Syntax

--rwpi_near

Description

Use this option to make the compiler generate code that uses the offset from the static base register (R9) to address-writable data.

When this option is used, these limitations apply

• The object attribute __ramfunc cannot be used.

- Pointer constants cannot be initialized with the address of a writable variable.
 However, static writable variables can be initialized to writable addresses at runtime.
- A maximum of 64 Kbytes of read/write memory can be addressed.

See also

--no_rw_dynamic_init, page 282 and Description of predefined preprocessor symbols, page 452.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--section

Syntax --section OldName=NewName

Description

The compiler places functions and data objects into named sections which are referred to by the IAR ILINK Linker. Use this option to change the name of the section OldName to NewName.

This is useful if you want to place your code or data in different address ranges and you find the @ notation, alternatively the #pragma location directive, insufficient. Note that any changes to the section names require corresponding modifications in the linker configuration file.

Example To place functions in the section MyText, use:

--section .text=MvText

See also Controlling data and function placement in memory, page 222.



Project>Options>C/C++ Compiler>Output>Code section name

--silent

Syntax --silent

Description

By default, the compiler issues introductory messages and a final statistics report. Use this option to make the compiler operate without sending these messages to the standard output stream (normally the screen).

This option does not affect the display of error and warning messages.



This option is not available in the IDE.

--source_encoding

Syntax --source_encoding {locale | utf8}

Parameters

locale The default source encoding is the system locale encoding.

utf8 The default source encoding is the UTF-8 encoding.

Description When reading a source file with no Byte Order Mark (BOM), use this option to specify

the encoding.

If this option is not specified and the source file does not have a BOM, the Raw encoding

will be used.

See also Text encodings, page 247



Project>Options>C/C++ Compiler>Encodings>Default source file encoding

--stack_protection

Syntax --stack_protection

Description Use this option to enable stack protection for the functions that are considered needing

it.

See also Stack protection, page 85.

ΙË

To set this option, use **Project>Options>C/C** ++ **Compiler>Extra Options**.

--strict

Syntax --strict

Description By default, the compiler accepts a relaxed superset of Standard C and C++. Use this

option to ensure that the source code of your application instead conforms to strict

Standard C and C++.

Note: The -e option and the --strict option cannot be used at the same time.

See also

Enabling language extensions, page 183.



Project>Options>C/C++ Compiler>Language 1>Language conformance>Strict

--system_include_dir

Syntax --system_include_dir path

Parameters

path The path to the system include files, see *Rules for specifying*

a filename or directory as parameters, page 252.

Description By default, the compiler automatically locates the system include files. Use this option

to explicitly specify a different path to the system include files. This might be useful if

you have not installed IAR Embedded Workbench in the default location.

See also --dlib_config, page 268, and --no_system_include, page 283.

ΠË

This option is not available in the IDE.

--text_out

Syntax --text_out {utf8|utf16le|utf16be|locale}

Parameters

utf8 Uses the UTF-8 encoding

utf16le Uses the UTF-16 little-endian encoding

utf16be Uses the UTF-16 big-endian encoding

locale Uses the system locale encoding

Description Use this option to specify the encoding to be used when generating a text output file.

The default for the compiler list files is to use the same encoding as the main source file.

The default for all other text files is UTF-8 with a Byte Order Mark (BOM).

If you want text output in UTF-8 encoding without a BOM, use the option --no_bom.

See also --no_bom, page 277 and Text encodings, page 247



Project>Options>C/C++ Compiler>Encodings>Text output file encoding

--thumb

Syntax --thumb

Description Use this option to set default function mode to Thumb.

Note: This option has the same effect as the --cpu_mode=thumb option.



Project>Options>C/C++ Compiler>Code>Processor mode>Thumb

--uniform_attribute_syntax

Syntax --uniform_attribute_syntax

Description By default, an IAR type attribute specified before the type specifier applies to the object

or typedef itself, and not to the type specifier, as const and volatile do. If you specify this option, IAR type attributes obey the same syntax rules as const and volatile.

The default for IAR type attributes is to *not* use uniform attribute syntax.

See also --no uniform attribute syntax, page 285 and Syntax for type attributes used on data

objects, page 356

ΠË

To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

--use_c++_inline

Syntax --use_c++_inline

Description Standard C uses slightly different semantics for the inline keyword than C++ does.

Use this option if you want C++ semantics when you are using C.

See also Inlining functions, page 83

Project>Options>C/C++ Compiler>Language 1>C dialect>C99>C++ inline semantics

--use_unix_directory_separators

Syntax --use_unix_directory_separators

Description Use this option to make DWARF debug information use / (instead of \) as directory

separators in file paths.

This option can be useful if you have a debugger that requires directory separators in

UNIX style.

ΠË

To set this option, use **Project>Options>**C/C++ Compiler>Extra Options.

--utf8_text_in

Syntax --utf8_text_in

Description Use this option to specify that the compiler shall use UTF-8 encoding when reading a

text input file with no Byte Order Mark (BOM).

Note: This option does not apply to source files.

See also Text encodings, page 247

ΠË

Project>Options>C/C++ Compiler>Encodings>Default input file encoding

--vectorize

Syntax --vectorize

Description Use this option to enable generation of NEON vector instructions.

Loops will only be vectorized if the target processor has NEON capability and the

optimization level is -Ohs.

Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Vectorize

--version

Syntax --version

Description Use this option to make the compiler send version information to the console and then

exit

This option is not available in the IDE.

--vla

Syntax --vla

Description Use this option to enable support for C99 variable length arrays. Such arrays are located

on the heap. This option requires Standard C and cannot be used together with the

--c89 compiler option.

Note: --vla should not be used together with the longjmp library function, as that can

lead to memory leakages.

See also *C language overview*, page 181.

Project>Options>C/C++ Compiler>Language 1>C dialect>Allow VLA

--warn_about_c_style_casts

Syntax --warn_about_c_style_casts

Description Use this option to make the compiler warn when C-style casts are used in C++ source

code.

This option is not available in the IDE.

--warnings_affect_exit_code

Syntax --warnings_affect_exit_code

Description By default, the exit code is not affected by warnings, because only errors produce a

non-zero exit code. With this option, warnings will also generate a non-zero exit code.



This option is not available in the IDE.

--warnings_are_errors

Syntax --warnings_are_errors

Description

Use this option to make the compiler treat all warnings as errors. If the compiler encounters an error, no object code is generated. Warnings that have been changed into remarks are not treated as errors.

Note: Any diagnostic messages that have been reclassified as warnings by the option --diag_warning or the #pragma diag_warning directive will also be treated as errors when --warnings_are_errors is used.

See also

--diag_warning, page 267.



Project>Options>C/C++ Compiler>Diagnostics>Treat all warnings as errors

Descriptions of compiler options

Linker options

- Summary of linker options
- Descriptions of linker options

For general syntax rules, see Options syntax, page 251.

Summary of linker options

This table summarizes the linker options:

Command line option	Description
advanced_heap	Uses an advanced heap
basic_heap	Uses a basic heap
BE8	Uses the big-endian format BE8
BE32	Uses the big-endian format BE32
bounds_table_size	Specifies the size of the global bounds table. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
call_graph	Produces a call graph file in XML format
config	Specifies the linker configuration file to be used by the linker
config_def	Defines symbols for the configuration file
config_search	Specifies more directories to search for linker configuration files
cpp_init_routine	Specifies a user-defined C++ dynamic initialization routine
cpu	Specifies a processor variant
debug_heap	Uses the checked heap. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
default_to_complex_ranges	Makes complex ranges the default decompressor in initialize directives
define_symbol	Defines symbols that can be used by the application

Table 25: Linker options summary

Command line option	Description
dependencies	Lists file dependencies
diag_error	Treats these message tags as errors
diag_remark	Treats these message tags as remarks
diag_suppress	Suppresses these diagnostic messages
diag_warning	Treats these message tags as warnings
diagnostics_tables	Lists all diagnostic messages
do_segment_pad	Pads each ELF segment to n-byte alignment
enable_hardware_workaround	Enables specified hardware workaround
enable_stack_usage	Enables stack usage analysis
entry	Treats the symbol as a root symbol and as the start of the application
error_limit	Specifies the allowed number of errors before linking stops
exception_tables	Generates exception tables for C code
export_builtin_config	Produces an icf file for the default configuration
extra_init	Specifies an extra initialization routine that will b called if it is defined.
-f	Extends the command line
force_exceptions	Always includes exception runtime code
force_output	Produces an output file even if errors occurred
fpu	Selects the FPU to link your application for
ignore_uninstrumented_point ers	Disables checking of accessing via pointers in memory for which no bounds have been set. See the C-RUN documentation in the <i>C-SPY®</i> Debugging Guide for Arm.
image_input	Puts an image file in a section
import_cmse_lib_in	Reads previous version of import library for building a non-secure image
import_cmse_lib_out	Produces an import library, for building a non-secure image
inline	Inlines small routines
keep	Forces a symbol to be included in the application
-L	Specifies more directories to search for object an library files. Alias forsearch.

Table 25: Linker options summary (Continued)

Command line option	Description
log	Enables log output for selected topics
log_file	Directs the log to a file
mangled_names_in_messages	Adds mangled names in messages
$\begin{tabular}{ll} \texttt{manual_dynamic_initializati} \\ \texttt{on} \end{tabular}$	Suppresses automatic initialization during system startup
map	Produces a map file
merge_duplicate_sections	Merges equivalent read-only sections
misrac	Enables error messages specific to MISRA-C:1998. This option is a synonym tomisrac1998 and is only available for backwards compatibility.
misrac1998	Enables error messages specific to MISRA-C:1998. See the IAR Embedded Workbench® MISRA C:1998 Reference Guide.
misrac2004	Enables error messages specific to MISRA-C:2004. See the IAR Embedded Workbench® MISRA C:2004 Reference Guide.
misrac_verbose	Enables verbose logging of MISRA C checking. See the IAR Embedded Workbench® MISRA C:1998 Reference Guide and the IAR Embedded Workbench® MISRA C:2004 Reference Guid.
no_bom	Omits the Byte Order Mark from UTF-8 output files
no_dynamic_rtti_elimination	Includes dynamic runtime type information even when it is not needed.
no_entry	Sets the entry point to zero
no_exceptions	Generates an error if exceptions are used
no_fragments	Disables section fragment handling
no_free_heap	Uses the smallest possible heap implementation
no_inline	Excludes functions from small function inlining
no_library_search	Disables automatic runtime library search
no_literal_pool	Generates code that should run from a memory region where it is not allowed to read data, only to execute code
no_locals	Removes local symbols from the ELF executable image.

Table 25: Linker options summary (Continued)

Command line option	Description
no_range_reservations	Disables range reservations for absolute symbols
no_remove	Disables removal of unused sections
no_vfe	Disables Virtual Function Elimination
no_warnings	Disables generation of warnings
no_wrap_diagnostics	Does not wrap long lines in diagnostic messages
-0	Sets the object filename. Alias foroutput.
only_stdout	Uses standard output only
output	Sets the object filename
pi_veneers	Generates position independent veneers.
place_holder	Reserve a place in ROM to be filled by some other tool, for example a checksum calculated by ielftool.
preconfig	Reads the specified file before reading the linker configuration file
printf_multibytes	Makes the printf formatter support multibytes
redirect	Redirects a reference to a symbol to another symbol
remarks	Enables remarks
scanf_multibytes	Makes the scanf formatter support multibytes
search	Specifies more directories to search for object and library files
semihosting	Links with debug interface
silent	Sets silent operation
skip_dynamic_initialization	Suppresses dynamic initialization during system startup
stack_usage_control	Specifies a stack usage control file
strip	Removes debug information from the executable image
text_out	Specifies the encoding for text output files
threaded_lib	Configures the runtime library for use with threads
timezone_lib	Enables the time zone and daylight savings time functionality in the library

Table 25: Linker options summary (Continued)

Command line option	Description
treat_rvct_modules_as_softf	Treats all modules generated by RVCT as using the
р	standard (non-VFP) calling convention
use_full_std_template_names	Enables full names for standard C++ templates
utf8_text_in	Uses the UTF-8 encoding for text input files
version	Sends version information to the console and then
	exits
vfe	Controls Virtual Function Elimination
warnings_affect_exit_code	Warnings affects exit code
warnings_are_errors	Warnings are treated as errors
whole_archive	Treats every object file in the archive as if it was specified on the command line.

Table 25: Linker options summary (Continued)

Descriptions of linker options

The following section gives detailed reference information about each linker option.



Note that if you use the options page **Extra Options** to specify specific command line options, the IDE does not perform an instant check for consistency problems like conflicting options, duplication of options, or use of irrelevant options.

--advanced_heap

Syntax --advanced_heap

Description Use this option to use an advanced heap.

See also Advanced, basic, and no-free heap, page 201



Project>Options>General Options>Library options 2>Heap selection

--basic_heap

Syntax --basic_heap

Description Use this option to use the basic heap handler.

See also Advanced, basic, and no-free heap, page 201



Project>Options>General Options>Library options 2>Heap selection

--BE8

Syntax --BE8

Description Use this option to specify the Byte Invariant Addressing mode.

This means that the linker reverses the byte order of the instructions, resulting in little-endian code and big-endian data. This is the default byte addressing mode for Armv6 big-endian images. This is the only mode available for Arm v6M and Arm v7 with big-endian images.

Byte Invariant Addressing mode is only available on Arm processors that support Armv6, Arm v6M, and Arm v7.

See also Byte order, page 68, Byte order, page 340, --BE32, page 306, and --endian, page 270.



Project>Options>General Options>Target>Endian mode

--BE32

Syntax --BE32

Description Use this option to specify the legacy big-endian mode.

This produces big-endian code and data. This is the only byte-addressing mode for all big-endian images prior to Armv6. This mode is also available for Arm v6 with big-endian, but not for Arm v6M or Arm v7.

See also Byte order, page 68, Byte order, page 340, --BE8, page 306, and --endian, page 270.



Project>Options>General Options>Target>Endian mode

--call_graph

Syntax --call_graph {filename|directory}

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to produce a call graph file. If no filename extension is specified, the extension egx is used. This option can only be used once on the command line.

Using this option enables stack usage analysis in the linker.

See also

Stack usage analysis, page 96



Project>Options>Linker>Advanced>Call graph output (XML)

--config

Syntax --config filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to specify the configuration file to be used by the linker (the default filename extension is icf). If no configuration file is specified, a default configuration is used. This option can only be used once on the command line.

See also The chapter *The linker configuration file*.



Project>Options>Linker>Config>Linker configuration file

--config_def

Syntax --config_def symbol=constant_value

Parameters

symbol The name of the symbol to be used in the configuration file.

constant_value The constant value of the configuration symbol.

Description

Use this option to define a constant configuration symbol to be used in the configuration file. This option has the same effect as the define symbol directive in the linker configuration file. This option can be used more than once on the command line.

See also

--define_symbol, page 309 and Interaction between ILINK and the application, page 114.



Project>Options>Linker>Config>Defined symbols for configuration file

--config_search

Syntax --config_search path

Parameters

path A path to a directory where the linker should search for

linker configuration include files.

Description Use this option to specify more directories to search for files when processing an

include directive in a linker configuration file.

By default, the linker searches for configuration include files only in the system configuration directory. To specify more than one search directory, use this option for

each path.

See also *include directive*, page 504.



To set this option, use Project>Options>Linker>Extra Options.

--cpp_init_routine

Syntax --cpp_init_routine routine

Parameters

routine A user-defined C++ dynamic initialization routine.

Description When using the IAR C/C++ compiler and the standard library, C++ dynamic

initialization is handled automatically. In other cases you might need to use this option.

If any sections with the section type INIT_ARRAY or PREINIT_ARRAY are included in your application, the C++ dynamic initialization routine is considered to be needed. By default, this routine is named __iar_cstart_call_ctors and is called by the startup code in the standard library. Use this option if you require another routine to handle the initialization, for instance if you are not using the standard library.



To set this option, use Project>Options>Linker>Extra Options.

--cpu

Syntax --cpu=core

Parameters

core Specifies a specific processor variant

Description Use this option to select the processor variant to link your application for. The default is

to use a processor or architecture compatible with the object file attributes.

See also --cpu, page 261



Project>Options>General Options>Target>Processor configuration

--default_to_complex_ranges

Syntax --default_to_complex_ranges

Description Normally, if initialize directives in a linker configuration file do not specify simple

ranges or complex ranges, the linker uses simple ranges if the associated

section placement directives use single range regions.

Use this option to make the linker always use complex ranges by default. This was the behavior of the linker before the introduction of simple ranges and complex

ranges.

See also *initialize directive*, page 487.



Project>Options>Linker>Extra Options

--define_symbol

Syntax --define_symbol symbol=constant_value

Parameters

symbol The name of the constant symbol that can be used by the

application.

constant_value The constant value of the symbol.

Description

Use this option to define a constant symbol, that is a label, that can be used by your application. This option can be used more than once on the command line. Note that his option is different from the define symbol directive.

See also

--config def, page 307 and Interaction between ILINK and the application, page 114.



Project>Options>Linker>#define>Defined symbols

--dependencies

Syntax --dependencies[=[i|m]] {filename|directory}

Parameters

i (default) Lists only the names of files

m Lists in makefile style

See also Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to make the linker list the names of the linker configuration, object, and library files opened for input into a file with the default filename extension i.

Example

If --dependencies or --dependencies=i is used, the name of each opened input file, including the full path, if available, is output on a separate line. For example:

```
c:\myproject\foo.o
d:\myproject\bar.o
```

If --dependencies=m is used, the output is in makefile style. For each input file, one line containing a makefile dependency rule is produced. Each line consists of the name of the output file, a colon, a space, and the name of an input file. For example:

```
a.out: c:\myproject\foo.o
a.out: d:\myproject\bar.o
```



This option is not available in the IDE.

--diag_error

Syntax --diag_error=tag[,tag,...]

Parameters

The number of a diagnostic message, for example the

message number Pe117

Description

Use this option to reclassify certain diagnostic messages as errors. An error indicates a problem of such severity that an executable image will not be generated. The exit code will be non-zero. This option may be used more than once on the command line.



Project>Options>Linker>Diagnostics>Treat these as errors

--diag_remark

Syntax --diag_remark=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Go109

Description

Use this option to reclassify certain diagnostic messages as remarks. A remark is the least severe type of diagnostic message and indicates a construction that may cause strange behavior in the executable image. Note that not all diagnostic messages can be reclassified. This option may be used more than once on the command line.

Note: By default, remarks are not displayed; use the --remarks option to display them.



Project>Options>Linker>Diagnostics>Treat these as remarks

--diag_suppress

Syntax --diag_suppress=tag[,tag,...]

Parameters

The number of a diagnostic message, for example the

message number Pa180

Description

Use this option to suppress certain diagnostic messages. These messages will not be displayed. Note that not all diagnostic messages can be reclassified. This option may be used more than once on the command line.



Project>Options>Linker>Diagnostics>Suppress these diagnostics

--diag_warning

Syntax --diag_warning=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Li004

Description

Use this option to reclassify certain diagnostic messages as warnings. A warning indicates an error or omission that is of concern, but which will not cause the linker to stop before linking is completed. Note that not all diagnostic messages can be reclassified. This option may be used more than once on the command line.



Project>Options>Linker>Diagnostics>Treat these as warnings

--diagnostics_tables

Syntax --diagnostics_tables {filename | directory}

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description Use this option to list all possible diagnostic messages in a named file. This can be

convenient, for example, if you have used a pragma directive to suppress or change the

severity level of any diagnostic messages, but forgot to document why.

This option cannot be given together with other options.



This option is not available in the IDE.

--do segment pad

Syntax --do segment pad

Description Use this option to extend each ELF segment in the executable file with content, to make

it an even multiple of 4 bytes long (if possible). Some runtime library routines might access memory in units of 4 bytes, and might, if the right data object is placed last in an ELF segment, access memory outside the strict bounds of the segment. If you are executing in an environment where this is a problem, you can use this option to extend

the ELF segments appropriately so that this is not a problem.



This option is not available in the IDE.

-- enable hardware workaround

Syntax --enable_hardware_workaround=waid[waid[...]]

Parameters

waid The ID number of the workaround that you want to

enable. For a list of available workarounds, see the release

notes available in the Information Center.

Description Use this option to make the linker generate a workaround for a specific hardware

problem.

See also The release notes for the linker for a list of available parameters.



To set this option, use Project>Options>Linker>Extra Options.

--enable_stack_usage

Syntax --enable_stack_usage

Description Use this option to enable stack usage analysis. If a linker map file is produced, a stack

usage chapter is included in the map file.

Note: If you use at least one of the --stack_usage_control or --call_graph

options, stack usage analysis is automatically enabled.

See also Stack usage analysis, page 96



Project>Options>Linker>Advanced>Enable stack usage analysis

--entry

Syntax --entry symbol

Parameters

symbol The name of the symbol to be treated as a root symbol and

start label

Description

Use this option to make a symbol be treated as a root symbol and the start label of the application. This is useful for loaders. If this option is not used, the default start symbol is __iar_program_start. A root symbol is kept whether or not it is referenced from the rest of the application, provided its module is included. A module in an object file is always included but a module part of a library is only included if needed.

Note: The label referred to must be available in your application. You must also make sure that the reset vector refers to the new start label (for example --redirect __iar_program_start=_myStartLabel).



Project>Options>Linker>Library>Override default program entry

--error_limit

Syntax --error_limit=n

n

Parameters

The number of errors before the linker stops linking. n must

be a positive integer; 0 indicates no limit.

Description

Use the --error_limit option to specify the number of errors allowed before the linker stops the linking. By default, 100 errors are allowed.

ΠË

This option is not available in the IDE.

--exception_tables

Syntax --exception_tables={nocreate|unwind|cantumwind}

Parameters

nocreate (default) Does not generate entries. Uses the least amount of memory,

but the result is undefined if an exception is propagated through a function without exception information.

unwind Generates unwind entries that enable an exception to be

correctly propagated through functions without exception

information.

cantunwind Generates no-unwind entries so that any attempt to

propagate an exception through the function will result in a

call to terminate.

Description Use this option to determine what the linker should do with functions that do not have

exception information but which do have correct call frame information.

The compiler ensures that C functions get correct call frame information. For functions written in assembler language you need to use assembler directives to generate call

frame information.

See also Using C++, page 189.

ΠË

To set this option, use **Project>Options>Linker>Extra Options**.

--export_builtin_config

Syntax --export_builtin_config filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description Exports the configuration used by default to a file.

This option is not available in the IDE.

--extra init

Syntax --extra_init routine

Parameters

routine A user-defined initialization routine.

Description

Use this option to make the linker add an entry for the specified routine at the end of the initialization table. The routine will be called during system startup, after other initialization routines have been called and before main is called. Note that the routine must preserve the value passed to it in register R0. No entry is added if the routine is not defined.



To set this option, use **Project>Options>Linker>Extra Options**.

-f

Syntax -f filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description

Use this option to make the linker read command line options from the named file, with the default filename extension xcl.

In the command file, you format the items exactly as if they were on the command line itself, except that you may use multiple lines, because the newline character acts just as a space or tab character.

Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.



To set this option, use **Project>Options>Linker>Extra Options**.

--force_exceptions

Syntax --force_exceptions

Description Use this option to make the linker include exception tables and exception code even

when the linker heuristics indicate that exceptions are not used.

The linker considers exceptions to be used if there is a throw expression that is not a rethrow in the included code. If there is no such throw expression in the rest of the

code, the linker arranges for operator new, dynamic_cast, and typeid to call abort instead of throwing an exception on failure. If you need to catch exceptions from these constructs but your code contains no other throws, you might need to use this option.

See also

Using C++, page 189.



Project>Options>Linker>Optimizations>C++ Exceptions>Allow>Always include

--force_output

Syntax --force_output

Description Use this option to produce an output executable image regardless of any linking errors.



To set this option, use Project>Options>Linker>Extra Options

--fpu

Syntax --fpu=name|none

Parameters

name The target FPU architecture.

none No FPU.

Description

Use this option to select the FPU to link your application for. The default is to use an FPU compatible with the object file attribute.

See also --fpu, page 272

ΠË

Project>Options>General Options>Target>FPU

--image_input

Syntax --image_input filename [, symbol, [section[, alignment]]]

Parameters

filename The pure binary file containing the raw image you want to

link

symbol The symbol which the binary data can be referenced with.

section The section where the binary data will be placed; default is

.text.

alignment of the section; default is 1.

Description Use this option to link pure binary files in addition to the ordinary input files. The file's

entire contents are placed in the section, which means it can only contain pure binary

data.

Note: Just as for sections from object files, sections created by using the

--image_input option are not included unless actually needed. You can either specify a symbol in the option and reference this symbol in your application (or use a --keep option), or you can specify a section name and use the keep directive in a linker

configuration file to ensure that the section is included.

Example --image_input bootstrap.abs,Bootstrap,CSTARTUPCODE,4

The contents of the pure binary file bootstrap.abs are placed in the section CSTARTUPCODE. The section where the contents are placed is 4-byte aligned and will only be included if your application (or the command line option --keep) includes a

reference to the symbol Bootstrap.

See also --keep, page 320.



Project>Options>Linker>Input>Raw binary image

--import_cmse_lib_in

Syntax --import_cmse_lib_in filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description Reads a previous version of the import library and creates gateway veneers with the

same address as given in the import library. Use this option to create a secure image

where each entry function that exists in the provided import library is placed at the same address in the output import library.

See also --cmse, page 261, --import cmse lib out, page 319, and

ΙË

To set this option, use **Project>Options>Linker>Extra Options**.

--import_cmse_lib_out

Syntax --import_cmse_lib_out filename|directory

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description Use this option when building a secure image to automatically create an import library

for use in a corresponding non-secure image. The import library consists of a relocatable ELF object module that contains only a symbol table. Each symbol specifies an absolute

address of a secure gateway for an entry in the section Veneer\$\$CMSE.

See also --cmse, page 261 and --import cmse lib in, page 318

ΠË

To set this option, use **Project>Options>Linker>Extra Options**.

--inline

Syntax --inline

Description Some routines are so small that they can fit in the space of the instruction that calls the

routine. Use this option to make the linker replace the call of a routine with the body of

the routine, where applicable.

See also Small function inlining, page 213

ΠË

Project>Options>Linker>Optimizations>Inline small routines

--keep

Syntax --keep symbol

Parameters

symbol The name of the symbol to be treated as a root symbol

Description Normally, the linker keeps a symbol only if it is needed by your application. Use this option to make a symbol always be included in the final application.



Project>Options>Linker>Input>Keep symbols

--log

Syntax --log topic[,topic,...]

Parameters topic can be one of:

call_graph Lists the call graph as seen by stack usage analysis.

initialization Lists copy batches and the compression selected for each

batch.

libraries Lists all decisions made by the automatic library selector.

This might include extra symbols needed (--keep), redirections (--redirect), as well as which runtime

libraries that were selected.

modules Lists each module that is selected for inclusion in the

application, and which symbol that caused it to be included.

redirects Lists redirected symbols.

sections Lists each symbol and section fragment that is selected for

inclusion in the application, and the dependence that caused

it to be included.

veeners Lists some veneer creation and usage statistics.

unused_fragments Lists those section fragments that were not included in the

application.

Description Use this option to make the linker log information to stdout. The log information can

be useful for understanding why an executable image became the way it is.

See also --log file, page 321.



Project>Options>Linker>List>Generate log

--log_file

Syntax --log_file filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description Use this option to direct the log output to the specified file.

See also --log, page 320.



Project>Options>Linker>List>Generate log

--mangled_names_in_messages

Syntax --mangled_names_in_messages

Description Use this option to produce both mangled and unmangled names for C/C++ symbols in

messages. Mangling is a technique used for mapping a complex C name or a C++ name (for example, for overloading) into a simple name. For example, void h(int, char)

becomes _Z1hic.



This option is not available in the IDE.

--manual_dynamic_initialization

Syntax --manual_dynamic_initialization

Description Normally, dynamic initialization (typically initialization of C++ objects with static

storage duration) is performed automatically during application startup. If you use

--manual_dynamic_initialization, you must call

__iar_dynamic_initialization at some later point for this initialization to be

done.

The function $__iar_dynamic_initialization$ is declared in the header file

iar_dynamic_init.h.



To set this option use Project>Options>Linker>Extra Options.

--map

Syntax

--map {filename | directory}

Description

Use this option to produce a linker memory map file. The map file has the default filename extension map. The map file contains:

- Linking summary in the map file header which lists the version of the linker, the current date and time, and the command line that was used.
- Runtime attribute summary which lists runtime attributes.
- Placement summary which lists each section/block in address order, sorted by placement directives.
- Initialization table layout which lists the data ranges, packing methods, and compression ratios.
- Module summary which lists contributions from each module to the image, sorted by directory and library.
- Entry list which lists all public and some local symbols in alphabetical order, indicating which module they came from.
- Some of the bytes might be reported as *shared*.

Shared objects are functions or data objects that are shared between modules. If any of these occur in more than one module, only one copy is retained. For example, in some cases inline functions are not inlined, which means that they are marked as shared, because only one instance of each function will be included in the final application. This mechanism is sometimes also used for compiler-generated code or data not directly associated with a particular function or variable, and when only one instance is required in the final application.

This option can only be used once on the command line.



Project>Options>Linker>List>Generate linker map file

--merge_duplicate_sections

Syntax

--merge_duplicate_sections

Description

Use this option to keep only one copy of equivalent read-only sections. Note that this can cause different functions or constants to have the same address, so an application

that depends on the addresses being different will not work correctly with this option enabled.

See also

Duplicate section merging, page 213



Project>Options>Linker>Optimizations>Merge duplicate sections

--no_bom

Syntax --no_bom

Description Use this option to omit the Byte Order Mark (BOM) when generating a UTF-8 output

file.

See also --text_out, page 333 and Text encodings, page 247



Project>Options>Linker>Encodings>Text output file encoding

--no_dynamic_rtti_elimination

Syntax --no_dynamic_rtti_elimination

Description

Use this option to make the linker include dynamic (polymorphic) runtime type information (RTTI) data in the application image even when the linker heuristics

indicate that it is not needed.

The linker considers dynamic runtime type information to be needed if there is a typeid or dynamic_cast expression for a polymorphic type in the included code. By default, if the linker detects no such expression, RTTI data will not be included just to make dynamic RTTI requests work.

Note: A typeid expression for a *non*-polymorphic type results in a direct reference to a particular RTTI object and will not cause the linker to include any potentially unneeded objects.

See also Using C++, page 189.

To set this option, use **Project>Options>Linker>Extra Options**.

--no_entry

Syntax --no_entry

Description Use this option to set the entry point field to zero for produced ELF files.



Project>Options>Linker>Library>Override default program entry

--no_exceptions

Syntax --no_exceptions

Description Use this option to make the linker generate an error if there is a throw in the included

code. This option is useful for making sure that your application does not use

exceptions.

See also Using C++, page 189.

ΙË

To set related options, choose:

Project>Options>Linker>Advanced>Allow C++ exceptions

--no_fragments

Syntax --no_fragments

Description Use this option to disable section fragment handling. Normally, the toolset uses IAR

proprietary information for transferring section fragment information to the linker. The linker uses this information to remove unused code and data, and thus further minimize the size of the executable image. Use this option to disable the removal of fragments of sections, instead including or not including each section in its entirety, usually resulting

in a larger application.

See also Keeping symbols and sections, page 109.

ΠË

To set this option, use Project>Options>Linker>Extra Options

--no_free_heap

Syntax --no_free_heap

Description Use this option to use the smallest possible heap implementation. Because this heap

does not support free or realloc, it is only suitable for applications that in the startup phase allocate heap memory for various buffers, etc, and for applications that never

deallocate memory.

See also --advanced heap, page 305 and --basic heap, page 305.



Project>Options>General Options>Library Options 2>Heap selection

--no_inline

Syntax --no_inline func[,func...]

Parameters

func The name of a function symbol

Description Use this option to exclude some functions from small function inlining.

See also --inline, page 319



To set this option, use **Project>Options>Linker>Extra Options**.

--no_library_search

Syntax --no_library_search

Description

Use this option to disable the automatic runtime library search. This option turns off the automatic inclusion of the correct standard libraries. This is useful, for example, if the

application needs a user-built standard library, etc.

Note that the option disables all steps of the automatic library selection, some of which might need to be reproduced if you are using the standard libraries. Use the

--log libraries linker option together with automatic library selection enabled to determine which the steps are.



Project>Options>Linker>Library>Automatic runtime library selection

--no_literal_pool

Syntax --no_literal_pool

Description Use this option for code that should run from a memory region where it is not allowed

to read data, only to execute code.

When this option is used, the linker will use the MOV32 pseudo instruction in a mode-changing veneer, to avoid using the data bus to load the destination address. The option also means that libraries compiled with this option will be used.

The option --no_literal_pool is only allowed for Armv6-M and Armv7-M cores.

See also --no_literal_pool, page 280.

ΠË

To set this option, use **Project>Options>Linker>Extra Options**.

--no_locals

Syntax --no_locals

Description Use this option to remove local symbols from the ELF executable image.

Note: This option does not remove any local symbols from the DWARF information in the executable image.

ΠË

Project>Options>Linker>Output

--no_range_reservations

Syntax --no_range_reservations

Description Normally, the linker reserves any ranges used by absolute symbols with a non-zero size,

excluding them from consideration for place in commands.

When this option is used, these reservations are disabled, and the linker is free to place sections in such a way as to overlap the extent of absolute symbols.

ΠË

To set this option, use **Project>Options>Linker>Extra Options**.

--no_remove

Syntax --no_remove

Description When this option is used, unused sections are not removed. In other words, each module

that is included in the executable image contains all its original sections.

See also Keeping symbols and sections, page 109.

ΠË

To set this option, use Project>Options>Linker>Extra Options.

--no_vfe

Syntax --no_vfe

Description Use this option to disable the Virtual Function Elimination optimization. All virtual

functions in all classes with at least one instance will be kept, and Runtime Type Information data will be kept for all polymorphic classes. Also, no warning message will

be issued for modules that lack VFE information.

See also --vfe, page 335 and Virtual function elimination, page 213.

ΠË

To set related options, choose:

Project>Options>Linker>Optimizations>PerformC++ Virtual Function Elimination

--no_warnings

Syntax --no_warnings

Description By default, the linker issues warning messages. Use this option to disable all warning

messages.

This option is not available in the IDE.

--no_wrap_diagnostics

Syntax --no_wrap_diagnostics

Description By default, long lines in diagnostic messages are broken into several lines to make the message easier to read. Use this option to disable line wrapping of diagnostic messages.

This option is not available in the IDE.

--only_stdout

Syntax --only_stdout

Description Use this option to make the linker use the standard output stream (stdout) also for

messages that are normally directed to the error output stream (stderr).

This option is not available in the IDE.

--output, -o

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description By default, the object executable image produced by the linker is located in a file with the name a . out. Use this option to explicitly specify a different output filename, which

by default will have the filename extension out.

Project>Options>Linker>Output>Output file

--pi_veneers

Syntax --pi_veneers

Description Use this option to make the linker generate position-independent veneers. Note that this

type of veneer is larger and slower than normal veneers.

See also *Veneers*, page 115.



To set this option, use Project>Options>Linker>Extra Options.

--place_holder

Syntax --place_holder symbol[,size[,section[,alignment]]]

Parameters

symbol The name of the symbol to create
size Size in ROM; by default 4 bytes

section Section name to use; by default .text

alignment Alignment of section; by default 1

Description

Use this option to reserve a place in ROM to be filled by some other tool, for example a checksum calculated by ielftool. Each use of this linker option results in a section with the specified name, size, and alignment. The symbol can be used by your application to refer to the section.

Note: Like any other section, sections created by the --place_holder option will only be included in your application if the section appears to be needed. The --keep linker option, or the keep linker directive can be used for forcing such section to be included.

See also

IAR utilities, page 519.



To set this option, use Project>Options>Linker>Extra Options

--preconfig

Syntax --preconfig filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

DescriptionUse this option to make the linker read the specified file before reading the linker configuration file.

ΠË

To set this option, use Project>Options>Linker>Extra Options.

--printf_multibytes

Syntax --printf_multibytes

Description Use this option to make the linker automatically select a printf formatter that supports

multibytes.

ΠË

Project>Options>General Options>Library options 1>Printf formatter

--redirect

Syntax --redirect from_symbol=to_symbol

Parameters

from_symbol The name of the source symbol

to_symbol The name of the destination symbol

Description Use this option to change references to an external symbol so that they refer to another

symbol.

Note: Redirection will normally not affect references within a module.

III

To set this option, use Project>Options>Linker>Extra Options

--remarks

Syntax --remarks

Description The least severe diagnostic messages are called remarks. A remark indicates a source

code construct that may cause strange behavior in the generated code. By default, the linker does not generate remarks. Use this option to make the linker generate remarks.

See also Severity levels, page 249.

ΠË

Project>Options>Linker>Diagnostics>Enable remarks

--scanf_multibytes

Syntax --scanf_multibytes

Description Use this option to make the linker automatically select a scanf formatter that supports

multibytes.

ΠË

Project>Options>General Options>Library options 1>Scanf formatter

--search, -L

Syntax --search path

-L path

Parameters

path A path to a directory where the linker should search for

object and library files.

Description Use this option to specify more directories for the linker to search for object and library

files in.

By default, the linker searches for object and library files only in the working directory.

Each use of this option on the command line adds another search directory.

See also The linking process in detail, page 89.

ΠË

This option is not available in the IDE.

--semihosting

Syntax --semihosting[=iar_breakpoint]

Parameters

iar_breakpoint The IAR-specific mechanism can be used when

debugging applications that use SWI/SVC extensively.

Description Use this option to include the debug interface—breakpoint mechanism—in the output

image. If no parameter is specified, the SWI/SVC mechanism is included for

Arm7/9/11, and the BKPT mechanism is included for Cortex-M.

See also The semihosting mechanism, page 137.



Project>Options>General Options>Library Configuration>Semihosted

--silent

--silent Syntax

Description

By default, the linker issues introductory messages and a final statistics report. Use this option to make the linker operate without sending these messages to the standard output stream (normally the screen).

This option does not affect the display of error and warning messages.



This option is not available in the IDE.

--skip_dynamic_initialization

Syntax --skip_dynamic_initialization

Description

When using the IAR C/C++ compiler and the standard library, C++ dynamic initialization is handled automatically.

Use this option to suppress dynamic initialization to be performed during system startup. Typically, this can be useful if you need to set up, for example, heap management for an RTOS before the initialization takes place.

In this case you must add a call to the library function

__iar_dynamic_initialization in your application source code. Initialization

will then take place at the time of the call to this function.



To set this option, use **Project>Options>Linker>Extra Options**.

--stack_usage_control

Syntax --stack_usage_control=filename

Parameters See Rules for specifying a filename or directory as parameters, page 252. Description Use this option to specify a stack usage control file. This file controls stack usage

analysis, or provides more stack usage information for modules or functions. You can use this option multiple times to specify multiple stack usage control files. If no filename

extension is specified, the extension suc is used.

Using this option enables stack usage analysis in the linker.

See also Stack usage analysis, page 96



Project>Options>Linker>Advanced>Control file

--strip

Syntax --strip

Description By default, the linker retains the debug information from the input object files in the output executable image. Use this option to remove that information.



To set related options, choose:

Project>Options>Linker>Output>Include debug information in output

--text_out

Syntax --text_out{utf8|utf16le|utf16be|locale}

Parameters

utf8 Uses the UTF-8 encoding

utf161e Uses the UTF-16 little-endian encoding
utf16be Uses the UTF-16 big-endian encoding

locale Uses the system locale encoding

Description Use this option to specify the encoding to be used when generating a text output file.

The default for the linker list files is to use the same encoding as the main source file.

The default for all other text files is UTF-8 with a Byte Order Mark (BOM).

If you want text output in UTF-8 encoding without BOM, you can use the option

--no_bom as well.

See also --no bom, page 323 and Text encodings, page 247



Project>Options>Linker>Encodings>Text output file encoding

--threaded_lib

Syntax --threaded_lib

Description Use this option to automatically configure the runtime library for use with threads.



Project>Options>General Options>Library Configuration>Enable thread support in library

--timezone_lib

Syntax --timezone_lib

Description Use this option to enable the time zone and daylight savings time functionality in the

DLIB library.

Note: You need to implement the time zone functionality.

See also __getzone, page 147



To set this option, use **Project>Option>Linker>Extra Options**.

--treat_rvct_modules_as_softfp

Syntax --treat_rvct_modules_as_softfp

Description Use this option to treat all modules generated by RVCT as using the standard (non-VFP)

calling convention.

ШЁ

To set this option, use **Project>Options>Linker>Extra Options**.

--use_full_std_template_names

Syntax --use_full_std_template_names

Description In the unmangled names of C++ entities, the linker by default uses shorter names for

some classes. For example, "std::string" instead of

"std::basic_string<char,

std::char_traits<char>, std::allocator<char>>". Use this option to make the linker instead use the full, unabbreviated names.



This option is not available in the IDE.

--utf8_text_in

Syntax --utf8_text_in

Description Use this option to specify that the linker shall use the UTF-8 encoding when reading a

text input file with no Byte Order Mark (BOM).

Note: This option does not apply to source files.

See also Text encodings, page 247

ΠË

Project>Options>Linker>Encodings>Default input file encoding

--version

Syntax --version

Description Use this option to make the linker send version information to the console and then exit.

ΙË

This option is not available in th IDE.

--vfe

Syntax --vfe=[forced]

Parameters

forced Performs Virtual Function Elimination even if one or more

modules lack the needed virtual function elimination

information.

Description By default, Virtual Function Elimination is always performed but requires that all object

files contain the necessary virtual function elimination information. Use

--vfe=forced to perform Virtual Function Elimination even if one or more modules do not have the necessary information.

Forcing the use of Virtual Function Elimination can be unsafe if some of the modules that lack the needed information perform virtual function calls or use dynamic Runtime Type Information.

See also

--no vfe, page 327 and Virtual function elimination, page 213.



To set related options, choose:

Project>Options>Linker>Optimizations>Perform C++ Virtual Function Elimination

--warnings_affect_exit_code

Syntax

--warnings_affect_exit_code

Description

By default, the exit code is not affected by warnings, because only errors produce a non-zero exit code. With this option, warnings will also generate a non-zero exit code.



This option is not available in the IDE.

--warnings_are_errors

Syntax

--warnings are errors

Description

Use this option to make the linker treat all warnings as errors. If the linker encounters an error, no executable image is generated. Warnings that have been changed into remarks are not treated as errors.

Note: Any diagnostic messages that have been reclassified as warnings by the option --diag_warning will also be treated as errors when --warnings_are_errors is used.

See also

--diag warning, page 312 and --diag warning, page 312.



Project>Options>Linker>Diagnostics>Treat all warnings as errors

--whole archive

Syntax --whole_archive filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

Description Use this option to make the linker treat every object file in the archive as if it was

specified on the command line. This is useful when an archive contains root content that is always included from an object file (filename extension o), but only included from an

archive if some entry from the module is referred to.

Example If archive.a contains the object files file1.o, file2.o, and file3.o, using

--whole_archive archive.a is equivalent to specifying file1.o file2.o

file3.o.

See also Keeping modules, page 109

ΠË

To set this option, use Project>Options>Linker>Extra Options

Descriptions of linker options

Data representation

- Alignment
- Byte order
- Basic data types—integer types
- Basic data types—floating-point types
- Pointer types
- Structure types
- Type qualifiers
- Data types in C++

See the chapter Efficient coding for embedded applications for information about which data types provide the most efficient code for your application.

Alignment

Every C data object has an alignment that controls how the object can be stored in memory. Should an object have an alignment of, for example, 4, it must be stored on an address that is divisible by 4.

The reason for the concept of alignment is that some processors have hardware limitations for how the memory can be accessed.

Assume that a processor can read 4 bytes of memory using one instruction, but only when the memory read is placed on an address divisible by 4. Then, 4-byte objects, such as long integers, will have alignment 4.

Another processor might only be able to read 2 bytes at a time; in that environment, the alignment for a 4-byte long integer might be 2.

A structure type will have the same alignment as the structure member with the most strict alignment. To decrease the alignment requirements on the structure and its members, use #pragma pack or the __packed data type attribute.

All data types must have a size that is a multiple of their alignment. Otherwise, only the first element of an array would be guaranteed to be placed in accordance with the alignment requirements. This means that the compiler might add pad bytes at the end of the structure. For more information about pad bytes, see *Packed structure types*, page 350.

Note that with the #pragma data_alignment directive you can increase the alignment demands on specific variables.

See also the C11 file stdalign.h.

ALIGNMENT ON THE ARM CORE

The alignment of a data object controls how it can be stored in memory. The reason for using alignment is that the Arm core can access 4-byte objects more efficiently when the object is stored at an address divisible by 4.

Objects with alignment 4 must be stored at an address divisible by 4, while objects with alignment 2 must be stored at addresses divisible by 2.

The compiler ensures this by assigning an alignment to every data type, ensuring that the Arm core will be able to read the data.

For related information, see --align_sp_on_irq, page 259 and --no_const_align, page 278.

Byte order

In the little-endian byte order, which is default, the *least* significant byte is stored at the lowest address in memory. The *most* significant byte is stored at the highest address.

In the big-endian byte order, the *most* significant byte is stored at the lowest address in memory. The *least* significant byte is stored at the highest address. If you use the big-endian byte order, it might be necessary to use the

#pragma bitfields=reversed directive to be compatible with code for other compilers and I/O register definitions of some devices, see *Bitfields*, page 342.

Note: There are two variants of the big-endian mode, BE8 and BE32, which you specify at link time. In BE8 data is big-endian and code is little-endian. In BE32 both data and code are big-endian. In architectures before v6, the BE32 endian mode is used, and after v6 the BE8 mode is used. In the v6 (Arm11) architecture, both big-endian modes are supported.

Basic data types—integer types

The compiler supports both all Standard C basic data types and some additional types.

These topics are covered:

- Integer types—an overview
- Bool
- The enum type
- The char type
- The wchar_t type
- The char16_t type
- The char32_t type
- Bitfields

INTEGER TYPES—AN OVERVIEW

This table gives the size and range of each integer data type:

Data type	Size	Range	Alignment
bool	8 bits	0 to 1	I
char	8 bits	0 to 255	1
signed char	8 bits	-128 to 127	1
unsigned char	8 bits	0 to 255	1
signed short	16 bits	-32768 to 32767	2
unsigned short	16 bits	0 to 65535	2
signed int	32 bits	-2 ³¹ to 2 ³¹ -1	4
unsigned int	32 bits	0 to 2 ³² -1	4
signed long	32 bits	-2 ³¹ to 2 ³¹ -1	4
unsigned long	32 bits	0 to 2 ³² -1	4
signed long long	64 bits	-2 ⁶³ to 2 ⁶³ -1	8
unsigned long long	64 bits	0 to 2 ⁶⁴ -1	8

Table 26: Integer types

Signed variables are represented using the two's complement form.

BOOL

The bool data type is supported by default in the C++ language. If you have enabled language extensions, the bool type can also be used in C source code if you include the file stdbool.h. This will also enable the boolean values false and true.

THE ENUM TYPE

The compiler will use the smallest type required to hold enum constants, preferring signed rather than unsigned.

When IAR Systems language extensions are enabled, and in C++, the enum constants and types can also be of the type long, unsigned long, long long, or unsigned long long.

To make the compiler use a larger type than it would automatically use, define an enum constant with a large enough value. For example:

See also the C++ enum struct syntax.

For related information, see *--enum* is int, page 271.

THE CHAR TYPE

The char type is by default unsigned in the compiler, but the --char_is_signed compiler option allows you to make it signed. Note, however, that the library is compiled with the char type as unsigned.

THE WCHAR T TYPE

The wchar_t data type is 4 bytes and the encoding used for it is UTF-32.

THE CHARI6_T TYPE

The char16_t data type is 2 bytes and the encoding used for it is UTF-16.

THE CHAR32 T TYPE

The char32_t data type is 4 bytes and the encoding used for it is UTF-32.

BITFIELDS

In Standard C, int, signed int, and unsigned int can be used as the base type for integer bitfields. In standard C++, and in C when language extensions are enabled in the compiler, any integer or enumeration type can be used as the base type. It is implementation defined whether a plain integer type (char, short, int, etc) results in a signed or unsigned bitfield.

In the IAR C/C++ Compiler for Arm, plain integer types are treated as unsigned.

Bitfields in expressions are treated as int if int can represent all values of the bitfield. Otherwise, they are treated as the bitfield base type.

Each bitfield is placed in the next suitably aligned container of its base type that has enough available bits to accommodate the bitfield. Within each container, the bitfield is placed in the first available byte or bytes, taking the byte order into account. Note that containers can overlap if needed, as long as they are suitably aligned for their type.

In addition, the compiler supports an alternative bitfield allocation strategy (disjoint types), where bitfield containers of different types are not allowed to overlap. Using this allocation strategy, each bitfield is placed in a new container if its type is different from that of the previous bitfield, or if the bitfield does not fit in the same container as the previous bitfield. Within each container, the bitfield is placed from the least significant bit to the most significant bit (disjoint types) or from the most significant bit to the least significant bit (reverse disjoint types). This allocation strategy will never use less space than the default allocation strategy (joined types), and can use significantly more space when mixing bitfield types.

Use the #pragma bitfields directive to choose which bitfield allocation strategy to use, see *bitfields*, page 376.

Assume this example:

```
struct BitfieldExample
{
  uint32_t a : 12;
  uint16_t b : 3;
  uint16_t c : 7;
  uint8_t d;
};
```

The example in the joined types bitfield allocation strategy


To place the first bitfield, a, the compiler allocates a 32-bit container at offset 0 and puts a into the first and second bytes of the container.

For the second bitfield, b, a 16-bit container is needed and because there are still four bits free at offset 0, the bitfield is placed there.


For the third bitfield, c, as there is now only one bit left in the first 16-bit container, a new container is allocated at offset 2, and c is placed in the first byte of this container.

The fourth member, d, can be placed in the next available full byte, which is the byte at offset 3.

In little-endian mode, each bitfield is allocated starting from the least significant free bit of its container to ensure that it is placed into bytes from left to right.

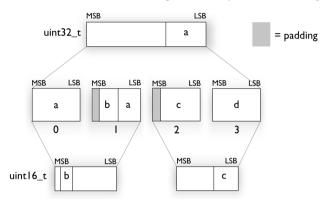

In big-endian mode, each bitfield is allocated starting from the most significant free bit of its container to ensure that it is placed into bytes from left to right.



The example in the disjoint types bitfield allocation strategy

To place the first bitfield, a, the compiler allocates a 32-bit container at offset 0 and puts a into the least significant 12 bits of the container.


To place the second bitfield, b, a new container is allocated at offset 4, because the type of the bitfield is not the same as that of the previous one. b is placed into the least significant three bits of this container.


The third bitfield, c, has the same type as b and fits into the same container.

The fourth member, d, is allocated into the byte at offset 6. d cannot be placed into the same container as b and c because it is not a bitfield, it is not of the same type, and it would not fit.

When using reverse order (reverse disjoint types), each bitfield is instead placed starting from the most significant bit of its container.

This is the layout of bitfield_example in little-endian mode:

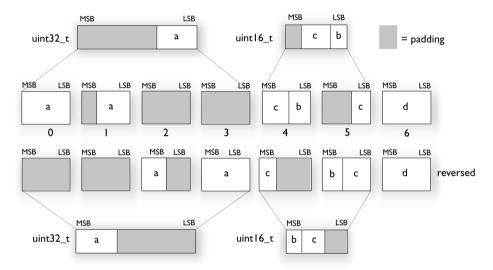

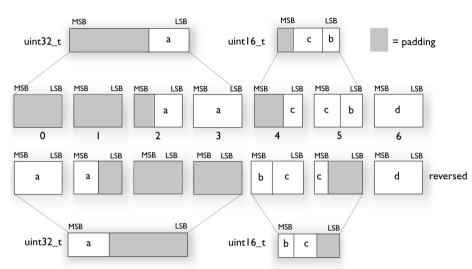

This is the layout of bitfield_example in big-endian mode:

Basic data types—floating-point types

In the IAR C/C++ Compiler for Arm, floating-point values are represented in standard IEEE 754 format. The sizes for the different floating-point types are:

Туре	Size	Range (+/-)	Decimals	Exponent	Mantissa	Alignment
float	32 bits	±1.18E-38 to ±3.40E+38	7	8 bits	23 bits	4
double	64 bits	$\pm 2.23E-308$ to $\pm 1.79E+308$	15	II bits	52 bits	8
long double	64 bits	±2.23E-308 to ±1.79E+308	15	II bits	52 bits	8

Table 27: Floating-point types

For Cortex-M0 and Cortex-M1, the compiler does not support subnormal numbers. All operations that should produce subnormal numbers will instead generate zero. For information about the representation of subnormal numbers for other cores, see *Representation of special floating-point numbers*, page 347.

FLOATING-POINT ENVIRONMENT

Exception flags for floating-point values are supported for devices with a VFP unit, and they are defined in the fenv.h file. For devices without a VFP unit, the functions defined in the fenv.h file exist but have no functionality.

The feraiseexcept function does not raise an inexact floating-point exception when called with FE_OVERFLOW or FE_UNDERFLOW.

32-BIT FLOATING-POINT FORMAT

The representation of a 32-bit floating-point number as an integer is:



The exponent is 8 bits, and the mantissa is 23 bits.

The value of the number is:

The range of the number is at least:

The precision of the float operators (+, -, *, and /) is approximately 7 decimal digits.

64-BIT FLOATING-POINT FORMAT

The representation of a 64-bit floating-point number as an integer is:

63	62	52 51	0
s	Exponent	Mantissa	

The exponent is 11 bits, and the mantissa is 52 bits.

The value of the number is:

The range of the number is at least:

The precision of the float operators (+, -, *, and /) is approximately 15 decimal digits.

REPRESENTATION OF SPECIAL FLOATING-POINT NUMBERS

This list describes the representation of special floating-point numbers:

- Zero is represented by zero mantissa and exponent. The sign bit signifies positive or negative zero.
- Infinity is represented by setting the exponent to the highest value and the mantissa to zero. The sign bit signifies positive or negative infinity.

- Not a number (NaN) is represented by setting the exponent to the highest positive
 value and the most significant bit in the mantissa to 1. The value of the sign bit is
 ignored.
- Subnormal numbers are used for representing values smaller than what can be represented by normal values. The drawback is that the precision will decrease with smaller values. The exponent is set to 0 to signify that the number is subnormal, even though the number is treated as if the exponent was 1. Unlike normal numbers, subnormal numbers do not have an implicit 1 as the most significant bit (the MSB) of the mantissa. The value of a subnormal number is:

```
(-1)^{S} * 2^{(1-BIAS)} * 0.Mantissa
```

where BIAS is 127 and 1023 for 32-bit and 64-bit floating-point values, respectively.

Pointer types

The compiler has two basic types of pointers: function pointers and data pointers.

FUNCTION POINTERS

The size of function pointers is always 32 bits, and the range is 0x0-0xffffffff.

When function pointer types are declared, attributes are inserted before the * sign, for example:

```
typedef void (__thumb * IntHandler) (void);
```

This can be rewritten using #pragma directives:

```
#pragma type_attribute=__thumb
typedef void IntHandler_function(void);
typedef IntHandler_function *IntHandler;
```

DATA POINTERS

There is one data pointer available. Its size is 32 bits and the range is $0 \times 0 - 0 \times FFFFFFFFF$.

CASTING

Casts between pointers have these characteristics:

- Casting a value of an integer type to a pointer of a smaller type is performed by truncation
- Casting a pointer type to a smaller integer type is performed by truncation
- Casting a *pointer type* to a larger integer type is performed by zero extension
- Casting a data pointer to a function pointer and vice versa is illegal
- Casting a function pointer to an integer type gives an undefined result

 Casting a value of an unsigned integer type to a pointer of a larger type is performed by zero extension

size_t

 $size_t$ is the unsigned integer type of the result of the sizeof operator. In the IAR C/C++ Compiler for Arm, the type used for $size_t$ is unsigned int.

ptrdiff_t

ptrdiff_t is the signed integer type of the result of subtracting two pointers. In the IAR C/C++ Compiler for Arm, the type used for ptrdiff_t is the signed integer variant of the size_t type.

intptr_t

intptr_t is a signed integer type large enough to contain a void *. In the IAR C/C++ Compiler for Arm, the type used for intptr_t is signed long int.

uintptr_t

uintptr_t is equivalent to intptr_t, with the exception that it is unsigned.

Structure types

The members of a struct are stored sequentially in the order in which they are declared: the first member has the lowest memory address.

ALIGNMENT OF STRUCTURE TYPES

The struct and union types have the same alignment as the member with the highest alignment requirement. Note that this alignment requirement also applies to a member that is a structure. To allow arrays of aligned structure objects, the size of a struct is adjusted to an even multiple of the alignment.

GENERAL LAYOUT

Members of a struct are always allocated in the order specified in the declaration. Each member is placed in the struct according to the specified alignment (offsets).

```
struct First
{
   char c;
   short s;
} s;
```

This diagram shows the layout in memory:



The alignment of the structure is 2 bytes, and a pad byte must be inserted to give short s the correct alignment.

PACKED STRUCTURE TYPES

The is used for relaxing the alignment requirements of the members of a structure. This changes the layout of the structure. The members are placed in the same order as when declared, but there might be less pad space between members.

Note that accessing an object that is not correctly aligned requires code that is both larger and slower. If such structure members are accessed many times, it is usually better to construct the correct values in a struct that is not packed, and access this struct instead.

Special care is also needed when creating and using pointers to misaligned members. For direct access to misaligned members in a packed struct, the compiler will emit the correct (but slower and larger) code when needed. However, when a misaligned member is accessed through a pointer to the member, the normal (smaller and faster) code is used. In the general case, this will not work, because the normal code might depend on the alignment being correct.

This example declares a packed structure:

```
#pragma pack(1)
struct S
{
   char c;
   short s;
};
#pragma pack()
```

The structure S has this memory layout:



The next example declares a new non-packed structure, S2, that contains the structure s declared in the previous example:

```
struct S2
{
   struct S s;
   long 1;
};
```

The structure S2 has this memory layout



The structure S will use the memory layout, size, and alignment described in the previous example. The alignment of the member 1 is 4, which means that alignment of the structure S2 will become 4.

For more information, see *Alignment of elements in a structure*, page 220.

Type qualifiers

According to the C standard, volatile and const are type qualifiers.

DECLARING OBJECTS VOLATILE

By declaring an object <code>volatile</code>, the compiler is informed that the value of the object can change beyond the compiler's control. The compiler must also assume that any accesses can have side effects—thus all accesses to the <code>volatile</code> object must be preserved.

There are three main reasons for declaring an object volatile:

- Shared access; the object is shared between several tasks in a multitasking environment
- Trigger access; as for a memory-mapped SFR where the fact that an access occurs has an effect
- Modified access; where the contents of the object can change in ways not known to the compiler.

Definition of access to volatile objects

The C standard defines an abstract machine, which governs the behavior of accesses to volatile declared objects. In general and in accordance to the abstract machine:

- The compiler considers each read and write access to an object declared volatile as an access
- The unit for the access is either the entire object or, for accesses to an element in a composite object—such as an array, struct, class, or union—the element. For example:

```
char volatile a;
a = 5;    /* A write access */
a += 6;    /* First a read then a write access */
```

- An access to a bitfield is treated as an access to the underlying type
- Adding a const qualifier to a volatile object will make write accesses to the
 object impossible. However, the object will be placed in RAM as specified by the C
 standard.

However, these rules are not detailed enough to handle the hardware-related requirements. The rules specific to the IAR C/C++ Compiler for Arm are described below.

Rules for accesses

In the IAR C/C++ Compiler for Arm, accesses to volatile declared objects are subject to these rules:

- All accesses are preserved
- All accesses are complete, that is, the whole object is accessed
- All accesses are performed in the same order as given in the abstract machine
- All accesses are atomic, that is, they cannot be interrupted.

The compiler adheres to these rules for accesses to all 8-, 16-, and 32-bit scalar types, except for accesses to unaligned 16- and 32-bit fields in packed structures.

For all combinations of object types not listed, only the rule that states that all accesses are preserved applies.

DECLARING OBJECTS VOLATILE AND CONST

If you declare a volatile object const, it will be write-protected but it will still be stored in RAM memory as the C standard specifies.

To store the object in read-only memory instead, but still make it possible to access it as a const volatile object, define the variable like this:

```
const volatile int x @ "FLASH";
```

The compiler will generate the read/write section FLASH. That section should be placed in ROM and is used for manually initializing the variables when the application starts up.

Thereafter, the initializers can be reflashed with other values at any time.

DECLARING OBJECTS CONST

The const type qualifier is used for indicating that a data object, accessed directly or via a pointer, is non-writable. A pointer to const declared data can point to both constant and non-constant objects. It is good programming practice to use const declared pointers whenever possible because this improves the compiler's possibilities to optimize the generated code and reduces the risk of application failure due to erroneously modified data.

Static and global objects declared const are allocated in ROM.

In C++, objects that require runtime initialization cannot be placed in ROM.

Data types in C++

In C++, all plain C data types are represented in the same way as described earlier in this chapter. However, if any C++ features are used for a type, no assumptions can be made concerning the data representation. This means, for example, that it is not supported to write assembler code that accesses class members.

Data types in C++

Extended keywords

- General syntax rules for extended keywords
- Summary of extended keywords
- Descriptions of extended keywords
- Supported GCC attributes

General syntax rules for extended keywords

The compiler provides a set of attributes that can be used on functions or data objects to support specific features of the Arm core. There are two types of attributes—type attributes and object attributes:

- Type attributes affect the *external functionality* of the data object or function
- Object attributes affect the *internal functionality* of the data object or function.

The syntax for the keywords differs slightly depending on whether it is a type attribute or an object attribute, and whether it is applied to a data object or a function.

For more information about each attribute, see *Descriptions of extended keywords*, page 359.

Note: The extended keywords are only available when language extensions are enabled in the compiler.



In the IDE, language extensions are enabled by default.



Use the -e compiler option to enable language extensions. See -e, page 269.

TYPE ATTRIBUTES

Type attributes define how a function is called, or how a data object is accessed. This means that if you use a type attribute, it must be specified both when a function or data object is defined and when it is declared.

You can either place the type attributes explicitly in your declarations, or use the pragma directive #pragma type_attribute.

Type attributes can be further divided into *memory type attributes* and *general type attributes*. Memory type attributes are referred to as simply *memory attributes* in the rest of the documentation.

General type attributes

Available *function type attributes* (affect how the function should be called):

```
__arm,__cmse_nonsecure_call,__fiq,__interwork,__irq,__swi,__task,__thumb
```

Available data type attributes:

```
__big_endian, __little_endian__packed
```

You can specify as many type attributes as required for each level of pointer indirection.

Syntax for type attributes used on data objects

If you select the *uniform attribute syntax*, data type attributes use the same syntax rules as the type qualifiers const and volatile.

If not, data type attributes use almost the same syntax rules as the type qualifiers const and volatile. For example:

```
__little_endian int i;
int __little_endian j;
```

Both i and j will be accessed with little-endian byte order.

Unlike const and volatile, when a type attribute is used before the type specifier in a derived type, the type attribute applies to the object, or typedef itself, except in structure member declarations.

The third case is interpreted differently when uniform attribute syntax is selected. If so, it is equivalent to the first case, just as would be the case if const or volatile were used correspondingly.

Using a type definition can sometimes make the code clearer:

```
typedef __packed int packed_int;
packed_int *q1;
```

packed_int is a typedef for packed integers. The variable q1 can point to such integers.

You can also use the #pragma type_attributes directive to specify type attributes for a declaration. The type attributes specified in the pragma directive are applied to the data object or typedef being declared.

```
#pragma type_attribute=__packed
int * q2;
```

The variable q2 is packed.

For more information about the uniform attribute syntax, see --uniform_attribute_syntax, page 296 and --no_uniform_attribute_syntax, page 285.

Syntax for type attributes used on functions

The syntax for using type attributes on functions differs slightly from the syntax of type attributes on data objects. For functions, the attribute must be placed either in front of the return type, or inside the parentheses for function pointers, for example:

```
__irq __arm void my_handler(void);
or
void (__irq __arm * my_fp)(void);
You can also use #pragma type_attribute to specify the function type attributes:
#pragma type_attribute=__irq __arm
void my_handler(void);
#pragma type attribute=__irq __arm
typedef void my_fun_t(void);
my_fun_t * my_fp;
```

OBJECT ATTRIBUTES

Normally, object attributes affect the internal functionality of functions and data objects, but not directly how the function is called or how the data is accessed. This means that an object attribute does not normally need to be present in the declaration of an object.

These object attributes are available:

• Object attributes that can be used for variables:

```
__absolute, __no_alloc, __no_alloc16, __no_alloc_str, __no_alloc_str16, __no_init, __ro_placement
```

• Object attributes that can be used for functions and variables:

```
location, @, __root, __weak
```

• Object attributes that can be used for functions:

```
__cmse_nonsecure_entry, __intrinsic, __nested, __noreturn,
__ramfunc, __stackless
```

You can specify as many object attributes as required for a specific function or data object.

For more information about location and @, see *Controlling data and function placement in memory*, page 222.

Syntax for object attributes

The object attribute must be placed in front of the type. For example, to place myarray in memory that is not initialized at startup:

```
__no_init int myarray[10];
```

The #pragma object_attribute directive can also be used. This declaration is equivalent to the previous one:

```
#pragma object_attribute=__no_init
int myarray[10];
```

Note: Object attributes cannot be used in combination with the typedef keyword.

Summary of extended keywords

This table summarizes the extended keywords:

Extended keyword	Description
absolute	Makes references to the object use absolute addressing
arm	Makes a function execute in ARM mode
big_endian	Declares a variable to use the big-endian byte order
cmse_nonsecure_call	Declares a function pointer to call non-secure code
cmse_nonsecure_entry	Makes a function callable from a non-secure image
fiq	Declares a fast interrupt function
interwork	Declares a function to be callable from both ARM and Thumb mode
intrinsic	Reserved for compiler internal use only
irq	Declares an interrupt function
little_endian	Declares a variable to use the little-endian byte order
no_alloc,	Makes a constant available in the execution file
no_alloc16	
no_alloc_str, no_alloc_str16	Makes a string literal available in the execution file
nested	Allows an $__irq$ declared interrupt function to be nested, that is, interruptible by the same type of interrupt
no_init	Places a data object in non-volatile memory
noreturn	Informs the compiler that the function will not return
packed	Decreases data type alignment to I

Table 28: Extended keywords summary

Extended keyword	Description
pcrel	Used internally by the compiler for constant data when theropi compiler option is used
ramfunc	Makes a function execute in RAM
root	Ensures that a function or variable is included in the object code even if unused
ro_placement	Places const volatile data in read-only memory.
sbrel	Used internally by the compiler for constant data when therwpi compiler option is used
stackless	Makes a function callable without a working stack
swi	Declares a software interrupt function
task	Relaxes the rules for preserving registers
thumb	Makes a function execute in Thumb mode
weak	Declares a symbol to be externally weakly linked

Table 28: Extended keywords summary (Continued)

Descriptions of extended keywords

This section gives detailed information about each extended keyword.

absolute	
Syntax	See Syntax for object attributes, page 358.
Description	Theabsolute keyword makes references to the object use absolute addressing. The following limitations apply:
	 Only available when theropi orrwpi compiler option is used Can only be used on external declarations.
Example	<pre>externabsolute char otherBuffer[100];</pre>
arm	
Syntax	See Syntax for type attributes used on functions, page 357.
Description	Thearm keyword makes a function execute in Arm mode.

A function declared __arm cannot be declared __thumb.

Example __arm int func1(void);

__big_endian

Syntax See Syntax for type attributes used on data objects, page 356.

Description The __big_endian keyword is used for accessing a variable that is stored in the

big-endian byte order regardless of what byte order the rest of the application uses. The

__big_endian keyword is available when you compile for Armv6 or higher.

Note that this keyword cannot be used on pointers. Also, this attribute cannot be used on

arrays.

Example __big_endian long my_variable;

See also *little endian*, page 362.

__cmse_nonsecure_call

Syntax See Syntax for type attributes used on functions, page 357.

Description The keyword __cmse_nonsecure_call can be used on a function pointer, and

indicates that a call via the pointer will enter non-secure state. The execution state will be cleared up before such a call, to avoid leaking sensitive data to the non-secure state.

The __cmse_nonsecure_call keyword can only be used with a function pointer, and

it is only allowed when compiling with --cmse.

The keyword __cmse_nonsecure_call is not supported for variadic functions, for functions with parameters or return values that do not fit in registers, or for functions

with parameters or return values in floating-point registers.

Example #include <arm_cmse.h>

typedef __cmse_nonsecure_call void (*fp_ns_t)(void);

static fp_ns_t callback_ns = 0;

__cmse_nonsecure_entry void set_callback_ns(fp_ns_t func_ns) {

callback_ns = cmse_nsfptr_create(func_ns);

}

See also --cmse, page 261

__cmse_nonsecure_entry

Syntax See Syntax for object attributes, page 358.

Description The __cmse_nonsecure_entry keyword declares an entry function that can be called

from the non-secure state. The execution state will be cleared before returning to the

caller, to avoid leaking sensitive data to the non-secure state.

The keyword __cmse_nonsecure_entry is not supported for variadic functions or

functions with parameters or return values that do not fit in registers.

The keyword __cmse_nonsecure_entry is only allowed when compiling with

--cmse.

Example #include <arm_cmse.h>

__cmse_nonsecure_entry int secure_add(int a, int b) {
 return cmse_nonsecure_caller() ? a + b : 0;
}

See also --cmse, page 261

__fiq

Syntax See *Syntax for type attributes used on functions*, page 357.

Description The __fig keyword declares a fast interrupt function. All interrupt functions must be

compiled in Arm mode. A function declared __fiq does not accept parameters and does not have a return value. This keyword is not available when you compile for

Cortex-M devices.

interwork

Syntax See Syntax for type attributes used on functions, page 357.

Description A function declared __interwork can be called from functions executing in either

Arm or Thumb mode.

Note: All functions are interwork. The keyword exists for compatibility reasons.

Example typedef void (__thumb __interwork *IntHandler)(void);

intrinsic

Description The __intrinsic keyword is reserved for compiler internal use only.

__irq

Syntax See Syntax for type attributes used on functions, page 357.

Description The __irq keyword declares an interrupt function. All interrupt functions must be

compiled in Arm mode. A function declared __irq does not accept parameters and does not have a return value. This keyword is not available when you compile for

Cortex-M devices.

See also --align sp on irq, page 259

__little_endian

Syntax See Syntax for type attributes used on data objects, page 356.

Description The __little_endian keyword is used for accessing a variable that is stored in the

little-endian byte order regardless of what byte order the rest of the application uses. The __little_endian keyword is available when you compile for Armv6 or higher.

Note that this keyword cannot be used on pointers. Also, this attribute cannot be used on

arrays.

Example __little_endian long my_variable;

See also big endian, page 360.

nested

Syntax See Syntax for object attributes, page 358.

Description The __nested keyword modifies the enter and exit code of an interrupt function to

allow for nested interrupts. This allows interrupts to be enabled, which means new interrupts can be served inside an interrupt function, without overwriting the SPSR and return address in R14. Nested interrupts are only supported for __irq declared

functions.

Note: The __nested keyword requires the processor mode to be in either User or

System mode.

See also Nested interrupts, page 81 and --align sp on irq, page 259.

__no_alloc, __no_alloc16

Syntax See Syntax for object attributes, page 358.

Description Use the __no_alloc or __no_alloc16 object attribute on a constant to make the

constant available in the executable file without occupying any space in the linked

application.

You cannot access the contents of such a constant from your application. You can take its address, which is an integer offset to the section of the constant. The type of the offset

is unsigned long when $_{\tt no_alloc}$ is used, and unsigned short when

__no_alloc16 is used.

Example __no_alloc const struct MyData my_data @ "XXX" = {...};

See also no alloc str, no alloc str16, page 363.

__no_alloc_str, __no_alloc_str16

Syntax __no_alloc_str(string_literal @ section)

and

__no_alloc_str16(string_literal @ section)

where

string_literal The string literal that you want to make available in the

executable file.

section The name of the section to place the string literal in.

Description Use the __no_alloc_str or __no_alloc_str16 operators to make string literals

available in the executable file without occupying any space in the linked application.

The value of the expression is the offset of the string literal in the section. For __no_alloc_str, the type of the offset is unsigned long. For __no_alloc_str16, the type of the offset is unsigned short.

Example

```
#define MYSEG "YYY"
#define X(str) __no_alloc_str(str @ MYSEG)
extern void dbg_printf(unsigned long fmt, ...)
#define DBGPRINTF(fmt, ...) dbg_printf(X(fmt), __VA_ARGS__)

void
foo(int i, double d)
{
    DBGPRINTF("The value of i is: %d, the value of d is: %f",i,d);
}
```

Depending on your debugger and the runtime support, this could produce trace output on the host computer. Note that there is no such runtime support in C-SPY, unless you use an external plugin module.

See also

__no_alloc, __no_alloc16, page 363.

no init

Syntax

See Syntax for object attributes, page 358.

Description

Use the __no_init keyword to place a data object in non-volatile memory. This means that the initialization of the variable, for example at system startup, is suppressed.

Example

__no_init int myarray[10];

See also

Non-initialized variables, page 237 and do not initialize directive, page 490.

noreturn

Syntax

See Syntax for object attributes, page 358.

Description

The __noreturn keyword can be used on a function to inform the compiler that the function will not return. If you use this keyword on such functions, the compiler can optimize more efficiently. Examples of functions that do not return are about and exit.

Note: At optimization levels Medium or High, the __noreturn keyword might cause incorrect call stack debug information at any point where it can be determined that the current function cannot return.

Note: The extended keyword __noreturn has the same meaning as the Standard C keyword _Noreturn or the macro noreturn (if stdnoreturn.h has been included) and as the Standard C++ attribute [[noreturn]].

Example

__noreturn void terminate(void);

__packed

Syntax

See *Syntax for type attributes used on data objects*, page 356. An exception is when the keyword is used for modifying the structure type in a struct or union declarations, see below.

Description

Use the __packed keyword to specify a data alignment of 1 for a data type. __packed can be used in two ways:

- When used before the struct or union keyword in a structure definition, the
 maximum alignment of each member in the structure is set to 1, eliminating the
 need for gaps between the members.
 - You can also use the __packed keyword with structure declarations, but it is illegal to refer to a structure type defined without the __packed keyword using a structure declaration with the __packed keyword.
- When used in any other position, it follows the syntax rules for type attributes, and
 affects a type in its entirety. A type with the __packed type attribute is the same as
 the type attribute without the __packed type attribute, except that it has a data
 alignment of 1. Types that already have an alignment of 1 are not affected by the
 __packed type attribute.

A normal pointer can be implicitly converted to a pointer to __packed, but the reverse conversion requires a cast.

Note: Accessing data types at other alignments than their natural alignment can result in code that is significantly larger and slower.

Use either __packed or #pragma pack to relax the alignment restrictions for a type and the objects defined using that type. Mixing __packed and #pragma pack might lead to unexpected behavior.

Example

```
/* No pad bytes in X: */
packed struct X { char ch; int i; };
/* __packed is optional here: */
struct X * xp;
/* NOTE: no __packed: */
struct Y { char ch; int i; };
/* ERROR: Y not defined with packed: */
__packed struct Y * yp ;
/* Member 'i' has alignment 1: */
struct Z { char ch; __packed int i; };
void Foo(struct X * xp)
  /* Error: "int packed *" -> "int *" not allowed: */
  int * p1 = &xp->1;
  /* OK: */
 int packed * p2 = &xp->i;
  /* OK, char not affected */
 char * p3 = &xp->ch;
```

See also

pack, page 390.

__ramfunc

Syntax

See Syntax for object attributes, page 358.

Description

The __ramfunc keyword makes a function execute in RAM. Two code sections will be created: one for the RAM execution (.textrw), and one for the ROM initialization (.textrw_init).

If a function declared __ramfunc tries to access ROM, the compiler will issue a warning. This behavior is intended to simplify the creation of *upgrade* routines, for instance, rewriting parts of flash memory. If this is not why you have declared the function __ramfunc, you can safely ignore or disable these warnings.

Functions declared __ramfunc are by default stored in the section named .textrw.

Example

__ramfunc int FlashPage(char * data, char * page);

See also

The C-SPY® Debugging Guide for Arm to read more about __ramfunc declared functions in relation to breakpoints.

__ro_placement

Syntax

See Syntax for object attributes, page 358.

Description

The __ro_placement attribute specifies that a data object should be placed in read-only memory. There are two cases where you might want to use this object attribute:

- Data objects declared const volatile are by default placed in read-write memory. Use the __ro_placement object attribute to place the data object in read-only memory instead.
- In C++, a data object declared const and that needs dynamic initialization is placed
 in read-write memory and initialized at system startup. If you use the
 __ro_placement object attribute, the compiler will give an error message if the
 data object needs dynamic initialization.

You can only use the __ro_placement object attribute on const objects.

In some cases (primarily involving simple constructors), the compiler will be able to optimize C++ dynamic initialization of a data object into static initialization. In that case no error message will be issued for the object.

Example

__ro_placement const volatile int x = 10;

root

Syntax

See Syntax for object attributes, page 358.

Description

A function or variable with the __root attribute is kept whether or not it is referenced from the rest of the application, provided its module is included. Program modules are always included and library modules are only included if needed.

Example

__root int myarray[10];

See also

For more information about root symbols and how they are kept, see *Keeping symbols and sections*, page 109.

__stackless

Syntax

See Syntax for object attributes, page 358.

Description

The __stackless keyword declares a function that can be called without a working stack.



A function declared __stackless violates the calling convention in such a way that it is not possible to return from it. However, the compiler cannot reliably detect if the function returns and will not issue an error if it does.

Example

__stackless void start_application(void);

swi

Syntax

See Syntax for type attributes used on functions, page 357.

Description

The __swi declares a software interrupt function. It inserts an SVC (formerly SWI) instruction and the specified software interrupt number to make a proper function call. A function declared __swi accepts arguments and returns values. The __swi keyword makes the compiler generate the correct return sequence for a specific software interrupt function. Software interrupt functions follow the same calling convention regarding parameters and return values as an ordinary function, except for the stack usage.

The __swi keyword also expects a software interrupt number which is specified with the #pragma swi_number=number directive. The swi_number is used as an argument to the generated assembler SVC instruction, and can be used by the SVC interrupt handler, for example SWI_Handler, to select one software interrupt function in a system containing several such functions. Note that the software interrupt number should only be specified in the function declaration—typically, in a header file that you include in the source code file that calls the interrupt function—not in the function definition.

Note: All interrupt functions must be compiled in Arm mode, except for Cortex-M. Use either the __arm keyword or the #pragma type_attribute=__arm directive to alter the default behavior if needed.

Example

To declare your software interrupt function, typically in a header file, write for example like this:

IAR C/C++ Development Guide Compiling and Linking for Arm Somewhere in your application source code, you define your software interrupt function:

```
...
__swi __arm int the_actual_swi0x23_function(int a, int b)
{
    ...
    return 42;
}
```

See also

Software interrupts, page 82 and Calling convention, page 170.

__task

Syntax

See Syntax for type attributes used on functions, page 357.

Description

This keyword allows functions to relax the rules for preserving registers. Typically, the keyword is used on the start function for a task in an RTOS.

By default, functions save the contents of used preserved registers on the stack upon entry, and restore them at exit. Functions that are declared __task do not save all registers, and therefore require less stack space.

Because a function declared __task can corrupt registers that are needed by the calling function, you should only use __task on functions that do not return or call such a function from assembler code.

The function main can be declared __task, unless it is explicitly called from the application. In real-time applications with more than one task, the root function of each task can be declared __task.

Example

__task void my_handler(void);

__thumb

Syntax

See Syntax for type attributes used on functions, page 357.

Description

The __thumb keyword makes a function execute in Thumb mode.

A function declared __thumb cannot be declared __arm.

Example

__thumb int func2(void);

__weak

Syntax

See Syntax for object attributes, page 358.

Description

Using the __weak object attribute on an external declaration of a symbol makes all references to that symbol in the module weak.

Using the __weak object attribute on a public definition of a symbol makes that definition a weak definition.

The linker will not include a module from a library solely to satisfy weak references to a symbol, nor will the lack of a definition for a weak reference result in an error. If no definition is included, the address of the object will be zero.

When linking, a symbol can have any number of weak definitions, and at most one non-weak definition. If the symbol is needed, and there is a non-weak definition, this definition will be used. If there is no non-weak definition, one of the weak definitions will be used.

Example

```
extern __weak int foo; /* A weak reference. */
__weak void bar(void) /* A weak definition. */
{
    /* Increment foo if it was included. */
    if (&foo != 0)
        ++foo;
}
```

Supported GCC attributes

In extended language mode, the IAR C/C++ Compiler also supports a limited selection of GCC-style attributes. Use the __attribute__ ((attribute-list)) syntax for these attributes.

The following attributes are supported in part or in whole. For more information, see the GCC documentation.

- alias
- aligned
- always_inline
- cmse_nonsecure_call
- cmse_nonsecure_entry
- deprecated

- noinline
- noreturn
- packed
- pcs (for IAR type attributes used on functions)
- section
- target (for IAR object attributes used on functions)
- transparent_union
- unused
- used
- volatile
- weak

Supported GCC attributes

Pragma directives

- Summary of pragma directives
- Descriptions of pragma directives

Summary of pragma directives

The #pragma directive is defined by Standard C and is a mechanism for using vendor-specific extensions in a controlled way to make sure that the source code is still portable.

The pragma directives control the behavior of the compiler, for example how it allocates memory for variables and functions, whether it allows extended keywords, and whether it outputs warning messages.

The pragma directives are always enabled in the compiler.

This table lists the pragma directives of the compiler that can be used either with the <code>#pragma</code> preprocessor directive or the <code>_Pragma()</code> preprocessor operator:

Pragma directive	Description	
bitfields	Controls the order of bitfield members.	
calls	Lists possible called functions for indirect calls.	
call_graph_root	Specifies that the function is a call graph root.	
cstat_disable	See the C-STAT® Static Analysis Guide.	
cstat_enable	See the C-STAT® Static Analysis Guide.	
cstat_restore	See the C-STAT® Static Analysis Guide.	
cstat_suppress	See the C-STAT® Static Analysis Guide.	
data_alignment	Gives a variable a higher (more strict) alignment.	
default_function_attributes	Sets default type and object attributes for declarations and definitions of functions.	
default_no_bounds	Applies #pragma no_bounds to a whole set of functions. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.	
default_variable_attributes	Sets default type and object attributes for declarations and definitions of variables.	

Table 29: Pragma directives summary

Pragma directive	Description
define_with_bounds	Instruments a function to track pointer bounds. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
define_without_bounds	Defines the version of a function that does not have extra bounds information. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
deprecated	Marks an entity as deprecated.
diag_default	Changes the severity level of diagnostic messages.
diag_error	Changes the severity level of diagnostic messages.
diag_remark	Changes the severity level of diagnostic messages.
diag_suppress	Suppresses diagnostic messages.
diag_warning	Changes the severity level of diagnostic messages.
disable_check	Specifies that the immediately following function does not check accesses against bounds. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
error	Signals an error while parsing.
function_category	Declares function categories for stack usage analysis
generate_entry_without_boun ds	Enables generation of an extra entry without bounds for the immediately following function. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
include_alias	Specifies an alias for an include file.
inline	Controls inlining of a function.
language	Controls the IAR Systems language extensions.
location	Specifies the absolute address of a variable, places a variable in a register, or places groups of functions or variables in named sections.
message	Prints a message.
no_arith_checks	Specifies that no C-RUN arithmetic checks will be performed in the following function. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.

Table 29: Pragma directives summary (Continued)

Pragma directive	Description
no_bounds	Specifies that the immediately following function is not instrumented for bounds checking. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
no_stack_protect	Disables stack protection for the following function.
object_attribute	Adds object attributes to the declaration or definition of a variable or function.
optimize	Specifies the type and level of an optimization.
pack	Specifies the alignment of structures and union members.
printf_args	Verifies that a function with a printf-style format string is called with the correct arguments.
public_equ	Defines a public assembler label and gives it a value.
required	Ensures that a symbol that is needed by another symbol is included in the linked output.
rtmodel	Adds a runtime model attribute to the module.
scanf_args	Verifies that a function with a scanf-style format string is called with the correct arguments.
section	Declares a section name to be used by intrinsic functions.
segment	This directive is an alias for #pragma section.
stack_protect	Forces stack protection for the function that follows.
STDC CX_LIMITED_RANGE	Specifies whether the compiler can use normal complex mathematical formulas or not.
STDC FENV_ACCESS	Specifies whether your source code accesses the floating-point environment or not.
STDC FP_CONTRACT	Specifies whether the compiler is allowed to contract floating-point expressions or not.
swi_number	Sets the interrupt number of a software interrupt.
unroll	Unrolls loops.
vectorize	Enables or disables generation of NEON vector instructions for a loop.
weak	Makes a definition a weak definition, or creates a weak alias for a function or a variable.

Table 29: Pragma directives summary (Continued)

Pragma directive	Description	
type_attribute	Adds type attributes to a declaration or to	
	definitions.	

Table 29: Pragma directives summary (Continued)

Note: For portability reasons, see also *Recognized pragma directives (6.10.6)*, page 573.

Descriptions of pragma directives

This section gives detailed information about each pragma directive.

bitfields

Syntax	<pre>#pragma bitfields=disjoint_types joined_types </pre>	
Parameters	disjoint_types	Bitfield members are placed from the least significant bit to the most significant bit in the container type. Storage containers of bitfields with different base types will not overlap.
	joined_types	Bitfield members are placed depending on the byte order. Storage containers of bitfields will overlap other structure members. For more information, see <i>Bitfields</i> , page 342.
	reversed_disjoint_types	Bitfield members are placed from the most significant bit to the least significant bit in the container type. Storage containers of bitfields with different base types will not overlap.
	reversed	This is an alias for reversed_disjoint_types.
	default	Restores the default layout of bitfield members. The default behavior for the compiler is joined_types.
Description	Use this pragma directive to control the layout of bitfield members.	

Example

```
#pragma bitfields=disjoint_types
/* Structure that uses disjoint bitfield types. */
struct S
{
   unsigned char error : 1;
   unsigned char size : 4;
   unsigned short code : 10;
};
#pragma bitfields=default /* Restores to default setting. */
```

See also

Bitfields, page 342.

calls

Syntax

#pragma calls=arg[, arg...]

Parameters

arg can be one of these:

function

A declared function

category

A string that represents the name of a function category

Description

Use this pragma directive to specify all functions that can be indirectly called in the following statement. This information can be used for stack usage analysis in the linker. You can specify individual functions or function categories. Specifying a category is equivalent to specifying all included functions in that category.

Example

See also

function_category, page 384 and Stack usage analysis, page 96.

call_graph_root

Syntax #pragma call_graph_root[=category]

Parameters

category A string that identifies an optional call graph root category

Description Use this pragma directive to specify that, for stack usage analysis purposes, the

immediately following function is a call graph root. You can also specify an optional category. The compiler will usually automatically assign a call graph root category to interrupt and task functions. If you use the #pragma call_graph_root directive on such a function you will override the default category. You can specify any string as a

category.

Example #pragma call_graph_root="interrupt"

See also Stack usage analysis, page 96

data_alignment

Syntax #pragma data_alignment=expression

Parameters

expression A constant which must be a power of two (1, 2, 4, etc.).

Description

Use this pragma directive to give the immediately following variable a higher (more strict) alignment of the start address than it would otherwise have. This directive can be used on variables with static and automatic storage duration.

When you use this directive on variables with automatic storage duration, there is an upper limit on the allowed alignment for each function, determined by the calling convention used.

Note: Normally, the size of a variable is a multiple of its alignment. The data_alignment directive only affects the alignment of the variable's start address, and not its size, and can thus be used for creating situations where the size is not a multiple of the alignment.

Note: To comply with the ISO C11 standard and later, it is recommended to use the alignment specifier _Alignas for C code. To comply with the C++11 standard and later, it is recommended to use the alignment specifier alignas for C++ code.

default_function_attributes

where attribute can be:

type_attribute
object_attribute
@ section_name

Parameters

type_attribute See Type attributes, page 355.

object_attribute See Object attributes, page 357.

@ section_name See Data and function placement in sections, page 224.

Description

Use this pragma directive to set default section placement, type attributes, and object attributes for function declarations and definitions. The default settings are only used for declarations and definitions that do not specify type or object attributes or location in some other way.

Specifying a default_function_attributes pragma directive with no attributes, restores the initial state where no such defaults have been applied to function declarations and definitions.

Example

```
/* Place following functions in section MYSEC" */
#pragma default_function_attributes = @ "MYSEC"
int fun1(int x) { return x + 1; }
int fun2(int x) { return x - 1;
/* Stop placing functions into MYSEC */
#pragma default_function_attributes =
```

has the same effect as:

```
int fun1(int x) @ "MYSEC" { return x + 1; } int fun2(int x) @ "MYSEC" { return x - 1; }
```

See also

location, page 386

object_attribute, page 388 type attribute, page 396

default variable attributes

where attribute can be:

type_attribute
object_attribute
@ section_name

Parameters

type_attribute See Type attributes, page 355.

object_attributes See Object attributes, page 357.

@ section_name See Data and function placement in sections, page 224.

Description

Use this pragma directive to set default section placement, type attributes, and object attributes for declarations and definitions of variables with static storage duration. The default settings are only used for declarations and definitions that do not specify type or object attributes or location in some other way.

Specifying a default_variable_attributes pragma directive with no attributes restores the initial state of no such defaults being applied to variables with static storage duration.

Note that the extended keyword __packed can be used in two ways: as a normal type attribute and in a structure type definition. The pragma directive

default_variable_attributes only affects the use of __packed as a type attribute. Structure definitions are not affected by this pragma directive. See __packed, page 365.

Example

```
/* Place following variables in section MYSEC" */
#pragma default_variable_attributes = @ "MYSEC"
int var1 = 42;
int var2 = 17;
/* Stop placing variables into MYSEC */
#pragma default_variable_attributes =
```

has the same effect as:

```
int var1 @ "MYSEC" = 42;
int var2 @ "MYSEC" = 17;
```

See also

location, page 386

object_attribute, page 388
type attribute, page 396

deprecated

Syntax

#pragma deprecated=entity

Description

If you place this pragma directive immediately before the declaration of a type, variable, function, field, or constant, any use of that type, variable, function, field, or constant will result in a warning.

The deprecated pragma directive has the same effect as the C++ attribute [[deprecated]], but is available in C as well.

Example

```
#pragma deprecated
typedef int * intp_t; // typedef intp_t is deprecated
#pragma deprecated
extern int fun(void); // function fun is deprecated
#pragma deprecated
struct xx { // struct xx is deprecated
 int x:
};
struct yy {
#pragma deprecated
 int v;
                      // field y is deprecated
};
intp_t fun(void)
                      // Warning here
 struct xx ax;
                      // Warning here
 struct yy ay;
 fun();
                      // Warning here
                      // Warning here
 return ay.y;
```

See also

Annex K (Bounds-checking interfaces) of the C standard.

diag_default

Syntax

#pragma diag_default=tag[,tag,...]

Parameters

tag

The number of a diagnostic message, for example the message number Pe177.

Description Use this pragma directive to change the severity level back to the default, or to the

severity level defined on the command line by any of the options --diag_error, --diag_remark, --diag_suppress, or --diag_warnings, for the diagnostic messages specified with the tags. This level remains in effect until changed by another

diagnostic-level pragma directive.

See also *Diagnostics*, page 248.

diag_error

Syntax #pragma diag_error=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Pe177.

Description Use this pragma directive to change the severity level to error for the specified

diagnostics. This level remains in effect until changed by another diagnostic-level

pragma directive.

See also Diagnostics, page 248.

diag_remark

Syntax #pragma diag_remark=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Pe177.

Description Use this pragma directive to change the severity level to remark for the specified

diagnostic messages. This level remains in effect until changed by another

diagnostic-level pragma directive.

See also *Diagnostics*, page 248.

diag_suppress

Syntax #pragma diag_suppress=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Pe117.

Description Use this pragma directive to suppress the specified diagnostic messages. This level

remains in effect until changed by another diagnostic-level pragma directive.

See also *Diagnostics*, page 248.

diag_warning

Syntax #pragma diag_warning=tag[,tag,...]

Parameters

tag The number of a diagnostic message, for example the

message number Pe826.

Description Use this pragma directive to change the severity level to warning for the specified

diagnostic messages. This level remains in effect until changed by another

diagnostic-level pragma directive.

See also *Diagnostics*, page 248.

error

Syntax #pragma error message

Parameters

message A string that represents the error message.

Description Use this pragma directive to cause an error message when it is parsed. This mechanism

is different from the preprocessor directive #error, because the #pragma error directive can be included in a preprocessor macro using the _Pragma form of the

directive and only causes an error if the macro is used.

Example #if FOO_AVAILABLE

#define FOO ...

#else

#define FOO _Pragma("error\"Foo is not available\"")

#endif

If FOO AVAILABLE is zero, an error will be signaled if the FOO macro is used in actual

source code.

function_category

Syntax #pragma function_category=category[, category...]

Parameters

category A string that represents the name of a function category.

Description Use this pragma directive to specify one or more function categories that the

immediately following function belongs to. When used together with #pragma calls, the function_category directive specifies the destination for indirect calls for stack

usage analysis purposes.

Example #pragma function_category="Cat1"

See also calls, page 377 and Stack usage analysis, page 96.

include alias

#pragma include_alias (<orig_header> , <subst_header>)

Parameters

orig_header The name of a header file for which you want to create an

alias.

subst_header The alias for the original header file.

Description Use this pragma directive to provide an alias for a header file. This is useful for

substituting one header file with another, and for specifying an absolute path to a relative

file.

This pragma directive must appear before the corresponding #include directives and

subst_header must match its corresponding #include directive exactly.

#include <stdio.h>

This example will substitute the relative file stdio.h with a counterpart located

according to the specified path.

See also *Include file search procedure*, page 243.

inline

Syntax #pragma inline[=forced|=never]

Parameters

No parameter Has the same effect as the inline keyword.

forced Disables the compiler's heuristics and forces inlining.

never Disables the compiler's heuristics and makes sure that the

function will not be inlined.

Description Use #pragma inline to advise the compiler that the function defined immediately after

the directive should be inlined according to C++ inline semantics.

Specifying #pragma inline=forced will always inline the defined function. If the compiler fails to inline the function for some reason, for example due to recursion, a

warning message is emitted.

Inlining is normally performed only on the High optimization level. Specifying

#pragma inline=forced will inline the function or result in an error due to recursion

etc.

See also *Inlining functions*, page 83.

language

Parameters

extended Enables the IAR Systems language extensions from the first

use of the pragma directive and onward.

default From the first use of the pragma directive and onward,

restores the settings for the IAR Systems language extensions to whatever that was specified by compiler

options.

save | restore Saves and restores, respectively, the IAR Systems language

extensions setting around a piece of source code.

Each use of save must be followed by a matching restore in the same file without any intervening #include directive.

Description Use this pragma directive to control the use of language extensions.

Example At the top of a file that needs to be compiled with IAR Systems extensions enabled:

```
#pragma language=extended
/* The rest of the file. */
```

Around a particular part of the source code that needs to be compiled with IAR Systems extensions enabled, but where the state before the sequence cannot be assumed to be the same as that specified by the compiler options in use:

```
#pragma language=save
#pragma language=extended
/* Part of source code. */
#pragma language=restore
```

See also -e, page 269 and --strict, page 294.

location

Syntax #pragma location={address|register|NAME}

Parameters

address The absolute address of the global or static variable or

function for which you want an absolute location.

register An identifier that corresponds to one of the Arm core

registers R4-R11.

NAME A user-defined section name; cannot be a section name

predefined for use by the compiler and linker.

Description Use this pragma directive to specify:

- The location—the absolute address—of the global or static variable whose declaration follows the pragma directive. The variables must be declared no init.
- An identifier specifying a register. The variable defined after the pragma directive is
 placed in the register. The variable must be declared as __no_init and have file
 scope.

A string specifying a section for placing either a variable or function whose declaration follows the pragma directive. Do not place variables that would normally be in different sections (for example, variables declared as __no_init and variables declared as const) in the same named section.

Example

See also

Controlling data and function placement in memory, page 222 and Declare and place your own sections, page 108.

message

Syntax #pragma message(message)

Parameters

message The message that you want to direct to the standard output stream.

Description

Use this pragma directive to make the compiler print a message to the standard output stream when the file is compiled.

Example #ifdef TESTING

#pragma message("Testing")

#endif

no_stack_protect

Syntax #pragma no_stack_protect

Description Use this pragma directive to disable stack protection for the defined function that

follows.

This pragma directive only has effect if the compiler option --stack_protection has

been used.

See also Stack protection, page 85.

object_attribute

Syntax #pragma object_attribute=object_attribute[object_attribute...]

Parameters For information about object attributes that can be used with this pragma directive, see

Object attributes, page 357.

Description Use this pragma directive to add one or more IAR-specific object attributes to the

declaration or definition of a variable or function. Object attributes affect the actual variable or function and not its type. When you define a variable or function, the union

of the object attributes from all declarations including the definition, is used.

char bar;

is equivalent to:

__no_init char bar;

See also General syntax rules for extended keywords, page 355.

optimize

Syntax

#pragma optimize=[goal][level][no_optimization...]

Parameters

goal Choose between:

size, optimizes for size

balanced, optimizes balanced between speed and size

speed, optimizes for speed.

no_size_constraints, optimizes for speed, but relaxes the

normal restrictions for code size expansion.

1evel Specifies the level of optimization; choose between none,

low, medium, or high.

no_optimization Disables one or several optimizations; choose between:

no_code_motion, disables code motion

no_cse, disables common subexpression elimination

no_inline, disables function inlining

no_tbaa, disables type-based alias analysis

no_unroll, disables loop unrolling

no_vectorize, disables generation of NEON vector

instructions

no_scheduling, disables instruction scheduling.

vectorize, enables generation of NEON vector instructions

Description

Use this pragma directive to decrease the optimization level, or to turn off some specific optimizations. This pragma directive only affects the function that follows immediately after the directive.

The parameters size, balanced, speed, and no_size_constraints only have effect on the high optimization level and only one of them can be used as it is not possible to optimize for speed and size at the same time. It is also not possible to use preprocessor macros embedded in this pragma directive. Any such macro will not be expanded by the preprocessor.

Note: If you use the #pragma optimize directive to specify an optimization level that is higher than the optimization level you specify using a compiler option, the pragma directive is ignored.

Example

```
#pragma optimize=speed
int SmallAndUsedOften()
{
    /* Do something here. */
}
#pragma optimize=size
int BigAndSeldomUsed()
{
    /* Do something here. */
}
```

See also

Fine-tuning enabled transformations, page 229.

pack

Syntax

```
#pragma pack(n)
#pragma pack()
#pragma pack({push|pop}[,name] [,n])
```

Parameters

n Sets an optional structure alignment; one of: 1, 2, 4, 8, or 16

Empty list Restores the structure alignment to default

push Sets a temporary structure alignment

pop Restores the structure alignment from a temporarily pushed

alignment

name An optional pushed or popped alignment label

Description

Use this pragma directive to specify the maximum alignment of struct and union members.

The #pragma pack directive affects declarations of structures following the pragma directive to the next #pragma pack or the end of the compilation unit.

Note: This can result in significantly larger and slower code when accessing members of the structure.

Use either __packed or #pragma pack to relax the alignment restrictions for a type and the objects defined using that type. Mixing __packed and #pragma pack might lead to unexpected behavior.

See also *Structure types*, page 349.

__printf_args

Syntax #pragma __printf_args

Description Use this pragma directive on a function with a printf-style format string. For any call to

that function, the compiler verifies that the argument to each conversion specifier (for

example %d) is syntactically correct.

Example #pragma __printf_args

```
int printf(char const *,...);

void PrintNumbers(unsigned short x)
{
    printf("%d", x); /* Compiler checks that x is an integer */
```

public_equ

Syntax #pragma public_equ="symbol", value

Parameters

symbol The name of the assembler symbol to be defined (string).

value The value of the defined assembler symbol (integer constant

expression).

Description Use this pragma directive to define a public assembler label and give it a value.

Example #pragma public_equ="MY_SYMBOL",0x123456

See also *public equ*, page 391.

required

Syntax #pragma required=symbol

Parameters

symbol Any statically linked function or variable.

Description

Use this pragma directive to ensure that a symbol which is needed by a second symbol is included in the linked output. The directive must be placed immediately before the second symbol.

Use the directive if the requirement for a symbol is not otherwise visible in the application, for example if a variable is only referenced indirectly through the section it resides in.

Example

```
const char copyright[] = "Copyright by me";
#pragma required=copyright
int main()
{
    /* Do something here. */
}
```

Even if the copyright string is not used by the application, it will still be included by the linker and available in the output.

rtmodel

Syntax #pragma rtmodel="key", "value"

Parameters

"key" A text string that specifies the runtime model attribute.

"value" A text string that specifies the value of the runtime model

attribute. Using the special value * is equivalent to not

defining the attribute at all.

Description

Use this pragma directive to add a runtime model attribute to a module, which can be used by the linker to check consistency between modules.

This pragma directive is useful for enforcing consistency between modules. All modules that are linked together and define the same runtime attribute key must have the same value for the corresponding key, or the special value *. It can, however, be useful to state explicitly that the module can handle any runtime model.

A module can have several runtime model definitions.

Note: The predefined compiler runtime model attributes start with a double underscore. To avoid confusion, this style must not be used in the user-defined attributes.

Example

```
#pragma rtmodel="I2C","ENABLED"
```

The linker will generate an error if a module that contains this definition is linked with a module that does not have the corresponding runtime model attributes defined.

See also

Checking module consistency, page 117.

__scanf_args

Syntax

```
#pragma __scanf_args
```

Description

Use this pragma directive on a function with a scanf-style format string. For any call to that function, the compiler verifies that the argument to each conversion specifier (for example %d) is syntactically correct.

Example

section

Syntax

#pragma section="NAME"

alias

#pragma segment="NAME"

Parameters

NAME

The name of the section.

Description Use this pragma directive to define a section name that can be used by the section

operators __section_begin, __section_end, and __section_size. All section declarations for a specific section must have the same memory type attribute and

alignment.

Note: To place variables or functions in a specific section, use the #pragma location

directive or the @ operator.

Example #pragma section="MYSECTION"

See also Dedicated section operators, page 184 and the chapter Linking your application.

stack_protect

Syntax #pragma stack_protect

Description Use this pragma directive to force stack protection for the defined function that follows.

See also Stack protection, page 85.

STDC CX LIMITED RANGE

Parameters

ON Normal complex mathematic formulas can be used.

OFF Normal complex mathematic formulas cannot be used.

DEFAULT Sets the default behavior, that is OFF.

Description Use this pragma directive to specify that the compiler can use the normal complex

mathematic formulas for * (multiplication), / (division), and abs.

Note: This directive is required by Standard C. The directive is recognized but has no

effect in the compiler.

STDC FENV_ACCESS

Syntax #pragma STDC FENV_ACCESS {ON|OFF|DEFAULT}

Parameters

ON Source code accesses the floating-point environment. Note

that this argument is not supported by the compiler.

OFF Source code does not access the floating-point environment.

DEFAULT Sets the default behavior, that is OFF.

Description Use this pragma directive to specify whether your source code accesses the

floating-point environment or not.

Note: This directive is required by Standard C.

STDC FP_CONTRACT

Parameters

ON The compiler is allowed to contract floating-point

expressions.

OFF The compiler is not allowed to contract floating-point

expressions. Note that this argument is not supported by the

compiler.

DEFAULT Sets the default behavior, that is ON.

Description Use this pragma directive to specify whether the compiler is allowed to contract

floating-point expressions or not. This directive is required by Standard C.

Example #pragma STDC FP_CONTRACT=ON

swi_number

Syntax #pragma swi_number=number

Parameters

number The software interrupt number

Description Use this pragma directive together with the __swi extended keyword. It is used as an

argument to the generated SVC assembler instruction, and is used for selecting one

software interrupt function in a system containing several such functions.

Example #pragma swi_number=17

See also *Software interrupts*, page 82.

type_attribute

Syntax #pragma type_attribute=type_attr[type_attr...]

Parameters For information about type attributes that can be used with this pragma directive, see

Type attributes, page 355.

Description Use this pragma directive to specify IAR-specific type attributes, which are not part of

Standard C. Note however, that a given type attribute might not be applicable to all kind

of objects.

This directive affects the declaration of the identifier, the next variable, or the next

function that follows immediately after the pragma directive.

Example In this example, thumb-mode code is generated for the function foo:

```
#pragma type_attribute=__thumb
void foo(void)
{
}
```

This declaration, which uses extended keywords, is equivalent:

```
__thumb void foo(void)
{
}
```

See also The chapter Extended keywords.

unroll

Syntax #pragma unroll=n

n

Parameters

The number of loop bodies in the unrolled loop, a constant integer. #pragma unroll = 1 will prevent the unrolling of

a loop.

Description

Use this pragma directive to specify that the loop following immediately after the directive should be unrolled and that the unrolled loop should have *n* copies of the loop body. The pragma directive can only be placed immediately before a for, do, or while loop, whose number of iterations can be determined at compile time.

Normally, unrolling is most effective for relatively small loops. However, in some cases, unrolling larger loops can be beneficial if it exposes opportunities for further optimizations between the unrolled loop iterations, for example common subexpression elimination or dead code elimination.

The #pragma unroll directive can be used to force a loop to be unrolled if the unrolling heuristics are not aggressive enough. The pragma directive can also be used to reduce the aggressiveness of the unrolling heuristics.

Example

```
#pragma unroll=4
for (i = 0; i < 64; ++i)
{
  foo(i * k, (i + 1) * k);
}</pre>
```

See also

Loop unrolling, page 230

vectorize

Syntax

#pragma vectorize [= never]

Parameters

No parameter

Enables generation of NEON vector instructions.

never

Disables generation of NEON vector instructions.

Description

Use this pragma directive to enable or disable generation of NEON vector instructions for the loop that follows immediately after the pragma directive. This pragma directive can only be placed immediately before a for, do, or while loop. If the optimization level is lower than High, the pragma directive has no effect.

a[i] = b[i] * c[i];]

weak

Syntax

#pragma weak symbol1[=symbol2]

Parameters

symbol1 A function or variable with external linkage.

symbol2 A defined function or variable.

Description

This pragma directive can be used in one of two ways:

- To make the definition of a function or variable with external linkage a weak definition. The __weak attribute can also be used for this purpose.
- To create a weak alias for another function or variable. You can make more than one alias for the same function or variable.

Example

To make the definition of foo a weak definition, write:

#pragma weak foo

To make NMI_Handler a weak alias for Default_Handler, write:

#pragma weak NMI_Handler=Default_Handler

If ${\tt NMI_Handler}$ is not defined elsewhere in the program, all references to

 ${\tt NMI_Handler} \ will \ refer \ to \ {\tt Default_Handler}.$

See also

weak, page 370.

Intrinsic functions

- Summary of intrinsic functions
- Descriptions of intrinsic functions

Summary of intrinsic functions

To use intrinsic functions in an application, include the header file intrinsics.h.

To use Neon intrinsic functions in an application, include the header file arm_neon.h. For more information, see *Intrinsic functions for Neon instructions*, page 408.

Note that the intrinsic function names start with double underscores, for example:

__disable_interrupt

This table summarizes the intrinsic functions:

Intrinsic function	Description
arm_cdp	Inserts a coprocessor data operation instruction
arm_cdp2	Inserts a coprocessor data operation instruction
arm_ldc	Inserts a coprocessor load instruction
arm_ldcl	Inserts a coprocessor load instruction
arm_ldc2	Inserts a coprocessor load instruction
arm_ldc21	Inserts a coprocessor load instruction
arm_mcr	Inserts the coprocessor write instruction ${\tt MCR}$
arm_mcr2	Inserts a coprocessor write instruction MCR2
arm_mcrr	Inserts a coprocessor write instruction MCRR
arm_mcrr2	Inserts a coprocessor write instruction MCRR2
arm_mrc	Inserts the coprocessor read instruction ${\tt MRC}$
arm_mrc2	Inserts the coprocessor read instruction ${\tt MRC2}$
arm_mrrc	Inserts the coprocessor read instruction ${\tt MRRC}$
arm_mrrc2	Inserts the coprocessor read instruction MRRC2
arm_rsr	Inserts an instruction to read the specified system register
arm_rsr64	Inserts an instruction to read the specified system register
arm_rsrp	Inserts an instruction to read the specified system register

Table 30: Intrinsic functions summary

Intrinsic function	Description
arm_stc	Inserts a coprocessor store instruction
arm_stcl	Inserts a coprocessor store instruction
arm_stc2	Inserts a coprocessor store instruction
arm_stc21	Inserts a coprocessor store instruction
as_get_base	Creates a pointer of the same type as the parameter, representing the base of the area pointed to by the parameter. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
as_get_bounds	Creates a pointer of the same type as the parameter, representing the upper bound of the area pointed to by the parameter. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
as_make_bounds	Creates a pointer with bounds information. See the C-RUN documentation in the C-SPY® Debugging Guide for Arm.
CDP	Inserts a coprocessor data operation instruction
CDP2	Inserts a coprocessor data operation instruction
CLREX	Inserts a CLREX instruction
CLZ	Inserts a CLZ instruction
CRC32B	Inserts a CRC32B instruction
CRC32H	Inserts a CRC32H instruction
CRC32W	Inserts a CRC32W instruction
CRC32CB	Inserts a CRC32CB instruction
CRC32CH	Inserts a CRC32CH instruction
CRC32CW	Inserts a CRC32CW instruction
crc32b	Calculates a CRC32 checksum
crc32h	Calculates a CRC32 checksum
crc32w	Calculates a CRC32 checksum
crc32d	Calculates a CRC32 checksum
crc32cb	Calculates a CRC32 checksum
crc32ch	Calculates a CRC32 checksum
crc32cw	Calculates a CRC32 checksum
crc32cd	Calculates a CRC32 checksum
disable_fiq	Disables fast interrupt requests (fiq)

Table 30: Intrinsic functions summary (Continued)

Intrinsic function	Description
disable_interrupt	Disables interrupts
disable_irq	Disables interrupt requests (irq)
DMB	Inserts a DMB instruction
DSB	Inserts a DSB instruction
enable_fiq	Enables fast interrupt requests (fiq)
enable_interrupt	Enables interrupts
enable_irq	Enables interrupt requests (irq)
fma	Performs a fused floating-point multiply-accumulate calculation without intermediate rounding
fmaf	Performs a fused floating-point multiply-accumulate calculation without intermediate rounding
get_BASEPRI	Returns the value of the Cortex-M3/Cortex-M4/Cortex-M7 BASEPRI register
get_CONTROL	Returns the value of the Cortex-M CONTROL register
get_CPSR	Returns the value of the Arm CPSR (Current Program Status Register)
get_FAULTMASK	Returns the value of the Cortex-M3/Cortex-M4/Cortex-M7 FAULTMASK register
get_FPSCR	Returns the value of FPSCR
get_interrupt_state	Returns the interrupt state
get_IPSR	Returns the value of the IPSR register
get_LR	Returns the value of the link register
get_MSP	Returns the value of the \mathtt{MSP} register
get_PRIMASK	Returns the value of the Cortex-M PRIMASK register
get_PSP	Returns the value of the PSP register
get_PSR	Returns the value of the PSR register
get_SB	Returns the value of the static base register
get_SP	Returns the value of the stack pointer register
ISB	Inserts an ISB instruction
LDC	Inserts the coprocessor load instruction ${\tt LDC}$
LDCL	Inserts the coprocessor load instruction \mathtt{LDCL}
LDC2	Inserts the coprocessor load instruction $\mathtt{LDC2}$
LDC2L	Inserts the coprocessor load instruction LDC2L

Intrinsic function	Description
LDC_noidx	Inserts the coprocessor load instruction LDC
LDCL_noidx	Inserts the coprocessor load instruction \mathtt{LDCL}
LDC2_noidx	Inserts the coprocessor load instruction LDC2
LDC2L_noidx	Inserts the coprocessor load instruction $\mathtt{LDC}2\mathtt{L}$
LDREX	Inserts an LDREX instruction
LDREXB	Inserts an LDREXB instruction
LDREXD	Inserts an LDREXD instruction
LDREXH	Inserts an LDREXH instruction
MCR	Inserts the coprocessor write instruction ${\tt MCR}$
MCR2	Inserts the coprocessor write instruction ${\tt MCR2}$
MCRR	Inserts the coprocessor write instruction MCRR
MCRR2	Inserts the coprocessor write instruction ${\tt MCRR2}$
MRC	Inserts the coprocessor read instruction ${\tt MRC}$
MRC2	Inserts the coprocessor read instruction MRC2
MRRC	Inserts the coprocessor read instruction ${\tt MRRC}$
MRRC2	Inserts the coprocessor read instruction MRRC2
no_operation	Inserts a NOP instruction
PKHBT	Inserts a PKHBT instruction
PKHTB	Inserts a PKHTB instruction
PLD	Inserts the preload data instruction ${\tt PLD}$
PLDW	Inserts the preload data instruction \mathtt{PLDW}
PLI	Inserts a PLI instruction
QADD	Inserts a QADD instruction
QADD8	Inserts a QADD8 instruction
QADD16	Inserts a QADD16 instruction
QASX	Inserts a QASX instruction
QCFlag	Returns the value of the cumulative saturation flag of the FPSCR register
QDADD	Inserts a QDADD instruction
QDOUBLE	Inserts a QDOUBLE instruction
QSUB	Inserts a QDSUB instruction

Table 30: Intrinsic functions summary (Continued)

Intrinsic function	Description
QFlag	Returns the ${\mathbb Q}$ flag that indicates if overflow/saturation has
	occurred
QSAX	Inserts a QSAX instruction
QSUB	Inserts a QSUB instruction
QADD8	Inserts a QSUB8 instruction
QSUB16	Inserts a QSUB16 instruction
RBIT	Inserts an RBIT instruction
reset_Q_flag	Clears the $\ensuremath{\mathbb{Q}}$ flag that indicates if overflow/saturation has occurred
reset_QC_flag	Clears the value of the cumulative saturation flag QC of the ${\tt FPSCR}$ register
REV	Inserts an REV instruction
REV16	Inserts an REV16 instruction
REVSH	Inserts an REVSH instruction
rintn	Rounds a number to the nearest integer number
rintnf	Rounds a number to the nearest integer number
ROR	Inserts a ROR instruction
RRX	Inserts an RRX instruction
SADD8	Inserts an SADD8 instruction
SADD16	Inserts an SADD16 instruction
SASX	Inserts an SASX instruction
SEL	Inserts an SEL instruction
set_BASEPRI	Sets the value of the Cortex-M3/Cortex-M4/Cortex-M7 BASEPRI register
set_CONTROL	Sets the value of the Cortex-M CONTROL register
set_CPSR	Sets the value of the Arm ${\tt CPSR}$ (Current Program Status Register)
set_FAULTMASK	Sets the value of the Cortex-M3/Cortex-M4/Cortex-M7 FAULTMASK register
set_FPSCR	Sets the value of the FPSCR register
set_interrupt_state	Restores the interrupt state
set_LR	Assigns a new address to the link register
set_MSP	Sets the value of the MSP register

Intrinsic function	Description
set_PRIMASK	Sets the value of the Cortex-M PRIMASK register
set_PSP	Sets the value of the PSP register
set_SB	Assigns a new address to the static base register
set_SP	Assigns a new address to the stack pointer register
SEV	Inserts an SEV instruction
SHADD8	Inserts an SHADD8 instruction
SHADD16	Inserts an SHADD16 instruction
SHASX	Inserts an SHASX instruction
SHSAX	Inserts an SHSAX instruction
SHSUB8	Inserts an SHSUB8 instruction
SHSUB16	Inserts an SHSUB16 instruction
SMLABB	Inserts an SMLABB instruction
SMLABT	Inserts an SMLABT instruction
SMLAD	Inserts an SMLAD instruction
SMLADX	Inserts an SMLADX instruction
SMLALBB	Inserts an SMLALBB instruction
SMLALBT	Inserts an SMLALBT instruction
SMLALD	Inserts an SMLALD instruction
SMLALDX	Inserts an SMLALDX instruction
SMLALTB	Inserts an SMLALTB instruction
SMLALTT	Inserts an SMLALTT instruction
SMLATB	Inserts an SMLATB instruction
SMLATT	Inserts an SMLATT instruction
SMLAWB	Inserts an SMLAWB instruction
SMLAWT	Inserts an SMLAWT instruction
SMLSD	Inserts an SMLSD instruction
SMLSDX	Inserts an SMLSDX instruction
SMLSLD	Inserts an SMLSLD instruction
SMLSLDX	Inserts an SMLSLDX instruction
SMMLA	Inserts an SMMLA instruction
SMMLAR	Inserts an SMMLAR instruction
SMMLS	Inserts an SMMLS instruction

Table 30: Intrinsic functions summary (Continued)

SMMLSR	Inserts an SMMLSR instruction
SMMUL	Inserts an SMMUL instruction
_SMMULR	Inserts an SMMULR instruction
_SMUAD	Inserts an SMUAD instruction
_SMUADX	Inserts an SMUADX instruction
_SMUL	Inserts a signed 16-bit multiplication
_SMULBB	Inserts an SMULBB instruction
_SMULBT	Inserts an SMULBT instruction
_SMULTB	Inserts an SMULTB instruction
_SMULTT	Inserts an SMULTT instruction
_SMULWB	Inserts an SMULWB instruction
_SMULWT	Inserts an SMULWT instruction
_SMUSD	Inserts an SMUSD instruction
_SMUSDX	Inserts an SMUSDX instruction
_sqrt	Computes the square root of an operand
_sqrtf	Computes the square root of an operand
_SSAT	Inserts an SSAT instruction
_SSAT16	Inserts an SSAT16 instruction
_SSAX	Inserts an SSAX instruction
_SSUB8	Inserts an SSUB8 instruction
_SSUB16	Inserts an SSUB16 instruction
_STC	Inserts the coprocessor store instruction ${\tt STC}$
_STCL	Inserts the coprocessor store instruction ${\tt STCL}$
_STC2	Inserts the coprocessor store instruction $\ensuremath{\mathtt{STC2}}$
_STC2L	Inserts the coprocessor store instruction ${\tt STC2L}$
_STC_noidx	Inserts the coprocessor store instruction ${\tt STC}$
_STCL_noidx	Inserts the coprocessor store instruction ${\tt STCL}$
_STC2_noidx	Inserts the coprocessor store instruction $\ensuremath{\mathtt{STC2}}$
_STC2L_noidx	Inserts the coprocessor store instruction ${\tt STC2L}$
_STREX	Inserts a STREX instruction
_STREXB	Inserts a STREXB instruction
_STREXD	Inserts a STREXD instruction

Table 30: Intrinsic functions summary (Continued)

Intrinsic function	Description
STREXH	Inserts a STREXH instruction
SWP	Inserts an SWP instruction
SWPB	Inserts an SWPB instruction
SXTAB	Inserts an SXTAB instruction
SXTAB16	Inserts an SXTAB16 instruction
SXTAH	Inserts an SXTAH instruction
SXTB16	Inserts an SXTB16 instruction
TT	Inserts a TT instruction
TTT	Inserts a TTT instruction
TTA	Inserts a TTA instruction
TTAT	Inserts a TTAT instruction
UADD8	Inserts a UADD8 instruction
UADD16	Inserts a UADD16 instruction
UASX	Inserts a UASX instruction
UHADD8	Inserts a UHADD8 instruction
UHADD16	Inserts a UHADD16 instruction
UHASX	Inserts a UHASX instruction
UHSAX	Inserts a UHSAX instruction
UHSUB8	Inserts a UHSUB8 instruction
UHSUB16	Inserts a UHSUB16 instruction
UMAAL	Inserts a UMAAL instruction
UQADD8	Inserts a UQADD8 instruction
UQADD16	Inserts a UQADD16 instruction
UQASX	Inserts a UQASX instruction
UQSAX	Inserts a UQSAX instruction
UQSUB8	Inserts a UQSUB8 instruction
UQSUB16	Inserts a UQSUB16 instruction
USAD8	Inserts a USAD8 instruction
USADA8	Inserts a USAD8A8 instruction
USAT	Inserts a USAT instruction
USAT16	Inserts a USAT16 instruction
USAX	Inserts a USAX instruction

Table 30: Intrinsic functions summary (Continued)

Intrinsic function	Description
USUB8	Inserts a USUB8 instruction
USUB16	Inserts a USUB16 instruction
UXTAB	Inserts a UXTAB instruction
UXTAB16	Inserts a UXTAB16 instruction
UXTAH	Inserts a UXTAH instruction
UXTB16	Inserts a UXTB16 instruction
VFMA_F64	Inserts a VFMA instruction
VFMS_F64	Inserts a VFMS instruction
VFNMA_F64	Inserts a VFNMA instruction
VFNMS_F64	Inserts a VFNMS instruction
VFMA_F32	Inserts a VFMA instruction
VFMS_F32	Inserts a VFMS instruction
VFNMA_F32	Inserts a VFNMA instruction
VFNMS_F32	Inserts a VFNMS instruction
VMINNM_F64	Inserts a VMINNM instruction
VMAXNM_F64	Inserts a VMAXNM instruction
VMINNM_F32	Inserts a VMINNM instruction
VMAXNM_F32	Inserts a VMAXNM instruction
VRINTA_F64	Inserts a VRINTA instruction
VRINTM_F64	Inserts a VRINTM instruction
VRINTN_F64	Inserts a VRINTN instruction
VRINTP_F64	Inserts a VRINTP instruction
VRINTX_F64	Inserts a VRINTX instruction
VRINTR_F64	Inserts a VRINTR instruction
VRINTZ_F64	Inserts a VRINTZ instruction
VRINTA_F32	Inserts a VRINTA instruction
VRINTM_F32	Inserts a VRINTM instruction
VRINTN_F32	Inserts a VRINTN instruction
VRINTP_F32	Inserts a VRINTP instruction
VRINTX_F32	Inserts a VRINTX instruction
VRINTR_F32	Inserts a VRINTR instruction
VRINTZ_F32	Inserts a VRINTZ instruction

Intrinsic function	Description
VSQRT_F64	Inserts a VSQRT instruction
VSQRT_F32	Inserts a VSQRT instruction
WFE	Inserts a WFE instruction
WFI	Inserts a WFI instruction
YIELD	Inserts a YIELD instruction

INTRINSIC FUNCTIONS FOR NEON INSTRUCTIONS

The Neon co-processor implements the Advanced SIMD instruction set extension, as defined by the Arm architecture. To use Neon intrinsic functions in an application, include the header file <code>arm_neon.h</code>. The functions use vector types that are named according to this pattern:

```
<type><size>x<number_of_lanes>_t
```

where:

- type is int, unsigned int, float, or poly
- size is 8, 16, 32, or 64
- number_of_lanes is 1, 2, 4, 8, or 16.

The total bit width of a vector type is size times number_of_lanes, and should fit in a D register (64 bits) or a Q register (128 bits).

For example:

```
__intrinsic float32x2_t vsub_f32(float32x2_t, float32x2_t);
```

The intrinsic function vsub_f32 inserts a VSUB.F32 instruction that operates on two 64-bit vectors (D registers), each with two elements (lanes) of 32-bit floating-point type.

Some functions use an array of vector types. As an example, the definition of an array type with four elements of type $float32x2_t$ is:

```
typedef struct
{
  float32x2_t val[4];
}
float32x2x4_t;
```

Descriptions of intrinsic functions

This section gives reference information about each intrinsic function.

```
arm cdp
_arm_cdp2
   Syntax
                           void __arm_cdp(__cpid coproc, __cpopcw opc1, __cpreg CRd, __cpreg
                           CRn, __cpreg CRm, __cpopc opc2);
                           void __arm_cdp2(__cpid , __cpopw coprocopc1, __cpreg CRd, __cpreg
                           CRn, __cpreg CRm, __cpopc opc2);
   Parameters
                                               The coprocessor number 0..15.
                           coproc
                                               Coprocessor-specific operation codes.
                           opc1, opc2
                                               Coprocessor registers.
                           CRd, CRn, CRm
   Description
                           Inserts the coprocessor-specific data operation instruction CDP or CDP2. The parameters
                           will be encoded in the instruction and must therefore be constants.
    See also
                           CDP, page 413 and CDP2, page 413
_arm_ldc
arm Idcl
arm Idc2
arm Idc2I
   Syntax
                           void __arm_ldc(__cpid coproc, __cpreg CRd, const void* p);
                           void __arm_ldcl(__cpid coproc, __cpreg CRd, const void* p);
                           void __arm_ldc2(__cpid coproc, __cpreg CRd, const void* p);
                           void __arm_ldcl2(__cpid coproc, __cpreg CRd, const void* p);
   Parameters
                                              The coprocessor number 0..15.
                           coproc
```

A coprocessor register. CRd Pointer to memory that the coprocessor will read from. р Description Inserts the coprocessor load instruction LDC (or one of its variants), which means that a value will be loaded into a coprocessor register. The parameters coproc, and CRd will be encoded in the instruction and must therefore be constants. See also LDC, page 421, LDCL, page 421, LDC2, page 421, and LDC2L, page 421 _arm_mcr _arm_mcr2 arm mcrr arm mcrr2 Syntax void __arm_mcr(__cpid coproc, __cpopc opc1, __ul src, __cpreg CRn, __cpreg CRm, __cpopc opc2); void __arm_mcr2(__cpid coproc, __cpopc opc1, __ul src, __cpreg CRn, __cpreg CRm, __cpopc opc2); void __arm_mcrr(__cpid coproc, __cpopc opc1, unsigned long long src, __cpreg CRm); void __arm_mcrr2(__cpid coproc, __cpopc opc1, unsigned long long src, cpreq CRm); **Parameters** The coprocessor number 0..15. coproc opc1, opc2 Coprocessor-specific operation code. src The value to be written to the coprocessor. CRn, CRm The coprocessor register to read from. Description Inserts a coprocessor write instruction, MCR, MCR2, MCRR, or MCRR2. The parameters coproc, opc1, opc2, CRn, and CRm will be encoded in the instruction and must therefore be constants. __MCR, page 423, __MCR2, page 423, __MCRR, page 424, and MCRR2, page 424 See also

```
arm mrc
arm mrc2
 _arm_mrrc
 arm mrrc2
    Syntax
                           unsigned int __arm_mrc(__cpid coproc, __cpopc opc1, __cpreg CRn,
                           __cpreg CRm, __cpopc opc2);
                           unsigned int __arm_mrc2(__cpid coproc, __cpopc opc1, __cpreg CRn,
                           __cpreg CRm, __cpopc opc2);
                           unsigned long long arm mrrc( cpid coproc, cpopc opc1,
                           __cpreg CRm);
                           unsigned long long __arm_mrrc2(__cpid coproc, __cpopc opc1,
                           __cpreg CRm);
    Parameters
                                             The coprocessor number 0..15.
                           coproc
                                             Coprocessor-specific operation code.
                           opc1, opc2
                           CRn, CRm
                                             The coprocessor register to read from.
    Description
                           Inserts a coprocessor read instruction, MRC, MRC2, MRRC, or MRRC2. The parameters
                           coproc, opc1, opc2, CRn, and CRm will be encoded in the instruction and must
                           therefore be constants.
    See also
                           MRC, page 425, MRC2, page 425, MRRC, page 425, and MRRC2, page 425
 arm_rsr
 arm rsr64
 arm_rsrp
    Syntax
                           unsigned int __arm_rsr(sys_reg special_register);
                           unsigned long long __arm_rsr64(__sys_reg special_register);
                           void * __arm_rsrp(sys_reg special_register);
```

Parameters

special_register A string literal specifying a register.

Description

Reads a system register. Use a string literal to specify which register to read. For __arm_rsr and __arm_rsrp, the string literal can specify the name of a system register accepted in an MRS or VMRS instruction for the architecture specified by the compiler option --cpu. For __arm_rsr and __arm_rsrp, the string literal can also specify a 32-bit coprocessor register, using one of these formats:

- cp<coprocessor>:<opc1>:c<CRn>:c<CRm>:<opc2>
- p<coprocessor>:<opc1>:c<CRn>:c<CRm>:<opc2>

where

- <coprocessor> is a number 0..15
- <opc1> and <opc2> are numbers 0..7
- <CRn> and <CRm> are numbers 0..15

For __arm_rsr64, the string literal can specify a 64-bit coprocessor register using one of these formats:

- cp<coprocessor>:<opc1>:c<CRm>
- p<coprocessor>:<opc1>:c<CRm>

where

- <coprocessor> is a number 0..15
- <opc1> is a number 0..7
- *<CRm>* is a number 0..15

```
__arm_stcl
__arm_stc2
```

__arm_stc2l

Syntax

```
void __arm_stc(_cpid coproc, __cpreg CRd, const void* p);
void __arm_stcl(_cpid coproc, __cpreg CRd, const void* p);
void __arm_stc2(_cpid coproc, __cpreg CRd, const void* p);
void __arm_stc21(_cpid coproc, __cpreg CRd, const void* p);
```

Parameters

coproc The coprocessor number 0..15.

CRd A coprocessor register.

Pointer to memory that the coprocessor will write to.

Description Inserts the coprocessor store instruction STC (or one of its variants). The parameters

coproc, CRd, and p will be encoded in the instruction and must therefore be constants.

See also __STC, page 439, __STCL, page 439, __STC2, page 439, and __STC2L, page 439

__CDP2

Syntax void __CDP(__cpid coproc, __cpopcw opc1, __cpreg CRd, __cpreg

CRn, __cpreg CRm, __cpopc opc2);

void __CDP2(__cpid coproc, __cpopcw opc1, __cpreg CRd, __cpreg

CRn, __cpreg CRm, __cpopc opc2);

Parameters

coproc The coprocessor number 0..15.

opc1, opc2 Coprocessor-specific operation codes.

CRd, CRn, CRm Coprocessor registers.

Description Inserts the coprocessor-specific data operation instruction CDP or CDP2.

The parameters will be encoded in the instruction and must therefore be constants.

The intrinsic functions $__\texttt{CDP}$ and $__\texttt{CDP2}$ require an Armv5 architecture or higher for

Arm mode, or Armv6 or higher for Thumb mode.

__CLREX

Syntax void __CLREX(void);

Description Inserts a CLREX instruction.

This intrinsic function requires architecture Armv6K or Armv7 for Arm mode, and

AVRv7 for Thumb mode.

CLZ	
Syntax	unsigned intCLZ(unsigned int);
Description	Inserts a CLZ instruction.
_CRC32B	
_CRC32H	
_CRC32W	
_CRC32CB	
_CRC32CH	
CRC32CW	
Syntax	unsigned intCRC32B(unsigned int crc, unsigned char data); unsigned intCRC32H(unsigned int crc, unsigned short data); unsigned intCRC32W(unsigned int crc, unsigned int data); unsigned intCRC32CB(unsigned int crc, unsigned char data); unsigned intCRC32CH(unsigned int crc, unsigned short data) unsigned intCRC32CW(unsigned int crc, unsigned int data);
Description	Inserts a CRC32 instruction: CRC32B, CRC32H, CRC32W, CRC32CB, CRC32CH, or

CRC32CW.

crc32b	
crc32h	
crc32w	
crc32d	
Syntax	unsigned intcrc32b(unsigned int crc, unsigned char data); unsigned intcrc32b(unsigned int crc, unsigned short data); unsigned intcrc32w(unsigned int crc, unsigned int data); unsigned intcrc32d(unsigned int crc, unsigned long long data);
Description	Calculates a CRC32 checksum from a checksum (or initial value) crc and one item of data. Note that the 32-bit Arm/Thumb instructions do not include CRC32X, socrc32d is implemented as two calls tocrc32w.
	These intrinsic functions are defined according to the <i>Arm C Language Extensions</i> (ACLE).
crc32cb	
crc32ch	
crc32cw	
crc32cd	
Syntax	<pre>unsigned intcrc32cb(unsigned int crc, unsigned char data); unsigned intcrc32ch(unsigned int crc, unsigned short data); unsigned intcrc32cw(unsigned int crc, unsigned int data); unsigned intcrc32cd(unsigned int crc, unsigned long long data);</pre>
Description	Calculates a CRC32C checksum from a checksum (or initial value) crc and one item of data. Note that the 32-bit Arm/Thumb instructions do not include CRC32CX, socrc32cd is implemented as two calls tocrc32cw.

These intrinsic functions are defined according to the *Arm C Language Extensions* (ACLE).

__disable_fiq

Syntax void __disable_fiq(void);

Description Disables fast interrupt requests (fiq).

This intrinsic function can only be used in privileged mode and is not available for

Cortex-M devices.

__disable_interrupt

Syntax void __disable_interrupt(void);

Description Disables interrupts. For Cortex-M devices, it raises the execution priority level to 0 by

setting the priority mask bit, PRIMASK. For other devices, it disables interrupt requests

(irq) and fast interrupt requests (fiq).

This intrinsic function can only be used in privileged mode.

__disable_irq

Syntax void __disable_irq(void);

Description Disables interrupt requests (irq).

This intrinsic function can only be used in privileged mode and is not available for

Cortex-M devices.

__DMB

Syntax void __DMB(void);

Description Inserts a DMB instruction. This intrinsic function requires an Armv6M architecture, or an

Armv7 architecture or higher.

__DSB

Syntax void __DSB(void);

Description Inserts a DSB instruction. This intrinsic function requires an Armv6M architecture, or an

Army7 architecture or higher.

__enable_fiq

Syntax void __enable_fiq(void);

Description Enables fast interrupt requests (fig).

This intrinsic function can only be used in privileged mode, and it is not available for

Cortex-M devices.

__enable_interrupt

Syntax void __enable_interrupt(void);

Description Enables interrupts. For Cortex-M devices, it resets the execution priority level to default

by clearing the priority mask bit, PRIMASK. For other devices, it enables interrupt

requests (irq) and fast interrupt requests (fiq).

This intrinsic function can only be used in privileged mode.

__enable_irq

Syntax void __enable_irq(void);

Description Enables interrupt requests (irq).

This intrinsic function can only be used in privileged mode, and it is not available for

Cortex-M devices.

__fma

fmaf

 $\label{eq:continuous} \textbf{Syntax} \qquad \qquad \textbf{double } _\texttt{fma}(\texttt{double } \texttt{x}, \ \texttt{double } \texttt{y}, \ \texttt{double } \texttt{z}) \,;$

float __fmaf(float x, float y, float z);

Description Fused floating-point multiply-accumulate computes x*y+z without intermediate

rounding, which corresponds either to the intrinsic call __VFMA_F64(z, x, y) for

double precision, or __VFMA_F32(z, x, y) for single precision.

These intrinsic functions are defined according to the Arm C Language Extensions

(ACLE).

__get_BASEPRI

Syntax unsigned int __get_BASEPRI(void);

Description Returns the value of the BASEPRI register. This intrinsic function can only be used in

privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.

__get_CONTROL

Syntax unsigned int __get_CONTROL(void);

Description Returns the value of the CONTROL register. This intrinsic function can only be used in

privileged mode and it requires a Cortex-M device.

__get_CPSR

Syntax unsigned int __get_CPSR(void);

Description Returns the value of the Arm CPSR (Current Program Status Register). This intrinsic

function can only be used in privileged mode, is not available for Cortex-M devices, and

it requires Arm mode.

__get_FAULTMASK

Syntax unsigned int __get_FAULTMASK(void);

Description Returns the value of the FAULTMASK register. This intrinsic function can only be used in

privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.

__get_FPSCR

Syntax unsigned int __get_FPSCR(void);

Description Returns the value of FPSCR (floating-point status and control register).

This intrinsic function is only available for devices with a VFP coprocessor.

__get_interrupt_state

Syntax __istate_t __get_interrupt_state(void);

Description Returns the global interrupt state. The return value can be used as an argument to the

__set_interrupt_state intrinsic function, which will restore the interrupt state.

This intrinsic function can only be used in privileged mode, and cannot be used when using the --aeabi compiler option.

Example #include "intrinsics.h"

```
void CriticalFn()
{
    __istate_t s = __get_interrupt_state();
    __disable_interrupt();

    /* Do something here. */
    __set_interrupt_state(s);
}
```

The advantage of using this sequence of code compared to using

__get_IPSR

Syntax unsigned int __get_IPSR(void);

Description Returns the value of the IPSR register (Interrupt Program Status Register). This intrinsic

function can only be used in privileged mode, and is only available for Cortex-M

devices.

__get_LR

Syntax unsigned int __get_LR(void);

Description Returns the value of the link register (R14).

__get_MSP

Syntax unsigned int __get_MSP(void);

Description Returns the value of the MSP register (Main Stack Pointer). This intrinsic function can

only be used in privileged mode, and is only available for Cortex-M devices.

__get_PRIMASK

Syntax unsigned int __get_PRIMASK(void);

Description Returns the value of the PRIMASK register. This intrinsic function can only be used in

privileged mode and it requires a Cortex-M device.

__get_PSP

Syntax unsigned int __get_PSP(void);

Description Returns the value of the PSP register (Process Stack Pointer). This intrinsic function can

only be used in privileged mode, and is only available for Cortex-M devices.

__get_PSR

Syntax unsigned int __get_PSR(void);

Description Returns the value of the PSR register (combined Program Status Register). This intrinsic

function can only be used in privileged mode, and is only available for Cortex-M

devices.

__get_SB **Syntax** unsigned int __get_SB(void); Description Returns the value of the static base register (R9). _get_SP **Syntax** unsigned int __get_SP(void); Description Returns the value of the stack pointer register (R13). **ISB** Syntax void __ISB(void); Description Inserts an ISB instruction. This intrinsic function requires an Armv6M architecture, or an Armv7 architecture or higher. LDC **LDCL** LDC2 LDC2L **Syntax** void __LDCxxx(__ul coproc, __ul CRn, __ul const *src); **Parameters** The coprocessor number 0..15. coproc The coprocessor register to load. CRnA pointer to the data to load. src Description Inserts the coprocessor load instruction LDC—or one of its variants—which means that

a value will be loaded into a coprocessor register. The parameters coproc and CRn will

be encoded in the instruction and must therefore be constants.

The intrinsic functions __LDC and __LDCL require architecture Armv4 or higher for Arm mode, and Armv6T2 or higher for Thumb mode.

The intrinsic functions __LDC2 and __LDC2L require architecture Armv5 or higher for Arm mode, and Armv6T2 or higher for Thumb mode.

LDC noidx

LDCL noidx

LDC2 noidx

__LDC2L_noidx

Syntax void __LDCxxx_noidx(__ul coproc, __ul CRn, __ul const *src, __ul

option);

Parameters

COPTOC The coprocessor number 0..15.

CRn The coprocessor register to load.

src A pointer to the data to load.

option Additional coprocessor option 0..255.

Description

Inserts the coprocessor load instruction LDC, or one of its variants. A value will be loaded into a coprocessor register. The parameters *coproc*, *CRn*, and *option* will be encoded in the instruction and must therefore be constants.

The intrinsic functions __LDC_noidx and __LDCL_noidx require architecture Armv4 or higher for Arm mode, and Armv6T2 or higher for Thumb mode.

The intrinsic functions __LDC2_noidx and __LDC2L_noidx require architecture Armv5 or higher for Arm mode, and Armv6T2 or higher for Thumb mode.

__LDREX

LDREXB

LDREXD

LDREXH

Syntax

```
unsigned int __LDREX(unsigned int *);
unsigned char __LDREXB(unsigned char *);
unsigned long long __LDREXD(unsigned long long *);
unsigned short __LDREXH(unsigned short *);
```

Description

Inserts the specified instruction.

The __LDREX intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv6T2 or baseline Armv8-M for Thumb mode.

The __LDREXB and the __LDREXH intrinsic functions require architecture Armv6K or Armv7 for Arm mode, and Armv7 or baseline Armv8-M for Thumb mode.

The __LDREXD intrinsic function requires architecture Armv6K or Armv7 for Arm mode, and Armv7 but not Armv7-M for Thumb mode.

__MCR

MCR2

Syntax

```
void __MCR(__ul coproc, __ul opcode_1, __ul src, __ul CRn, __ul
CRm, __ul opcode_2);
void __MCR2(__ul coproc, __ul opcode_1, __ul src, __ul CRn, __ul
CRm, __ul opcode_2);
```

Parameters

coproc	The coprocessor number 015.
opcode_1	Coprocessor-specific operation code.
src	The value to be written to the coprocessor.
CRn	The coprocessor register to write to.
CRm	Additional coprocessor register; set to zero if not used.

opcode_2 Additional coprocessor-specific operation code; set to zero if not used

Description

Inserts a coprocessor write instruction (MCR or MCR2). The parameters coproc, opcode_1, CRn, CRm, and opcode_2 will be encoded in the instruction and must therefore be constants.

The intrinsic function __MCR requires either Arm mode, or an Armv6T2 or higher for Thumb mode.

The intrinsic function __MCR2 requires an Armv5T architecture or higher for Arm mode, or Armv6T2 or higher for Thumb mode.

__MCRR

MCRR2

Syntax void _MCRR(_cpid coproc, _cpopc opc1, unsigned long long src,

__cpreg CRm);

void __MCRR2(__cpid coproc, __cpopc opc1, unsigned long long src,

__cpreg CRm);

Parameters

coproc The coprocessor number 0..15.

opc1 Coprocessor-specific operation code.

src The value to be written to the coprocessor.

CRm The coprocessor register to read from.

Description

Inserts a coprocessor write instruction, MCRR or MCRR2. The parameters coproc, opc1,

and CRm will be encoded in the instruction and must therefore be constants.

The intrinsic functions __MCRR and __MCRR2 require an Armv6 architecture or higher for Arm mode, or Armv6T2 or higher for Thumb mode.

__MRC

MRC2

Syntax

unsigned int __MRC(__ul coproc, __ul opcode_1, __ul CRn, __ul
CRm, __ul opcode_2);
unsigned int __MRC2(__ul coproc, __ul opcode_1, __ul CRn, __ul
CRm, __ul opcode_2);

Parameters

coproc The coprocessor number 0..15.

opcode_1 Coprocessor-specific operation code.

CRn The coprocessor register to write to.

CRm Additional coprocessor register; set to zero if not used.

opcode_2 Additional coprocessor-specific operation code; set to zero if

not used.

Description

Inserts a coprocessor read instruction (MRC or MRC2). The parameters <code>coproc</code>, <code>opcode_1</code>, <code>CRn</code>, <code>CRm</code>, and <code>opcode_2</code> will be encoded in the instruction and must therefore be constants.

The intrinsic function __MRC requires either Arm mode, or an Armv6T2 or higher for Thumb mode.

The intrinsic function __MRC2 requires an Armv5T architecture or higher for Arm mode, or Armv6T2 or higher for Thumb mode.

__MRRC

__MRRC2

Syntax

unsigned long long __MRRC(__cpid coproc, __cpopc opc1, __cpreg
CRm);
unsigned long long __MRRC2(__cpid coproc, __cpopc opc1, __cpreg
CRm);

Parameters

coproc The coprocessor number 0..15.

opc1 Coprocessor-specific operation code.

CRm The coprocessor register to read from.

Description Inserts a coprocessor read instruction, MRRC or MRRC2. The parameters coproc, opc1,

and CRm will be encoded in the instruction and must therefore be constants.

The intrinsic functions __MRRC and __MRRC2 require an Armv6 architecture or higher

for Arm mode, or ArmV6T2 or higher for Thumb mode.

__no_operation

Syntax void __no_operation(void);

Description Inserts a NOP instruction.

__PKHBT

Syntax unsigned int $_$ PKHBT(unsigned int x, unsigned int y, unsigned

int count);

Parameters

x First operand.

y Second operand, optionally shifted left.

count Shift count 0–31, where 0 means no shift.

Description Inserts a PKHBT instruction, with an optionally shifted operand (LSL) for count in the

range 1-31.

This intrinsic function requires an Arm v6 architecture or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__PKHTB

Syntax unsigned int $_$ _PKHTB(unsigned int x, unsigned int y, unsigned

int count);

Parameters

x First operand.

y Second operand, optionally shifted right (arithmetic shift).

count Shift count 0–32, where 0 means no shift.

Description

Inserts a PKHTB instruction, with an optionally shifted operand (ASR) for count in the

range 1-32.

This intrinsic function requires an Arm v6 architecture or higher for Arm mode, and

Armv7-A, Armv7-R, or Arm v7E-M for Thumb mode.

PLD

PLDW

Syntax void __PLD(void const *);

void __PLDW(void const *);

Description Inserts a preload data instruction (PLD or PLDW).

The intrinsic function __PLD requires an Armv7 architecture. __PLDW requires an

Armv7 architecture with MP extensions (for example Cortex-A5).

__PLI

Syntax void __PLI(void const *);

Description Inserts a PLI instruction.

This intrinsic function requires an Arm v7 architecture.

__QADD

QDADD

__QDSUB

__QSUB

Syntax signed int __Qxxx(signed int, signed int);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv5E or higher for core mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__QADD8

__QADD16

__QASX

__QSAX

QSUB8

QSUB16

Syntax unsigned int __Qxxx(unsigned int, unsigned int);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__QCFlag

Syntax unsigned int __QCFlag(void);

Description Returns the value of the cumulative saturation flag QC of the FPSCR register

(Floating-point Status and Control Register). This intrinsic function is only available for

devices with Neon (Advanced SIMD).

__QDOUBLE

Syntax signed int __QDOUBLE(signed int);

Description Inserts an instruction QADD Rd, Rs, Rs for a source register Rs, and a destination register

Rd.

This intrinsic function requires architecture Armv5E or higher for Arm mode, and

Army7-A, Army7-R, or Army7E-M for Thumb mode.

__QFlag

Syntax int __QFlag(void);

Description Returns the Q flag that indicates if overflow/saturation has occurred.

This intrinsic function requires architecture Armv5E or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

RBIT

Syntax unsigned int __RBIT(unsigned int);

Description Inserts an RBIT instruction, which reverses the bit order in a 32-bit register.

__reset_Q_flag

Syntax void __reset_Q_flag(void);

Description Clears the Q flag that indicates if overflow/saturation has occurred.

This intrinsic function requires an Arm v5E architecture or higher for Arm mode, and

Arm v7A, Arm v7R, or Arm v7E-M for Thumb mode.

__reset_QC_flag

Syntax void __reset_QC_flag(void);

Description Clears the value of the cumulative saturation flag QC of the FPSCR register

(Floating-point Status and Control Register). This intrinsic function is only available for

devices with Neon (Advanced SIMD).

__REV

__REV16

REVSH

Syntax unsigned int __REV(unsigned int);

unsigned int __REV16(unsigned int);

signed int __REVSH(short);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher.

__rintn

__rintnf

Syntax double __rintn(double x);

float __rintnf(float x);

Description Rounds a number x to the nearest integer number (with ties to even), which corresponds

either to the intrinsic call __VRINTN_F64(x) for double precision, or

__VRINTN_F32(x) for single precision.

These intrinsic functions are defined according to the Arm C Language Extensions

(ACLE).

__ROR

Syntax unsigned int __ROR(unsigned int);

Description Inserts an ROR instruction.

 $__RRX$

Syntax unsigned int __RRX(unsigned int);

Description Inserts an RRX instruction.

SADD8	
SADD16	
SASX	
SSAX	
SSUB8	
SSUB16	
Syntax	<pre>unsigned intSxxx(unsigned int, unsigned int);</pre>
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
SEL	
Syntax	<pre>unsigned intSEL(unsigned int, unsigned int);</pre>
Description	Inserts an SEL instruction.
	This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
set_BASEPRI	
Syntax	<pre>voidset_BASEPRI(unsigned int);</pre>
Description	Sets the value of the BASEPRI register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.

__set_CONTROL

Syntax void __set_CONTROL(unsigned int);

Description Sets the value of the CONTROL register. This intrinsic function can only be used in

privileged mode and it requires a Cortex-M device.

__set_CPSR

Syntax void __set_CPSR(unsigned int);

Description Sets the value of the Arm CPSR (Current Program Status Register). Only the control field

is changed (bits 0-7). This intrinsic function can only be used in privileged mode, is not

available for Cortex-M devices, and it requires Arm mode.

__set_FAULTMASK

Syntax void __set_FAULTMASK(unsigned int);

Description Sets the value of the FAULTMASK register. This intrinsic function can only be used in

privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.

__set_FPSCR

Syntax void __set_FPSCR(unsigned int);

Description Sets the value of FPSCR (floating-point status and control register)

This intrinsic function is only available for devices with a VFP coprocessor.

__set_interrupt_state

Syntax void __set_interrupt_state(__istate_t);

Description Restores the interrupt state to a value previously returned by the

__get_interrupt_state function.

For information about the __istate_t type, see get interrupt state, page 419.

__set_LR

Syntax void __set_LR(unsigned int);

Description Assigns a new address to the link register (R14).

__set_MSP

Syntax void __set_MSP(unsigned int);

Description Sets the value of the MSP register (Main Stack Pointer). This intrinsic function can only

be used in privileged mode, and is only available for Cortex-M devices.

set PRIMASK

Syntax void __set_PRIMASK(unsigned int);

Description Sets the value of the PRIMASK register. This intrinsic function can only be used in

privileged mode and it requires a Cortex-M device.

__set_PSP

Syntax void __set_PSP(unsigned int);

Description Sets the value of the PSP register (Process Stack Pointer). This intrinsic function can

only be used in privileged mode, and is only available for Cortex-M devices.

set SB

Syntax void __set_SB(unsigned int);

Description Assigns a new address to the static base register (R9).

__set_SP

Syntax void __set_SP(unsigned int);

Description Assigns a new address to the stack pointer register (R13).

SEV	
Syntax	<pre>voidSEV(void);</pre>
Description	Inserts an SEV instruction.
	This intrinsic function requires architecture Armv7 for Arm mode, and Armv6-M of Armv7 for Thumb mode.
SHADD8	
SHADD16	
SHASX	
SHSAX	
SHSUB8	
SHSUB16	
Syntax	<pre>unsigned intSHxxx(unsigned int, unsigned int);</pre>
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

SMLABB	
SMLABT	
SMLATB	
SMLATT	
SMLAWB	
SMLAWT	
Syntax	unsigned int $__SMLAxxx(unsigned int, unsigned int, unsigned int);$
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
SMLAD	
SMLADX	
SMLSD	
SMLSDX	
Syntax	unsigned intSMLxxx(unsigned int, unsigned int, unsigned int)
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__SMLALBB

SMLALBT

SMLALTB

SMLALTT

Syntax unsigned long long __SMLALxxx(unsigned int, unsigned int,

unsigned long long);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__SMLALD

__SMLALDX

__SMLSLD

__SMLSLDX

Syntax unsigned long long __SMLxxx(unsigned int, unsigned int, unsigned

long long);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

SMMLA	
SMMLAR	
SMMLS	
SMMLSR	
Syntax	<pre>unsigned intSMMLxxx(unsigned int, unsigned int, unsigned int);</pre>
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
SMMUL	
SMMULR	
Syntax	<pre>unsigned intSMMULxxx(unsigned int, unsigned int);</pre>
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
SMUAD	
SMUADX	
SMUSD	
SMUSDX	
Syntax	<pre>unsigned intSMUxxx(unsigned int, unsigned int);</pre>
Description	Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__SMUL

Syntax signed int __SMUL(signed short, signed short);

Description Inserts a signed 16-bit multiplication.

This intrinsic function requires architecture Armv5-E or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

SMULBB

SMULTB

__SMULTT

__SMULWB

__SMULWT

Syntax unsigned int __SMULxxx(unsigned int, unsigned int);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__sqrt

__sqrtf

Description

Computes the square root of the operand x, which corresponds either to the intrinsic call ___VSQRT_F64 (x) for double precision, or __VSQRT_F32 (x) for single precision.

These intrinsic functions are defined according to the Arm C Language Extensions

(ACLE).

__SSAT

Syntax signed int __SSAT(signed int, unsigned int);

Description Inserts an SSAT instruction.

The compiler will incorporate a shift instruction into the operand when possible. For example, $__SSAT(x << 3.11)$ compiles to SSAT Rd, #11, Rn, LSL #3, where the value of x has been placed in register Rn and the return value of $__SSAT$ will be placed in register Rd.

This intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7-M for Thumb mode.

SSAT16

Syntax unsigned int __SSAT16(unsigned int, unsigned int);

Description Inserts an SSAT16 instruction.

This intrinsic function requires architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Arm v7E-M for Thumb mode.

__STC

STCL

STC2

__STC2L

Syntax void __STCxxx(__ul coproc, __ul CRn, __ul const *dst);

Parameter	S
-----------	---

coproc The coprocessor number 0..15.

CRn The coprocessor register to load.

dst A pointer to the destination.

Description

Inserts the coprocessor store instruction STC—or one of its variants—which means that the value of the specified coprocessor register will be written to a memory location. The parameters *coproc* and *CRn* will be encoded in the instruction and must therefore be constants.

The intrinsic functions __STC and __STCL require architecture Armv4 or higher for Arm mode, and Arm v6T2 or higher for Thumb mode.

The intrinsic functions __STC2 and __STC2L require architecture Armv5 or higher for Arm mode, and Armv6-T2 or higher for Thumb mode.

__STC_noidx

__STCL_noidx

__STC2_noidx

__STC2L_noidx

Syntax void __STCxxx_noidx(__ul coproc, __ul CRn, __ul const *dst, __ul

option);

CRn

Parameters

The coprocessor number 0..15.

dst A pointer to the destination.

option Additional coprocessor option 0..255.

Description Inserts the coprocess

Inserts the coprocessor store instruction STC—or one of its variants—which means that the value of the specified coprocessor register will be written to a memory location. The parameters <code>coproc</code>, <code>CRn</code>, and <code>option</code> will be encoded in the instruction and must

The coprocessor register to load.

therefore be constants.

The intrinsic functions __STC_noidx and __STCL_noidx require architecture Armv4 or higher for Arm mode, and Armv6-T2 or higher for Thumb mode.

The intrinsic functions __STC2_noidx and __STC2L_noidx require architecture Armv5 or higher for Arm mode, and Armv6-T2 or higher for Thumb mode.

STREX

__STREXB

__STREXD

STREXH

Syntax

```
unsigned int __STREX(unsigned int, unsigned int *);
unsigned int __STREXB(unsigned char, unsigned char *);
unsigned int __STREXD(unsigned long long, unsigned long long*);
unsigned int __STREXH(unsigned short, unsigned short *);
```

Description

Inserts the specified instruction.

The __STREX intrinsic function requires architecture Armv6 or higher for Arm mode, and Armv6-T2 or baseline Armv8-M for Thumb mode.

The __STREXB and the __STREXH intrinsic functions require architecture Armv6K or Armv7 for Arm mode, and Armv7 or baseline Armv8-M for Thumb mode.

The __STREXD intrinsic function requires architecture Armv6K or Armv7 for Arm mode, and Armv7 except for Armv7-M for Thumb mode.

__SWP

SWPB

Description Inserts the specified instruction.

These intrinsic functions require Arm mode.

SXTAB SXTAB16 **SXTAH** SXTB16 **Syntax** unsigned int __SXTxxx(unsigned int, unsigned int); Description Inserts the specified instruction. These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode. TT TTT TTA TTAT **Syntax** unsigned int __TT(unsigned int); unsigned int __TTT(unsugned int); unsigned int __TTA(unsigned int); unsigned int __TTAT(unsigned int); Description Inserts the specified instruction. Avoid using these intrinsic functions directly. Instead use the functions cmse_TT, cmse_TTT_fptr, and cmse_TTT_fptr, which are defined in the header file arm_cmse.h. These intrinsic functions require architecture Armv8-M with security extensions.

--cmse, page 261

See also

UADD8	
UADD16	
UASX	
USAX	
USUB8	
USUB16	
Syntax	unsigned intUxxx(unsigned int, unsigned int);
Description	Inserts the specified instruction.
	These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.
UHADD8	
UHADD16	
UHASX	
UHSAX	
UHSUB8	
UHSUB16	
Syntax	<pre>unsigned intUHxxx(unsigned int, unsigned int);</pre>
Description	Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__UMAAL

Syntax unsigned long long __UMAAL(unsigned int, unsigned int, unsigned

int, unsigned int);

Description Inserts an UMAAL instruction.

This intrinsic function requires architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__UQADD8

__UQADD16

__UQASX

__UQSAX

__UQSUB8

__UQSUB16

Syntax unsigned int __UQxxx(unsigned int, unsigned int);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and

Army7-A, Army7-R, or Army7E-M for Thumb mode.

__USAD8

__USADA8

Syntax unsigned int __USADxxx(unsigned int, unsigned int);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

__USAT

Syntax unsigned int __USAT(signed int, unsigned int);

Description Inserts a USAT instruction.

The compiler will incorporate a shift instruction into the operand when possible. For example, __USAT (x << 3,11) compiles to USAT Rd, #11, Rn, LSL #3, where the value of x has been placed in register Rn and the return value of __USAT will be placed

in register Rd.

This intrinsic function requires architecture Armv6 or higher for Arm mode, and

Armv7-A, Armv7-R, or Armv7-M for Thumb mode.

__USAT16

Syntax unsigned int __USAT16(unsigned int, unsigned int);

Description Inserts a USAT16 instruction.

This intrinsic function requires architecture Armv6 or higher for Arm mode, and

Army7-A, Army7-R, or Army7E-M for Thumb mode.

__UXTAB

UXTAB16

UXTAH

UXTB16

Syntax unsigned int __UXTxxx(unsigned int, unsigned int);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv6 or higher for Arm mode, and Armv7-A, Armv7-R, or Armv7E-M for Thumb mode.

Inserts a fused floating-point multiply-accumulate instruction VFMA, VFMS, VFNMA, or

```
VFMA F64
VFMS F64
__VFNMA_F64
VFNMS F64
VFMA F32
VFMS F32
VFNMA F32
VFNMS F32
     Syntax
                        double __VFMA_F64(double a, double x, double y);
                        double __VFMS_F64(double a, double x, double y);
                        double __VFNMA_F64(double a, double x, double y);
                        double VFNMS F64(double a, double x, double y);
                        float __VFMA_f32(float a, float x, float y);
                        float __VFMS_f32(float a, float x, float y);
                        float __VFNMA_F32(float a, float x, float y);
                        float __VFNMS_F32(float a, float x, float y);
```

Description

VFNMS.

__VMINNM_F64

__VMAXNM_F64

__VMINNM_F32

__VMAXNM_F32

 $\label{eq:continuous} \mbox{Syntax} \qquad \qquad \mbox{double $_$_VMINNM_F64 (double x, double y);}$

double __VMAXNM_F64(double x, double y);
float __VMINNM_F32(float x, float y);
float __VMAXNM_F32(float x, float y);

Description Inserts a VMINNM or VMAXNM instruction.

__VRINTA_F64 __VRINTM_F64 __VRINTN_F64 __VRINTP_F64 VRINTX F64 VRINTR F64 **VRINTZ F64** __VRINTA_F32 __VRINTM_F32 __VRINTN_F32 VRINTP F32 __VRINTX_F32 __VRINTR_F32 __VRINTZ_F32 Syntax double __VRINTA_F64(double x); double __VRINTM_F64(double x); double __VRINTN_F64(double x); double __VRINTP_F64(double x); double __VRINTX_F64(double x); double __VRINTR_F64(double x);

```
double __VRINTZ_F64(double x);
float __VRINTA_F32(float x);
float __VRINTM_F32(float x);
float __VRINTN_F32(float x);
float __VRINTP_F32(float x);
float __VRINTX_F32(float x);
float __VRINTX_F32(float x);
float __VRINTX_F32(float x);
```

Description

Performs a directed rounding and inserts the corresponding instruction:

- VRINTA: Rounds floating-point to integer to Nearest with Ties to Away
- VRINTM: Rounds floating-point to integer towards -Infinity
- VRINTN: Rounds floating-point to integer to Nearest
- VRINTP: Rounds floating-point to integer towards +Infinity
- VRINTR: Rounds floating-point to integer (using rounding mode in FPSCR)
- VRINTX: rounds floating-point to integer inexact (using rounding mode in FPSCR)
- VRINTZ: Rounds floating-point to integer towards Zero

If the result of for example __VRINTA_F64 is converted to int, the instruction VCVTA.S32.F64 is used instead. For conversion to unsigned int, the instruction VCVTA.U32.F64 is used instead. Similarly, VRINTM, VRINTN, VRINTP, and VRINTR use corresponding instructions VCVTM, VCVTM, VCVTP, and VCVTR for integer conversion.

__VSQRT_F64

__VSQRT_F32

Description

Inserts the square root instruction VSQRT.

WI	FE
----	----

WFI

YIELD

Syntax void int __xxx(void);

Description Inserts the specified instruction.

These intrinsic functions require architecture Armv7 for Arm mode, and Armv6-M, or Armv7 for Thumb mode.

The preprocessor

- Overview of the preprocessor
- Description of predefined preprocessor symbols
- Descriptions of miscellaneous preprocessor extensions

Overview of the preprocessor

The preprocessor of the IAR C/C++ Compiler for Arm adheres to Standard C. The compiler also makes these preprocessor-related features available to you:

- Predefined preprocessor symbols
 - These symbols allow you to inspect the compile-time environment, for example the time and date of compilation. For more information, see *Description of predefined preprocessor symbols*, page 452.
- User-defined preprocessor symbols defined using a compiler option
 In addition to defining your own preprocessor symbols using the #define directive, you can also use the option -D, see -D, page 263.
- Preprocessor extensions
 - There are several preprocessor extensions, for example many pragma directives; for more information, see the chapter *Pragma directives*. For information about the corresponding _Pragma operator and the other extensions related to the preprocessor, see *Descriptions of miscellaneous preprocessor extensions*, page 461.
- Preprocessor output
 - Use the option --preprocess to direct preprocessor output to a named file, see --preprocess, page 289.

To specify a path for an include file, use forward slashes:

```
#include "mydirectory/myfile"
```

In source code, use forward slashes:

```
file = fopen("mydirectory/myfile","rt");
```

Note that backslashes can also be used. In this case, use one in include file paths and two in source code strings.

Description of predefined preprocessor symbols

This section lists and describes the preprocessor symbols.

Note: To list the predefined preprocessor symbols, use the compiler option

--predef_macros. See --predef macros, page 288.

AAPCS

Description An integer that is set based on the --aapcs option. The symbol is set to 1 if the AAPCS

base standard is the selected calling convention (--aapcs=std). The symbol is

undefined for other calling conventions.

See also --aapcs, page 259.

__AAPCS_VFP__

Description An integer that is set based on the --aapcs option. The symbol is set to 1 if the VFP

variant of AAPCS is the selected calling convention (--aapcs=vfp). The symbol is

undefined for other calling conventions.

See also --aapcs, page 259.

__ARM_ADVANCED_SIMD__

Description An integer that is set based on the --cpu option. The symbol is set to 1 if the selected

processor architecture has the Advanced SIMD architecture extension. The symbol is

undefined for other cores.

See also --cpu, page 261.

__ARM_ARCH

Description This symbol is defined according to the *Arm C Language Extensions* (ACLE).

See also Arm C Language Extensions (IHI 0053D)

__ARM_ARCH_ISA_ARM

Description This symbol is defined according to the *Arm C Language Extensions* (ACLE).

See also Arm C Language Extensions (IHI 0053D)

__ARM_ARCH_ISA_THUMB

Description This symbol is defined according to the Arm C Language Extensions (ACLE).

See also Arm C Language Extensions (IHI 0053D)

__ARM_ARCH_PROFILE

Description This symbol is defined according to the Arm C Language Extensions (ACLE).

See also Arm C Language Extensions (IHI 0053D)

__ARM_BIG_ENDIAN

Description This symbol is defined according to the *Arm C Language Extensions* (ACLE).

See also Arm C Language Extensions (IHI 0053D)

ARM FEATURE CMSE

Description An integer that is set based on the compiler options --cpu and --cmse. The symbol is

set to 3 if the selected processor architecture has CMSE (Cortex-M security extensions)

and the compiler option --cmse is specified.

The symbol is set to 1 if the selected processor architecture has CMSE and the compiler

option --cmse is not specified.

The symbol is undefined for cores without CMSE.

See also --cmse, page 261 and --cpu, page 261

__ARM_FEATURE_CRC32

Description This symbol is defined to 1 if the CRC32 instructions are supported (optional in

Armv8-A/R).

This symbol is defined according to the Arm C Language Extensions (ACLE).

__ARM_FEATURE_CRYPTO

Description This symbol is defined to 1 if the crypto instructions are supported (implies Armv8-A/R

with Neon).

This symbol is defined according to the Arm C Language Extensions (ACLE).

ARM FEATURE_DIRECTED_ROUNDING

Description This symbol is defined to 1 if the directed rounding and conversion instructions are

supported.

This symbol is defined according to the Arm C Language Extensions (ACLE).

__ARM_FEATURE_DSP

Description This symbol is defined according to the Arm C Language Extensions (ACLE).

See also Arm C Language Extensions (IHI 0053D)

__ARM_FEATURE_FMA

Description This symbol is defined to 1 if the FPU supports fused floating-point

multiply-accumulate.

This symbol is defined according to the Arm C Language Extensions (ACLE).

__ARM_FEATURE_IDIV

Description This symbol is defined according to the *Arm C Language Extensions* (ACLE).

See also Arm C Language Extensions (IHI 0053D)

__ARM_FEATURE_NUMERIC_MAXMIN

Description This symbol is defined to 1 if the floating-point maximum and minimum instructions

are supported.

This symbol is defined according to the Arm C Language Extensions (ACLE).

__ARM_FEATURE_UNALIGNED

Description This symbol is defined only if the target supports unaligned access, and unaligned

access is allowed. The compiler option --no_unaligned_access can be used to

disallow unaligned access.

This symbol is defined according to the Arm C Language Extensions (ACLE).

__ARM_FP

Description This symbol is defined according to the Arm C Language Extensions (ACLE).

See also Arm C Language Extensions (IHI 0053D)

__ARM_MEDIA__

Description An integer that is set based on the --cpu option. The symbol is set to 1 if the selected

processor architecture has the Armv6 SIMD extensions for multimedia. The symbol is

undefined for other cores.

See also --cpu, page 261.

_ARM_NEON

Description This symbol is defined according to the *Arm C Language Extensions* (ACLE).

__ARM_NEON_FP

Description This symbol is defined according to the *Arm C Language Extensions* (ACLE).

__ARM_PROFILE_M_

Description An integer that is set based on the --cpu option. The symbol is set to 1 if the selected

processor architecture is a profile M core. The symbol is undefined for other cores.

See also --cpu, page 261.

__ARMVFP__

Description An integer that reflects the --fpu option and is defined to __ARMVFPV2__,

__ARMVFPV3__, or __ARMVFPV4__. These symbolic names can be used when testing the __ARMVFP__ symbol. If VFP code generation is disabled (default), the symbol will

be undefined.

See also --fpu, page 272.

__ARMVFP_D16__

Description An integer that is set based on the --fpu option. The symbol is set to 1 if the selected

FPU is a VFPv3 or VFPv4 unit with only 16 D registers. Otherwise, the symbol is

undefined.

See also --fpu, page 272.

__ARMVFP_FP16__

Description An integer that is set based on the --fpu option. The symbol is set to 1 if the selected

FPU only supports 16-bit floating-point numbers. Otherwise, the symbol is undefined.

See also --fpu, page 272.

__ARMVFP_SP__

Description An integer that is set based on the --fpu option. The symbol is set to 1 if the selected

FPU only supports 32-bit single-precision. Otherwise, the symbol is undefined.

See also --fpu, page 272.

__BASE_FILE__

Description A string that identifies the name of the base source file (that is, not the header file), being

compiled.

See also FILE, page 458, and --no path in file macros, page 281.

BUILD_NUMBER_	_
Description	A unique integer that identifies the build number of the compiler currently in use.
CORE	
Description	An integer that identifies the chip core in use. The value reflects the setting of thecpu option and is defined toarm4tm,arm5,arm5e,arm6,arm6m,arm6sm,arm7m,arm7em,arm7a,arm8a,arm8m_baseline,arm8m_mainline,arm8r, orarm8em_mainline These symbolic names can be used when testing thecore symbol.
COUNTER	
Description	A macro that expands to a new integer each time it is expanded, starting at zero (0) and counting up.
cplusplus	
Description	An integer which is defined when the compiler runs in any of the C++ modes, otherwise it is undefined. When defined, its value is $201402L$. This symbol can be used with #ifdef to detect whether the compiler accepts C++ code. It is particularly useful when creating header files that are to be shared by C and C++ code.
	This symbol is required by Standard C.
CPU_MODE	
Description	An integer that reflects the selected CPU mode and is defined to 1 for Thumb and 2 for Arm.
DATE	
Description	A string that identifies the date of compilation, which is returned in the form "Mmm dd yyyy", for example "Oct 30 2014"
	This symbol is required by Standard C.

EXCEPTIONS

Description A symbol that is defined when exceptions are supported in C++.

See also --no exceptions, page 279

FILE

Description A string that identifies the name of the file being compiled, which can be both the base

source file and any included header file.

This symbol is required by Standard C.

See also BASE FILE , page 456, and --no path in file macros, page 281.

__func__

Description A predefined string identifier that is initialized with the name of the function in which

the symbol is used. This is useful for assertions and other trace utilities. The symbol

requires that language extensions are enabled.

This symbol is required by Standard C.

See also -e, page 269 and PRETTY FUNCTION, page 459.

FUNCTION

Description A predefined string identifier that is initialized with the name of the function in which

the symbol is used. This is useful for assertions and other trace utilities. The symbol

requires that language extensions are enabled.

See also -e, page 269 and PRETTY FUNCTION, page 459.

__IAR_SYSTEMS_ICC__

Description An integer that identifies the IAR compiler platform. The current value is 8. Note that

the number could be higher in a future version of the product. This symbol can be tested with #ifdef to detect whether the code was compiled by a compiler from IAR Systems.

__ICCARM__

Description An integer that is set to 1 when the code is compiled with the IAR C/C++ Compiler for

Arm.

LINE

Description An integer that identifies the current source line number of the file being compiled,

which can be both the base source file and any included header file.

This symbol is required by Standard C.

__LITTLE_ENDIAN__

Description An integer that reflects the setting of the --endian option and is defined to 1 when the

byte order is little-endian. The symbol is defined to 0 when the byte order is big-endian.

_PRETTY_FUNCTION__

Description A predefined string identifier that is initialized with the function name, including

parameter types and return type, of the function in which the symbol is used, for example "void func (char)". This symbol is useful for assertions and other trace

utilities. The symbol requires that language extensions are enabled.

See also -e, page 269 and func, page 458.

__ROPI__

Description An integer that is defined when the --ropi compiler option is used.

See also --ropi, page 291.

__RTTI__

Description A symbol that is defined when runtime type information (RTTI) is supported in C++.

See also --no rtti, page 281

__RWPI__

Description An integer that is defined when the --rwpi compiler option is used.

See also --rwpi, page 292.

__STDC__

Description An integer that is set to 1, which means the compiler adheres to Standard C. This symbol

can be tested with #ifdef to detect whether the compiler in use adheres to Standard C.*

This symbol is required by Standard C.

__STDC_LIB_EXTI__

Description An integer that is set to 2011112L and that signals that Annex K, Bounds-checking

interfaces, of the C standard is supported.

See also STDC WANT LIB EXT1 , page 462

__STDC_NO_ATOMICS__

Description Set to 1 if the compiler does not support atomic types nor stdatomic.h.

__STDC_NO_THREADS__

Description Set to 1 to indicate that the implementation does not support threads.

__STDC_NO_VLA__

Description Set to 1 to indicate that C variable length arrays, VLAs, are not enabled.

See also --vla, page 298

__STDC_UTF16__

Description Set to 1 to indicate that the values of type char16_t are UTF-16 encoded.

__STDC_UTF32__

Description Set to 1 to indicate that the values of type char32_t are UTF-32 encoded.

__STDC_VERSION__

Description An integer that identifies the version of the C standard in use. The symbol expands to

201112L, unless the --c89 compiler option is used, in which case the symbol expands

to 199409L.

This symbol is required by Standard C.

__TIME__

Description A string that identifies the time of compilation in the form "hh:mm:ss".

This symbol is required by Standard C.

__TIMESTAMP__

Description A string constant that identifies the date and time of the last modification of the current

source file. The format of the string is the same as that used by the asctime standard

function (in other words, "Tue Sep 16 13:03:52 2014").

__VER_

Description An integer that identifies the version number of the IAR compiler in use. For example,

version 5.11.3 is returned as 5011003.

Descriptions of miscellaneous preprocessor extensions

This section gives reference information about the preprocessor extensions that are available in addition to the predefined symbols, pragma directives, and Standard C directives.

NDEBUG

Description This preprocessor symbol determines whether any assert macros you have written in

your application shall be included or not in the built application.

If this symbol is not defined, all assert macros are evaluated. If the symbol is defined, all assert macros are excluded from the compilation. In other words, if the symbol is:

- defined, the assert code will not be included
- not defined, the assert code will be included

This means that if you write any assert code and build your application, you should define this symbol to exclude the assert code from the final application.

Note that the assert macro is defined in the assert.h standard include file.

In the IDE, the NDEBUG symbol is automatically defined if you build your application in the Release build configuration.

See also aeabi assert, page 144.

__STDC_WANT_LIB_EXTI__

Description If this symbol is defined to 1 prior to any inclusions of system header files, it will enable

the use of functions from Annex K, *Bounds-checking interfaces*, of the C standard.

See also Bounds checking functionality, page 129

#warning message

Syntax #warning message

where message can be any string.

Description Use this preprocessor directive to produce messages. Typically, this is useful for

assertions and other trace utilities, similar to the way the Standard C #error directive is used. This directive is not recognized when the --strict compiler option is used.

C/C++ standard library functions

- C/C++ standard library overview
- DLIB runtime environment—implementation details

For detailed reference information about the library functions, see the online help system.

C/C++ standard library overview

The IAR DLIB Runtime Environment is a complete implementation of the C/C++ standard library, compliant with Standard C and C++. This library also supports floating-point numbers in IEEE 754 format and it can be configured to include different levels of support for locale, file descriptors, multibyte characters, etc.

For more information about customization, see the chapter *The DLIB runtime* environment.

For detailed information about the library functions, see the online documentation supplied with the product. There is also keyword reference information for the DLIB library functions. To obtain reference information for a function, select the function name in the editor window and press F1.

For more information about library functions, see the chapter *Implementation-defined* behavior for Standard C in this guide.

HEADER FILES

Your application program gains access to library definitions through header files, which it incorporates using the #include directive. The definitions are divided into several different header files, each covering a particular functional area, letting you include just those that are required.

It is essential to include the appropriate header file before making any reference to its definitions. Failure to do so can cause the call to fail during execution, or generate error or warning messages at compile time or link time.

LIBRARY OBJECT FILES

Most of the library definitions can be used without modification, that is, directly from the library object files that are supplied with the product. For information about how to set up a runtime library, see *Setting up the runtime environment*, page 123. The linker will include only those routines that are required—directly or indirectly—by your application.

See also *Overriding library modules*, page 126 for information about how you can override library modules with your own versions.

ALTERNATIVE MORE ACCURATE LIBRARY FUNCTIONS

The default implementation of cos, sin, tan, and pow is designed to be fast and small. As an alternative, there are versions designed to provide better accuracy. They are named __iar_xxx_accuratef for float variants of the functions and __iar_xxx_accuratel for long double variants of the functions, and where xxx is cos, sin, etc.

To use any of these more accurate versions, use the --redirect linker option.

REENTRANCY

A function that can be simultaneously invoked in the main application and in any number of interrupts is reentrant. A library function that uses statically allocated data is therefore not reentrant.

Most parts of the DLIB runtime environment are reentrant, but the following functions and parts are not reentrant because they need static data:

- Heap functions—malloc, free, realloc, calloc, etc. and the C++ operators new and delete
- Locale functions—localeconv, setlocale
- Multibyte functions—mblen, mbrlen, mbrtowc, mbsrtowc, mbtowc, wcrtomb, wcsrtomb, wctomb
- Rand functions—rand, srand
- Time functions—asctime, localtime, gmtime, mktime
- The miscellaneous functions atexit, perror, strerror, strtok
- Functions that use files or the heap in some way. This includes scanf, sscanf, getchar, getwchar, putchar, and putwchar. In addition, if you are using the options --enable_multibyte and --dlib_config=Full, the printf and sprintf functions (or any variants) can also use the heap.

Functions that can set errno are not reentrant, because an errno value resulting from one of these functions can be destroyed by a subsequent use of the function before it is read. This applies to math and string conversion functions, among others.

Remedies for this are:

- Do not use non-reentrant functions in interrupt service routines
- Guard calls to a non-reentrant function by a mutex, or a secure region, etc.

THE LONGJMP FUNCTION



A longjmp is in effect a jump to a previously defined setjmp. Any variable length arrays or C++ objects residing on the stack during stack unwinding will not be destroyed. This can lead to resource leaks or incorrect application behavior.

DLIB runtime environment—implementation details

These topics are covered:

- Briefly about the DLIB runtime environment
- C header files
- C++ header files
- Library functions as intrinsic functions
- Not supported C/C++ functionality
- Atomic operations
- Added C functionality
- Non-standard implementations
- Symbols used internally by the library

BRIEFLY ABOUT THE DLIB RUNTIME ENVIRONMENT

The DLIB runtime environment provides most of the important C and C++ standard library definitions that apply to embedded systems. These are of the following types:

- Adherence to a free-standing implementation of Standard C. The library supports most of the hosted functionality, but you must implement some of its base functionality. For additional information, see the chapter *Implementation-defined behavior for Standard C* in this guide.
- Standard C library definitions, for user programs.
- C++ library definitions, for user programs.
- CSTARTUP, the module containing the start-up code, see the chapter *The DLIB* runtime environment in this guide.

- Runtime support libraries; for example low-level floating-point routines.
- Intrinsic functions, allowing low-level use of Arm features. See the chapter *Intrinsic functions* for more information.

In addition, the DLIB runtime environment includes some added C functionality, see *Added C functionality*, page 471.

C HEADER FILES

This section lists the C header files specific to the DLIB runtime environment. Header files may additionally contain target-specific definitions; these are documented in the chapter *Using C*.

This table lists the C header files:

Header file	Usage
assert.h	Enforcing assertions when functions execute
complex.h	Computing common complex mathematical functions
ctype.h	Classifying characters
errno.h	Testing error codes reported by library functions
fenv.h	Floating-point exception flags
float.h	Testing floating-point type properties
inttypes.h	Defining formatters for all types defined in stdint.h
iso646.h	Alternative spellings
limits.h	Testing integer type properties
locale.h	Adapting to different cultural conventions
math.h	Computing common mathematical functions
setjmp.h	Executing non-local goto statements
signal.h	Controlling various exceptional conditions
stdalign.h	Handling alignment on data objects
stdarg.h	Accessing a varying number of arguments
stdatomic.h	Adding support for atomic operations
stdbool.h	Adds support for the bool data type in C.
stddef.h	Defining several useful types and macros
stdint.h	Providing integer characteristics
stdio.h	Performing input and output
stdlib.h	Performing a variety of operations
stdnoreturn.h	Adding support for non-returning functions

Table 31: Traditional Standard C header files—DLIB

Header file	Usage
string.h	Manipulating several kinds of strings
tgmath.h	Type-generic mathematical functions
threads.h	Adding support for multiple threads of execution
time.h	Converting between various time and date formats
uchar.h	Unicode functionality
wchar.h	Support for wide characters
wctype.h	Classifying wide characters

Table 31: Traditional Standard C header files—DLIB (Continued)

C++ HEADER FILES

This section lists the C++ header files:

- The C++ library header files

 The header files that constitute the Standard C++ library.
- The C++ C header files

 The C++ header files that provide the resources from the C library.

The C++ library header files

This table lists the header files that can be used in C++:

Header file	Usage
algorithm	Defines several common operations on containers and other sequences
array	Adding support for the array sequencer container
atomic	Adding support for atomic operations
bitset	Defining a container with fixed-sized sequences of bits
chrono	Adding support for time utilities
codecvt	Adding support for conversions between encodings
complex	Defining a class that supports complex arithmetic
condition_variable	Adding support for thread condition variables
deque	A deque sequence container
exception	Defining several functions that control exception handling
forward_list	Adding support for the forward list sequence container
fstream	Defining several I/O stream classes that manipulate external files

Table 32: C++ header files

Header file	Usage
functional	Defines several function objects
future	Adding support for passing function information between threads
hash_map	A map associative container, based on a hash algorithm
hash_set	A set associative container, based on a hash algorithm
initializer_list	Adding support for the initializer_list class
iomanip	Declaring several I/O stream manipulators that take an argument
ios	Defining the class that serves as the base for many I/O streams classes
iosfwd	Declaring several I/O stream classes before they are necessarily defined
iostream	Declaring the I/O stream objects that manipulate the standard streams
istream	Defining the class that performs extractions
iterator	Defines common iterators, and operations on iterators
limits	Defining numerical values
list	A doubly-linked list sequence container
locale	Adapting to different cultural conventions
map	A map associative container
memory	Defines facilities for managing memory
mutex	Adding support for the data race protection object \mathtt{mutex}
new	Declaring several functions that allocate and free storage
numeric	Performs generalized numeric operations on sequences
ostream	Defining the class that performs insertions
queue	A queue sequence container
random	Adding support for random numbers
ratio	Adding support for compile-time rational arithmetic
regex	Adding support for regular expressions
scoped_allocator	Adding support for the memory resource scoped_allocator_adaptor
set	A set associative container
shared_mutex	Adding support for the data race protection object shared_mutex
slist	A singly-linked list sequence container

Table 32: C++ header files (Continued)

Header file	Usage
sstream	Defining several I/O stream classes that manipulate string containers
stack	A stack sequence container
stdexcept	Defining several classes useful for reporting exceptions
streambuf	Defining classes that buffer I/O stream operations
string	Defining a class that implements a string container
strstream	Defining several I/O stream classes that manipulate in-memory character sequences
system_error	Adding support for global error reporting
thread	Adding support for multiple threads of execution
tuple	Adding support for the tuple class
typeinfo	Defining type information support
typeindex	Adding support for type indexes
typetraits	Adding support for traits on types
unordered_map	Adding support for the unordered map associative container
unordered_set	Adding support for the unordered set associative container
utility	Defines several utility components
valarray	Defining varying length array container
vector	A vector sequence container

Table 32: C++ header files (Continued)

Using Standard C libraries in C++

The C++ library works in conjunction with some of the header files from the Standard C library, sometimes with small alterations. The header files come in two forms—new and traditional—for example, cassert and assert.h. The former puts all declared symbols in the global and std namespace, whereas the latter puts them in the global namespace only.

This table shows the new header files:

Header file	Usage
cassert	Enforcing assertions when functions execute
ccomplex	Computing common complex mathematical functions
cctype	Classifying characters
cerrno	Testing error codes reported by library functions

Table 33: New Standard C header files—DLIB

Header file	Usage
cfenv	Floating-point exception flags
cfloat	Testing floating-point type properties
cinttypes	Defining formatters for all types defined in ${\tt stdint.h}$
ciso646	Alternative spellings
climits	Testing integer type properties
clocale	Adapting to different cultural conventions
cmath	Computing common mathematical functions
csetjmp	Executing non-local goto statements
csignal	Controlling various exceptional conditions
cstdalign	Handling alignment on data objects
cstdarg	Accessing a varying number of arguments
cstdatomic	Adding support for atomic operations
cstdbool	Adds support for the bool data type in C.
cstddef	Defining several useful types and macros
cstdint	Providing integer characteristics
cstdio	Performing input and output
cstdlib	Performing a variety of operations
cstdnoreturn	Adding support for non-returning functions
cstring	Manipulating several kinds of strings
ctgmath	Type-generic mathematical functions
cthreads	Adding support for multiple threads of execution
ctime	Converting between various time and date formats
cuchar	Unicode functionality
cwchar	Support for wide characters
cwctype	Classifying wide characters

Table 33: New Standard C header files—DLIB (Continued)

LIBRARY FUNCTIONS AS INTRINSIC FUNCTIONS

Certain C library functions will under some circumstances be handled as intrinsic functions and will generate inline code instead of an ordinary function call, for example memcpy, memset, and strcat.

NOT SUPPORTED C/C++ FUNCTIONALITY

The following files have contents that are not supported by the IAR C/C++ compiler:

- stdatomic.h, atomic
 - **Note:** Atomic operations are available in cores where the instruction set supports them.
- threads.h, condition_variable, future, mutex, shared_mutex, thread

Some library functions will have the same address. This occurs, most notably, when the library function parameters differ in type but not in size, as for example cos(double) and cosl(long double).

ATOMIC OPERATIONS

When you compile for cores with instruction set support for atomic accesses, the standard C and C++ atomic operations are available. If atomic operations are not available, the macro __STDC_NO_ATOMICS__ is defined to 1. This is true both in C and C++.

Atomic operations that cannot be handled natively by the hardware are passed on to library functions. The IAR C/C++ Compiler for Arm does not include implementations for these functions. A template implementation can be found in the file src\lib\atomic\libatomic\libatomic\c.

ADDED C FUNCTIONALITY

The DLIB runtime environment includes some added C functionality:

- C bounds-checking interface
- DLib_Threads.h
- iar_dlmalloc.h
- LowLevelIOInterface.h
- stdio.h
- stdlib.h
- string.h
- time.h

C bounds-checking interface

The C library supports Annex K (*Bounds-checking interfaces*) of the C standard. It adds symbols, types, and functions in the header files errno.h, stddef.h, stdint.h, stdlib.h, string.h, time.h, and wchar.h.

To enable the interface, define the preprocessor extension __STDC_WANT_LIB_EXT1__ to 1 prior to including any system header file. See __STDC_WANT_LIB_EXT1__, page 462.

As an added benefit, the compiler will issue warning messages for the use of unsafe functions for which the interface has a more safe version. For example, using strcpy instead of the more safe strcpy_s will make the compiler issue a warning message.

DLib Threads.h

The DLib_Threads.h header file contains support for locks and thread-local storage (TLS) variables. This is useful for implementing thread support. For more information, see the header file.

iar dlmalloc.h

The iar_dlmalloc.h header file contains support for the advanced (dlmalloc) heap handler. For more information, see *Heap considerations*, page 201.

LowLevellOInterface.h

The header file LowLevelInterface.h contains declarations for the low-level I/O functions used by DLIB. See *The DLIB low-level I/O interface*, page 143.

stdio.h

These functions provide additional I/O functionality:

fdopen	Opens a file based on a low-level file descriptor.	
fileno	Gets the low-level file descriptor from the file descriptor (FILE*).	
gets	Corresponds to fgets on stdin.	
getw	Gets a wchar_t character from stdin.	
putw	Puts a wchar_t character to stdout.	
ungetchar	Corresponds to ungetc on stdout.	
write_array	Corresponds to fwrite on stdout.	

string.h

These are the additional functions defined in string.h:

strdup Duplicates a string on the heap.

strcasecmp Compares strings case-insensitive.

strncasecmp Compares strings case-insensitive and bounded.

strnlen Bounded string length.

time.h

There are two interfaces for using time_t and the associated functions time, ctime, difftime, gmtime, localtime, and mktime:

- The 32-bit interface supports years from 1900 up to 2035 and uses a 32-bit integer for time_t. The type and function have names like __time32_t, __time32, etc. This variant is mainly available for backwards compatibility.
- The 64-bit interface supports years from -9999 up to 9999 and uses a signed long long for time_t. The type and function have names like __time64_t, __time64, etc.

The interfaces are defined in three header files:

- time32.h defines __time32_t, time_t, __time32, time, and associated functions.
- time64.h defines __time64_t, time_t, __time64, time, and associated functions.
- time.h includes time32.h or time64.h depending on the definition of DLIB TIME USES 64.

If DLIB TIME USES 64 is:

- defined to 1, it will include time64.h.
- defined to 0, it will include time32.h.
- undefined, it will include time32.h.

In both interfaces, time_t starts at the year 1970.

An application can use either interface, and even mix them by explicitly using the 32or 64-bit variants.

See also, time32, time64, page 151.

clock_t is represented by a 32-bit integer type.

By default, the time library does not support the timezone and daylight saving time functionality. To enable that functionality, use the linker option --timezone_lib. See --timezone lib, page 334.

There are two functions that can be used for loading or force-loading the timezone and daylight saving time information from __getzone:

- int _ReloadDstRules (void)
- int _ForceReloadDstRules (void)

Both these functions return 0 for success and -1 for failure.

NON-STANDARD IMPLEMENTATIONS

These functions do not work as specified by the C standard:

- fopen_s and freopen
 - These functions will not propagate the u exclusivity attribute to the low-level interface.
- towupper and towlower
 - These functions will only handle A, \ldots, Z and a, \ldots, Z .
- iswalnum, ..., iswxdigit
 - These functions will only handle arguments in the range 0 to 127.
- The collate functions strcoll and strxfrm will not work as intended. The same applies to the C++ equivalent functionality.

SYMBOLS USED INTERNALLY BY THE LIBRARY

The system header files use intrinsic functions, symbols, pragma directives etc. Some are defined in the library and some in the compiler. These reserved symbols start with ___ and should only be used by the library.

Use the compiler option --predef_macros to determine the value for any predefined symbols.

The symbols used internally by the library are not listed in this guide.

The linker configuration file

- Overview
- Defining memories and regions
- Regions
- Section handling
- Section selection
- Using symbols, expressions, and numbers
- Structural configuration

Before you read this chapter you must be familiar with the concept of sections, see *Modules and sections*, page 88.

Overview

To link and locate an application in memory according to your requirements, ILINK needs information about how to handle sections and how to place them into the available memory regions. In other words, ILINK needs a *configuration*, passed to it by means of the *linker configuration file*.

This file consists of a sequence of directives and typically, provides facilities for:

- Defining available addressable memories
 giving the linker information about the maximum size of possible addresses and
 defining the available physical memory, as well as dealing with memories that can be
 addressed in different ways.
- Defining the regions of the available memories that are populated with ROM or RAM
 - giving the start and end address for each region.
- · Section groups

dealing with how to group sections into blocks and overlays depending on the section requirements.

- Defining how to handle initialization of the application giving information about which sections that are to be initialized, and how that initialization should be made.
- Memory allocation defining where—in what memory region—each set of sections should be placed.
- Using symbols, expressions, and numbers
 expressing addresses and sizes, etc, in the other configuration directives. The
 symbols can also be used in the application itself.
- Structural configuration
 meaning that you can include or exclude directives depending on a condition, and to
 split the configuration file into several different files.
- Special characters in names
 When specifying the name of a symbol or section that uses non-identifier characters, you can enclose the name in backquotes. Example: 'My Name'.

Comments can be written either as C comments (/*...*/) or as C++ comments (//...).

Defining memories and regions

ILINK needs information about the available memory spaces, or more specifically it needs information about:

- The maximum size of possible addressable memories
 The define memory directive defines a *memory space* with a given size, which is the maximum possible amount of addressable memory, not necessarily physically available. See *define memory directive*, page 477.
- Available physical memory

The define region directive defines a region in the available memories in which specific sections of application code and sections of application data can be placed. See *define region directive*, page 477.

A region consists of one or several memory ranges. A range is a continuous sequence of bytes in a memory and several ranges can be expressed by using region expressions. See *Region expression*, page 479.

This section gives detailed information about each linker directive specific to defining memories and regions.

define memory directive

Syntax define memory [name] with size = size_expr [,unit-size];

where unit-size is one of:

unitbitsize = bitsize_expr
unitbytesize = bytesize_expr

and where expr is an expression, see expressions, page 501.

Parameters

size_expr Specifies how many units the memory space

contains; always counted from address zero.

bitsize_expr Specifies how many bits each unit contains.

bytesize_expr Specifies how many bytes each unit contains. Each

byte contains 8 bits.

Description The define memory directive defines a *memory space* with a given size, which is the

maximum possible amount of addressable memory, not necessarily physically available. This sets the limits for the possible addresses to be used in the linker configuration file.

For many microcontrollers, one memory space is sufficient. However, some microcontrollers require two or more. For example, a Harvard architecture usually requires two different memory spaces, one for code and one for data. If only one memory is defined, the memory name is optional. If no unit-size is given, the unit

contains 8 bits.

Example /* Declare the memory space Mem of four Gigabytes */

define memory Mem with size = 4G;

define region directive

Syntax define region name = region-expr;

where region-expr is a region expression, see also Regions, page 478.

Parameters

name The name of the region.

Description The define region directive defines a region in which specific sections of code and

sections of data can be placed. A region consists of one or several memory ranges, where

each memory range consists of a continuous sequence of bytes in a specific memory.

Several ranges can be combined by using region expressions. Note that those ranges do not need to be consecutive or even in the same memory.

Example

```
/* Define the 0x10000-byte code region ROM located at address 0x10000 in memory Mem */ define region ROM = Mem:[from 0x10000 size 0x10000];
```

Regions

A *region* is s a set of non-overlapping memory ranges. A *region expression* is built up out of *region literals* and set operations (union, intersection, and difference) on regions.

Region literal

Syntax [memory-name:][from expr { to expr | size expr }

[repeat expr [displacement expr]]]

where expr is an expression, see expressions, page 501.

Parameters

memory-name The name of the memory space in which the region literal

will be located. If there is only one memory, the name is

optional.

from expr expr is the start address of the memory range (inclusive).

to expr expr is the end address of the memory range (inclusive).

size expr expr is the size of the memory range.

repeat expr expr defines several ranges in the same memory for the

region literal.

displacement expr expr is the displacement from the previous range start in the

repeat sequence. Default displacement is the same value as

the range size.

Description

A region literal consists of one memory range. When you define a range, the memory it resides in, a start address, and a size must be specified. The range size can be stated explicitly by specifying a size, or implicitly by specifying the final address of the range. The final address is included in the range and a zero-sized range will only contain an address. A range can span over the address zero and such a range can even be expressed by unsigned values, because it is known where the memory wraps.

The repeat parameter will create a region literal that contains several ranges, one for each repeat. This is useful for *banked* or *far* regions.

Example

```
/* The 5-byte size range spans over the address zero */
Mem:[from -2 to 2]

/* The 512-byte size range spans over zero, in a 64-Kbyte memory
*/
Mem:[from 0xFF00 to 0xFF]

/* Defining several ranges in the same memory, a repeating
   literal */
Mem:[from 0 size 0x100 repeat 3 displacement 0x1000]

/* Resulting in a region containing:
   Mem:[from 0 size 0x100]
   Mem:[from 0x1000 size 0x100]
   Mem:[from 0x2000 size 0x100]
*/
```

See also

define region directive, page 477, and Region expression, page 479.

Region expression

Syntax

```
region-operand
  | region-expr | region-operand
  | region-expr - region-operand
  | region-expr & region-operand
  where region-operand is one of:
( region-expr )
```

(region-expr)
region-name
region-literal
empty-region

where region-name is a region, see define region directive, page 477

where region-literal is a region literal, see Region literal, page 478

and where empty-region is an empty region, see Empty region, page 480.

Description

Normally, a region consists of one memory range, which means a *region literal* is sufficient to express it. When a region contains several ranges, possibly in different memories, it is instead necessary to use a *region expression* to express it. Region expressions are actually set expressions on sets of memory ranges.

To create region expressions, three operators are available: union (|), intersection (&), and difference (-). These operators work as in *set theory*. For example, if you have the sets A and B, then the result of the operators would be:

- A | B: all elements in either set A or set B
- A & B: all elements in both set A and B
- A B: all elements in set A but not in B.

Example

```
/* Resulting in a range starting at 1000 and ending at 2FFF, in
   memory Mem */
Mem:[from 0x1000 to 0x1FFF] | Mem:[from 0x1500 to 0x2FFF]

/* Resulting in a range starting at 1500 and ending at 1FFF, in
   memory Mem */
Mem:[from 0x1000 to 0x1FFF] & Mem:[from 0x1500 to 0x2FFF]

/* Resulting in a range starting at 1000 and ending at 14FF, in
   memory Mem */
Mem:[from 0x1000 to 0x1FFF] - Mem:[from 0x1500 to 0x2FFF]

/* Resulting in two ranges. The first starting at 1000 and ending
   at 1FFF, the second starting at 2501 and ending at 2FFF.
   Both located in memory Mem */
Mem:[from 0x1000 to 0x2FFF] - Mem:[from 0x2000 to 0x24FF]
```

Empty region

Syntax

[]

Description

The empty region does not contain any memory ranges. If the empty region is used in a placement directive that actually is used for placing one or more sections, ILINK will issue an error.

Example

```
define region Code = Mem:[from 0 size 0x10000];
if (Banked) {
   define region Bank = Mem:[from 0x8000 size 0x1000];
} else {
   define region Bank = [];
}
define region NonBanked = Code - Bank;
```

/* Depending on the Banked symbol, the NonBanked region is either one range with 0x10000 bytes, or two ranges with 0x8000 and 0x7000 bytes, respectively. */ See also

Region expression, page 479.

Section handling

Section handling describes how ILINK should handle the sections of the execution image, which means:

• Placing sections in regions

The place at and place in directives place sets of sections with similar attributes into previously defined regions. See *place at directive*, page 491 and *place in directive*, page 492.

• Making sets of sections with special requirements

The block directive makes it possible to create empty sections with specific sizes and alignments, sequentially sorted sections of different types, etc.

The overlay directive makes it possible to create an area of memory that can contain several overlay images. See *define block directive*, page 482, and *define overlay directive*, page 486.

• Initializing the application

The directives initialize and do not initialize control how the application should be started. With these directives, the application can initialize global symbols at startup, and copy pieces of code. The initializers can be stored in several ways, for example they can be compressed. See *initialize directive*, page 487 and *do not initialize directive*, page 490.

Keeping removed sections

The keep directive retains sections even though they are not referred to by the rest of the application, which means it is equivalent to the *root* concept in the assembler and compiler. See *keep directive*, page 490.

• Specifying the contents of linker-generated sections

The define section directive can be used for creating specific sections with content and calculations that are only available at link time.

• Additional more specialized directives:

use init table directive

This section gives detailed information about each linker directive specific to section handling.

define block directive

Syntax

```
define [movable] block name
  [ with param, param... ]
{
    extended-selectors
}
[except
  {
    section_selectors
}];
```

where param can be one of:

```
size = expr
maximum size = expr
alignment = expr
fixed order
alphabetical order
static base [basename]
```

and where the rest of the directive selects sections to include in the block, see *Section selection*, page 494.

Parameters

name	The name of the block to be defined.
size	Customizes the size of the block. By default, the size of a block is the sum of its parts dependent of its contents.
maximum size	Specifies an upper limit for the size of the block. An error is generated if the sections in the block do not fit.
alignment	Specifies a minimum alignment for the block. If any section in the block has a higher alignment than the minimum alignment, the block will have that alignment.
fixed order	Places sections in the specified order. Each extended-selector is added in a separate nested block, and these blocks are kept in the specified order.

alphabetical order Places sections in alphabetical order by section name. Only section-selector patterns are allowed in alphabetical order blocks (no nested blocks, for example). All sections in a particular alphabetical order block must use the same kind of initialization (read-only, zero-init, copy-init, or no-init, and otherwise equivalent). You cannot use section begin, etc on individual sections contained in an alphabetical order block.

static base [basename]

Specifies that the static base with the name basename will be placed at the start of the block or in the middle of the block, as appropriate for the particular static base. The startup code must ensure that the register that holds the static base is initialized to the correct value. If there is only one static base, the name can be omitted.

Description

The block directive defines a contiguous area of memory that contains a possibly empty set of sections or other blocks. Blocks with no content are useful for allocating space for stacks or heaps. Blocks with content are usually used to group together sections that must to be consecutive.

You can access the start, end, and size of a block from an application by using the __section_begin, __section_end, or __section_size operators. If there is no block with the specified name, but there are sections with that name, a block will be created by the linker, containing all such sections.

movable blocks are for use with read-only and read-write position independence. Making blocks movable enables the linker to validate the application's use of addresses. Movable blocks are located in exactly the same way as other blocks, but the linker will check that the appropriate relocations are used when referring to symbols in movable blocks.

Example

```
/* Create a 0x1000-byte block for the heap */
define block HEAP with size = 0x1000, alignment = 8 { };
```

See also

Interaction between the tools and your application, page 202. See define overlay directive, page 486 for an Accessing example.

define section directive

Syntax

```
define [ root ] section name
  [ with alignment = sec-align ]
  section-content-item...
};
where each section-content-item can be one of:
udata8 { data | string };
sdata8 data [ ,data ] ...;
udata16 data [ ,data ] ...;
sdata16 data [ ,data ] ...;
udata24 data [ ,data ] ...;
sdata24 data [ ,data ] ...;
udata32 data [ .data ] ...:
sdata32 data [ ,data ] ...;
udata64 data [ ,data ] ...;
sdata64 data [ ,data ] ...;
pad_to data-align;
[ public ] label;
if-item:
where if-item is:
if (condition) {
   section-content-item...
[} else if (condition] {
   section-content-item... 1...
[] else {
   section-content-item...]
}
```

Parameters

sec-align

The alignment of the section, an expression.

root

Optional. If root is specified, the section is always included, even if it is not referenced.

udata8{data|string};

If the parameter is an expression, it generates an unsigned one-byte member in the section. The <code>data</code> expression is only evaluated during relocation and only if the value is needed. It causes a relocation error if the value of <code>data</code> is too large to fit in a byte. The possible range of values is 0 to 0xFF. If the parameter is a quoted string, it generates one one-byte member in the section for each character in the string.

sdata8 <i>data</i> ;	As udata8 <i>data</i> , except that it generates a signed one-byte member.
	The possible range of values is $-0x80$ to $0x7F$.
udata16 <i>data</i> ;	As sdata8, except that it generates an unsigned two-byte member. The possible range of values is 0 to 0xffff.
sdata16 <i>data</i> ;	As sdata8, except that it generates a signed two-byte member. The possible range of values is -0×8000 to 0×7 FFF.
udata24 <i>data</i> ;	As sdata8, except that it generates an unsigned three-byte member. The possible range of values is 0 to 0xffffff.
sdata24 <i>data</i> ;	As sdata8, except that it generates a signed three-byte member. The possible range of values is $-0x8000000$ to $0x7$ FFFFFF.
udata32 <i>data</i> ;	As sdata8, except that it generates an unsigned four-byte member. The possible range of values is 0 to 0xffffffff.
sdata32 data;	As sdata8, except that it generates a signed four-byte member.
	The possible range of values is $-0x800000000$ to $0x7$ FFFFFFF.
udata64 <i>data</i> ;	As sdata8, except that it generates an unsigned eight-byte member. The possible range of values is 0 to 0xfffffffffffffffffff.
sdata64 <i>data</i> ;	As sdata8, except that it generates a signed eight-byte member. The possible range of values is -0x8000000000000000000 to 0x7fffffffffffffff.
<pre>pad_to data_align;</pre>	Generates pad bytes to make the current offset from the start of the section to be aligned to the expression data-align.
[public] label;	Defines a label at the current offset from the start of the section. If public is specified, the label is visible to other program modules. If not, it is only visible to other data expressions in the linker configuration file.

if-item

name

alignment

Configuration-time selection of items. The conditions are expressions.

Description

Use the define section directive to create sections with content that is not available from assembler language or C/C++. Examples of this are the results of stack usage analysis and arithmetic that do not exist as relocations.

Unknown identifiers in data expressions are assumed to be labels. Note that only data expressions can use labels, stack usage analysis results, etc. All the other expressions are evaluated immediately when the configuration file is read.

Example

```
define section.conf {
   /* The application entry in a 16-bit word, provided it is less
        than 256K and 4-byte aligned. */
   udata16 __iar_program_start >> 2;
   /* The maximum stack usage in the program entry category. */
   udata16 maxstack("Application entry");
};
```

define overlay directive

Syntax

```
define overlay name [ with param, param... ]
{
   extended-selectors;
}
[except
   {
   section_selectors
   }];
```

For information about extended selectors and except clauses, see *Section selection*, page 494

Parameters

Customizes the size of the overlay. By default, the size of a overlay is the sum of its parts dependent of its contents.

Specifies an upper limit for the size of the overlay. An error is generated if the sections in the overlay do not fit.

The name of the overlay.

Specifies a minimum alignment for the overlay. If any section in the overlay has a higher alignment than the minimum alignment, the overlay will have that alignment.

fixed order

Places sections in fixed order; if not specified, the order of

the sections will be arbitrary.

Description

The overlay directive defines a named set of sections. In contrast to the block directive, the overlay directive can define the same name several times. Each definition will then be grouped in memory at the same place as all other definitions of the same name. This creates an *overlaid* memory area, which can be useful for an application that has several independent sub-applications.

Place each sub-application image in ROM and reserve a RAM overlay area that can hold all sub-applications. To execute a sub-application, first copy it from ROM to the RAM overlay. Note that ILINK does not help you with managing interdependent overlay definitions, apart from generating a diagnostic message for any reference from one overlay to another overlay.

The size of an overlay will be the same size as the largest definition of that overlay name and the alignment requirements will be the same as for the definition with the highest alignment requirements.

Note: Sections that were overlaid must be split into a RAM and a ROM part and you must take care of all the copying needed.

See also

Manual initialization, page 111.

initialize directive

Syntax

initialize { by copy | manually }
 [with param, param...]

where param can be one of:

packing = algorithm
simple ranges
complex ranges

Parameters

by copy

Splits the section into sections for initializers and initialized

data, and handles the initialization at application startup

automatically.

manually

Splits the section into sections for initializers and initialized

data. The initialization at application startup is not handled

automatically.

algorithm

Specifies how to handle the initializers. Choose between:

none - Disables compression of the selected section contents. This is the default method for initialize manually.

zeros - Compresses consecutive bytes with the value zero.

packbits - Compresses with the PackBits algorithm. This method generates good results for data with many identical consecutive bytes.

1z77 - Compresses with the Lempel-Ziv-77 algorithm. This method handles a larger variety of inputs well, but has a slightly larger decompressor.

auto - ILINK estimates the resulting size using each packing method (except for auto), and then chooses the packing method that produces the smallest estimated size. Note that the size of the decompressor is also included. This is the default method for initialize by copy.

smallest - This is a synonym for auto.

Description

The initialize directive splits each selected section into one section that holds initializer data and another section that holds the space for the initialized data. The section that holds the space for the initialized data retains the original section name, and the section that holds initializer data gets the name suffix _init. You can choose whether the initialization at startup should be handled automatically (initialize by copy) or whether you should handle it yourself (initialize manually).

When you use the packing method auto (default for initialize by copy), ILINK will automatically choose an appropriate packing algorithm for the initializers. To override this, specify a different packing method. The --log initialization option shows how ILINK decided which packing algorithm to use.

When initializers are compressed, a decompressor is automatically added to the image.

Each decompressor has two variants: one that can only handle a single source and destination range at a time, and one that can handle more complex cases. By default, the linker chooses a decompressor variant based on whether the associated section placement directives specify a single- or multi-range memory region. In general, this is the desired behavior, but you can use the with complex ranges or the with simple ranges modifier on an initialize directive to specify which decompressor variant to use. You can also use the command line option --default_to_complex_ranges to make initialize directives by default use complex ranges. The simple ranges decompressors are normally hundreds of bytes smaller than the complex ranges variants.

When initializers are compressed, the exact size of the compressed initializers is unknown until the exact content of the uncompressed data is known. If this data contains other addresses, and some of these addresses are dependent on the size of the compressed initializers, the linker fails with error Lp017. To avoid this, place compressed initializers last, or in a memory region together with sections whose addresses do not need to be known.

Due to an internal dependence, generation of compressed initializers can also fail (with error LP021) if the address of the initialized area depends on the size of its initializers. To avoid this, place the initializers and the initialized area in different parts of the memory (for example, the initializers are placed in ROM and the initialized area in RAM).

Unless initialize manually is used, ILINK will arrange for initialization to occur during system startup by including an initialization table. Startup code calls an initialization routine that reads this table and performs the necessary initializations.

Zero-initialized sections are not affected by the initialize directive.

The initialize directive is normally used for initialized variables, but can be used for copying any sections, for example copying executable code from slow ROM to fast RAM, or for overlays. For another example, see *define overlay directive*, page 486.

Sections that are needed for initialization are not affected by the initialize by copy directive. This includes the __low_level_init function and anything it references.

Anything reachable from the program entry label is considered *needed for initialization* unless reached via a section fragment with a label starting with <code>__iar_init\$\$done</code>. The <code>--log sections</code> option, in addition to logging the marking of section fragments to be included in the application, also logs the process of determining which sections are needed for initialization.

Example

```
/* Copy all read-write sections automatically from ROM to RAM at
   program start */
initialize by copy { rw };
place in RAM { rw };
place in ROM { ro };
```

See also

Initialization at system startup, page 94, and *do not initialize directive*, page 490.

do not initialize directive

Syntax

```
do not initialize
{
   section-selectors
}
[except
   {
    section-selectors
}1:
```

For information about extended selectors and except clauses, see *Section selection*, page 494.

Description

Use the do not initialize directive to specify the sections that you do not want to be automatically zero-initialized by the system startup code. The directive can only be used on zeroinit sections.

Typically, this is useful if you want to handle zero-initialization in some other way for all or some zeroinit sections.

This can also be useful if you want to suppress zero-initialization of variables entirely. Normally, this is handled automatically for variables specified as __no_init in the source, but if you link with object files produced by older tools from IAR Systems or other tool vendors, you might need to suppress zero-initialization specifically for some sections.

Example

```
/* Do not initialize read-write sections whose name ends with
   _noinit at program start */
do not initialize { rw section .*_noinit };
place in RAM { rw section .*_noinit };
```

See also

Initialization at system startup, page 94, and initialize directive, page 487.

keep directive

Syntax

```
keep
{
    section-selectors
}
[except
    {
    section-selectors
}];
```

For information about extended selectors and except clauses, see *Section selection*, page 494.

Description

The keep directive can be used for including blocks, overlays, or sections in the executable image that would otherwise be discarded because no references to them exist in the included parts of the application. Note that only sections from included modules

The keep directive does not cause any additional *modules* to be included in the application. To cause modules that define the specified symbols to be included, use the **Keep symbols** linker option (or the --keep command line option).

Example

```
keep { section .keep* } except {section .keep};
```

are considered for inclusion.

place at directive

Syntax

For information about extended selectors and except clauses, see *Section selection*, page 494.

Parameters

name

Optional. If it is specified, it is used in the map file, in some log messages, and is part of the name of any ELF output sections resulting from the directive.

noload

Optional. If it is specified, it prevents the sections in the directive from being loaded to the target system. To use the sections, you must put them into the target system in some other way. noload can only be used when a name is specified.

memory: expr A specific address in a specific memory. The address must

be available in the supplied memory defined by the define memory directive. The memory specifier is

optional if there is only one memory.

start of region_expr A region expression that results in a single-internal

region. The start of the interval is used.

end of region_expr A region expression that results in a single-internal

region. The end of the interval is used.

Description

The place at directive places sections and blocks either at a specific address or, at the beginning or the end of a region. The same address cannot be used for two different place at directives. It is also not possible to use an empty region in a place at directive. If placed in a region, the sections and blocks will be placed before any other sections or blocks placed in the same region with a place in directive.

Example

```
/* Place the read-only section .startup at the beginning of the
  code_region */
"START": place at start of ROM { readonly section .startup };
```

See also

place in directive, page 492.

place in directive

Syntax

```
[ "name": ]
place [ noload ] in region-expr
{
   extended-selectors
}
[except{
   section-selectors
}];
```

where region-expr is a region expression, see also Regions, page 478.

and where the rest of the directive selects sections to include in the block. See *Section selection*, page 494.

Parameters

name

Optional. If it is specified, it is used in the map file, in some log messages, and is part of the name of any ELF output sections resulting from the directive.

noload

Optional. If it is specified, it prevents the sections in the directive from being loaded to the target system. To use the sections, you must put them into the target system in some other way. noload can only be used when a name is specified.

Description

The place in directive places sections and blocks in a specific region. The sections and blocks will be placed in the region in an arbitrary order.

To specify a specific order, use the block directive. The region can have several ranges.

Example

```
/* Place the read-only sections in the code_region */
"ROM": place in ROM { readonly };
```

See also

place at directive, page 491.

use init table directive

Syntax

```
use init table name for
{
   extended-selectors
}
[except
   {
    section-selectors
}];
```

For information about extended selectors and except clauses, see *Section selection*, page 494.

Parameters

name

The name of the init table.

Description

Normally, all initialization entries are generated into a single initialization table (called Table). Use this directive to cause some of the entries to be put into a separate table. You can then use this initialization table at another time, or under different circumstances, than the normal initialization table.

Initialization entries for all variables not mentioned in a use init table directive are put into the normal initialization table. By having multiple use init table directives you can have multiple initialization tables.

The start, end, and size of the init table can be accessed in the application program by using __section_begin, __section_end, or __section_size of

"Region\$\$name", respectively, or via the symbols Region\$\$name\$\$Base, Region\$\$name\$\$Limit, and Region\$\$name\$\$Length.

Example

```
use init table Core2 for { section *.core2};

/* __section_begin("Region$$Core2") can be used to get the start
  of the Core2 init table. */
```

Section selection

The purpose of *section selection* is to specify—by means of *section selectors* and *except clauses*—the sections that an ILINK directive should be applied to. All sections that match one or more of the section selectors will be selected, and none of the sections selectors in the except clause, if any. Each section selector can match sections on section attributes, section name, and object or library name.

Some directives provide functionality that requires more detailed selection capabilities, for example directives that can be applied on both sections and blocks. In this case, the *extended-selectors* are used.

This section gives detailed information about each linker directive specific to section selection.

section-selectors

```
Syntax
```

```
[ section-selector [, section-selector...]]
section-selectoris:
  [ section-attribute ][ section-type ]
  [ symbol symbol-name ][ section section-name ]
  [object {module|filename} ]
section-attribute is:
  ro [ code|data ] | rw [ code|data ] | zi
section-type is:
  [ preinit_array|init_array ]
```

Parameters

section-attribute

Only sections with the specified attribute will be selected. section-attribute can consist of:

ro | readonly, for read-only sections.
rw | readwrite, for read/write sections.

zi|zeroinit, for zero-initialized sections. These sections have no content and should possibly be initialized with zeros during system startup.

code, for sections that contain code. data, for sections that contain data.

section-type

Only sections with that ELF section type will be selected. section-type can be:

preinit_array, sections of the ELF section type
 SHT_PREINIT_ARRAY.

init_array, sections of the ELF section type
SHT_INIT_ARRAY.

symbol symbol-name

Only sections that define at least one public symbol that matches the symbol name pattern will be selected. symbol-name is the symbol name pattern. Two wildcards are allowed:

? matches any single character.

* matches zero or more characters.

section section-name

Only sections whose names match the <code>section-name</code> will be selected. Two wildcards are allowed:

? matches any single character

* matches zero or more characters.

object module-spec

Only sections that originate from library modules or object files that matches *module-spec* will be selected. *module-spec* can be in one of two forms:

module, a name in the form

objectname (1ibraryname). Sections from object modules where both the object name and the library name match their respective patterns are selected. An empty library name pattern selects only sections from object files.

filename, the name of an object file, or an object in a library.

Two wildcards are allowed:

- ? matches any single character
- * matches zero or more characters.

Description

A section selector selects all sections that match the section attribute, section type, symbol name, section name, and the name of the module. Up to four of the five conditions can be omitted.

It is also possible to use only $\{\ \}$ without any section selectors, which can be useful when defining blocks.

Note that a section selector with narrower scope has higher priority than a more generic section selector. If more than one section selector matches for the same purpose, one of them must be more specific. A section selector is more specific than another one if in priority order:

- It specifies a symbol name with no wildcards and the other one does not.
- It specifies a section name or object name with no wildcards and the other one does not
- It specifies a section type and the other one does not
- There could be sections that match the other selector that also match this one, and the reverse is not true.

Selector I	Selector 2	More specific
ro	ro code	Selector 2
symbol mysym	section foo	Selector 1
ro code section f*	ro section f*	Selector 1
section foo*	section f*	Selector 1

Table 34: Examples of section selector specifications

Selector I	Selector 2	More specific
section *x	section f*	Neither
init_array	section f*	Selector 1
section .intvec	ro section .int*	Selector 1
section .intvec	object foo.o	Neither

Table 34: Examples of section selector specifications (Continued)

Example

```
{ rw } /* Selects all read-write sections */
{ section .mydata* } /* Selects only .mydata* sections */
/* Selects .mydata* sections available in the object special.o */
{ section .mydata* object special.o }
```

Assuming a section in an object named foo.o in a library named lib.a, any of these selectors will select that section:

```
object foo.o(lib.a)
object f*(lib*)
object foo.o
object lib.a
```

last

See also

initialize directive, page 487, do not initialize directive, page 490, and keep directive, page 490.

extended-selectors

```
Syntax
```

Places the selected sections, block or overlay last in the containing placement directive, block, or overlay.

Parameters

midway Places the selected sections, block, or overlay so that they are

no further than half the maximum size of the containing block away from either edge of the block. Note that this parameter can only be used inside a block that has a

maximum size.

name The name of the block or overlay.

Description

Use extended-selectors to select content for inclusion in a placement directive, block, or overlay. In addition to using section selection patterns, you can also explicitly specify blocks or overlays for inclusion.

Using the first or last keyword, you can specify one pattern, block, or overlay that is to be placed first or last in the containing placement directive, block, or overlay. If you need more precise control of the placement order you can instead use a block with fixed order.

Blocks can be defined separately, using the define block directive, or inline, as part of an extended-selector.

The midway parameter is primarily useful together with a static base that can have both negative and positive offsets.

Example

You can also define the block First inline, instead of in a separate define block directive:

```
define block Table { first block First { ro section .f* }, ro section .b* };
```

See also

define block directive, page 482, define overlay directive, page 486, and place at directive, page 491.

Using symbols, expressions, and numbers

In the linker configuration file, you can also:

• Define and export symbols

The define symbol directive defines a symbol with a specified value that can be used in expressions in the configuration file. The symbol can also be exported to be used by the application or the debugger. See *define symbol directive*, page 500, and *export directive*, page 500.

Use expressions and numbers

In the linker configuration file, expressions and numbers of the expressions and numbers.

In the linker configuration file, expressions and numbers are used for specifying addresses, sizes, etc. See *expressions*, page 501.

This section gives detailed information about each linker directive specific to defining symbols, expressions and numbers.

check that directive

Syntax check that expression;

Parameters

expression A boolean expression.

Description

You can use the check that directive to compare the results of stack usage analysis against the sizes of blocks and regions. If the expression evaluates to zero, an error is emitted.

Three extra operators are available for use only in check that expressions:

maxstack(category) The stack depth of the deepest call chain for any call

graph root function in the category.

totalstack(category) The sum of the stack depths of the deepest call chains

for each call graph root function in the category.

size(block) The size of the block.

Example check that maxstack("Program entry")

+ totalstack("interrupt")

+ 1K

<= size(block CSTACK);

See also Stack usage analysis, page 96.

define symbol directive

Syntax define [exported] symbol name = expr;

Parameters

exported Exports the symbol to be usable by the executable

image.

name The name of the symbol.

expr The symbol value.

Description

The define symbol directive defines a symbol with a specified value. The symbol can then be used in expressions in the configuration file. The symbols defined in this way work exactly like the symbols defined with the option --config_def outside of the configuration file.

The define exported symbol variant of this directive is a shortcut for using the directive define symbol in combination with the export symbol directive. On the command line this would require both a --config_def option and a

--define_symbol option to achieve the same effect.

Note:

- A symbol cannot be redefined
- Symbols that are either prefixed by _x, where x is a capital letter, or that contain __ (double underscore) are reserved for toolset vendors.

define symbol my_symbol = 4;

See also export directive, page 500 and Interaction between ILINK and the application, page

114.

export directive

Syntax export symbol name;

Parameters

name The name of the symbol.

Description The export directive defines a symbol to be exported, so that it can be used both from

the executable image and from a global label. The application, or the debugger, can then

refer to it for setup purposes etc.

Example

```
/* Define the symbol my_symbol to be exported */
export symbol my_symbol;
```

expressions

Syntax

An expression is built up of the following constituents:

```
expression binop expression
unop expression
expression ? expression : expression
(expression)
number
symbol
func-operator
```

where binop is one of these binary operators:

```
+, -, *, /, %, <<, >>, <, >, ==, !=, &, ^, |, &&, | |
```

where unop is one of this unary operators:

```
+, -, !, ~
```

where number is a number, see numbers, page 502

where symbol is a defined symbol, see define symbol directive, page 500 and --config_def, page 307

and where func-operator is one of these function-like operators:

minimum(expr,expr)	Returns the smallest of the two parameters.
maximum(expr,expr)	Returns the largest of the two parameters.
isempty(r)	Returns True if the region is empty, otherwise False.
<pre>isdefinedsymbol(expr-symbol)</pre>	Returns True if the expression symbol is defined, otherwise False.
start(r)	Returns the lowest address in the region.
end(r)	Returns the highest address in the region.
size(r)	Returns the size of the complete region.

where expr is an expression, and r is a region expression, see *Region expression*, page 479.

Description

In the linker configuration file, an expression is a 65-bit value with the range -2^64 to 2^64. The expression syntax closely follows C syntax with some minor exceptions. There are no assignments, casts, pre- or post-operations, and no address operations (*, &, [], ->, and .). Some operations that extract a value from a region expression, etc, use a syntax resembling that of a function call. A boolean expression returns 0 (False) or 1 (True).

numbers

Syntax

```
nr [nr-suffix]
```

where nr is either a decimal number or a hexadecimal number $(0 \times ... \text{ or } 0 \times ...)$.

and where nr-suffix is one of:

Description

A number can be expressed either by normal C means or by suffixing it with a set of useful suffixes, which provides a compact way of specifying numbers.

Example

1024 is the same as 0×400 , which is the same as 1K.

Structural configuration

The structural directives provide means for creating structure within the configuration, such as:

• Conditional inclusion

An if directive includes or excludes other directives depending on a condition, which makes it possible to have directives for several different memory configurations in the same file. See *if directive*, page 503.

- Dividing the linker configuration file into several different files
 The include directive makes it possible to divide the configuration file into several logically distinct files. See *include directive*, page 504.
- Signaling an error for unsupported cases

This section gives detailed information about each linker directive specific to structural configuration.

error directive

Syntax error string

Parameters

string The error message.

Description An error directive can be used for signaling an error if the directive occurs in the active

part of a conditional directive.

Example error "Unsupported configuration"

if directive

[} else if (expr) {
 directives]
[} else {
 directives]
}

where expr is an expression, see expressions, page 501.

Parameters

directives Any ILINK directive.

Description

An if directive includes or excludes other directives depending on a condition, which makes it possible to have directives for several different memory configurations, for example both a banked and non-banked memory configuration, in the same file.

The directives inside an if part, else if part, or an else part are syntax checked and processed regardless of whether the conditional expression was true or false, but only the directives in the part where the conditional expression was true, or the else part if none of the conditions were true, will have any effect outside the if directive. The if

directives can be nested.

Example See *Empty region*, page 480.

include directive

Syntax include "filename";

Parameters

filename A path where both / and \ can be used as the directory

delimiter.

Description The include directive makes it possible to divide the configuration file into several

logically distinct parts, each in a separate file. For instance, there might be parts that you

need to change often and parts that you seldom edit.

Normally, the linker searches for configuration include files in the system configuration directory. You can use the --config_search linker option to add more directories to

search.

See also --config_search, page 308

Section reference

- Summary of sections
- Descriptions of sections and blocks

For more information about sections, see the chapter *Modules and sections*, page 88.

Summary of sections

This table lists the ELF sections and blocks that are used by the IAR build tools:

Section	Description
.bss	Holds zero-initialized static and global variables.
CSTACK	Holds the stack used by C or C++ programs.
.data	Holds static and global initialized variables.
.data_init	Holds initial values for . ${\tt data}$ sections when the linker directive ${\tt initialize}$ is used.
.exc.text	Holds exception-related code.
HEAP	Holds the heap used for dynamically allocated data.
iar_tls.\$\$DATA	Holds initial values for TLS variables.
.iar.dynexit	Holds the atexit table.
.init_array	Holds a table of dynamic initialization functions.
.intvec	Holds the reset vector table
IRQ_STACK	Holds the stack for interrupt requests, IRQ, and exceptions.
.noinit	Holdsno_init static and global variables.
.preinit_array	Holds a table of dynamic initialization functions.
.prepreinit_array	Holds a table of dynamic initialization functions.
.rodata	Holds constant data.
.text	Holds the program code.
.textrw	Holdsramfunc declared program code.
.textrw_init	Holds initializers for the $\mbox{.}\mbox{textrw}$ declared section.
Veneer\$\$CMSE	Holds secure gateway veneers.

Table 35: Section summary

In addition to the ELF sections used for your application, the tools use a number of other ELF sections for a variety of purposes:

- Sections starting with .debug generally contain debug information in the DWARF format
- Sections starting with .iar.debug contain supplemental debug information in an IAR format
- The section .comment contains the tools and command lines used for building the file
- Sections starting with .rel or .rela contain ELF relocation information
- The section . symtab contains the symbol table for a file
- The section .strtab contains the names of the symbol in the symbol table
- The section .shstrtab contains the names of the sections.

Descriptions of sections and blocks

This section gives reference information about each section, where the:

- Description describes what type of content the section is holding and, where required, how the section is treated by the linker
- Memory placement describes memory placement restrictions.

For information about how to allocate sections in memory by modifying the linker configuration file, see *Placing code and data—the linker configuration file*, page 91.

.bss

Description Holds zero-initialized static and global variables.

Memory placement This section can be placed anywhere in memory.

CSTACK

Description Block that holds the internal data stack.

Memory placement This block can be placed anywhere in memory.

See also Setting up stack memory, page 109.

.data

Description Holds static and global initialized variables. In object files, this includes the initial

values. When the linker directive initialize is used, a corresponding .data_init section is created for each .data section, holding the possibly compressed initial

values.

Memory placement This section can be placed anywhere in memory.

.data init

Description Holds the possibly compressed initial values for .data sections. This section is created

by the linker if the initialize linker directive is used.

Memory placement This section can be placed anywhere in memory.

.exc.text

Description Holds code that is only executed when your application handles an exception.

Memory placement In the same memory as .text.

See also *Exception handling*, page 190.

HEAP

Description Holds the heap used for dynamically allocated data in memory, in other words data

allocated by malloc and free, and in C++, new and delete.

Memory placement This section can be placed anywhere in memory.

See also Setting up heap memory, page 110.

__iar_tls.\$\$DATA

Description Holds initial values for TLS variables. This section is created by the linker if the linker

option -- threaded_lib is used.

Memory placement This section can be placed anywhere in memory.

See also Managing a multithreaded environment, page 154

.iar.dynexit

Description Holds the table of calls to be made at exit.

Memory placement This section can be placed anywhere in memory.

See also Setting up the atexit limit, page 110.

.init_array

Description Holds pointers to routines to call for initializing one or more C++ objects with static

storage duration.

Memory placement This section can be placed anywhere in memory.

.intvec

Description Holds the reset vector table and exception vectors which contain branch instructions to

cstartup, interrupt service routines etc.

Memory placement This section must be placed at address range 0×00 to $0 \times 3F$.

IRQ_STACK

Description Holds the stack which is used when servicing IRQ exceptions. Other stacks may be

added as needed for servicing other exception types: FIQ, SVC, ABT, and UND. The cstartup.s file must be modified to initialize the exception stack pointers used.

Note: This section is not used when compiling for Cortex-M.

Memory placement This section can be placed anywhere in memory.

See also Exception stack, page 200

.noinit

Description Holds static and global __no_init variables.

Memory placement This section can be placed anywhere in memory.

.preinit_array

Description Like .init_array, but is used by the library to make some C++ initializations happen

before the others.

Memory placement This section can be placed anywhere in memory.

See also .init array, page 508.

.prepreinit_array

Description Like .init_array, but is used when C static initialization is rewritten as dynamic

initialization. Performed before all C++ dynamic initialization.

Memory placement This section can be placed anywhere in memory.

See also .init array, page 508.

.rodata

Description Holds constant data. This can include constant variables, string and aggregate literals,

etc.

Memory placement This section can be placed anywhere in memory.

.text

Description Holds program code, including the code for system initialization.

Memory placement This section can be placed anywhere in memory.

.textrw

Description Holds __ramfunc declared program code.

Memory placement This section can be placed anywhere in memory.

See also ramfunc, page 366.

.textrw init

Description Holds initializers for the .textrw declared sections.

Memory placement This section can be placed anywhere in memory.

See also *ramfunc*, page 366.

Veneer\$\$CMSE

Description This section contains secure gateway veneers created automatically by the linker for

each entry function, as determined by the extended keyword

__cmse_nonsecure_entry.

Memory placement This section should be placed in an NSC (non-secure callable) memory region. NSC

regions can be programmed using an SAU (security attribution unit) or an IDAU (implementation-defined attribute unit). For information about how to program the SAU

or IDAU, see the documentation for your Armv8-M core.

See also Arm TrustZone®, page 56, --cmse, page 261, __cmse_nonsecure_entry, page 361, and

--import cmse lib out, page 319

The stack usage control file

- Overview
- Stack usage control directives
- Syntactic components

Before you read this chapter, see Stack usage analysis, page 96.

Overview

A stack usage control file consists of a sequence of directives that control stack usage analysis. You can use C("/*...*/") and C++("//...") comments in these files.

The default filename extension for stack usage control files is suc.

C++ NAMES

When you specify the name of a C++ function in a stack usage control file, you must use the name exactly as used by the linker. Both the number and names of parameters, as well as the names of types must match. However, most non-significant white-space differences are accepted. In particular, you must enclose the name in quote marks because all C++ function names include non-identifier characters.

You can also use wildcards in function names. "#*" matches any sequence of characters, and "#?" matches a single character. This makes it possible to write function names that will match any instantiation of a template function.

Examples:

```
"operator new(unsigned int)"
"std::ostream::flush()"
"operator <<(std::ostream &, char const *)"
"void Sort<#*>(#*, #*, #*)"
```

Stack usage control directives

This section gives detailed reference information about each stack usage control directive.

call graph root directive

Syntax call graph root [category] : func-spec [, func-spec...];

Parameters

category See category, page 515

func-spec See func-spec, page 515

Description Specifies that the listed functions are call graph roots. You can optionally specify a call

graph root category. Call graph roots are listed under their category in the Stack Usage

chapter in the linker map file.

The linker will normally issue a warning for functions needed in the application that are

not call graph roots and which do not appear to be called.

Example call graph root [task]: MyFunc10, MyFunc11;

See also *call_graph_root*, page 378.

exclude directive

Syntax exclude func-spec [, func-spec...];

Parameters

func-spec See func-spec, page 515

Description Excludes the specified functions, and call trees originating with them, from stack usage

calculations.

Example exclude MyFunc5, MyFunc6;

function directive

Syntax [override] function [category] func-spec : stack-size

[, call-info...];

Parameters

category See category, page 515

func-spec See func-spec, page 515

call-info See call-info, page 516

stack-size

See stack-size, page 516

Description

Specifies what the maximum stack usage is in a function and which other functions that

are called from that function.

Normally, an error is issued if there already is stack usage information for the function, but if you start with override, the error will be suppressed and the information

supplied in the directive will be used instead of the previous information.

Example

function MyFunc1: 32,

calls MyFunc2,

calls MyFunc3, MyFunc4: 16;

function [interrupt] MyInterruptHandler: 44;

max recursion depth directive

Syntax max recursion depth func-spec : size;

Parameters

func-spec See func-spec, page 515

size See *size*, page 517

Description

Specifies the maximum number of iterations through any of the cycles in the recursion

nest of which the function is a member.

A recursion nest is a set of cycles in the call graph where each cycle shares at least one

node with another cycle in the nest.

Stack usage analysis will base its result on the max recursion depth multiplied by the stack usage of the deepest cycle in the nest. If the nest is not entered on a point along one of the deepest cycles, no stack usage result will be calculated for such calls.

Example max recursion depth MyFunc12: 10;

no calls from directive

Syntax no calls from module-spec to func-spec [, func-spec...];

Parameters

func-spec See func-spec, page 515

module-spec See module-spec, page 515

Description When you provide stack usage information for some functions in a module without

stack usage information, the linker warns about functions that are referenced from the module but not listed as called. This is primarily to help avoid problems with C runtime

routines, calls to which are generated by the compiler, beyond user control.

If there actually is no call to some of these functions, use the no calls from directive to selectively suppress the warning for the specified functions. You can also disable the

warning entirely (--diag_suppress or

 $\label{lem:project} Project \!\!>\!\! Options \!\!>\!\! Linker \!\!>\!\! Diagnostics \!\!>\!\! Suppress\ these\ diagnostics).$

Example no calls from [file.o] to MyFunc13, MyFun14;

possible calls directive

Syntax possible calls calling-func : called-func [, called-func...];

Parameters

calling-func See func-spec, page 515
called-func See func-spec, page 515

Description Specifies an exhaustive list of possible destinations for all indirect calls in one function.

Use this for functions which are known to perform indirect calls and where you know exactly which functions that might be called in this particular application. Consider using the #pragma calls directive if the information about which functions that might

be called is available when compiling.

Example possible calls MyFunc7: MyFunc8, MyFunc9;

When the function does not perform any calls, the list is empty:

possible calls MyFunc8: ;

See also *calls*, page 377.

Syntactic components

This section describes the syntactical components that can be used by the stack usage control directives.

category

Syntax [name]

Description A call graph root category. You can use any name you like. Categories are not

case-sensitive.

Example category examples:

[interrupt]
[task]

func-spec

Syntax [?] name [module-spec]

Description Specifies the name of a symbol, and for module-local symbols, the name of the module

it is defined in. Normally, if func-spec does not match a symbol in the program, a

warning is emitted. Prefixing with? suppresses this warning.

Example *func-spec* examples:

xFun MyFun [file.o] ?"fun1(int)"

module-spec

Syntax [name [(name)]]

Description

Specifies the name of a module, and optionally, in parentheses, the name of the library it belongs to. To distinguish between modules with the same name, you can specify:

- The complete path of the file ("D:\C1\test\file.o")
- As many path elements as are needed at the end of the path ("test\file.o")
- Some path elements at the start of the path, followed by "...", followed by some path elements at the end ("D:\...\file.o").

Note that when using multi-file compilation (--mfc), multiple files are compiled into a single module, named after the first file.

Example *module-spec* examples:

[file.o]
[file.o(lib.a)]
["D:\C1\test\file.o"]

name

Description A name can be either an identifier or a quoted string.

The first character of an identifier must be either a letter or one of the characters "_",

"\$", or ".". The rest of the characters can also be digits.

A quoted string starts and ends with " and can contain any character. Two consecutive

" characters can be used inside a quoted string to represent a single ".

Example name examples:

MyFun file.o "file-1.o"

call-info

Syntax calls func-spec [, func-spec...][: stack-size]

Description Specifies one or more called functions, and optionally, the stack size at the calls.

Example call-info examples:

calls MyFunc1 : stack 16

calls MyFunc2, MyFunc3, MyFunc4

stack-size

Syntax [stack] size

Description Specifies the size of a stack frame.

Example stack-size examples:

24

stack 28

size

A decimal integer, or 0x followed by a hexadecimal integer. Either alternative can optionally be followed by a suffix indicating a power of two (K= 2^{10} , M= 2^{20} , G= 2^{30} , T= 2^{40} , P= 2^{50}). Description

Example size examples:

24

0x18

2048 2K

Syntactic components

IAR utilities

- The IAR Archive Tool—iarchive—creates and manipulates a library (an archive) of several ELF object files
- The IAR ELF Tool—ielftool—performs various transformations on an ELF executable image (such as fill, checksum, format conversions, etc)
- The IAR ELF Dumper—ielfdump—creates a text representation of the contents of an ELF relocatable or executable image
- The IAR ELF Object Tool—iobjmanip—is used for performing low-level manipulation of ELF object files
- The IAR Absolute Symbol Exporter—isymexport—exports absolute symbols from a ROM image file, so that they can be used when you link an add-on application.
- The IAR ELF Relocatable Object Creator—iexe2obj—creates a relocatable ELF object file from an executable ELF object file.
- Descriptions of options—detailed reference information about each command line option available for the different utilities.

The IAR Archive Tool—iarchive

The IAR Archive Tool, iarchive, can create a library (an archive) file from several ELF object files. You can also use iarchive to manipulate ELF libraries.

A library file contains several relocatable ELF object modules, each of which can be independently used by a linker. In contrast with object modules specified directly to the linker, each module in a library is only included if it is needed.

For information about how to build a library in the IDE, see the *IDE Project Management and Building Guide for Arm*.

INVOCATION SYNTAX

The invocation syntax for the archive builder is:

iarchive parameters

Parameters

The parameters are:

Parameter	Description
command	Command line options that define an operation to be performed. Such an option must be specified before the name of the library file.
libraryfile	The library file to be operated on.
objectfile1 objectfileN	The object file(s) that the specified command operates on.
options	Command line options that define actions to be performed. These options can be placed anywhere on the command line.

Table 36: iarchive parameters

Examples

This example creates a library file called mylibrary.a from the source object files module1.o, module.2.o, and module3.o:

iarchive mylibrary.a module1.o module2.o module3.o.

This example lists the contents of mylibrary.a:

iarchive --toc mylibrary.a

This example replaces module3.0 in the library with the content in the module3.0 file and appends module4.0 to mylibrary.a:

iarchive --replace mylibrary.a module3.o module4.o

SUMMARY OF IARCHIVE COMMANDS

This table summarizes the iarchive commands:

Command line option	Description
create	Creates a library that contains the listed object files.
delete, -d	Deletes the listed object files from the library.
extract, -x	Extracts the listed object files from the library.
replace, -r	Replaces or appends the listed object files to the library.

Table 37: iarchive commands summary

Command line option	Description
symbols	Lists all symbols defined by files in the library.
toc, -t	Lists all files in the library.

Table 37: iarchive commands summary (Continued)

For more information, see *Descriptions of options*, page 537.

SUMMARY OF IARCHIVE OPTIONS

This table summarizes the iarchive options:

Command line option	Description
-f	Extends the command line.
no_bom	Omits the byte order mark from UTF-8 output files.
output, -o	Specifies the library file.
text_out	Specifies the encoding for text output files.
utf8_text_in	Uses the UTF-8 encoding for text input files.
verbose, -V	Reports all performed operations.
version	Sends tool output to the console and then exits.

Table 38: iarchive options summary

For more information, see Descriptions of options, page 537.

DIAGNOSTIC MESSAGES

This section lists the messages produced by iarchive:

La001: could not open file filename

iarchive failed to open an object file.

La002: illegal path pathname

The path pathname is not a valid path.

La006: too many parameters to cmd command

A list of object modules was specified as parameters to a command that only accepts a single library file.

La007: too few parameters to cmd command

A command that takes a list of object modules was issued without the expected modules.

La008: lib is not a library file

The library file did not pass a basic syntax check. Most likely the file is not the intended library file.

La009: lib has no symbol table

The library file does not contain the expected symbol information. The reason might be that the file is not the intended library file, or that it does not contain any ELF object modules.

La010: no library parameter given

The tool could not identify which library file to operate on. The reason might be that a library file has not been specified.

La011: file file already exists

The file could not be created because a file with the same name already exists.

La013: file confusions, lib given as both library and object

The library file was also mentioned in the list of object modules.

La014: module module not present in archive lib

The specified object module could not be found in the archive.

La015: internal error

The invocation triggered an unexpected error in iarchive.

Ms003: could not open file filename for writing

iarchive failed to open the archive file for writing. Make sure that it is not write protected.

Ms004: problem writing to file filename

An error occurred while writing to file filename. A possible reason for this is that the volume is full.

Ms005: problem closing file filename

An error occurred while closing the file filename.

The IAR ELF Tool—ielftool

The IAR ELF Tool, ielftool, can generate a checksum on specific ranges of memories. This checksum can be compared with a checksum calculated on your application.

The source code for ielftool and a Microsoft VisualStudio template project are available in the arm\src\elfutils directory. If you have specific requirements for how the checksum should be generated or requirements for format conversion, you can modify the source code accordingly.

INVOCATION SYNTAX

The invocation syntax for the IAR ELF Tool is:

```
ielftool [options] inputfile outputfile [options]
```

The ielftool tool will first process all the fill options, then it will process all the checksum options (from left to right).

Parameters

The parameters are:

Parameter	Description
inputfile	An absolute ELF executable image produced by the ILINK linker.
options	Any of the available command line options, see Summary of ielftool options, page 524.
outputfile	An absolute ELF executable image.

Table 39: ielftool parameters

See also Rules for specifying a filename or directory as parameters, page 252.

Example

This example fills a memory range with <code>0xff</code> and then calculates a checksum on the same range:

SUMMARY OF IELFTOOL OPTIONS

This table summarizes the ielftool command line options:

Command line option	Description
bin	Sets the format of the output file to raw binary.
checksum	Generates a checksum.
fill	Specifies fill requirements.
front_headers	Outputs headers in the beginning of the file.
ihex	Sets the format of the output file to 32-bit linear Intel Extended hex.
offset	Adds (or subtracts) an offset to all addresses in the generated output file.
parity	Generates parity bits.
self_reloc	Not for general use.
silent	Sets silent operation.
simple	Sets the format of the output file to Simple-code.
simple-ne	Assimple, but without an entry record.
srec	Sets the format of the output file to Motorola S-records.
srec-len	Restricts the number of data bytes in each S-record.
srec-s3only	Restricts the S-record output to contain only a subset of records.
strip	Removes debug information.
titxt	Sets the format of the output file to Texas Instruments TI-TXT.
verbose, -V	Prints all performed operations.
version	Sends tool output to the console and then exits.

Table 40: ielftool options summary

For more information, see *Descriptions of options*, page 537.

The IAR ELF Dumper—ielfdump

The IAR ELF Dumper for Arm, ielfdumparm, can be used for creating a text representation of the contents of a relocatable or absolute ELF file.

ielfdumparm can be used in one of three ways:

 To produce a listing of the general properties of the input file and the ELF segments and ELF sections it contains. This is the default behavior when no command line options are used.

- To also include a textual representation of the contents of each ELF section in the input file. To specify this behavior, use the command line option --all.
- To produce a textual representation of selected ELF sections from the input file. To specify this behavior, use the command line option --section.

INVOCATION SYNTAX

The invocation syntax for ielfdumparm is:

ielfdumparm input_file [output_file]

Note: ielfdumparm is a command line tool which is not primarily intended to be used in the IDE.

Parameters

The parameters are:

Parameter	Description
input_file	An ELF relocatable or executable file to use as input.
output_file	A file or directory where the output is emitted. If absent and nooutput option is specified, output is directed to the console.

Table 41: ielfdumparm parameters

See also Rules for specifying a filename or directory as parameters, page 252.

SUMMARY OF IELFDUMP OPTIONS

This table summarizes the ielfdumparm command line options:

Command line option	Description
a	Generates output for all sections except string table sections.
all	Generates output for all input sections regardless of their names or numbers.
code	Dumps all sections that contain executable code.
disasm_data	Dumps data sections as code sections.
-f	Extends the command line.
output, -o	Specifies an output file.
no_bom	Omits the Byte Order Mark from UTF-8 output files.
no_header	Suppresses production of a list header in the output.
no_rel_section	Suppresses dumping of .rel/.rela sections.
no_strtab	Suppresses dumping of string table sections.

Table 42: ielfdumparm options summary

Command line option	Description
no_utf8_in	Do not assume UTF-8 for non-IAR ELF files.
range	Disassembles only addresses in the specified range.
raw	Uses the generic hexadecimal/ASCII output format for the contents of any selected section, instead of any dedicated output format for that section.
section, -s	Generates output for selected input sections.
segment, -g	Generates output for segments with specified numbers.
source	Includes source with disassembled code in executable files.
text_out	Specifies the encoding for text output files.
use_full_std_t emplate_names	Uses full short full names for some Standard C++ templates.
utf8_text_in	Uses the UTF-8 encoding for text input files.
version	Sends tool output to the console and then exits.

Table 42: ielfdumparm options summary (Continued)

For more information, see Descriptions of options, page 537.

The IAR ELF Object Tool—iobjmanip

Use the IAR ELF Object Tool, <code>iobjmanip</code>, to perform low-level manipulation of ELF object files.

INVOCATION SYNTAX

The invocation syntax for the IAR ELF Object Tool is:

iobjmanip options inputfile outputfile

Parameters

The parameters are:

Parameter	Description
options	Command line options that define actions to be performed. These options can be placed anywhere on the command line. At least one of the options must be specified.
inputfile	A relocatable ELF object file.
outputfile	\boldsymbol{A} relocatable ELF object file with all the requested operations applied.

Table 43: iobjmanip parameters

See also Rules for specifying a filename or directory as parameters, page 252.

Examples

This example renames the section .example in input.o to .example2 and stores the result in output.o:

iobjmanip --rename_section .example=.example2 input.o output.o

SUMMARY OF IOBJMANIP OPTIONS

This table summarizes the iobjmanip options:

Command line option	Description
-f	Extends the command line.
no_bom	Omits the Byte Order Mark from UTF-8 output files.
remove_file_path	Removes path information from the file symbol.
remove_section	Removes one or more section.
rename_section	Renames a section.
rename_symbol	Renames a symbol.
silent	Sets silent operation.
strip	Removes debug information.
text_out	Specifies the encoding for text output files.
utf8_text_in	Uses the UTF-8 encoding for text input files.
version	Sends tool output to the console and then exits.

Table 44: iobjmanip options summary

For more information, see *Descriptions of options*, page 537.

DIAGNOSTIC MESSAGES

This section lists the messages produced by iobjmanip:

Lm001: No operation given

None of the command line parameters specified an operation to perform.

Lm002: Expected nr parameters but got nr

Too few or too many parameters. Check invocation syntax for iobjmanip and for the used command line options.

Lm003: Invalid section/symbol renaming pattern pattern

The pattern does not define a valid renaming operation.

Lm004: Could not open file filename

iobjmanip failed to open the input file.

Lm005: ELF format error msg

The input file is not a valid ELF object file.

Lm006: Unsupported section type nr

The object file contains a section that iobjmanip cannot handle. This section will be ignored when generating the output file.

Lm007: Unknown section type nr

iobjmanip encountered an unrecognized section. iobjmanip will try to copy the content as is.

Lm008: Symbol symbol has unsupported format

iobjmanip encountered a symbol that cannot be handled. iobjmanip will ignore this symbol when generating the output file.

Lm009: Group type nr not supported

iobjmanip only supports groups of type GRP_COMDAT. If any other group type is encountered, the result is undefined.

Lm010: Unsupported ELF feature in file: msg

The input file uses a feature that iobjmanip does not support.

Lm011: Unsupported ELF file type

The input file is not a relocatable object file.

Lm012: Ambiguous rename for section/symbol name (alt1 and alt2)

An ambiguity was detected while renaming a section or symbol. One of the alternatives will be used.

Lm013: Section name removed due to transitive dependency on name

A section was removed as it depends on an explicitly removed section.

Lm014: File has no section with index nr

A section index, used as a parameter to --remove_section or --rename_section, did not refer to a section in the input file.

Ms003: could not open file filename for writing

iobjmanip failed to open the output file for writing. Make sure that it is not write protected.

Ms004: problem writing to file filename

An error occurred while writing to file filename. A possible reason for this is that the volume is full.

Ms005: problem closing file filename

An error occurred while closing the file filename.

The IAR Absolute Symbol Exporter—isymexport

The IAR Absolute Symbol Exporter, isymexport, can export absolute symbols from a ROM image file, so that they can be used when you link an add-on application.

To keep symbols from your symbols file in your final application, the symbols must be referred to, either from your source code or by using the linker option --keep.

INVOCATION SYNTAX

The invocation syntax for the IAR Absolute Symbol Exporter is:

isymexport [options] inputfile outputfile [options]

Parameters

The parameters are:

Parameter	Description
inputfile	A ROM image in the form of an executable ELF file (output from linking).
options	Any of the available command line options, see Summary of isymexport options, page 531.
outputfile	A relocatable ELF file that can be used as input to linking, and which contains all or a selection of the absolute symbols in the input file. The output file contains only the symbols, not the actual code or data sections. A steering file can be used to control which symbols that are included, and also to rename some of the symbols if that is desired.

Table 45: isymexport parameters

See also Rules for specifying a filename or directory as parameters, page 252.



In the IDE, to add the export of library symbols, choose **Project>Options>Build Actions** and specify your command line in the **Post-build command line** text field, for example like this:

\$TOOLKIT_DIR\$\bin\isymexport.exe "\$TARGET_PATH\$"
"\$PROJ_DIR\$\const_lib.symbols"

SUMMARY OF ISYMEXPORT OPTIONS

This table summarizes the isymexport command line options:

Command line option	Description
edit	Specifies a steering file.
-f	Extends the command line.
generate_vfe_header	Declares that the image does not contain any virtual function calls to potentially discarded functions.
no_bom	Omits the Byte Order Mark from UTF-8 output files.
ram_reserve_ranges	Generates symbols for the areas in RAM that the image uses.
reserve_ranges	Generates symbols to reserve the areas in ROM and RAM that the image uses.
show_entry_as	Exports the entry point of the application with the given name.
text_out	Specifies the encoding for text output files.
utf8_text_in	Uses the UTF-8 encoding for text input files.
version	Sends tool output to the console and then exits.

Table 46: isymexport options summary

For more information, see *Descriptions of options*, page 537.

STEERING FILES

A steering file can be used for controlling which symbols that are included, and also to rename some of the symbols if that is desired. In the file, you can use show and hide directives to select which public symbols from the input file that are to be included in the output file. rename directives can be used for changing the names of symbols in the input file.

When you use a steering file, only actively exported symbols will be available in the output file. Thus, a steering file without show directives will generate an output file without symbols.

Syntax

The following syntax rules apply:

- Each directive is specified on a separate line.
- C comments (/*...*/) and C++ comments (//...) can be used.
- Patterns can contain wildcard characters that match more than one possible character in a symbol name.

- The * character matches any sequence of zero or more characters in a symbol name.
- The ? character matches any single character in a symbol name.

Example

```
rename xxx_* as YYY_* /*Change symbol prefix from xxx_ to YYY_ */
show YYY_* /* Export all symbols from YYY package */
hide *_internal /* But do not export internal symbols */
show zzz? /* Export zzza, but not zzzaaa */
hide zzzx /* But do not export zzzx */
```

Show directive

Syntax show pattern

Parameters

pattern A pattern to match against a symbol name.

Description A symbol with a name that matches the pattern will be included in the output file unless

this is overridden by a later hide directive.

Example /* Include all public symbols ending in _pub. */

show *_pub

Show-weak directive

Syntax show-weak pattern

Parameters

pattern A pattern to match against a symbol name.

Description A symbol with a name that matches the pattern will be included in the output file as a

weak symbol unless this is overridden by a later hide directive.

When linking, no error will be reported if the new code contains a definition for a symbol with the same name as the exported symbol. Note that any internal references in the isymexport input file are already resolved and cannot be affected by the presence

of definitions in the new code.

Example /* Export myFunc as a weak definition */

show-weak myFunc

Hide directive

Syntax hide pattern

Parameters

pattern A pattern to match against a symbol name.

Description A symbol with a name that matches the pattern will not be included in the output file

unless this is overridden by a later show directive.

Example /* Do not include public symbols ending in _sys. */

hide *_sys

Rename directive

Syntax rename pattern1 as pattern2

Parameters

pattern1 A pattern used for finding symbols to be renamed. The pattern

can contain no more than one * or ? wildcard character.

pattern2 A pattern used for the new name for a symbol. If the pattern

contains a wildcard character, it must be of the same kind as in

pattern1.

Description Use this directive to rename symbols from the output file to the input file. No exported

symbol is allowed to match more than one rename pattern.

rename directives can be placed anywhere in the steering file, but they are executed before any show and hide directives. Thus, if a symbol will be renamed, all show and

hide directives in the steering file must refer to the new name.

If the name of a symbol matches a *pattern1* pattern that contains no wildcard

characters, the symbol will be renamed pattern2 in the output file.

If the name of a symbol matches a pattern1 pattern that contains a wildcard character, the symbol will be renamed pattern2 in the output file, with part of the name matching

the wildcard character preserved.

Example /* xxx_start will be renamed Y_start_X in the output file,

xxx_stop will be renamed Y_stop_X in the output file. */

rename xxx_* as Y_*_X

DIAGNOSTIC MESSAGES

This section lists the messages produced by isymexport:

Es001: could not open file filename

isymexport failed to open the specified file.

Es002: illegal path pathname

The path pathname is not a valid path.

Es003: format error: message

A problem occurred while reading the input file.

Es004: no input file

No input file was specified.

Es005: no output file

An input file, but no output file was specified.

Es006: too many input files

More than two files were specified.

Es007: input file is not an ELF executable

The input file is not an ELF executable file.

Es008: unknown directive: directive

The specified directive in the steering file is not recognized.

Es009: unexpected end of file

The steering file ended when more input was required.

Es010: unexpected end of line

A line in the steering file ended before the directive was complete.

Es011: unexpected text after end of directive

There is more text on the same line after the end of a steering file directive.

Es012: expected text

The specified text was not present in the steering file, but must be present for the directive to be correct.

Es013: pattern can contain at most one * or ?

Each pattern in the current directive can contain at most one * or one ? wildcard character.

Es014: rename patterns have different wildcards

Both patterns in the current directive must contain exactly the same kind of wildcard. That is, both must either contain:

- No wildcards
- Exactly one *
- Exactly one ?

This error occurs if the patterns are not the same in this regard.

Es015: ambiguous pattern match: symbol matches more than one rename pattern

A symbol in the input file matches more than one rename pattern.

Es016: the entry point symbol is already exported

The option --show_entry_as was used with a name that already exists in the input file.

The IAR ELF Relocatable Object Creator—iexe2obj

The IAR ELF Relocatable Object Creator, iexe2obj, creates a relocatable ELF object file from an executable ELF object file.

INVOCATION SYNTAX

The invocation syntax for iexe2obj is:

iexe2obj options inputfile outputfile

Parameters

The parameters are:

Parameter	Description
options	Command line options that define actions to be performed. These options can be placed anywhere on the command line. At least one option must be specified. See Summary of iexe2obj options, page 537
inputfile	An executable ELF object file.
outputfile	The name of the resulting relocatable ELF object file with all the requested operations applied.

Table 47: iexe2obj parameters

See also Rules for specifying a filename or directory as parameters, page 252.

BUILDING THE INPUT FILE

The input file must be linked with the linker option --no_entry, using object files compiled with --rwpi, --ropi, and --ropi_cb. See also --ropi_cb, page 291.

A function symbol FUNC, that should have a wrapper, must be preserved by the linker when it builds the input file. You can achieve this either by using the keyword __root in the declaration of FUNC or by using the linker command line option --keep FUNC.

Code and constant data

The input file can contain at most one *non-writable*, *executable* section that will be placed in the output file. To enable placing the executable section in execute-only memory, you must use the option <code>--no_literal_pool</code> both when compiling and when linking.

The input file can contain at most one *non-writable*, *non-executable* section that will be placed in the output file. The start address of the section will be used as a constants base address, CB.

Writable data

The input file can contain at most one *writable*, *non-executable* section that will be placed in the output file. The start address of the section will be used as a static base address, SB.

The writable data section might need dynamic initialization, in which case <code>iexe2obj</code> will create a function (<code>__sti_routine</code>) that is called during dynamic initialization of the client application. For this to work, a label <code>__init</code> is needed (as defined in the

library rt7MQx_t1), and the linker configuration file used for creating your input file must contain:

```
define block INIT with alignment=4, fixed order {
   section .init_start,
   section .init_a,
   section .init_b,
   section .init_end.
};
```

The linker might issue a warning (Lp005) for mixing sections with content and sections without content. If that warning concerns sections .data and .bss, it can be ignored.

SUMMARY OF IEXE2OBJ OPTIONS

Command line option	Description
hide_symbols	Hides all symbols from the input file
keep_mode_symbols	Copies mode symbols from the input file to the output file
prefix	Sets a prefix for symbol and section names
wrap	Generates wrapper functions for function symbols in <pre>inputfile that should be callable by clients of outputfile.</pre>

Table 48: iexe2obj options summary

Descriptions of options

This section gives detailed reference information about each command line option available for the different utilities.

--a

Syntax --a

For use with ielfdumparm

Description Use this option as a shortcut for --all --no_strtab.

ΠË

This option is not available in the IDE.

--all

Syntax --all

For use with ielfdumparm

Description Use this option to include the contents of all ELF sections in the output, in addition to

the general properties of the input file. Sections are output in index order, except that each relocation section is output immediately after the section it holds relocations for.

By default, no section contents are included in the output.



This option is not available in the IDE.

--bin

Syntax --bin

For use with ielftool

Description Sets the format of the output file to raw binary, a binary format that includes all the bytes

of the program from the lowest address to the highest and nothing else. In particular, no address information is present in the output file. Any address gaps in the program will

be generated as zeros.



To set related options, choose:

Project>Options>Output converter

--checksum

Syntax --checksum

 $\{symbol \, [+offset] \, \big| \, address \} : size, algorithm [: [1 \big| 2] \, [a \big| m \big| z] \, [L \big| W] \, [r] \, [R]$

[o][i|p]]

[,start];range[;range...]

Parameters

symbol The name of the symbol where the checksum value should be

stored. Note that it must exist in the symbol table in the input

ELF file.

offset An offset to the symbol.

address	The absolute address where the checksum value should be stored.
size	The number of bytes in the checksum: 1, 2, or 4; must not be larger than the size of the checksum symbol.
algorithm	The checksum algorithm used, one of:
	\bullet sum, a byte-wise calculated arithmetic sum. The result is truncated to 8 bits.
	\bullet sum8wide, a byte-wise calculated arithmetic sum. The result is truncated to the size of the symbol.
	• sum32, a word-wise (32 bits) calculated arithmetic sum.
	\bullet crc16, CRC16 (generating polynomial 0x1021); used by default.
	• crc32, CRC32 (generating polynomial 0x04C11DB7).
	• crc64iso, CRC64iso (generating polynomial 0x1B).
	• crc64ecma, CRC64ECMA (generating polynomial 0x42F0E1EBA9EA3693).
	• crc=n, CRC with a generating polynomial of n.
1 2	If specified, can be one of:
	• 1 - Specifies one's complement.
	• 2 - Specifies two's complement.
$a \mid m \mid z$	Reverses the order of the bits for the checksum; choose between:
	a, reverses the input bytes (but nothing else).
	m, reverses the input bytes and the final checksum.
	z, reverses the final checksum (but nothing else).
	Note that using a and \boldsymbol{z} in combination has the same effect as $\boldsymbol{m}.$

L|W

calculated.

Choose between:

	Using these parameters does not add any additional error detection power to the checksum.
r	Reverses the byte order of the input data. This has no effect unless the number of bits per iteration has been set using the ${\tt L}$ or ${\tt W}$ parameters.
R	Traverses the checksum range(s) in reverse order.
	If the range is for example $0 \times 100 - 0 \times FFF$; $0 \times 2000 - 0 \times 2FFF$, the checksum calculation will normally start on 0×100 and then calculate every byte up to and including $0 \times FFF$, followed by calculating the byte on 0×2000 and continue to $0 \times 2FFF$.
	Using the R parameter, the calculation instead starts on $0 \times 2 \text{FFF}$ and continues by calculating every byte down to 0×2000 , then from $0 \times \text{FFF}$ down to and including 0×100 .
0	Outputs the Rocksoft model specification for the checksum.
i p	Use either \mathtt{i} or \mathtt{p} , if the $start$ value is bigger than 0. If specified, can be one of:
	\bullet i $$ - Initializes the checksum value with the start value.
	ullet p - Prefixes the input data with a word of size size that contains the start value.
start	By default, the initial value of the checksum is 0. If necessary, use $start$ to supply a different initial value. If not 0, then either i or p must be specified.
range	The address range on which the checksum should be calculated. Hexadecimal and decimal notation is allowed (for example, 0x8002-0x8FFF).
	Symbols that are present in ELF file can be used in the range description (for example,checksum_beginchecksum_end).

Specifies the size of the unit for which a checksum should be

If you do not specify a unit size, 8 bits will be used by default.

L, calculates a checksum on 32 bits in every iteration W, calculates a checksum on 16 bits in every iteration.

For use with

ielftool

Description

Use this option to calculate a checksum with the specified algorithm for the specified ranges. If you have an external definition for the checksum (for example, a hardware CRC implementation), use the appropriate parameters to the --checksum option to match the external design. (In this case, learn more about that design in the hardware documentation.) The checksum will then replace the original value in <code>symbo1</code>. A new absolute symbol will be generated; with the <code>symbo1</code> name suffixed with <code>_value</code> containing the calculated checksum. This symbol can be used for accessing the checksum value later when needed, for example during debugging.

If the --checksum option is used more than once on the command line, the options are evaluated from left to right. If a checksum is calculated for a *symbol* that is specified in a later evaluated --checksum option, an error is issued.

Example

This example shows how to use the crc16 algorithm with the start value 0 over the address range 0x8000-0x8fff:

```
ielftool --checksum=__checksum:2,crc16;0x8000-0x8FFF
sourceFile.out destinationFile.out
```

The input data i read from sourceFile.out, and the resulting checksum value of size 2 bytes will be stored at the symbol __checksum. The modified ELF file is saved as destinationFile.out leaving sourceFile.out untouched.

In the next example, a symbol is used for specifying the start of the range:

ielftool --checksum=__checksum:2,crc16;__checksum_begin-0x8FFF
sourceFile.out destinationFile.out

See also

Checksum calculation for verifying image integrity, page 204



To set related options, choose:

Project>Options>Linker>Checksum

--code

Syntax --code

For use with ielfdumparm

Description

Use this option to dump all sections that contain executable code (sections with the ELF section attribute SHF_EXECINSTR).



This option is not available in the IDE.

--create

Syntax --create libraryfile objectfile1 ... objectfileN

Parameters

 ${\it library file} \qquad {\it The library file that the command operates on. See \it Rules for}$

specifying a filename or directory as parameters, page 252.

objectfile1 ... The object file(s) to build the library from.

objectfileN

For use with iarchive

Description

Use this command to build a new library from a set of object files (modules). The object files are added to the library in the exact order that they are specified on the command line.

If no command is specified on the command line, --create is used by default.



This option is not available in the IDE.

--delete, -d

Syntax --delete libraryfile objectfile1 ... objectfileN
-d libraryfile objectfile1 ... objectfileN

a libraryllic objectifier ... objectifier

Parameters

11braryfile The library file that the command operates on. See *Rules for*

specifying a filename or directory as parameters, page 252.

objectfile1 ... The object file(s) that the command operates on.

objectfileN

For use with iarchive

Description

Use this command to remove object files (modules) from an existing library. All object files that are specified on the command line will be removed from the library.



This option is not available in the IDE.

--disasm_data

Syntax --disasm_data

For use with ielfdumparm

Description Use this command to instruct the dumper to dump data sections as if they were code sections.



This option is not available in the IDE.

--edit

Syntax --edit steering_file

For use with isymexport

Description

Use this option to specify a steering file to control which symbols that are included in

the isymexport output file, and also to rename some of the symbols if that is desired.

See also Steering files, page 531.



This option is not available in the IDE.

--extract, -x

Syntax --extract libraryfile [objectfile1 ... objectfileN]

-x libraryfile [objectfile1 ... objectfileN]

Parameters

11 Items 11 Items 11 Items 12 Items 12

specifying a filename or directory as parameters, page 252.

objectfile1 ... The object file(s) that the command operates on. objectfileN

For use with

Description

Use this command to extract object files (modules) from an existing library. If a list of object files is specified, only these files are extracted. If a list of object files is not

specified, all object files in the library are extracted.

ΠË

iarchive

This option is not available in the IDE.

-f

Syntax -f filename

Parameters See Rules for specifying a filename or directory as parameters, page 252.

For use with iarchive, ielfdumparm, iobjmanip, and isymexport.

Description

Use this option to make the tool read command line options from the named file, with the default filename extension xcl.

In the command file, you format the items exactly as if they were on the command line itself, except that you can use multiple lines, because the newline character acts just as a space or tab character.

Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.



This option is not available in the IDE.

--fill

Syntax --fill [v;]pattern;range[;range...]

Parameters

Generates virtual fill for the fill command. Virtual fill is filler v

> bytes that are included in checksumming, but that are not included in the output file. The primary use for this is certain types of hardware where bytes that are not specified by the image

have a known value (typically, 0xFF or 0x0).

A hexadecimal string with the 0x prefix (for example, 0xEF) pattern

interpreted as a sequence of bytes, where each pair of digits corresponds to one byte (for example 0x123456, for the sequence of bytes 0x12, 0x34, and 0x56). This sequence is repeated over the fill area. If the length of the fill pattern is greater than 1 byte, it is repeated as if it started at address 0.

Specifies the address range for the fill. Hexadecimal and decimal range

notation is allowed (for example, 0x8002-0x8FFF). Note that

each address must be 4-byte aligned.

Symbols that are present in the ELF file can be used in the range

description (for example. __checksum_begin-

__checksum_end).

For use with ielftool

Description Use this option to fill all gaps in one or more ranges with a pattern, which can be either an expression or a hexadecimal string. The contents will be calculated as if the fill

pattern was repeatedly filled from the start address until the end address is passed, and then the real contents will overwrite that pattern.

If the --fill option is used more than once on the command line, the fill ranges cannot

overlap each other.

To set related options, choose:

Project>Options>Linker>Checksum

--front headers

Syntax --front_headers

For use with ielftool Description

Use this option to output ELF program and section headers in the beginning of the file, instead of at the end.



This option is not available in the IDE.

--generate_vfe_header

Syntax --generate_vfe_header

For use with isymexport

Description Use this option to declare that the image does not contain any virtual function calls to

potentially discarded functions.

When the linker performs virtual function elimination, it discards virtual functions that appear not to be needed. For the optimization to be applied correctly, there must be no

virtual function calls in the image that affect the functions that are discarded.

See also *Virtual function elimination*, page 213.

ΠË

To set this options, use:

Project>Options>Linker>Extra Options

--hide_symbols

Syntax --hide_symbols

For use with iexe2obj

Description Use this option to hide all symbols from the input file.

ΠË

This option is not available in the IDE.

--ihex

Syntax --ihex

For use with ielftool

Description Sets the format of the output file to 32-bit linear Intel Extended hex, a hexadecimal text

format defined by Intel.

ΙË

To set related options, choose:

Project>Options>Linker>Output converter

--keep_mode_symbols

Syntax --keep_mode_symbols

For use with iexe2obj

Description Use this option to copy mode symbols from the input file to the output file. This is used,

for example, by the disassembler.

ΠË

This option is not available in the IDE.

--no_bom

Syntax --no_bom

For use with iarchive, ielfdumparm, iobjmanip, and isymexport

Description Use this option to omit the Byte Order Mark (BOM) when generating a UTF-8 output

file.

See also --text_out, page 561 and Text encodings, page 247

ΙË

This option is not available in the IDE.

--no header

Syntax --no_header

For use with ielfdumparm

Description By default, a standard list header is added before the actual file content. Use this option

to suppress output of the list header.



This option is not available in the IDE.

--no_rel_section

Syntax --no_rel_section

For use with ielfdumparm

Description By default, whenever the content of a section of a relocatable file is generated as output,

the associated section, if any, is also included in the output. Use this option to suppress

output of the relocation section.

ΠË

This option is not available in the IDE.

--no_strtab

Syntax --no_strtab

For use with ielfdumparm

Description Use this option to suppress dumping of string table sections (sections of type

SHT_STRTAB).

ΠË

This option is not available in the IDE.

--no utf8 in

Syntax --no_utf8_in

For use with ielfdumparm

Description The dumper can normally determine whether ELF files produced by IAR tools use the

UTF-8 text encoding or not, and produce the correct output. For ELF files produced by non-IAR tools, the dumper will assume UTF-8 encoding unless this option is used, in which case the encoding is assumed to be according to the current system default locale.

Note: This only makes a difference if any characters beyond 7-bit ASCII are used in

paths, symbols, etc.

See also

Text encodings, page 247



This option is not available in the IDE.

--offset

Syntax --offset [-] offset

Parameters

offset The offset will be added (or subtracted if - is specified) to

all addresses in the generated output file.

For use with ielftool

Description Use this option to add or subtract an offset to the address of each output record in the

generated output file. The option only works on Motorola S-records, Intel Hex, TI-Txt, and Simple-Code. The option has no effect when generating an ELF file or when binary files (--bin contain no address information) are generated. No content, including the entry point, will be changed by using this option, only the addresses in the output format.

Example --offset 0x30000

This will add an offset of 0×30000 to all addresses. As a result, content that was linked

at address 0x4000 will be placed at 0x34000.



This option is not available in the IDE.

--output, -o

Syntax -o {filename | directory}

--output {filename | directory}

Parameters See Rules for specifying a filename or directory as parameters, page 252.

For use with iarchive and ielfdumparm.

Description iarchive

By default, iarchive assumes that the first argument after the iarchive command is the name of the destination library. Use this option to explicitly specify a different

filename for the library.

ielfdumparm

By default, output from the dumper is directed to the console. Use this option to direct the output to a file instead. The default name of the output file is the name of the input file with an added id filename extension

You can also specify the output file by specifying a file or directory following the name of the input file.



This option is not available in the IDE.

--parity

Syntax

--parity{symbol[+offset] | address}:size,algo:flashbase[:flags];ran
ge[;range...]

Parameters

symbol The name of the symbol where the parity bytes should be

stored. Note that it must exist in the symbol table in the

input ELF file.

offset An offset to the symbol. By default, 0.

address The absolute address where the parity bytes should be

stored.

size The maximum number of bytes that the parity generation

can use. An error will be issued if this value is exceeded. Note that the size must fit in the specified symbol in the ELF

file.

algo Choose between:

odd, uses odd parity. even, uses even parity.

flashbase The start address of the flash memory. Parity bits will not be

generated for the addresses between <code>flashbase</code> and the start address of the range. If <code>flashbase</code> and the start address of the range coincide, parity bits will be generated

for all addresses

flags Choose between:

r, reverses the byte order within each word.

L, processes 4 bytes at a time. W, processes 2 bytes at a time. B, processes 1 byte at a time.

The address range over which the parity bytes should be

generated. Hexadecimal and decimal notation are allowed

(for example, 0x8002-0x8FFF).

For use with ielftool

Description Use this option to generate parity bytes over specified ranges. The range is traversed left

to the right and the parity bits are generated using the odd or even algorithm. The parity bits are finally stored in the specified symbol where they can be accessed by your

application.

ΠË

This option is not available in the IDE.

--prefix

Syntax --prefix prefix

Parameters

prefix A prefix for symbol and section names

For use with iexe2obj

Description By default, the base name of the output file is used as a prefix for symbol and section

names that are defined in wrappers. Use this option to set a custom prefix for these

symbols and section names.

See also --wrap, page 563

This option is not available in the IDE.

--ram_reserve_ranges

Syntax --ram_reserve_ranges[=symbol_prefix]

Parameters

symbol_prefix The prefix of symbols created by this option.

For use with isymexport

Description Use this option to generate symbols for the areas in RAM that the image uses. One

symbol will be generated for each such area. The name of each symbol is based on the name of the area and is prefixed by the optional parameter <code>symbol_prefix</code>.

Generating symbols that cover an area in this way prevents the linker from placing other content at the affected addresses. This can be useful when linking against an existing

image.

If --ram_reserve_ranges is used together with --reserve_ranges, the RAM areas will get their prefix from the --ram_reserve_ranges option and the non-RAM

areas will get their prefix from the --reserve_ranges option.

See also *--reserve ranges*, page 555.

This option is not available in the IDE.

--range

Syntax --range start-end

Parameters

start-end Disassemble code where the start address is greater than or

equal to start, and where the end address is less than end.

For use with ielfdumparm

Description Use this option to specify a range for which code from an executable will be dumped.

ΙË

This option is not available in the IDE.

--raw

Syntax --raw

For use with ielfdumparm

Description By default, many ELF sections will be dumped using a text format specific to a

particular kind of section. Use this option to dump each selected ELF section using the

generic text format.

The generic text format dumps each byte in the section in hexadecimal format, and

where appropriate, as ASCII text.



This option is not available in the IDE.

--remove_file_path

Syntax --remove_file_path

For use with iobjmanip

Description Use this option to make iobjmanip remove information about the directory structure

of the project source tree from the generated object file, which means that the file

symbol in the ELF object file is modified.

This option must be used in combination with --remove_section ".comment".



This option is not available in the IDE.

--remove_section

Syntax --remove_section { section | number}

Parameters

section The section—or sections, if there are more than one section with

the same name—to be removed.

number The number of the section to be removed. Section numbers can

be obtained from an object dump created using ielfdumparm.

For use with iobjmanip

Description

Use this option to make iobjmanip omit the specified section when generating the output file.



This option is not available in the IDE.

--rename section

Syntax --rename_section {oldname|oldnumber}=newname

Parameters

oldname The section—or sections, if there are more than one section with

the same name—to be renamed.

oldnumber The number of the section to be renamed. Section numbers can

be obtained from an object dump created using ielfdumparm.

newname The new name of the section.

For use with iobjmanip

Description Use this option to make iobjmanip rename the specified section when generating the

output file.

ΠË

This option is not available in the IDE.

--rename_symbol

Syntax --rename_symbol oldname =newname

Parameters

oldname The symbol to be renamed.

newname The new name of the symbol.

For use with iobjmanip

Description Use this option to make iobjmanip rename the specified symbol when generating the

output file.

This option is not available in the IDE.

--replace, -r

Syntax --replace libraryfile objectfile1 ... objectfileN

-r libraryfile objectfile1 ... objectfileN

Parameters

1ibraryfile The library file that the command operates on. See Rules for

specifying a filename or directory as parameters, page 252.

objectfile1 ... The object file(s) that the command operates on.

objectfileN

For use with iarchive

Description Use this command to replace or add object files (modules) to an existing library. The

object files specified on the command line either replace existing object files in the

library (if they have the same name) or are appended to the library.

ΠË

This option is not available in the IDE.

--reserve_ranges

Syntax --reserve_ranges[=symbol_prefix]

Parameters

symbol_prefix The prefix of symbols created by this option.

For use with isymexport

Description Use this option to generate symbols for the areas in ROM and RAM that the image uses.

One symbol will be generated for each such area. The name of each symbol is based on the name of the area and is prefixed by the optional parameter <code>symbol_prefix</code>.

Generating symbols that cover an area in this way prevents the linker from placing other content at the affected addresses. This can be useful when linking against an existing

image.

If --reserve_ranges is used together with --ram_reserve_ranges, the RAM areas will get their prefix from the --ram_reserve_ranges option and the non-RAM

areas will get their prefix from the --reserve_ranges option.

See also --ram reserve ranges, page 552.



This option is not available in the IDE.

--section, -s

Syntax --section section_number|section_name[,...]
--s section number|section name[,...]

Parameters

section_number The number of the section to be dumped.

section_name The name of the section to be dumped.

For use with ielfdumparm

Description

Use this option to dump the contents of a section with the specified number, or any section with the specified name. If a relocation section is associated with a selected section, its contents are output as well.

If you use this option, the general properties of the input file will not be included in the output.

You can specify multiple section numbers or names by separating them with commas, or by using this option more than once.

By default, no section contents are included in the output.

Example -s 3,17 /* Sections #3 and #17

-s .debug_frame,42 /* Any sections named .debug_frame and also section #42 */



This option is not available in the IDE.

--segment, -g

Syntax --segment segment_number[,...]

-g segment_number[,...]

Parameters

segmnt_number The number of a segment whose contents will be included

in the output.

For use with ielfdumparm

Description Use this option to select specific segments (parts of an executable image indicated by

program headers) for inclusion in the output.

This

This option is not available in the IDE.

--self reloc

Syntax --self_reloc

For use with ielftool

Description This option is intentionally not documented as it is not intended for general use.

ΠË

This option is not available in the IDE.

--show_entry_as

Syntax --show_entry_as name

Parameters

name The name to give to the program entry point in the output file.

For use with isymexport

Description Use this option to export the entry point of the application given as input under the name

name.

ΠË

This option is not available in the IDE.

--silent

Syntax --silent

For use with iobjmanip and ielftool.

Description Causes the tool to operate without sending any messages to the standard output stream.

By default, the tool sends various messages via the standard output stream. You can use this option to prevent this. The tool sends error and warning messages to the error output stream, so they are displayed regardless of this setting.



This option is not available in the IDE.

--simple

Syntax --simple

For use with ielftool

Description Sets the format of the output file to Simple-code, a binary format that includes address

information.

To set related options, choose:

Project>Options>Output converter

--simple-ne

Syntax --simple-ne

For use with ielftool

Description Sets the format of the output file to Simple code, but no entry record is generated.

ΠË

To set related options, choose:

Project>Options>Output converter

--source

Syntax --source

For use with ielfdumparm

Description Use this option to make ielftool include source for each statement before the code

for that statement, when dumping code from an executable file. To make this work, the executable image must be built with debug information, and the source code must still

be accessible in its original location.



This option is not available in the IDE.

--srec

Syntax --srec

For use with ielftool

Description Sets the format of the output file to Motorola S-records, a hexadecimal text format

defined by Motorola.

Note: You can use the ielftool options --srec-len and --srec-s3only to modify

the exact format used.

ΠË

To set related options, choose:

Project>Options>Output converter

--srec-len

Syntax --srec-len=length

Parameters

1ength The number of data bytes in each S-record.

For use with ielftool

Description Restricts the number of data bytes in each S-record. This option can be used in

combination with the --srec option.



This option is not available in the IDE.

--srec-s3only

Syntax --srec-s3only

For use with ielftool

Description Restricts the S-record output to contain only a subset of records, that is S0, S3 and S7

records. This option can be used in combination with the --srec option.



This option is not available in the IDE.

--strip

Syntax --strip

For use with iobjmanip and ielftool.

Description Use this option to remove all sections containing debug information before the output file is written.

Note that ielftool needs an unstripped input ELF image. If you use the --strip option in the linker, remove it and use the --strip option in ielftool instead.

ΠË

To set related options, choose:

Project>Options>Linker>Output>Include debug information in output

--symbols

Syntax --symbols libraryfile

Parameters

library file The library file that the command operates on. See Rules for

specifying a filename or directory as parameters, page 252.

For use with iarchive

Description

Use this command to list all external symbols that are defined by any object file (module) in the specified library, together with the name of the object file (module) that defines it.

In silent mode (--silent), this command performs symbol table-related syntax checks on the library file and displays only errors and warnings.

ΠË

This option is not available in the IDE.

--text out

Syntax --text_out{utf8|utf16le|utf16be|locale}

Parameters

utf8 Uses the UTF-8 encoding

utf161e Uses the UTF-16 little-endian encoding
utf16be Uses the UTF-16 big-endian encoding

locale Uses the system locale encoding

For use with iarchive, ielfdumparm, iobjmanip, and isymexport

Description Use this option to specify the encoding to be used when generating a text output file.

The default for the list files is to use the same encoding as the main source file. The

default for all other text files is UTF-8 with a Byte Order Mark (BOM).

If you want text output in UTF-8 encoding without BOM, you can use the option

--no_bom as well.

See also --no bom, page 547 and Text encodings, page 247

ΠË

This option is not available in the IDE.

--titxt

Syntax --titxt

For use with ielftool

Description Sets the format of the output file to Texas Instruments TI–TXT, a hexadecimal text

format defined by Texas Instruments.

To set related options, choose:

Project>Options>Output converter

--toc, -t

Syntax --toc libraryfile

-t libraryfile

Parameters

11braryfile The library file that the command operates on. See Rules for

specifying a filename or directory as parameters, page 252.

For use with iarchive

Description Use this command to list the names of all object files (modules) in a specified library.

In silent mode (--silent), this command performs basic syntax checks on the library

file, and displays only errors and warnings.



This option is not available in the IDE.

--use_full_std_template_names

Syntax --use_full_std_template_names

For use with ielfdumparm

Description Normally, the names of some standard C++ templates are used in the output in an

abbreviated form in the unmangled names of symbols (for example, "std::string"

instead of "std::basic_string<char, std::char_traits<char>,
std_::allocator<char>>"). Use this option to make ielfdump use the

unabbreviated form.



This option is not available in the IDE.

--utf8_text_in

Syntax --utf8_text_in

For use with iarchive, ielfdumparm, iobjmanip, and isymexport

Description Use this option to specify that the tool shall use the UTF-8 encoding when reading a text

input file with no Byte Order Mark (BOM).

Note: This option does not apply to source files.

See also Text encodings, page 247



This option is not available in the IDE.

--verbose, -V

Syntax --verbose

-V (iarchive only)

For use with iarchive and ielftool.

giving diagnostic messages.

This option is not available in the IDE because this setting is always enabled.

--version

Syntax --version

For use with iarchive, ielfdumparm, ielftool, iobjmanip, isymexport

Description Use this option to make the tool send version information to the console and then exit.

ΠË

This option is not available in the IDE.

--wrap

Syntax --wrap symbol

Parameters

symbol A function symbol that should be callable by clients of the

output file of iexe2obj.

For use with iexe2obj

Description Use this option to generate a wrapper function for function symbols.

This option is not available in the IDE.

Descriptions of options

Implementation-defined behavior for Standard C

Descriptions of implementation-defined behavior

If you are using C89 instead of Standard C, see *Implementation-defined behavior* for C89, page 585.

Descriptions of implementation-defined behavior

This section follows the same order as the C standard. Each item includes references to the ISO chapter and section (in parenthesis) that explains the implementation-defined behavior.

Note: The IAR Systems implementation adheres to a freestanding implementation of Standard C. This means that parts of a standard library can be excluded in the implementation.

J.3.1 TRANSLATION

Diagnostics (3.10, 5.1.1.3)

Diagnostics are produced in the form:

filename, linenumber level[tag]: message

where filename is the name of the source file in which the error was encountered, linenumber is the line number at which the compiler detected the error, level is the level of seriousness of the message (remark, warning, error, or fatal error), tag is a unique tag that identifies the message, and message is an explanatory message, possibly several lines.

White-space characters (5.1.1.2)

At translation phase three, each non-empty sequence of white-space characters is retained.

J.3.2 ENVIRONMENT

The character set (5.1.1.2)

The source character set is the same as the physical source file multibyte character set. By default, the standard ASCII character set is used. However, it can be UTF-8, UTF-16, or the system locale. See *Text encodings*, page 247.

Main (5.1.2.1)

The function called at program startup is called main. No prototype is declared for main, and the only definition supported for main is:

```
int main(void)
```

To change this behavior, see *Customizing* low level init, page 142.

The effect of program termination (5.1.2.1)

Terminating the application returns the execution to the startup code (just after the call to main).

Alternative ways to define main (5.1.2.2.1)

There is no alternative ways to define the main function.

The argy argument to main (5.1.2.2.1)

The argv argument is not supported.

Streams as interactive devices (5.1.2.3)

The streams stdin, stdout, and stderr are treated as interactive devices.

Multi-threaded environment (5.1.2.4)

By default, the IAR Systems runtime environment does not support more than one thread of execution. With an optional third-party RTOS, it might support several threads of execution.

Signals, their semantics, and the default handling (7.14)

In the DLIB runtime environment, the set of supported signals is the same as in Standard C. A raised signal will do nothing, unless the signal function is customized to fit the application.

Signal values for computational exceptions (7.14.1.1)

In the DLIB runtime environment, there are no implementation-defined values that correspond to a computational exception.

Signals at system startup (7.14.1.1)

In the DLIB runtime environment, there are no implementation-defined signals that are executed at system startup.

Environment names (7.22.4.6)

In the DLIB runtime environment, there are no implementation-defined environment names that are used by the getenv function.

The system function (7.22.4.8)

The system function is not supported.

J.3.3 IDENTIFIERS

Multibyte characters in identifiers (6.4.2)

Additional multibyte characters may appear in identifiers depending on the chosen encoding for the source file. The supported multibyte characters must be translatable to one Universal Character Name (UCN).

Significant characters in identifiers (5.2.4.1, 6.4.2)

The number of significant initial characters in an identifier with or without external linkage is guaranteed to be no less than 200.

J.3.4 CHARACTERS

Number of bits in a byte (3.6)

A byte contains 8 bits.

Execution character set member values (5.2.1)

The values of the members of the execution character set are the values of the ASCII character set, which can be augmented by the values of the extra characters in the source file character set. The source file character set is determined by the chosen encoding for the source file. See *Text encodings*, page 247.

Alphabetic escape sequences (5.2.2)

The standard alphabetic escape sequences have the values a-7, b-8, f-12, n-10, r-13, t-9, and v-11.

Characters outside of the basic executive character set (6.2.5)

A character outside of the basic executive character set that is stored in a char is not transformed.

Plain char (6.2.5, 6.3.1.1)

A plain char is treated as an unsigned char. See --char_is_signed, page 260 and --char is unsigned, page 261.

Source and execution character sets (6.4.4.4, 5.1.1.2)

The source character set is the set of legal characters that can appear in source files. It is dependent on the chosen encoding for the source file. See *Text encodings*, page 247. By default, the source character set is Raw.

The execution character set is the set of legal characters that can appear in the execution environment. These are the execution character set for character constants and string literals and their encoding types:

Execution character set	Encoding type
L	UTF-32
u	UTF-16
U	UTF-32
u8	UTF-8
none	The source character set

Table 49: Execution character sets and their encodings

The DLIB runtime environment needs a multibyte character scanner to support a multibyte execution character set. See *Locale*, page 153.

Integer character constants with more than one character (6.4.4.4)

An integer character constant that contains more than one character will be treated as an integer constant. The value will be calculated by treating the leftmost character as the most significant character, and the rightmost character as the least significant character, in an integer constant. A diagnostic message will be issued if the value cannot be represented in an integer constant.

Wide character constants with more than one character (6.4.4.4)

A wide character constant that contains more than one multibyte character generates a diagnostic message.

Locale used for wide character constants (6.4.4.4)

See Source and execution character sets (6.4.4.4, 5.1.1.2), page 568.

Concatenating wide string literals with different encoding types (6.4.5)

Wide string literals with different encoding types cannot be concatenated.

Locale used for wide string literals (6.4.5)

See Source and execution character sets (6.4.4.4, 5.1.1.2), page 568.

Source characters as executive characters (6.4.5)

All source characters can be represented as executive characters.

Encoding of wchar t, charl6 t, and char32 t (6.10.8.2)

wchar_t has the encoding UTF-32, char16_t has the encoding UTF-16, and char32_t has the encoding UTF-32.

J.3.5 INTEGERS

Extended integer types (6.2.5)

There are no extended integer types.

Range of integer values (6.2.6.2)

The representation of integer values are in the two's complement form. The most significant bit holds the sign; 1 for negative, 0 for positive and zero.

For information about the ranges for the different integer types, see *Basic data types—integer types*, page 341.

The rank of extended integer types (6.3.1.1)

There are no extended integer types.

Signals when converting to a signed integer type (6.3.1.3)

No signal is raised when an integer is converted to a signed integer type.

Signed bitwise operations (6.5)

Bitwise operations on signed integers work the same way as bitwise operations on unsigned integers; in other words, the sign-bit will be treated as any other bit, except for the operator >> which will behave as an arithmetic right shift.

J.3.6 FLOATING POINT

Accuracy of floating-point operations (5.2.4.2.2)

The accuracy of floating-point operations is unknown.

Accuracy of floating-point conversions (5.2.4.2.2)

The accuracy of floating-point conversions is unknown.

Rounding behaviors (5.2.4.2.2)

There are no non-standard values of FLT_ROUNDS.

Evaluation methods (5.2.4.2.2)

There are no non-standard values of FLT_EVAL_METHOD.

Converting integer values to floating-point values (6.3.1.4)

When an integer value is converted to a floating-point value that cannot exactly represent the source value, the round-to-nearest rounding mode is used (FLT_ROUNDS is defined to 1).

Converting floating-point values to floating-point values (6.3.1.5)

When a floating-point value is converted to a floating-point value that cannot exactly represent the source value, the round-to-nearest rounding mode is used (FLT_ROUNDS is defined to 1).

Denoting the value of floating-point constants (6.4.4.2)

The round-to-nearest rounding mode is used (FLT_ROUNDS is defined to 1).

Contraction of floating-point values (6.5)

Floating-point values are contracted. However, there is no loss in precision and because signaling is not supported, this does not matter.

Default state of FENV ACCESS (7.6.1)

The default state of the pragma directive FENV_ACCESS is OFF.

Additional floating-point mechanisms (7.6, 7.12)

There are no additional floating-point exceptions, rounding-modes, environments, and classifications

Default state of FP_CONTRACT (7.12.2)

The default state of the pragma directive FP_CONTRACT is OFF.

J.3.7 ARRAYS AND POINTERS

Conversion from/to pointers (6.3.2.3)

For information about casting of data pointers and function pointers, see *Casting*, page 348.

ptrdiff_t (6.5.6)

For information about ptrdiff t, see ptrdiff t, page 349.

J.3.8 HINTS

Honoring the register keyword (6.7.1)

User requests for register variables are not honored.

Inlining functions (6.7.4)

User requests for inlining functions increases the chance, but does not make it certain, that the function will actually be inlined into another function. See *Inlining functions*, page 83.

J.3.9 STRUCTURES, UNIONS, ENUMERATIONS, AND BITFIELDS

Sign of 'plain' bitfields (6.7.2, 6.7.2.1)

For information about how a 'plain' int bitfield is treated, see *Bitfields*, page 342.

Possible types for bitfields (6.7.2.1)

All integer types can be used as bitfields in the compiler's extended mode, see -*e*, page 269.

Atomic types for bitfields (6.7.2.1)

Atomic types cannot be used as bitfields.

Bitfields straddling a storage-unit boundary (6.7.2.1)

A bitfield is always placed in one—and one only—storage unit, which means that the bitfield cannot straddle a storage-unit boundary.

Allocation order of bitfields within a unit (6.7.2.1)

For information about how bitfields are allocated within a storage unit, see *Bitfields*, page 342.

Alignment of non-bitfield structure members (6.7.2.1)

The alignment of non-bitfield members of structures is the same as for the member types, see *Alignment*, page 339.

Integer type used for representing enumeration types (6.7.2.2)

The chosen integer type for a specific enumeration type depends on the enumeration constants defined for the enumeration type. The chosen integer type is the smallest possible.

J.3.10 QUALIFIERS

Access to volatile objects (6.7.3)

Any reference to an object with volatile qualified type is an access, see *Declaring objects volatile*, page 351.

J.3.11 PREPROCESSING DIRECTIVES

Locations in #pragma for header names (6.4, 6.4.7)

These pragma directives take header names as parameters at the specified positions:

```
#pragma include_alias ("header", "header")
#pragma include_alias (<header>, <header>)
```

Mapping of header names (6.4.7)

Sequences in header names are mapped to source file names verbatim. A backslash '\' is not treated as an escape sequence. See *Overview of the preprocessor*, page 451.

Character constants in constant expressions (6.10.1)

A character constant in a constant expression that controls conditional inclusion matches the value of the same character constant in the execution character set.

The value of a single-character constant (6.10.1)

A single-character constant may only have a negative value if a plain character (char) is treated as a signed character, see --char is signed, page 260.

Including bracketed filenames (6.10.2)

For information about the search algorithm used for file specifications in angle brackets <>, see *Include file search procedure*, page 243.

Including quoted filenames (6.10.2)

For information about the search algorithm used for file specifications enclosed in quotes, see *Include file search procedure*, page 243.

Preprocessing tokens in #include directives (6.10.2)

Preprocessing tokens in an #include directive are combined in the same way as outside an #include directive.

Nesting limits for #include directives (6.10.2)

There is no explicit nesting limit for #include processing.

inserts \ in front of \u (6.10.3.2)

(stringify argument) inserts a \ character in front of a Universal Character Name (UCN) in character constants and string literals.

Recognized pragma directives (6.10.6)

In addition to the pragma directives described in the chapter *Pragma directives*, the following directives are recognized and will have an indeterminate effect. If a pragma directive is listed both in the chapter *Pragma directives* and here, the information provided in the chapter *Pragma directives* overrides the information here.

```
alias_def

alignment

alternate_target_def

baseaddr

basic_template_matching

building_runtime

can instantiate
```

```
codeseg
constseg
cplusplus_neutral
cspy_support
cstat_dump
dataseq
define_type_info
do_not_instantiate
early_dynamic_initialization
exception neutral
function
function_category
function_effects
hdrstop
important_typedef
ident
implements_aspect
init_routines_only_for_needed_variables
initialization_routine
inline_template
instantiate
keep_definition
library_default_requirements
library_provides
library_requirement_override
memory
module_name
no_pch
no_vtable_use
```

```
once
pop_macro
preferred_typedef
push_macro
separate_init_routine
set_generate_entries_without_bounds
system_include
uses_aspect
vector
warnings
```

Default __DATE__ and __TIME__ (6.10.8)

The definitions for __TIME__ and __DATE__ are always available.

J.3.12 LIBRARY FUNCTIONS

Additional library facilities (5.1.2.1)

Most of the standard library facilities are supported. Some of them—the ones that need an operating system—require a low-level implementation in the application. For more information, see *The DLIB runtime environment*, page 119.

Diagnostic printed by the assert function (7.2.1.1)

```
The assert() function prints:

filename: linenr expression -- assertion failed when the parameter evaluates to zero.
```

Representation of the floating-point status flags (7.6.2.2)

There is no representation of floating-point status flags.

Feraiseexcept raising floating-point exception (7.6.2.3)

For information about the feraiseexcept function raising floating-point exceptions, see *Floating-point environment*, page 346.

Strings passed to the setlocale function (7.11.1.1)

For information about strings passed to the setlocale function, see *Locale*, page 153.

Types defined for float_t and double_t (7.12)

The FLT_EVAL_METHOD macro can only have the value 0.

Domain errors (7.12.1)

No function generates other domain errors than what the standard requires.

Return values on domain errors (7.12.1)

Mathematic functions return a floating-point NaN (not a number) for domain errors.

Underflow errors (7.12.1)

Mathematic functions set errno to the macro ERANGE (a macro in errno.h) and return zero for underflow errors.

fmod return value (7.12.10.1)

The fmod function sets errno to a domain error and returns a floating-point NaN when the second argument is zero.

remainder return value (7.12.10.2)

The remainder function sets errno to a domain error and returns a floating-point NaN when the second argument is zero.

The magnitude of remquo (7.12.10.3)

The magnitude is congruent modulo INT MAX.

remquo return value (7.12.10.3)

The remquo function sets errno to a domain error and returns a floating-point NaN when the second argument is zero.

signal() (7.14.1.1)

The signal part of the library is not supported.

Note: The default implementation of signal does not perform anything. Use the template source code to implement application-specific signal handling. See *signal*, page 150 and *raise*, page 148, respectively.

NULL macro (7.19)

The NULL macro is defined to 0.

Terminating newline character (7.21.2)

Stream functions recognize either newline or end of file (EOF) as the terminating character for a line.

Space characters before a newline character (7.21.2)

Space characters written to a stream immediately before a newline character are preserved.

Null characters appended to data written to binary streams (7.21.2)

No null characters are appended to data written to binary streams.

File position in append mode (7.21.3)

The file position is initially placed at the beginning of the file when it is opened in append-mode.

Truncation of files (7.21.3)

Whether a write operation on a text stream causes the associated file to be truncated beyond that point, depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 120.

File buffering (7.21.3)

An open file can be either block-buffered, line-buffered, or unbuffered.

A zero-length file (7.21.3)

Whether a zero-length file exists depends on the application-specific implementation of the low-level file routines.

Legal file names (7.21.3)

The legality of a filename depends on the application-specific implementation of the low-level file routines.

Number of times a file can be opened (7.21.3)

Whether a file can be opened more than once depends on the application-specific implementation of the low-level file routines.

Multibyte characters in a file (7.21.3)

The encoding of multibyte characters in a file depends on the application-specific implementation of the low-level file routines.

remove() (7.21.4.1)

The effect of a remove operation on an open file depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 120.

rename() (7.21.4.2)

The effect of renaming a file to an already existing filename depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 120.

Removal of open temporary files (7.21.4.3)

Whether an open temporary file is removed depends on the application-specific implementation of the low-level file routines.

Mode changing (7.21.5.4)

freopen closes the named stream, then reopens it in the new mode. The streams stdin, stdout, and stderr can be reopened in any new mode.

Style for printing infinity or NaN (7.21.6.1, 7.29.2.1)

The style used for printing infinity or NaN for a floating-point constant is inf and nan (INF and NAN for the F conversion specifier), respectively. The n-char-sequence is not used for nan.

%p in printf() (7.21.6.1, 7.29.2.1)

The argument to a %p conversion specifier, print pointer, to printf() is treated as having the type void *. The value will be printed as a hexadecimal number, similar to using the %x conversion specifier.

Reading ranges in scanf (7.21.6.2, 7.29.2.1)

A - (dash) character is always treated as a range symbol.

%p in scanf (7.21.6.2, 7.29.2.2)

The %p conversion specifier, scan pointer, to scanf() reads a hexadecimal number and converts it into a value with the type void *.

File position errors (7.21.9.1, 7.21.9.3, 7.21.9.4)

On file position errors, the functions fgetpos, ftell, and fsetpos store EFPOS in errno.

An n-char-sequence after nan (7.22.1.3, 7.29.4.1.1)

An n-char-sequence after a NaN is read and ignored.

errno value at underflow (7.22.1.3, 7.29.4.1.1)

errno is set to ERANGE if an underflow is encountered.

Zero-sized heap objects (7.22.3)

A request for a zero-sized heap object will return a valid pointer and not a null pointer.

Behavior of abort and exit (7.22.4.1, 7.22.4.5)

A call to abort () or _Exit() will not flush stream buffers, not close open streams, and not remove temporary files.

Termination status (7.22.4.1, 7.22.4.4, 7.22.4.5, 7.22.4.7)

The termination status will be propagated to __exit() as a parameter. exit(), _Exit(), and quick_exit use the input parameter, whereas abort uses EXIT_FAILURE.

The system function return value (7.22.4.8)

The system function returns -1 when its argument is not a null pointer.

Range and precision of clock t and time t (7.27)

The range and precision of clock_t is up to your implementation. The range and precision of time_t is 19000101 up to 20351231 in tics of a second if the 32-bit time_t is used. It is -9999 up to 9999 years in tics of a second if the 64-bit time_t is used. See *time.h*, page 473

The time zone (7.27.1)

The local time zone and daylight savings time must be defined by the application. For more information, see *time.h*, page 473.

The era for clock() (7.27.2.1)

The era for the clock function is up to your implementation.

TIME_UTC epoch (7.27.2.5)

The epoch for TIME_UTC is up to your implementation.

%Z replacement string (7.27.3.5, 7.29.5.1)

By default, ":" is used as a replacement for %z. Your application should implement the time zone handling. See __time32, __time64, page 151.

Math functions rounding mode (F.10)

The functions in math.h honor the rounding direction mode in FLT-ROUNDS.

J.3.13 ARCHITECTURE

Values and expressions assigned to some macros (5.2.4.2, 7.20.2, 7.20.3)

There are always 8 bits in a byte.

MB_LEN_MAX is at the most 6 bytes depending on the library configuration that is used.

For information about sizes, ranges, etc for all basic types, see *Data representation*, page 339.

The limit macros for the exact-width, minimum-width, and fastest minimum-width integer types defined in stdint.h have the same ranges as char, short, int, long, and long long.

The floating-point constant FLT_ROUNDS has the value 1 (to nearest) and the floating-point constant FLT_EVAL_METHOD has the value 0 (treat as is).

Accessing another thread's autos or thread locals (6.2.4)

The IAR Systems runtime environment does not allow multiple threads. With a third-party RTOS, the access will take place and work as intended as long as the accessed item has not gone out of its scope.

The number, order, and encoding of bytes (6.2.6.1)

See Data representation, page 339.

Extended alignments (6.2.8)

For information about extended alignments, see *data alignment*, page 378.

Valid alignments (6.2.8)

For information about valid alignments on fundamental types, see the chapter *Data representation*.

The value of the result of the size of operator (6.5.3.4)

See Data representation, page 339.

J.4 LOCALE

Members of the source and execution character set (5.2.1)

By default, the compiler accepts all one-byte characters in the host's default character set. The chapter *Encodings* describes how to change the default encoding for the source character set, and by that the encoding for plain character constants and plain string literals in the execution character set.

The meaning of the additional characters (5.2.1.2)

Any multibyte characters in the extended source character set is translated into the following encoding for the execution character set:

Execution character set	Encoding
L typed	UTF-32
u typed	UTF-16
Ŭ typed	UTF-32
u8 typed	UTF-8
none typed	The same as the source character set

Table 50: Translation of multibyte characters in the extended source character set

It is up to your application with the support of the library configuration to handle the characters correctly.

Shift states for encoding multibyte characters (5.2.1.2)

No shift states are supported.

Direction of successive printing characters (5.2.2)

The application defines the characteristics of a display device.

The decimal point character (7.1.1)

For a library with the configuration Normal or Tiny, the default decimal-point character is a '.'. For a library with the configuration Full, the chosen locale defines what character is used for the decimal point.

Printing characters (7.4, 7.30.2)

The set of printing characters is determined by the chosen locale.

Control characters (7.4, 7.30.2)

The set of control characters is determined by the chosen locale.

Characters tested for (7.4.1.2, 7.4.1.3, 7.4.1.7, 7.4.1.9, 7.4.1.10, 7.4.1.11, 7.30.2.1.2, 7.30.5.1.3, 7.30.2.1.7, 7.30.2.1.9, 7.30.2.1.10, 7.30.2.1.11)

The set of characters tested for the character-based functions are determined by the chosen locale. The set of characters tested for the wchar_t-based functions are the UTF-32 code points 0x0 to 0x7F.

The native environment (7.11.1.1)

The native environment is the same as the "C" locale.

Subject sequences for numeric conversion functions (7.22.1, 7.29.4.1)

There are no additional subject sequences that can be accepted by the numeric conversion functions

The collation of the execution character set (7.24.4.3, 7.29.4.4.2)

Collation is not supported.

Message returned by strerror (7.24.6.2)

The messages returned by the strerror function depending on the argument is:

Argument	Message
EZERO	no error
EDOM	domain error
ERANGE	range error
EFPOS	file positioning error
EILSEQ	multi-byte encoding error
<0 >99	unknown error
all others	error nnn

Table 51: Message returned by strerror()—DLIB runtime environment

Formats for time and date (7.27.3.5, 7.29.5.1)

Time zone information is as you have implemented it in the low-level function ___qetzone.

Character mappings (7.30.1)

The character mappings supported are tolower and toupper.

Character classifications (7.30.1)

The character classifications that are supported are alnum, cntrl, digit, graph, lower, print, punct, space, upper, and xdigit.

Descriptions of implementation-defined behavior

Implementation-defined behavior for C89

Descriptions of implementation-defined behavior

If you are using Standard C instead of C89, see Implementation-defined behavior for Standard C, page 565.

Descriptions of implementation-defined behavior

The descriptions follow the same order as the ISO appendix. Each item covered includes references to the ISO chapter and section (in parenthesis) that explains the implementation-defined behavior.

TRANSLATION

Diagnostics (5.1.1.3)

Diagnostics are produced in the form:

```
filename,linenumber level[tag]: message
```

where filename is the name of the source file in which the error was encountered, linenumber is the line number at which the compiler detected the error, level is the level of seriousness of the message (remark, warning, error, or fatal error), tag is a unique tag that identifies the message, and message is an explanatory message, possibly several lines.

ENVIRONMENT

Arguments to main (5.1.2.2.2.1)

The function called at program startup is called main. No prototype was declared for main, and the only definition supported for main is:

```
int main(void)
```

To change this behavior for the DLIB runtime environment, see *Customizing* __low_level_init, page 142.

Interactive devices (5.1.2.3)

The streams stdin and stdout are treated as interactive devices.

IDENTIFIERS

Significant characters without external linkage (6.1.2)

The number of significant initial characters in an identifier without external linkage is 200.

Significant characters with external linkage (6.1.2)

The number of significant initial characters in an identifier with external linkage is 200.

Case distinctions are significant (6.1.2)

Identifiers with external linkage are treated as case-sensitive.

CHARACTERS

Source and execution character sets (5.2.1)

The source character set is the set of legal characters that can appear in source files. It is dependent on the chosen encoding for the source file. See *Text encodings*, page 247. By default, the source character set is Raw.

The execution character set is the set of legal characters that can appear in the execution environment. These are the execution character set for character constants and string literals and their encoding types:

Execution character set	Encoding type
L	UTF-32
u	UTF-16
U	UTF-32
u8	UTF-8
none	The source character set

Table 52: Execution character sets and their encodings

The DLIB runtime environment needs a multibyte character scanner to support a multibyte execution character set. See *Locale*, page 153.

Bits per character in execution character set (5.2.4.2.1)

The number of bits in a character is represented by the manifest constant CHAR_BIT. The standard include file limits.h defines CHAR_BIT as 8.

Mapping of characters (6.1.3.4)

The mapping of members of the source character set (in character and string literals) to members of the execution character set is made in a one-to-one way. In other words, the same representation value is used for each member in the character sets except for the escape sequences listed in the ISO standard.

Unrepresented character constants (6.1.3.4)

The value of an integer character constant that contains a character or escape sequence not represented in the basic execution character set or in the extended character set for a wide character constant generates a diagnostic message, and will be truncated to fit the execution character set.

Character constant with more than one character (6.1.3.4)

An integer character constant that contains more than one character will be treated as an integer constant. The value will be calculated by treating the leftmost character as the most significant character, and the rightmost character as the least significant character, in an integer constant. A diagnostic message will be issued if the value cannot be represented in an integer constant.

A wide character constant that contains more than one multibyte character generates a diagnostic message.

Converting multibyte characters (6.1.3.4)

See Locale, page 153.

Range of 'plain' char (6.2.1.1)

A 'plain' char has the same range as an unsigned char.

INTEGERS

Range of integer values (6.1.2.5)

The representation of integer values are in the two's complement form. The most significant bit holds the sign; 1 for negative, 0 for positive and zero.

See *Basic data types—integer types*, page 341, for information about the ranges for the different integer types.

Demotion of integers (6.2.1.2)

Converting an integer to a shorter signed integer is made by truncation. If the value cannot be represented when converting an unsigned integer to a signed integer of equal length, the bit-pattern remains the same. In other words, a large enough value will be converted into a negative value.

Signed bitwise operations (6.3)

Bitwise operations on signed integers work the same way as bitwise operations on unsigned integers; in other words, the sign-bit will be treated as any other bit, except for the operator >> which will behave as an arithmetic right shift.

Sign of the remainder on integer division (6.3.5)

The sign of the remainder on integer division is the same as the sign of the dividend.

Negative valued signed right shifts (6.3.7)

The result of a right-shift of a negative-valued signed integral type preserves the sign-bit. For example, shifting <code>0xff00</code> down one step yields <code>0xff80</code>.

FLOATING POINT

Representation of floating-point values (6.1.2.5)

The representation and sets of the various floating-point numbers adheres to IEEE 854–1987. A typical floating-point number is built up of a sign-bit (s), a biased exponent (e), and a mantissa (m).

See *Basic data types—floating-point types*, page 346, for information about the ranges and sizes for the different floating-point types: float and double.

Converting integer values to floating-point values (6.2.1.3)

When an integral number is cast to a floating-point value that cannot exactly represent the value, the value is rounded (up or down) to the nearest suitable value.

Demoting floating-point values (6.2.1.4)

When a floating-point value is converted to a floating-point value of narrower type that cannot exactly represent the value, the value is rounded (up or down) to the nearest suitable value.

ARRAYS AND POINTERS

size_t (6.3.3.4, 7.1.1)

See *size t*, page 349, for information about size_t.

Conversion from/to pointers (6.3.4)

See *Casting*, page 348, for information about casting of data pointers and function pointers.

ptrdiff_t (6.3.6, 7.1.1)

See *ptrdiff t*, page 349, for information about the ptrdiff_t.

REGISTERS

Honoring the register keyword (6.5.1)

User requests for register variables are not honored.

STRUCTURES, UNIONS, ENUMERATIONS, AND BITFIELDS

Improper access to a union (6.3.2.3)

If a union gets its value stored through a member and is then accessed using a member of a different type, the result is solely dependent on the internal storage of the first member.

Padding and alignment of structure members (6.5.2.1)

See the section *Basic data types—integer types*, page 341, for information about the alignment requirement for data objects.

Sign of 'plain' bitfields (6.5.2.1)

A 'plain' int bitfield is treated as an unsigned int bitfield. All integer types are allowed as bitfields.

Allocation order of bitfields within a unit (6.5.2.1)

Bitfields are allocated within an integer from least-significant to most-significant bit.

Can bitfields straddle a storage-unit boundary (6.5.2.1)

Bitfields cannot straddle a storage-unit boundary for the chosen bitfield integer type.

Integer type chosen to represent enumeration types (6.5.2.2)

The chosen integer type for a specific enumeration type depends on the enumeration constants defined for the enumeration type. The chosen integer type is the smallest possible.

QUALIFIERS

Access to volatile objects (6.5.3)

Any reference to an object with volatile qualified type is an access.

DECLARATORS

Maximum numbers of declarators (6.5.4)

The number of declarators is not limited. The number is limited only by the available memory.

STATEMENTS

Maximum number of case statements (6.6.4.2)

The number of case statements (case values) in a switch statement is not limited. The number is limited only by the available memory.

PREPROCESSING DIRECTIVES

Character constants and conditional inclusion (6.8.1)

The character set used in the preprocessor directives is the same as the execution character set. The preprocessor recognizes negative character values if a 'plain' character is treated as a signed character.

Including bracketed filenames (6.8.2)

For file specifications enclosed in angle brackets, the preprocessor does not search directories of the parent files. A parent file is the file that contains the #include directive. Instead, it begins by searching for the file in the directories specified on the compiler command line.

Including quoted filenames (6.8.2)

For file specifications enclosed in quotes, the preprocessor directory search begins with the directories of the parent file, then proceeds through the directories of any grandparent files. Thus, searching begins relative to the directory containing the source

file currently being processed. If there is no grandparent file and the file is not found, the search continues as if the filename was enclosed in angle brackets.

Character sequences (6.8.2)

Preprocessor directives use the source character set, except for escape sequences. Thus, to specify a path for an include file, use only one backslash:

```
#include "mydirectory\myfile"
Within source code, two backslashes are necessary:
file = fopen("mydirectory\\myfile","rt");
```

Recognized pragma directives (6.8.6)

In addition to the pragma directives described in the chapter *Pragma directives*, the following directives are recognized and will have an indeterminate effect. If a pragma directive is listed both in the chapter *Pragma directives* and here, the information provided in the chapter *Pragma directives* overrides the information here.

```
alignment
baseaddr
basic template matching
building_runtime
can_instantiate
codesea
constseg
cspy_support
dataseq
define_type_info
do_not_instantiate
early_dynamic_initialization
function
function_effects
hdrstop
important_typedef
instantiate
```

```
keep_definition
library_default_requirements
library_provides
library_requirement_override
memory
module_name
no_pch
once
system_include
vector
warnings
```

Default __**DATE**__ and __**TIME**__ (6.8.8)

The definitions for __TIME__ and __DATE__ are always available.

LIBRARY FUNCTIONS FOR THE IAR DLIB RUNTIME ENVIRONMENT

Note that some items in this list only apply when file descriptors are supported by the library configuration. See the chapter *The DLIB runtime environment* for more information about runtime library configurations.

NULL macro (7.1.6)

The NULL macro is defined to 0.

Diagnostic printed by the assert function (7.2)

The assert () function prints:

filename: linenr expression -- assertion failed

when the parameter evaluates to zero.

Domain errors (7.5.1)

NaN (Not a Number) will be returned by the mathematic functions on domain errors.

Underflow of floating-point values sets errno to ERANGE (7.5.1)

The mathematics functions set the integer expression errno to ERANGE (a macro in errno.h) on underflow range errors.

fmod() functionality (7.5.6.4)

If the second argument to fmod() is zero, the function returns NaN; errno is set to EDOM.

signal() (7.7.1.1)

The signal part of the library is not supported.

Note: The default implementation of signal does not perform anything. Use the template source code to implement application-specific signal handling. See *signal*, page 150 and *raise*, page 148, respectively.

Terminating newline character (7.9.2)

stdout stream functions recognize either newline or end of file (EOF) as the terminating character for a line.

Blank lines (7.9.2)

Space characters written to the stdout stream immediately before a newline character are preserved. There is no way to read the line through the stdin stream that was written through the stdout stream.

Null characters appended to data written to binary streams (7.9.2)

No null characters are appended to data written to binary streams.

Files (7.9.3)

Whether the file position indicator of an append-mode stream is initially positioned at the beginning or the end of the file, depends on the application-specific implementation of the low-level file routines.

Whether a write operation on a text stream causes the associated file to be truncated beyond that point, depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 120.

The characteristics of the file buffering is that the implementation supports files that are unbuffered, line buffered, or fully buffered.

Whether a zero-length file actually exists depends on the application-specific implementation of the low-level file routines.

Rules for composing valid file names depends on the application-specific implementation of the low-level file routines.

Whether the same file can be simultaneously open multiple times depends on the application-specific implementation of the low-level file routines.

remove() (7.9.4.1)

The effect of a remove operation on an open file depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 120.

rename() (7.9.4.2)

The effect of renaming a file to an already existing filename depends on the application-specific implementation of the low-level file routines. See *Briefly about input and output (I/O)*, page 120.

%p in printf() (7.9.6.1)

The argument to a %p conversion specifier, print pointer, to printf() is treated as having the type void *. The value will be printed as a hexadecimal number, similar to using the %x conversion specifier.

%p in scanf() (7.9.6.2)

The %p conversion specifier, scan pointer, to scanf() reads a hexadecimal number and converts it into a value with the type void *.

Reading ranges in scanf() (7.9.6.2)

A - (dash) character is always treated as a range symbol.

File position errors (7.9.9.1, 7.9.9.4)

On file position errors, the functions fgetpos and ftell store EFPOS in errno.

Message generated by perror() (7.9.10.4)

The generated message is:

usersuppliedprefix:errormessage

Allocating zero bytes of memory (7.10.3)

The calloc(), malloc(), and realloc() functions accept zero as an argument. Memory will be allocated, a valid pointer to that memory is returned, and the memory block can be modified later by realloc.

Behavior of abort() (7.10.4.1)

The abort () function does not flush stream buffers, and it does not handle files, because this is an unsupported feature.

Behavior of exit() (7.10.4.3)

The argument passed to the exit function will be the return value returned by the main function to estartup.

Environment (7.10.4.4)

The set of available environment names and the method for altering the environment list is described in *getenv*, page 146.

system() (7.10.4.5)

How the command processor works depends on how you have implemented the system function. See *system*, page 151.

Message returned by strerror() (7.11.6.2)

The messages returned by strerror() depending on the argument is:

Argument	Message
EZERO	no error
EDOM	domain error
ERANGE	range error
EFPOS	file positioning error
EILSEQ	multi-byte encoding error
<0 >99	unknown error
all others	error nnn

Table 53: Message returned by strerror()—DLIB runtime environment

The time zone (7.12.1)

The local time zone and daylight savings time implementation is described in __time32, time64, page 151.

clock() (7.12.2.1)

From where the system clock starts counting depends on how you have implemented the clock function. See *clock*, page 145.

Descriptions of implementation-defined behavior

Λ	application
A	building, overview of
a (ielfdump option)	execution, overview of62
AAPCS (predefined symbol)	startup and termination (DLIB)
aapcs (compiler option)	argy (argument), implementation-defined behavior566
AAPCS_VFP (predefined symbol)	Arm
ABI, AEABI and IA64	and Thumb code, overview
abort	supported devices
implementation-defined behavior	_arm (extended keyword)359
implementation-defined behavior in C89 (DLIB) 595	arm (compiler option)
system termination (DLIB)	Arm TrustZone
_absolute (extended keyword)	ARMVFP (predefined symbol)
absolute location	ARMVFPV2 (predefined symbol)
data, placing at (@)	ARMVFPV3 (predefined symbol)
language support for	ARMVFPV4 (predefined symbol)
placing data in registers (@)	ARMVFP_D16 (predefined symbol)
#pragma location	ARMVFP_FP16 (predefined symbol)
advanced_heap (linker option)	ARMVFP_SP (predefined symbol)
-aeabi (compiler option)	ARM_ADVANCED_SIMD (predefined symbol) 452
_AEABI_PORTABILITY_LEVEL (preprocessor	ARM_ARCH (predefined symbol)
symbol)	ARM_ARCH_ISA_ARM (predefined symbol) 452
_AEABI_PORTABLE (preprocessor symbol)	ARM_ARCH_ISA_THUMB (predefined symbol) 453
algorithm (library header file)	ARM_ARCH_PROFILE (predefined symbol) 453
alias_def (pragma directive)	ARM_BIG_ENDIAN (predefined symbol)
alignment	arm_cdp (intrinsic function)
forcing stricter (#pragma data_alignment)	arm_cdp2 (intrinsic function)
in structures (#pragma pack)	ARM_FEATURE_CMSE (predefined symbol) 453
in structures, causing problems	ARM_FEATURE_CRC32 (predefined symbol)453
of an object (ALIGNOF)	ARM_FEATURE_CRYPTO (predefined symbol)454
of data types	ARM_FEATURE_DIRECTED_ROUNDING (predefined
restrictions for inline assembler	symbol)
alignment (pragma directive)	ARM_FEATURE_DSP (predefined symbol) 454
ALIGNOF (operator)	ARM_FEATURE_FMA (predefined symbol) 454
align_sp_on_irq (compiler option)	ARM_FEATURE_IDIV (predefined symbol) 454
all (ielfdump option)	ARM_FEATURE_NUMERIC_MAXMIN (predefined
alternate_target_def (pragma directive)	symbol)
anonymous structures	ARM_FEATURE_UNALIGNED (predefined symbol) 455
ANSI C. See C89	ARM_FP (predefined symbol)
11101 C. See Co)	arm_ldc (intrinsic function)
	arm_ldcl (intrinsic function)

arm_ldcl2 (intrinsic function)	implementation-defined behavior in C89589
arm_ldc2 (intrinsic function)	non-lvalue
arm_mcr (intrinsic function)410	of incomplete types
arm_mcrr (intrinsic function)	single-value initialization187
arm_mcrr2 (intrinsic function)	arrays of incomplete types196
arm_mcr2 (intrinsic function)	asm, _asm (language extension)
ARM_MEDIA (predefined symbol)	assembler code
arm_mrc (intrinsic function)	calling from C
arm_mrc2 (intrinsic function)	calling from C++
arm_mrrc (intrinsic function)	inserting inline
arm_mrrc2 (intrinsic function)	assembler directives
ARM_NEON (predefined symbol)	for call frame information
ARM_NEON_FP (predefined symbol)455	using in inline assembler code
ARM_PROFILE_M (predefined symbol)455	assembler instructions
arm_rsr (intrinsic function)	for software interrupts
arm_rsrp (intrinsic function)	assembler instructions, inserting inline
arm_rsr64 (intrinsic function)	assembler labels
arm_stc (intrinsic function)	default for application startup
arm_stcl (intrinsic function)	making public (public_equ)289
arm_stc2 (intrinsic function)	assembler language interface
arm_stc21 (intrinsic function)	calling convention. See assembler code
ARM4TM (predefined symbol)	assembler list file, generating
ARM5 (predefined symbol)	assembler output file
ARM5E (predefined symbol)	assembler statements
ARM6 (predefined symbol)	asserts
ARM6M (predefined symbol)	implementation-defined behavior of575
ARM6SM (predefined symbol)	implementation-defined behavior of in C89, (DLIB)592
ARM7A (predefined symbol)	including in application
ARM7EM (predefined symbol)	assert.h (DLIB header file)
ARM7M (predefined symbol)	assignment of pointer types
ARM7R (predefined symbol)	@ (operator)
ARM8A (predefined symbol)	placing at absolute address
ARM8EM_MAINLINE (predefined symbol)457	placing in sections
ARM8M_BASELINE (predefined symbol) 457	atexit limit, setting up
ARM8M_MAINLINE (predefined symbol) 457	atexit, reserving space for calls
ARM8R (predefined symbol)	atomic accesses
array (library header file)	atomic operations
arrays	atomic types for bitfields
implementation-defined behavior	implementation-defined behavior

atomic (library header file)	bool (data type)
auto, packing algorithm for initializers	
В	C
	C and C++ linkage
backtrace information See call frame information	C/C++ calling convention. See calling convention
Barr, Michael	C header files
baseaddr (pragma directive)	C language, overview
BASE_FILE (predefined symbol)	call frame information
basic_heap (linker option)	in assembler list file
basic_template_matching (pragma directive) 573, 591	in assembler list file (-lA)
batch files	call graph root (stack usage control directive)
error return codes	call stack
none for building library from command line 128	callee-save registers, stored on stack
BE32 (linker option)	calling convention
BE8 (linker option)	C++, requiring C linkage
big_endian (extended keyword)	in compiler
big-endian (byte order)	calloc (library function)
bin (ielftool option)	See also heap
binary streams	implementation-defined behavior in C89 (DLIB) 594
binary streams in C89 (DLIB)	calls (pragma directive)
bit negation	call_graph (linker option)
bitfields	call_graph_root (pragma directive)
data representation of	call-info (in stack usage control file)
hints	canaries
implementation-defined behavior	can_instantiate (pragma directive)
implementation-defined behavior in C89589	cassert (library header file)
non-standard types in	casting
bitfields (pragma directive)	of pointers and integers
bits in a byte, implementation-defined behavior	pointers to integers, language extension
bitset (library header file)	category (in stack usage control file)
bold style, in this guide	ccomplex (library header file)

ectype (DLIB header file)	clustering (compiler transformation)23
_CDP (intrinsic function)	disabling (no_clustering)
CDP2 (intrinsic function)	CLZ (intrinsic function)
cerrno (DLIB header file)	cmain (system initialization code)
cexit (system termination code)	in DLIB
customizing system termination142	cmath (DLIB header file)
in DLIB	CMSE56, 10
efenv (library header file)	cmse (compiler option)
CFI (assembler directive)	cmse_nonsecure_call (extended keyword) 36
CFI_COMMON_ARM (call frame information macro) 180	cmse_nonsecure_entry (extended keyword) 36
CFI_COMMON_Thumb (call frame information macro). 180	CMSIS integration
CFI_NAMES_BLOCK (call frame information macro) 180	code
efloat (DLIB header file)	Arm and Thumb, overview
char (data type)341	facilitating for good generation of
changing default representation (char_is_signed) 260	interruption of execution
changing representation (char_is_unsigned) 261	code (ielfdump option)54
implementation-defined behavior568	code motion (compiler transformation)
signed and unsigned	disabling (no_code_motion)
character set, implementation-defined behavior 566	codecvt (library header file)
characters	codeseg (pragma directive)
implementation-defined behavior567	command line options
implementation-defined behavior in C89586	See also compiler options
char_is_signed (compiler option)	See also linker options
char_is_unsigned (compiler option)261	part of compiler invocation syntax24
char16_t (data type)	part of linker invocation syntax
char32_t (data type)	passing24
check that (linker directive)	typographic convention
checksum	command prompt icon, in this guide4
calculation of	.comment (ELF section)
display format in C-SPY for symbol	comments
checksum (ielftool option)	after preprocessor directives
chrono (library header file)	common block (call frame information)
cinttypes (DLIB header file)	common subexpr elimination (compiler transformation) . 23
ciso646 (library header file)	disabling (no_cse)
climits (DLIB header file)	Common.i (CFI header example file)
clobber	compilation date
clocale (DLIB header file)	exact time of (TIME)
clock (DLIB library function),	identifying (DATE)
implementation-defined behavior in C89 595	
CLREY (intrinsic function) 413	

environment variables	compiler	in linker configuration files
output from 244 -config_ search (linker option) 308 compiler object file. 60 including debug information in (debug, -r) 264 consistency, module 117 compiler object file. 60 including debug information in (debug, -r) 264 const compiler optimis. 228 constructions compiler optimis. 228 constseg (pragma directive) 574, 591 compiler options. 251 control characters. control characters. implementation-defined behavior 582 reading from file (-f) 271 conventions, used in this guide .46 specifying parameters 253 copyright notice .2 syntax. 251 core core instruction scheduling 232 _CORE_ (predefined symbol) .457 compiler transformations 226 Cortex-M7 .216 compiler transformations 226 Cortex, special considerations for interrupt functions .77 complex transformations 261 conflibrary routine) .138-139 from the command line .67 <	environment variables	specifying for linker
compiler listing, generating (-1). 274 consistency, module 117 compiler object file. .60 const const including debug information in (debug, -r) .264 declaring objects .353 output from compiler .244 constseg (pragma directive) .574, 591 compiler options .251 contents, of this guide .42 passing to compiler .242 contents, of this guide .42 reading from file (-f) .271 contents, of this guide .42 specifying parameters .253 conventions, used in this guide .46 specifying parameters .253 conventions, used in this guide .46 syntax .251 core reating skeleton code .168 instruction scheduling .232 core (jeedfined symbol) .457 compiler platform, identifying .458 Cortex. M7 .216 compiler version number .461 Cortex. special considerations for interrupt functions .77 compiler version number .461 Cortex. special considerations for interrupt functions	invocation syntax241	config_def (linker option)
compiler object file. 60 const declaring objects 353 output from compiler. 244 constseg (pragma directive) 574, 591 compiler optimization levels. 228 contents, of this guide 42 compiler options. 251 control characters, 22 passing to compiler 242 control characters, 582 reading from file (-f) 271 conventions, used in this guide 46 specifying parameters 253 conventions, used in this guide 46 copyright notice 2 2 summary 253 cornel (predefined symbol) 457 syntax 251 identifying 457 instruction scheduling 232 cornel (predefined symbol) 457 compiler platform, identifying 458 Cortex. M7 216 compiler version number 461 cos (library function) 464 compiler version number 461 cos (library routine) 138-139 cost (library beader file) 467 cos (library routine)	output from	config_search (linker option)
including debug information in (debug, -r)	compiler listing, generating (-1)274	consistency, module
output from compiler .244 constseg (pragma directive) .574, 591 compiler optimization levels .228 control characters, compiler options .251 control characters, passing to compiler .242 control characters, reading from file (-f) .271 conventions, used in this guide .46 specifying parameters .253 conventions, used in this guide .46 sepcifying parameters .253 conventions, used in this guide .46 summary .253 conventions, used in this guide .46 suppright notice .22 conventions, used in this guide .46 suppright notice .22 conventions, used in this guide .46 suppright notice .22 copyright notice .22 summary .253 conventions, used in this guide .46 copyright notice .22 copyright notice .22 core .26 .20 .20 core .26 .20 .20 core .26 .	compiler object file	const
compiler optimization levels .228 contents, of this guide .42 compiler options .251 control characters .582 passing to compiler .242 control characters .582 reading from file (-f) .271 conventions, used in this guide .46 specifying parameters .253 conventions, used in this guide .46 specifying parameters .253 conventions, used in this guide .46 syntax .251 core .68 instruction scheduling .232 core .68 -warnings_affect_exit_code .245 core .68 -warnings_affect_exit_code .245 Cortex-M7 .216 compiler platform, identifying .458 Cortex-M7 .216 compiler version number .461 cos (library function) .464 compiler version number .461 cos (library function) .464 complex (library header file) .467 _cplusplus (predefined symbol) .457 complex (library header file) .466 _cplusp	including debug information in (debug, -r)	declaring objects
compiler options .251 control characters, implementation-defined behavior .582 passing to compiler .242 implementation-defined behavior .582 reading from file (-f) .271 syntax. .253 conventions, used in this guide .46 .46 specifying parameters .253 copyright notice .2 .2 .457		constseg (pragma directive)
compiler options .251 control characters, implementation-defined behavior .582 passing to compiler .242 implementation-defined behavior .582 reading from file (-f) .271 syntax. .253 conventions, used in this guide .46 .46 specifying parameters .253 copyright notice .2 .2 .457	compiler optimization levels228	contents, of this guide
passing to compiler 242 reading from file (-f) 271 conventions, used in this guide		control characters,
reading from file (-f)		implementation-defined behavior
specifying parameters 253 copyright notice .2 summary 253		
summary 253 CORE_ (predefined symbol) 457 syntax 251 core for creating skeleton code instruction scheduling 168 identifying 457 instruction scheduling 232 selecting 68 warnings_affect_exit_code 245 Cortex-M7 216 compiler platform, identifying 458 Cortex, special considerations for interrupt functions .77 compiler version number 461 cos (library function) .464 compiling cos (library routine) 138-139 from the command line 67 cos (library routine) 138-139 cost (library header file) 467 coll (library routine) 138-139 complex (library header file) 467 cplusplus (predefined symbol) .457 computer style, typographic convention 46 cplusplus_neutral (pragma directive) .574 comcatenating strings 188, 196 -cpu (compiler option) .20 concatenating wide string literals with different encoding types -cpu (linker option) .20 implementation-defined behavior <td>- · · · · · · · · · · · · · · · · · · ·</td> <td></td>	- · · · · · · · · · · · · · · · · · · ·	
Syntax 251 Core		** *
for creating skeleton code	•	
instruction scheduling	•	identifying
warnings_affect_exit_code 245 Cortex-M7 216 compiler platform, identifying 458 Cortex, special considerations for interrupt functions .77 compiler transformations 226 cos (library function) .464 compiler version number 461 cos (library routine) .138-139 compling cosl (library routine) .138-139 from the command line .67 cosl (library routine) .138-139 complex (library header file) .467 .20UNTER_ (predefined symbol) .457 complex, h (library header file) .466 .467 .20usplus_neutral (pragma directive) .574 concatenating strings .188, 196 .20u (compiler option) .261 concatenating wide string literals with different encoding types .20u (compiler option) .261 implementation-defined behavior .569 .20u (linker option) .262 condition_variable (library header file) .467 .20u (linker option) .262 configuration .20u (linker option) .20u (linker option) .262 condition_variable (library header file)	_	
compiler platform, identifying		
compiler transformations		
compiler version number		
compiling from the command line	-	
from the command line 67 syntax. 241 COUNTER_(predefined symbol). 457 complex (library header file). 467 complex.h (library header file). 466 concatenating strings. 188, 196 concatenating wide string literals with different encoding types	•	· · · · · · · · · · · · · · · · · · ·
syntax. 241COUNTER (predefined symbol). 457 complex (library header file). 467 complex.h (library header file). 466 computer style, typographic convention 46 concatenating strings. 188, 196 concatenating wide string literals with different encoding types 261 condition_variable (library header file). 467 configuration 307 configuration basic project settings 67 low_level_init 142 configuration symbols for file input and output 153 complex.h (library header file). 467 cplusplus (predefined symbol) 457 cplusplus_neutral (pragma directive) 574 cplusplus_neutral (pragma directive) 308 cplusplus_neutral		
complex (library header file)		
complex.h (library header file)	·	
computer style, typographic convention		
concatenating strings	-	
concatenating wide string literals with different encoding types concatenating wide string literals with different encoding types concatenating wide string literals with different encoding types concatenating wide string literals with different encoding concatenating wide string literals with different encoding concatenating wide string literals with different encoding copuration 569 copu_mode (compiler option) 262 CPU, specifying on command line for compiler 261 configuration		
typesCPU_MODE(predefined symbol) .457 implementation-defined behavior .569 condition_variable (library header file) .467 config (linker option) .262config (linker option) .307 cRC32B (intrinsic function) .414 configurationcrc32b (intrinsic function) .415 basic project settings .67CRC32CB (intrinsic function) .414low_level_init .142 crc32cb (intrinsic function) .415 configuration file for linker. See linker configuration file configuration symbolsCRC32CH (intrinsic function) .415 for file input and output .153crc32ch (intrinsic function) .415		
implementation-defined behavior	-	
condition_variable (library header file)467CPU, specifying on command line for compiler.261config (linker option).307_CRC32B (intrinsic function).414configuration_crc32b (intrinsic function).415_low_level_init.67_CRC32CB (intrinsic function).414_configuration file for linker. See linker configuration file_crc32cb (intrinsic function).415configuration symbols_crc32cd (intrinsic function).415for file input and output.153_crc32ch (intrinsic function).415		
config (linker option).307_CRC32B (intrinsic function).414configuration_crc32b (intrinsic function).415basic project settings.67_CRC32CB (intrinsic function).414_low_level_init.142_crc32cb (intrinsic function).415configuration file for linker. See linker configuration file_crc32cd (intrinsic function).415configuration symbols_CRC32CH (intrinsic function).414for file input and output.153_crc32ch (intrinsic function).415	-	
configuration_crc32b (intrinsic function)415basic project settings.67_CRC32CB (intrinsic function).414_low_level_init.142_crc32cb (intrinsic function).415configuration file for linker. See linker configuration file_crc32cd (intrinsic function).415configuration symbols_CRC32CH (intrinsic function).414for file input and output.153_crc32ch (intrinsic function).415	· · · · · · · · · · · · · · · · · · ·	
basic project settings	• •	
low_level_init	•	
configuration file for linker. See linker configuration filecrc32cd (intrinsic function).415configuration symbolsCRC32CH (intrinsic function).414for file input and output.153crc32ch (intrinsic function).415		
configuration symbolsCRC32CH (intrinsic function)		
for file input and output	e e	
	•	·
	in library configuration files	CRC32CW (intrinsic function)

crc32cw (intrinsic function)	interface to system termination
crc32d (intrinsic function)	C-STAT for static analysis, documentation for4
CRC32H (intrinsic function)	C++
crc32h (intrinsic function)	absolute location
CRC32W (intrinsic function)	calling convention
crc32w (intrinsic function)	header files46
create (iarchive option)	language extensions
csetjmp (DLIB header file)	static member variables
csignal (DLIB header file)	support for
cspy_support (pragma directive)574, 591	c++ (compiler option)
CSTACK (ELF block)	C++ header files
See also stack	C++ terminology
setting up size for	C++145
cstartup (system startup code)	C++14. See Standard C++
customizing system initialization142	C11 standard18
source files for (DLIB)	C11. See Standard C
cstat_disable (pragma directive)	C89
cstat_dump (pragma directive)	implementation-defined behavior
cstat_enable (pragma directive)	support for
cstat_restore (pragma directive)	c89 (compiler option)
cstat_suppress (pragma directive)373	
cstdalign (DLIB header file)	D
cstdarg (DLIB header file)	
cstdbool (DLIB header file)	-D (compiler option)
cstddef (DLIB header file)	-d (iarchive option)
cstdio (DLIB header file)	data
cstdlib (DLIB header file)470	alignment of
cstdnoreturn (DLIB header file)	different ways of storing7
cstring (DLIB header file)	located, declaring extern22
ctgmath (library header file)	placing
cthreads (DLIB header file)	at absolute location
ctime (DLIB header file)	placing in registers
ctype.h (library header file)	representation of
cuchar (DLIB header file)	storage
cwctype.h (library header file)	data block (call frame information)17
C_INCLUDE (environment variable)243	data pointers
C-RUN runtime error checking, documentation for 44	data types
C-SPY	floating point
debug support for C++194	in C++

integer types341	diagnostic messages
dataseg (pragma directive)	classifying as compilation errors
data_alignment (pragma directive)	classifying as compilation remarks
.data_init (ELF section)	classifying as compiler warnings
DATE (predefined symbol)	classifying as errors
date (library function), configuring support for125	classifying as linker warnings
DC32 (assembler directive)	classifying as linking errors
debug (compiler option)	classifying as linking remarks
debug information, including in object file	disabling compiler warnings
.debug (ELF section)	disabling linker warnings
debug_heap (linker option)	disabling wrapping of in compiler
decimal point, implementation-defined behavior 582	disabling wrapping of in linker
declarations	enabling compiler remarks290
empty187	enabling linker remarks
Kernighan & Ritchie	listing all used by compiler
of functions	listing all used by linker
declarators, implementation-defined behavior in C89590	suppressing in compiler
default_no_bounds (pragma directive)	suppressing in linker
default_to_complex_ranges (linker option) 309	diagnostics
define block (linker directive)	iarchive
define memory (linker directive)	iobjmanip
define overlay (linker directive)	isymexport534
define region (linker directive)	diagnostics_tables (compiler option)
define section (linker directive)	diagnostics_tables (linker option)
define symbol (linker directive) 500	diagnostics, implementation-defined behavior 565
define_symbol (linker option)	diag_default (pragma directive)
define_type_info (pragma directive)574, 591	diag_error (compiler option)
define_without_bounds (pragma directive)	diag_error (linker option)311
define_with_bounds (pragma directive)	no_fragments (compiler option)279
delete (iarchive option)	no_fragments (linker option)
delete (keyword)	diag_error (pragma directive)
denormalized numbers. See subnormal numbers	diag_remark (compiler option)266
dependencies (compiler option)	diag_remark (linker option)
dependencies (linker option)	diag_remark (pragma directive)
deprecated (pragma directive)381	diag_suppress (compiler option)
deprecated_feature_warnings (compiler option) 265	diag_suppress (linker option)311
deque (library header file)	diag_suppress (pragma directive)
destructors and interrupts, using	diag_warning (compiler option)
device description files, preconfigured for C-SPY 54	diag_warning (linker option)

diag_warning (pragma directive)	dynamic initialization	
	and C++dynamic memory	
pragma	dynamic RTTI data, including in the image	
	dynamic KTTT data, including in the image	323
directory, specifying as parameter	_	
disable_check (pragma directive)	E	
disable_fiq (intrinsic function)	_	
disable_interrupt (intrinsic function)	-e (compiler option)	
disable_irq (intrinsic function)	early_initialization (pragma directive)	574, 591
disasm_data (ielfdump option)	edit (isymexport option)	543
discard_unused_publics (compiler option)268	edition, of this guide	2
disclaimer	ELF utilities	519
DLIB	embedded systems, IAR special support for	55
configurations	empty region (in linker configuration file)	480
configuring	empty translation unit	188
naming convention47	enable_fiq (intrinsic function)	417
reference information. See the online help system 463	enable_hardware_workaround (compiler option)	
runtime environment	enable_hardware_workaround (linker option)	
dlib_config (compiler option)	enable_interrupt (intrinsic function)	
DLib_Defaults.h (library configuration file)128	enable_irq (intrinsic function)	
DLIB_FILE_DESCRIPTOR (configuration symbol) 153	enable_restrict (compiler option)	
DMB (intrinsic function)	enabling restrict keyword	
do not initialize (linker directive)	encoding of wchar_t, char16_t, and char32_t	
document conventions	implementation-defined behavior	560
documentation	encodings	
contents of this42	Raw	
how to use this	system default locale	
overview of guides	Unicode	
who should read this	UTF-16	
domain errors, implementation-defined behavior 576	UTF-8	
domain errors, implementation-defined behavior in C89	endianness. See byte order	247
(DLIB)		21/
double (data type)	entry (linker option)	
do_explicit_zero_opt_in_named_sections	entry label, program	140
(compiler option)	enumerations	57.1
do_not_instantiate (pragma directive)574, 591	implementation-defined behavior	
do_segment_pad (linker option)	implementation-defined behavior in C89	589
DSB (intrinsic function)	enums	
duplicate section merging	data representation	
dupheate section merging	forward declarations of	186

enum_is_int (compiler option)	_Exit (library function)
environment 500	exit (library function)
implementation-defined behavior	implementation-defined behavior
implementation-defined behavior in C89585	implementation-defined behavior in C89595
runtime (DLIB)	_exit (library function)
environment names, implementation-defined behavior 567	exit (library function)
environment variables	exp (library routine)
C_INCLUDE	expf (library routine)
ILINKARM_CMD_LINE	expl (library routine)138
QCCARM	export (linker directive)500
environment (native),	export_builtin_config (linker option)
implementation-defined behavior	expressions (in linker configuration file)501
EQU (assembler directive)	extended command line file
ERANGE576	for compiler
ERANGE (C89)	for linker
errno value at underflow,	passing options
implementation-defined behavior	extended keywords
errno.h (library header file)	enabling (-e)
error checking (C-RUN), documentation for	overview
error messages	summary
classifying	syntax
classifying for compiler	object attributes
classifying for linker	
range	type attributes on data objects
error return codes	type attributes on functions
error (linker directive)	extended-selectors (in linker configuration file)
error (pragma directive)	extern "C" linkage
* *	extract (iarchive option)
errors and warnings,	extra_init (linker option)
listing all used by the compiler (diagnostics_tables)267	<u></u>
error_limit (compiler option)	F
error_limit (linker option)	•
escape sequences, implementation-defined behavior 568	-f (compiler option)
exception flags, for floating-point values	-f (IAR utility option)
exception (library header file)	-f (linker option)
EXCEPTIONS (predefined symbol)458	fast interrupts
exceptions, code for in section	fatal error messages
exception_neutral (pragma directive)	fdopen, in stdio.h
exception_tables (linker option)315	FENV_ACCESS, implementation-defined behavior570
exclude (stack usage control directive)	fenv.h (library header file)
.exc.text (ELF section)	1011.11 (1101at y 110dat 1110) 1100, 470

fgetpos (library function), implementation-defined behavior	32-bits	
fgetpos (library function), implementation-defined	64-bits	
behavior in C89	floating-point unitfloating-point unit	
FILE (predefined symbol)	float.h (library header file)	
file buffering, implementation-defined behavior577	FLT_EVAL_METHOD, implementation-defined	. 400
file dependencies, tracking	behavior	580
file input and output	FLT_ROUNDS, implementation-defined	, 560
configuration symbols for	behavior	580
file paths, specifying for #include files	fma (intrinsic function)	
file position, implementation-defined behavior577	fmaf (intrinsic function)	
file (zero-length), implementation-defined behavior577	fmod (library function),	,
filename	implementation-defined behavior in C89	. 593
extension for device description files54	force_exceptions (linker option)	
extension for header files	force_output (linker option)	
of object executable image	formats	
of object file	floating-point values	. 346
search procedure for	standard IEEE (floating point)	
specifying as parameter	forward_list (library header file)	
filenames (legal), implementation-defined behavior 577	fpu (compiler option)	
fileno, in stdio.h	fpu (linker option)	
files, implementation-defined behavior	FP_CONTRACT, implementation-defined behavior	
handling of temporary	fragmentation, of heap memory	
multibyte characters in	free (library function). See also heap	
opening	freopen (function)	
fill (ielftool option)	front_headers (ielftool option)	
fiq (extended keyword)361	fsetpos (library function), implementation-defined	
float (data type)346	behavior	. 579
floating-point constants	fstream (library header file)	. 467
hints	ftell (library function), implementation-defined behavior	. 579
floating-point conversions	in C89	. 594
implementation-defined behavior	Full DLIB (library configuration)	. 130
floating-point environment, accessing or not	func (predefined symbol)	. 458
floating-point expressions	FUNCTION (predefined symbol)	. 458
contracting or not	function calls	
floating-point format346	calling convention	. 170
hints	eliminating overhead of by inlining	
implementation-defined behavior570	preserved registers across	
implementation-defined behavior in C89588	function declarations, Kernighan & Ritchie	
special cases 347	function execution, in RAM	76

function inlining	get_FPSCR (intrinsic function)
function inlining (compiler transformation)	get_interrupt_state (intrinsic function)
disabling (no_inline)	get_IPSR (intrinsic function)
function pointers348	get_LR (intrinsic function)
function prototypes	get_MSP (intrinsic function)
enforcing	get_PRIMASK (intrinsic function)
function (pragma directive)574, 591	get_PSP (intrinsic function)
function (stack usage control directive)	get_PSR (intrinsic function)
functional (library header file)	get_SB (intrinsic function)
functions	get_SP (intrinsic function)
declaring	global variables
inlining	affected by static clustering
interrupt	handled during system termination
intrinsic	hints for not using
parameters	initialized during system startup
placing in memory	GRP_COMDAT, group type
recursive	guard_calls (compiler option)
avoiding	guidelines, reading
storing data on stack	guidelines, reading
reentrancy (DLIB)	
related extensions	Н
return values from	Harbison, Samuel P
function_category (pragma directive)	hardware support in compiler
function_effects (pragma directive)	
function-spec (in stack usage control file)	hash_map (library header file)
future (library header file)	hdrstop (pragma directive)
ituale (notally neader me)	header files
	C
G	
- (:-1f-l	C++
-g (ielfdump option)	library
GCC attributes	special function registers
generate_entry_without_bounds (pragma directive) 374	DLib_Defaults.h
generate_vfe_header (isymexport option)	including stdbool.h for bool
getw, in stdio.h	header names, implementation-defined behavior 572
getzone (library function), configuring support for 125	header_context (compiler option)
get_BASEPRI (intrinsic function)	heap
get_CONTROL (intrinsic function)	advanced, basic, and no-free heap
get_CPSR (intrinsic function)	dynamic memory
get_FAULTMASK (intrinsic function)418	storing data71

VLA allocated on	iar_log_smalll (library routine)138
heap sections	iar_log10_small (library routine)
placing	iar_log10_smallf (library routine)
heap size	iar_log10_smalll (library routine)
and standard I/O	iar_maximum_atexit_calls
changing default110	iar_pow_accurate (library routine)
HEAP (ELF section)	iar_pow_accuratef (library routine)
heap (zero-sized), implementation-defined behavior 579	iar_pow_accuratef (library function)
hide (isymexport directive)533	iar_pow_accuratel (library routine)139
hide_symbols (iexe2obj option)546	iar_pow_accuratel (library function)464
hints	iar_pow_small (library routine)
for good code generation	iar_pow_smallf (library routine)
implementation-defined behavior	iar_pow_smalll (library routine)
using efficient data types	iar_program_start (label)140
	iar_ReportAssert (library function)145
	iar_sin_accurate (library routine)
	iar_sin_accuratef (library routine)
-I (compiler option)	iar_sin_accuratef (library function)
IAR Command Line Build Utility	iar_sin_accuratel (library routine)
IAR Systems Technical Support	iar_sin_accuratel (library function)
iarbuild.exe (utility)	iar_sin_small (library routine)
iarchive	iar_sin_smallf (library routine)
commands summary	iar_sin_smalll (library routine)
options summary	IAR_SYSTEMS_ICC (predefined symbol) 458
iar_cos_accurate (library routine)	iar_tan_accurate (library routine)
iar_cos_accurate (library routine)	iar_tan_accuratef (library routine)
iar_cos_accuratef (library function)	iar_tan_accuratef (library function)
iar_cos_accuratel (library routine)	iar_tan_accuratel (library routine)
iar_cos_accuratel (library function)	iar_tan_accuratel (library function)
iar_cos_small (library routine)	iar_tan_small (library routine)
iar_cos_smallf (library routine)	iar_tan_smallf (library routine)
•	iar_tan_smalll (library routine)
iar_cos_smalll (library routine)	iar_tls.\$\$DATA (ELF section)
· · · · · · · · · · · · · · · · · · ·	iar.debug (ELF section)
additional C functionality	iar.dynexit (ELF section)
iar_exp_small (library routine)	IA64 ABI
iar_exp_smallf (library routine)	ICCARM (predefined symbol)
iar_exp_smalll (library routine)	icons, in this guide
iar_log_small (library routine)	icons, in this guide
iar_log_smallf (library routine)	

IDE	initialize (linker directive)	487
building a library from	initializers, static	186
overview of build tools	initializer_list (library header file)	468
ident (pragma directive)	.init_array (section)	508
identifiers, implementation-defined behavior 567	init_routines_only_for_needed_variables	
identifiers, implementation-defined behavior in C89 586	(pragma directive)	574
IEEE format, floating-point values	inline (linker option)	319
ielfdump	inline assembler	158
options summary	avoiding	233
ielftool	for passing values between C and assembler	237
options summary	See also assembler language interface	
iexe2obj	inline functions	
if (linker directive)	in compiler	230
ignore_uninstrumented_pointers (linker option) 302	inline (pragma directive)	385
ihex (ielftool option)	inline_template (pragma directive)	574
ILINK options. See linker options	inlining	213
ILINKARM_CMD_LINE (environment variable) 243	inlining functions	. 84
ILINK. See linker	implementation-defined behavior	571
image_input (linker option)	installation directory	. 46
implements_aspect (pragma directive)	instantiate (pragma directive)	591
important_typedef (pragma directive)574, 591	instruction scheduling (compiler option)	232
import_cmse_lib_in (linker option)	int (data type) signed and unsigned	341
import_cmse_lib_out (linker option)	integer types	341
include files	casting	348
including before source files	implementation-defined behavior	569
specifying243	intptr_t	349
include (linker directive)504	ptrdiff_t	349
include_alias (pragma directive)	size_t	349
infinity	uintptr_t	349
infinity (style for printing), implementation-defined	integers, implementation-defined behavior in C89	587
behavior	integral promotion	234
initialization	Intel hex	199
changing default110	Intel IA64 ABI	214
C++ dynamic	internal error	250
dynamic	interrupt functions	. 78
manual	fast interrupts	. 80
packing algorithm for111	in Cortex	. 77
single-value	nested interrupts	. 81
suppressing	operations	. 83
initialization_routine (pragma directive)574	software interrupts	. 82

interrupt handler. See interrupt service routine	V
interrupt service routine78	N
interrupt state, restoring	keep (linker option)
interrupt vector table83	keep (linker directive)
start address for	keep_definition (pragma directive)
interrupts	keep_mode_symbols (iexe2obj option)
processor state	Kernighan & Ritchie function declarations
using with C++ destructors	disallowing
interwork (extended keyword)	keywords
intptr_t (integer type)349	extended, overview of
intrinsic (extended keyword)	
intrinsic functions	
for Neon	L
overview	-L (linker option)
summary	-1 (compiler option)
intrinsics.h (header file)	for creating skeleton code
inttypes.h (library header file)	labels
intvec (ELF section)	assembler, making public
invocation syntax241	iar_program_start
iobjmanip	nar_program_start
options summary	Labrosse, Jean J
iomanip (library header file)	language extensions
ios (library header file)	enabling using pragma
iosfwd (library header file)	enabling (-e)
iostream (library header file)	language overview
irq (extended keyword)	language (pragma directive)
IRQ_STACK (section)	LDC (intrinsic function)
ISB (intrinsic function)	LDCL (intrinsic function)
iso646.h (library header file)	LDCL_noidx (intrinsic function)
istream (library header file)	LDC_noidx (intrinsic function)
iswalnum (function)	LDC2 (intrinsic function)
iswxdigit (function)	LDC2L (intrinsic function)
isymexport	LDC2L_noidx (intrinsic function)
options summary	LDC2_noidx (intrinsic function)
italic style, in this guide46	LDREX (intrinsic function)
iterator (library header file)	LDREXB (intrinsic function)
I/O register. See SFR	LDREXD (intrinsic function)
	LDREXH (intrinsic function)
	(IIIIIIIISIC TUIICUOII)423

libraries216	linking
reason for using	from the command line
using a prebuilt	in the build process
library configuration files	introduction
DLIB	process for
DLib_Defaults.h	list (library header file)
modifying	listing, generating
specifying	literature, recommended
library documentation	LITTLE_ENDIAN (predefined symbol)459
library files, linker search path to (search)	little_endian (extended keyword)
library functions	little-endian (byte order)
summary, DLIB	local symbols, removing from ELF image
online help for	local variables, See auto variables
library header files	locale
library modules	changing at runtime
introduction	implementation-defined behavior
overriding	library header file
library object files	support for
library project, building using a template	locale.h (library header file)
library_default_requirements (pragma directive) 574, 592	located data, declaring extern
library_provides (pragma directive)	location (pragma directive)
library_requirement_override (pragma directive) 574, 592	log (linker option)
lightbulb icon, in this guide	log (library routine)
limits (library header file)	logf (library routine)
limits.h (library header file)	logl (library routine)
LINE (predefined symbol)	log_file (linker option)
linkage, C and C++	log10 (library routine)
linker	log10f (library routine)
output from	log10l (library routine)
linker configuration file	long double (data type)
for placing code and data	long float (data type), synonym for double
in depth	long long (data type) signed and unsigned
overview of	long (data type) signed and unsigned
selecting	longimp, restrictions for using
linker object executable image	loop unrolling (compiler transformation)
specifying filename of (-o)	disabling
linker options	#pragma unroll
reading from file (-f)	loop-invariant expressions
summary	
typographic convention	

low_level_init140	MCR (intrinsic function)	423
customizing	MCRR (intrinsic function)	424
initialization phase	MCRR2 (intrinsic function)	424
low_level_init.c	MCR2 (intrinsic function)	423
low-level processor operations	memory	
accessing	allocating in C++	73
lz77, packing algorithm for initializers	dynamic	73
	heap	73
M	non-initialized	237
1*1	RAM, saving	233
macros	releasing in C++	73
embedded in #pragma optimize	stack	72
ERANGE (in errno.h)	saving	233
inclusion of assert	used by global or static variables	71
NULL, implementation-defined behavior 577	memory clobber	159
in C89 for DLIB	memory map	
substituted in #pragma directives	initializing SFRs	142
macro_positions_in_diagnostics (compiler option) 275	linker configuration for	106
main (function)	output from linker	246
definition (C89)	producing (map)	322
implementation-defined behavior	memory (library header file)	468
make_all_definitions_weak (compiler option) 275	memory (pragma directive)57	14, 592
malloc (library function)	merge duplicate sections	213
See also heap	-merge_duplicate_sections (linker option)	322
implementation-defined behavior in C89594	message (pragma directive)	387
mangled_names_in_messages (linker option) 321	messages	
Mann, Bernhard	disabling29	3, 332
manual_dynamic_initialization (linker option) 321	forcing	387
-map (linker option)	Meyers, Scott	
map file, producing	mfc (compiler option)	276
map (library header file)	migration, from earlier IAR compilers	44
math functions rounding mode,	MISRA C	
implementation-defined behavior	documentation	
math functions (library functions)	misrac (compiler option)	
math.h (library header file)	misrac (linker option)	
max recursion depth (stack usage control directive) 513	misrac_verbose (compiler option)	
max_cost_constexpr_call (compiler option)276	misrac_verbose (linker option)	
max_depth_constexpr_call (compiler option) 276	misrac1998 (compiler option)	
MB_LEN_MAX, implementation-defined behavior 580	misrac1998 (linker option)	303

misrac2004 (compiler option)	non-initialized variables, hints for	227
misrae2001 (compiler option)	non minuted variables, minus ron	231
misrac2004 (linker option)	non-scalar parameters, avoiding	233
mode changing, implementation-defined behavior 578	non-secure mode	. 56
module consistency117	NOP (assembler instruction)	426
rtmodel392	noreturn (extended keyword)	364
modules, introduction	Normal DLIB (library configuration)	129
module_name (pragma directive)	Not a number (NaN)	348
module-spec (in stack usage control file)	no_alignment_reduction (compiler option)	277
Motorola S-records	no_alloc (extended keyword)	
MRC (intrinsic function)	no_alloc_str (operator)	
MRC2 (intrinsic function)	no_alloc_str16 (operator)	363
MRRC (intrinsic function)	no_alloc16 (extended keyword)	
MRRC2 (intrinsic function)	no_bom (ielfdump option)	547
multibyte characters, implementation-defined	no_bom (iobjmanip option)	
behavior	no_bom (isymexport option)	
multithreaded environment	no_bom (compiler option)	277
multi-file compilation	no_bom (iarchive option)	547
multi-threaded environment	no_bom (linker option)	323
implementation-defined behavior566	no_bounds (pragma directive)	
mutex (library header file)	no_clustering (compiler option)	
	no_code_motion (compiler option)	278
N	no_const_align (compiler option)	278
	no_cse (compiler option)	278
name (in stack usage control file)	no_dwarf3_cfi (compiler option)	279
names block (call frame information)	no_dynamic_rtti_elimination (linker option)	323
naming conventions	no_entry (linker option)	324
NaN	no_exceptions (compiler option)	279
implementation of	no_exceptions (linker option)	324
implementation-defined behavior578	no_free_heap (linker option)	325
native environment,	no_header (ielfdump option)	547
implementation-defined behavior	no_init (extended keyword)237,	364
NDEBUG (preprocessor symbol)	no_inline (compiler option)	280
Neon intrinsic functions	no_inline (linker option)	325
nested (extended keyword)	no_library_search (linker option)	325
nested interrupts	no_literal_pool (compiler option)	280
new (keyword)	no_literal_pool (linker option)	326
new (library header file)	no_locals (linker option)	326
no calls from (stack usage control directive)513	no_loop_align (compiler option)	280
.noinit (ELF section)509	no_mem_idioms (compiler option)	281

-no_path_in_file_macros (compiler option).	no_operation (intrinsic function)	-o (compiler option)	7
-no_range_reservations (linker option)	no_path_in_file_macros (compiler option) 281	-o (iarchive option)54	.9
-no_rel_section (ielfdump option)	no_pch (pragma directive)	-o (ielfdump option)	.9
-no_remove (linker option)	no_range_reservations (linker option)	-o (linker option)	8
-no_rtti (compiler option)			
-no_rtti (compiler option)	no_remove (linker option)	object filename, specifying (-o)	8
-no_rw_dynamic_init (compiler option)		object files, linker search path to (search)	1
-no_scheduling (compiler option)			
-no_size_constraints (compiler option)			
no_stack_protect (pragma directive) 388 -only_stdout (compiler option) 287 no_stratic_destruction (compiler option) 283 -only_stdout (linker option) 328 no_strata (ielfdump option) 548 -only_stdout (linker option) 328 no_system_include (compiler option) 283 -only_stdout (linker option) 328 no_to_typedefs_in_diagnostics (compiler option) 283 -only_stdout (linker option) 474 no_to_typedefs_in_diagnostics (compiler option) 284 -orly_stdout (linker option) 474 no_to_typedefs_in_diagnostics (compiler option) 284 for region expressions 480 no_unligmed_access (compiler option) 285 precision for 32-bit float 347 no_uniform_attribute_syntax (compiler option) 285 precision for 32-bit float 347 no_unform_attribute_syntax (compiler option) 285 precision for 64-bit float 347 no_unform_attribute_syntax (compiler option) 285 _ALIGNOF_, for alignment control. 184 no_var_align (compiler option) 286 _ALIGNOF_, for alignment control. 184 no_warnings (linker op		- · · · · · · · · · · · · · · · · · · ·	
-no_static_destruction (compiler option)			
-no_strtab (ielfdump option)			
-no_system_include (compiler option) 283 -no_tbaa (compiler option) 284 -no_typedefs_in_diagnostics (compiler option) 284 -no_unaligned_access (compiler option) 284 -no_uniform_attribute_syntax (compiler option) 285 -no_var_align (compiler option) 285 -no_var_align (compiler option) 286 -no_var_align (compiler option) 286 -no_var_anings (compiler option) 286 -no_warnings (inker option) 286 -no_warn_ings (inker option) 286 -no_warn_diagnostics (compiler option) 286 -no_warn_ings (inker option)		The state of the s	
-no_tbaa (compiler option)			
-no_typedefs_in_diagnostics (compiler option)		•	
-no_unaligned_access (compiler option)			0
no_uniform_attribute_syntax (compiler option)		- ·	
no_unroll (compiler option)			
-no_utf8_in (ielfdump option)		•	
no_var_align (compiler option)		-	
-no_vfe (linker option). 327			
no_vtable_use (pragma directive)			
-no_warnings (compiler option)			
no_warnings (linker option)		-	7
-no_wrap_diagnostics (compiler option)			
-no_wrap_diagnostics (linker option)			
NULL disabling			
implementation-defined behavior			
implementation-defined behavior in C89 (DLIB) 592 pointer constant, relaxation to Standard C 186 numbers (in linker configuration file) 502 numeric conversion functions, implementation-defined behavior 582 numeric (library header file) 468	implementation-defined behavior	_	
pointer constant, relaxation to Standard C	-		
numbers (in linker configuration file)	-		
numeric conversion functions, implementation-defined behavior	-		
implementation-defined behavior			
numeric (library header file)			
using inline assembler code	-	-	
using pragma directive	•		
optimization levels	lack		
	O		
-O (compiler option)	-O (compiler option)	optimize (pragma directive)	

option parameters	pending_instantiations (compiler option)	288
options, compiler. See compiler options	permanent registers	171
options, iarchive. See iarchive options	perror (library function),	
options, ielfdump. See ielfdump options	implementation-defined behavior in C89	594
options, ielftool. See ielftool options	pi_veneers (linker option)	328
options, iobjmanip. See iobjmanip options	PKHBT (intrinsic function)	426
options, isymexport. See isymexport options	PKHTB (intrinsic function)	426
options, linker. See linker options	place at (linker directive)	491
option_name (compiler option)	place in (linker directive)	492
Oram, Andy	placement	
ostream (library header file)	in named sections	224
output	of code and data, introduction to	91
from preprocessor	place_holder (linker option)	329
specifying for linker	plain char, implementation-defined behavior	
output (compiler option)	PLD (intrinsic function)	
output (iarchive option)	PLDW (intrinsic function)	
output (ielfdump option)	PLI (intrinsic function)	427
output (linker option)	pointer types	
overhead, reducing	mixing	186
,,	pointers	
D	casting	348
P	data	348
pack (pragma directive)	function	348
packbits, packing algorithm for initializers	implementation-defined behavior	571
packed (extended keyword)	implementation-defined behavior in C89	
packed structure types	pointers to different function types	
packed structure types	polymorphic RTTI data, including in the image	
parameters	pop_macro (pragma directive)	
function	porting, code containing pragma directives	
hidden	possible calls (stack usage control directive)	
non-scalar, avoiding	pow (library routine)	
register	alternative implementation of	
rules for specifying a file or directory	powf (library routine)	
specifying	powl (library routine)	
stack	pragma directives	
	summary	
typographic convention	for absolute located data	
	list of all recognized	
part number, of this guide	list of all recognized (C89)	
pcrel (extended keyword)	pack	
	Page	

preconfig (linker option)
predefined symbols
overview
summary
predef_macro (compiler option)288
preferred_typedef (pragma directive)
Prefetch_Handler (exception function)80
prefix (iexe2obj option)
preinclude (compiler option)
preinit_array (section)
.prepreinit_array (section)
preprocess (compiler option)
preprocessor
output
preprocessor directives
comments at the end of
implementation-defined behavior
implementation-defined behavior in C89590
#pragma
preprocessor extensions
#warning message
preprocessor symbols
defining
preserved registers
PRETTY_FUNCTION (predefined symbol) 459
print formatter, selecting
printf (library function)
choosing formatter
implementation-defined behavior
implementation-defined behavior in C89594
printf_args (pragma directive)
printf_multibytes (linker option)
printing characters, implementation-defined behavior582
processor configuration
processor operations
accessing
low-level
program entry label
program termination implementation defined behavior 566

programming hints
program_start (label)140
projects
basic settings for
setting up for a library
prototypes, enforcing
ptrdiff_t (integer type)
PUBLIC (assembler directive)
publication date, of this guide2
public_equ (compiler option)289
public_equ (pragma directive)
push_macro (pragma directive)
putenv (library function), absent from DLIB147
putw, in stdio.h
Q
QADD (intrinsic function)
_QADD8 (intrinsic function)
QADD16 (intrinsic function)
QASX (intrinsic function)
QCCARM (environment variable)
QCFlag (intrinsic function)
_QDADD (intrinsic function)
QDOUBLE (intrinsic function)
QDSUB (intrinsic function)
QFlag (intrinsic function)
_QSAX (intrinsic function)
_QSUB (intrinsic function)
_QSUB16 (intrinsic function)
QSUB8 (intrinsic function)
qualifiers
const and volatile
implementation-defined behavior
implementation-defined behavior in C89590
queue (library header file)
quick_exit (library function)142

R	implementation-defined behavior in C89	589
N	in assembler-level routines	170
-r (compiler option)	preserved	171
-r (iarchive option)	scratch	171
RAM	.rel (ELF section)	506
example of declaring region92	.rela (ELF section)	506
execution	relaxed_fp (compiler option)	290
initializers copied from ROM65	relay, see veneers	115
running code from	relocatable ELF object file	
saving memory	creating	535
ramfunc (extended keyword)	relocation errors, resolving	115
ram_reserve_ranges (isymexport option)	remark (diagnostic message)	249
random (library header file)	classifying for compiler	266
range (ielfdump option)	classifying for linker	311
range errors	enabling in compiler	
ratio (library header file)	enabling in linker	330
raw (ielfdump option)	remarks (compiler option)	
RBIT (intrinsic function)	remarks (linker option)	330
read formatter, selecting	remove (library function)	
reading guidelines	implementation-defined behavior	578
reading, recommended	implementation-defined behavior in C89 (DLIB)	594
realloc (library function)	remove_file_path (iobjmanip option)	553
implementation-defined behavior in C89594	remove_section (iobjmanip option)	553
See also heap	remquo, magnitude of	576
recursive functions	rename (isymexport directive)	
avoiding	rename (library function)	
storing data on stack	implementation-defined behavior	578
redirect (linker option)	implementation-defined behavior in C89 (DLIB)	594
reentrancy (DLIB)	rename_section (iobjmanip option)	554
reference information, typographic convention	rename_symbol (iobjmanip option)	554
region expression (in linker configuration file)479	replace (iarchive option)	555
region literal (in linker configuration file)	required (pragma directive)	392
register keyword, implementation-defined behavior571	require_prototypes (compiler option)	291
register parameters	reserve_ranges (isymexport option)	
registered trademarks	reset vector table	508
registers	reset_QC_flag (intrinsic function)	429
assigning to parameters	reset_Q_flag (intrinsic function)	
callee-save, stored on stack	restrict keyword, enabling	270
for function returns 174	return values, from functions	174

REV (intrinsic function)	SADD16 (intrinsic function)
REVSH (intrinsic function)	SASX (intrinsic function)
REV16 (intrinsic function)	_sbrel (extended keyword)
rintn (intrinsic function)	scanf (library function)
rintnf (intrinsic function)	choosing formatter (DLIB)
.rodata (ELF section)	implementation-defined behavior
ROM to RAM, copying	implementation-defined behavior in C89 (DLIB) 594
root (extended keyword)	scanf_args (pragma directive)
ROPI (predefined symbol)	scanf_multibytes (linker option)
ropi (compiler option)	scheduling (compiler transformation)232
ropi_cb (compiler option)291	disabling
ROR (intrinsic function)	scoped_allocator (library header file)
routines, time-critical	scratch registers
ro_placement (extended keyword)	search (linker option)
RRX (intrinsic function)	search directory, for linker configuration files (config
rtmodel (assembler directive)	search)
rtmodel (pragma directive)	search path to library files (search)331
RTTI (predefined symbol)	search path to object files (search)
RTTI data (dynamic), including in the image	section (ielfdump option)
runtime environment	section (compiler option)
DLIB	sections
setting up (DLIB)124	summary
runtime error checking, documentation for	allocation of
runtime libraries (DLIB)	declaring (#pragma section)
introduction	introduction
customizing system startup code	specifying (section)293
filename syntax	section_begin (extended operator)
overriding modules in	section_end (extended operator)
using prebuilt	section_size (extended operator)184
runtime model attributes	section-selectors (in linker configuration file)
runtime model definitions	secure mode
RWPI (predefined symbol)	segment (ielfdump option)
rwpi (compiler option)	segment (pragma directive)
rwpi_near (compiler option)292	SEL (intrinsic function)
	self_reloc (ielftool option)
S	semihosting (linker option)
3	semihosting, overview
-s (ielfdump option)	separate_init_routine (pragma directive)
SADD8 (intrinsic function)	set (library header file)
	setjmp.h (library header file)

setlocale (library function)	signal.h (library header file)
settings, basic for project configuration 67	signed char (data type)
set_BASEPRI (intrinsic function)	specifying
set_CONTROL (intrinsic function)	signed int (data type)
set_CPSR (intrinsic function)	signed long long (data type)
set_FAULTMASK (intrinsic function)	signed long (data type)
set_FPSCR (intrinsic function)	signed short (data type)
set_generate_entries_without_bounds (pragma directive). 575	silent (compiler option)
set_interrupt_state (intrinsic function)	silent (iarchive option)
set_LR (intrinsic function)	silent (ielftool option)
set_MSP (intrinsic function)	silent (linker option)
set_PRIMASK (intrinsic function)	silent operation
set_PSP (intrinsic function)	specifying in compiler
set_SB (intrinsic function)	specifying in linker
set_SP (intrinsic function)	simple (ielftool option)
SEV (intrinsic function)	simple-ne (ielftool option)
severity level, of diagnostic messages249	sin (library function)
specifying	sin (library routine)
SFR	sinf (library routine)
accessing special function registers	sinl (library routine)
declaring extern special function registers	64-bits (floating-point format)
SHADD8 (intrinsic function)	size (in stack usage control file)
SHADD16 (intrinsic function)	size_t (integer type)
shared object	skeleton code, creating for assembler language interface . 167
shared_mutex (library header file)	skip_dynamic_initialization (linker option)
SHASX (intrinsic function)	slist (library header file)
short (data type)	small function inlining
show (isymexport directive)	smallest, packing algorithm for initializers 488
show_entry_as (isymexport option)	SMLABB (intrinsic function)
show-weak (isymexport directive)	SMLABT (intrinsic function)
SHSAX (intrinsic function)	SMLAD (intrinsic function)
.shstrtab (ELF section)	SMLADX (intrinsic function)
SHSUB16 (intrinsic function)	SMLALBB (intrinsic function)
SHSUB8 (intrinsic function)	SMLALBT (intrinsic function)
signal (library function)	SMLALD (intrinsic function)
implementation-defined behavior576	SMLALDX (intrinsic function)
implementation-defined behavior in C89593	SMLALTB (intrinsic function)
signals, implementation-defined behavior566	SMLALTT (intrinsic function)
at system startup567	SMLATB (intrinsic function)

SMLATT (intrinsic function)	sscanf (library function)
SMLAWB (intrinsic function)	choosing formatter (DLIB)
SMLAWT (intrinsic function)	sstream (library header file)
SMLSD (intrinsic function)	SSUB16 (intrinsic function)
SMLSDX (intrinsic function)	SSUB8 (intrinsic function)
SMLSLD (intrinsic function)	stack
SMLSLDX (intrinsic function)	advantages and problems using
SMMLA (intrinsic function)	block for holding
SMMLAR (intrinsic function)	cleaning after function return
SMMLS (intrinsic function)	contents of
SMMLSR (intrinsic function)	layout173
SMMUL (intrinsic function)	saving space
SMMULR (intrinsic function)	setting up size for
SMUAD (intrinsic function)	size
SMUL (intrinsic function)	stack buffer overflow85
SMULBB (intrinsic function)	stack buffer overrun
SMULBT (intrinsic function)	stack canaries
SMULTB (intrinsic function)	stack parameters
SMULTT (intrinsic function)	stack pointer
SMULWB (intrinsic function)	stack protection85
SMULWT (intrinsic function)	stack smashing85
SMUSD (intrinsic function)	stack (library header file)
SMUSDX (intrinsic function)	stackless (extended keyword)
software interrupts	stack_protect (pragma directive)394
source (ielfdump option)	sack_protection (compiler option)
source files, list all referred273	stack_usage_control (linker option)
source_encoding (compiler option)	stack-size (in stack usage control file)516
space characters, implementation-defined behavior 577	Standard C
special function registers (SFR)	library compliance with
sprintf (library function)	specifying strict usage294
choosing formatter133	Standard C++
sqrt (intrinsic function)	standard error
sqrtf (intrinsic function)	redirecting in compiler287
srec (ielftool option)559	redirecting in linker
srec-len (ielftool option)559	See also diagnostic messages
srec-s3only (ielftool option)	standard output
SSAT (intrinsic function)	specifying in compiler
SSAT16 (intrinsic function)	specifying in linker
SSAX (intrinsic function)	

startup code	stdint.h (library header file)
cstartup	stdio.h (library header file)
startup system. See system startup	stdio.h, additional C functionality
statements, implementation-defined behavior in C89 590	stdlib.h (library header file)
static analysis	stdnoreturn.h (library header file)
documentation for	stdout
static clustering (compiler transformation)	implementation-defined behavior
static variables	implementation-defined behavior in C89 (DLIB) 593
taking the address of	Steele, Guy L
status flags for floating-point	steering file, input to isymexport
STC (intrinsic function)	streasecmp, in string.h
STCL (intrinsic function)	streoll (function)
STCL_noidx (intrinsic function)	strdup, in string.h
STC_noidx (intrinsic function)	streambuf (library header file)
STC2 (intrinsic function)	streams
STC2L (intrinsic function)	implementation-defined behavior
STC2L_noidx (intrinsic function)	strerror (library function), implementation-defined
STC2_noidx (intrinsic function)	behavior
stdalign.h (library header file)	strerror (library function),
stdarg.h (library header file)	implementation-defined behavior in C89 (DLIB)595
stdatomic.h (library header file)	STREX (intrinsic function)
stdbool.h (library header file)	STREXB (intrinsic function)
STDC (predefined symbol)	STREXD (intrinsic function)
STDC CX_LIMITED_RANGE (pragma directive) 394	STREXH (intrinsic function)
STDC FENV_ACCESS (pragma directive)	strict (compiler option)294
STDC FP_CONTRACT (pragma directive)	string (library header file)
STDC_LIB_EXT1 (predefined symbol)	string.h (library header file)
STDC_NO_ATOMICS (preprocessor symbol)460	string.h, additional C functionality
STDC_NO_THREADS (preprocessor symbol) 460	strip (ielftool option)
STDC_NO_VLA (preprocessor symbol)	strip (iobjmanip option)
STDC_UTF16 (preprocessor symbol)	strip (linker option)
STDC_UTF32 (preprocessor symbol)	strncasecmp, in string.h
STDC_VERSION (predefined symbol)	strnlen, in string.h
STDC_WANT_LIB_EXT1 (preprocessor symbol) . 462	strstream (library header file)
stddef.h (library header file)	.strtab (ELF section)
stderr	structure types
stdexcept (library header file)	alignment
stdin	layout of
implementation-defined behavior in C89 (DLIB) 593	packed

structures	system
aligning	C-S
anonymous221	DLI
implementation-defined behavior	system
implementation-defined behavior in C89589	imp
packing and unpacking221	system
strxfrm (function)	system
subnormal numbers	syster
support, technical	
Sutter, Herb	T
SVC #immed, for software interrupts	
swi (extended keyword)	-t (iarcl
SWI_Handler (exception function)80	tan (lib
swi_number (pragma directive)	tan (lib
SWO, directing stdout/stderr via124	tanf (lil
SWP (intrinsic function)	tanl (lil
SWPB (intrinsic function)	task
SXTAB (intrinsic function)	technic
SXTAB16 (intrinsic function)	templat
SXTAH (intrinsic function)	in C
SXTB16 (intrinsic function)	Termin
symbols	not
directing from one to another330	termina
including in output	termina
local, removing from ELF image326	termino
overview of predefined55	.text (E
preprocessor, defining	text end
symbols (iarchive option)	text_c
.symtab (ELF section)506	text_c
syntax	text_c
command line options	text_c
extended keywords356–358	text_c
invoking compiler and linker241	text_c
system function, implementation-defined behavior 567, 579	tgmath
system startup	32-bits
customizing	this (po
DLIB	thread
initialization phase	threade
	thread

system termination
C-SPY interface to
DLIB
system (library function)
implementation-defined behavior in C89 (DLIB) 595
system_error (library header file)
system_include (pragma directive) 575, 592
system_include_dir (compiler option)
Т
-t (iarchive option)
tan (library function)
tan (library routine)
tanf (library routine)
tanl (library routine)
task (extended keyword)369
technical support, IAR Systems250
template support
in C++
Terminal I/O window
not supported when
termination of system. See system termination
termination status, implementation-defined behavior 579
terminology46
.text (ELF section)
text encodings247
text_out (iarchive option)561
text_out (ielfdump option)
text_out (iobjmanip option)
text_out (isymexport option)
text_out (linker option)
text_out (compiler option)
tgmath.h (library header file)
32-bits (floating-point format)
this (pointer)
thread (library header file)469
threaded environment
threaded_lib (linker option)

threads.h (library header file)	typedefs
thumb (extended keyword)	excluding from dia
thumb (compiler option)	repeated
TIME (predefined symbol)	typeindex (library hea
time zone (library function)	typeinfo (library head
implementation-defined behavior in C89 595	typetraits (library head
time zone (library function), implementation-defined	type_attribute (pragma
behavior	type-based alias analy
TIMESTAMP (predefined symbol)	disabling
timezone_lib (linker option)	typographic convention
time-critical routines	
time.h (library header file)	U
additional C functionality473	
time32 (library function), configuring support for 125	UADD8 (intrinsic f
time64 (library function), configuring support for 125	UADD16 (intrinsic
tips, programming	UASX (intrinsic fur
titxt (ielftool option)	uchar.h (library heade
toc (iarchive option)	UHADD8 (intrinsic
tools icon, in this guide	UHADD16 (intrins
towlower (function)	UHASX (intrinsic f
towupper (function)	UHSAX (intrinsic f
trademarks	UHSUB16 (intrinsi
trailing comma	UHSUB8 (intrinsic
transformations, compiler	uintptr_t (integer type
translation	UMAAL (intrinsic
implementation-defined behavior565	underflow errors, imp
implementation-defined behavior in C89585	underflow range error
treat_rvct_modules_as_softfp (linker option)334	implementation-define
TrustZone	ungetchar, in stdio.l
TT (intrinsic function)	Unicode
TTA (intrinsic function)	uniform attribute synta
TTAT (intrinsic function)	uniform_attribute_sy
TTT (intrinsic function)	unions
tuple (library header file)	anonymous
type attributes	implementation-de
specifying	implementation-de
type qualifiers	universal character na
const and volatile	behavior
implementation-defined behavior572	unordered_map (librar
implementation-defined behavior in C89590	= 1 (

typedels
excluding from diagnostics
repeated
typeindex (library header file)469
typeinfo (library header file)
typetraits (library header file)
type_attribute (pragma directive)
type-based alias analysis (compiler transformation) 23
disabling
typographic conventions
U
UADD8 (intrinsic function)
UADD16 (intrinsic function)
UASX (intrinsic function)
uchar.h (library header file)
UHADD8 (intrinsic function)
UHADD16 (intrinsic function)
UHASX (intrinsic function)
UHSAX (intrinsic function)
UHSUB16 (intrinsic function)
UHSUB8 (intrinsic function)
uintptr_t (integer type)
UMAAL (intrinsic function)
underflow errors, implementation-defined behavior $\dots 570$
underflow range errors,
implementation-defined behavior in C89593
ungetchar, in stdio.h
Unicode
uniform attribute syntax
uniform_attribute_syntax (compiler option) 29
unions
anonymous22
implementation-defined behavior57
implementation-defined behavior in C89589
universal character names, implementation-defined
behavior
unordered_map (library header file)

unordered_set (library header file)
unroll (pragma directive)
unsigned char (data type)
changing to signed char
unsigned int (data type)341
unsigned long long (data type)
unsigned long (data type)
unsigned short (data type)341
UQADD8 (intrinsic function)
UQADD16 (intrinsic function)
UQASX (intrinsic function)
UQSAX (intrinsic function)
_UQSUB16 (intrinsic function)
UQSUB8 (intrinsic function)
USADA8 (intrinsic function)
_USAD8 (intrinsic function)
USAT (intrinsic function)
_USAT16 (intrinsic function)
_USAX (intrinsic function)
use init table (linker directive)
uses_aspect (pragma directive)
use_c++_inline (compiler option)
use_full_std_template_names (ielfdump option) 562
use_full_std_template_names (linker option)
use_unix_directory_separators (compiler option) 297
_USUB16 (intrinsic function)
_USUB8 (intrinsic function)443
UTF-16247
UTF-8247
utf8_text_in (compiler option)
utf8_text_in (iarchive option)562
utf8_text_in (ielfdump option)
utf8_text_in (iobjmanip option)
$utf8_text_in\ (isymexport\ option) \ .$
utf8_text_in (linker option)
utilities (ELF)
utility (library header file)
UXTAB (intrinsic function)
UXTAB16 (intrinsic function) 445

UXTAH (Intrinsic function)	443
UXTB16 (intrinsic function)	
. .	
V	
-V (iarchive option)	563
valarray (library header file)	469
variables	
auto	72
defined inside a function	72
global	
placement in memory	71
hints for choosing	
local. See auto variables	
non-initialized	237
placing at absolute addresses	224
placing in named sections	224
static	
placement in memory	71
taking the address of	
vector floating-point unit	
vector (library header file)	
vector (pragma directive)	
vectorize (compiler option)	
vectorize (pragma directive)	
vector_table, array holding vector table	
veneers	
verbose (iarchive option)	
verbose (ielftool option)	563
version	
identifying C standard in use (STDC_VERSI	
of compiler (VER)	
of this guide	
version (linker option)	
version (compiler option)	
version (utitilies option)	
vfe (linker option)	
VFMA_F32 (intrinsic function)	
VFMA F64 (intrinsic function)	446

VFMS_F32 (intrinsic function)	warnings
VFMS_F64 (intrinsic function)	classifying in compiler
VFNMA_F32 (intrinsic function)	classifying in linker
VFNMA_F64 (intrinsic function)	disabling in compiler
VFNMS_F32 (intrinsic function)	disabling in linker
VFNMS_F64 (intrinsic function)	exit code in compiler
VFP272	exit code in linker
vla (compiler option)	warnings icon, in this guide
VMAXNM_F32 (intrinsic function)	warnings (pragma directive)
VMAXNM_F64 (intrinsic function)447	warnings_affect_exit_code (compiler option) 245, 298
VMINNM_F32 (intrinsic function)	warnings_affect_exit_code (linker option)336
VMINNM_F64 (intrinsic function)	warnings_are_errors (compiler option)
void, pointers to	warnings_are_errors (linker option)
volatile	warn_about_c_style_casts (compiler option) 298
and const, declaring objects	wchar_t (data type)
declaring objects	wchar.h (library header file)
protecting simultaneously accesses variables235	wctype.h (library header file)
rules for access	weak (extended keyword)
VRINTA_F32 (intrinsic function)	weak (pragma directive)
VRINTA_F64 (intrinsic function)	web sites, recommended
VRINTM_F32 (intrinsic function)	WFE (intrinsic function)
VRINTM_F64 (intrinsic function)	WFI (intrinsic function)
VRINTN_F32 (intrinsic function)	white-space characters, implementation-defined behavior 565
VRINTN_F64 (intrinsic function)	whole_archive (linker option)
VRINTP_F32 (intrinsic function)	wrap (iexe2obj option)
VRINTP_F64 (intrinsic function)	write_array, in stdio.h
VRINTR_F32 (intrinsic function)	write_buffered (DLIB library function)
VRINTR_F64 (intrinsic function)	wite_builded (BEIB florary function)
VRINTX_F32 (intrinsic function)	V
VRINTX_F64 (intrinsic function)	X
VRINTZ_F32 (intrinsic function)	
VRINTZ_F64 (intrinsic function)	-x (iarchive option)
	- -
VSQRT_F32 (intrinsic function)	Y
VSQRT_F64 (intrinsic function)	•
NA	YIELD (intrinsic function)
W	
•	Z
#warning message (preprocessor extension)	-
	zeros, packing algorithm for initializers

Symbols

	arm_ldcl (intrinsic function)	409
_AEABI_PORTABILITY_LEVEL (preprocessor	arm_ldcl2 (intrinsic function)	409
symbol)216	arm_ldc2 (intrinsic function)	409
_AEABI_PORTABLE (preprocessor symbol) 216	arm_mcr (intrinsic function)	410
_Exit (library function)142	arm_mcrr (intrinsic function)	410
_exit (library function)	arm_mcrr2 (intrinsic function)	410
AAPCS_VFP (predefined symbol)	arm_mcr2 (intrinsic function)	410
AAPCS (predefined symbol)	ARM_MEDIA (predefined symbol)	455
_absolute (extended keyword)	arm_mrc (intrinsic function)	411
ALIGNOF (operator)	arm_mrc2 (intrinsic function)	411
arm (extended keyword)	arm_mrrc (intrinsic function)	411
ARMVFPV2 (predefined symbol)	arm_mrrc2 (intrinsic function)	411
ARMVFPV3 (predefined symbol)	ARM_NEON (predefined symbol)	
ARMVFPV4 (predefined symbol)	ARM_NEON_FP (predefined symbol)	455
ARMVFP_D16 (predefined symbol)	ARM_PROFILE_M (predefined symbol)	455
ARMVFP_FP16 (predefined symbol)	arm_rsr (intrinsic function)	411
ARMVFP_SP (predefined symbol)	arm_rsrp (intrinsic function)	411
ARMVFP (predefined symbol)	arm_rsr64 (intrinsic function)	411
ARM_ADVANCED_SIMD (predefined symbol) 452	arm_stc (intrinsic function)	412
ARM_ARCH (predefined symbol)	arm_stel (intrinsic function)	412
ARM_ARCH_ISA_ARM (predefined symbol) 452	arm_stc2 (intrinsic function)	412
ARM_ARCH_ISA_THUMB (predefined symbol)453	arm_stc2l (intrinsic function)	412
ARM_ARCH_PROFILE (predefined symbol) 453	ARM4TM (predefined symbol)	457
ARM_BIG_ENDIAN (predefined symbol)	ARM5E (predefined symbol)	457
arm_cdp (intrinsic function)	ARM5 (predefined symbol)	
arm_cdp2 (intrinsic function)	ARM6M (predefined symbol)	457
ARM_FEATURE_CMSE (predefined symbol) 453	ARM6SM (predefined symbol)	457
ARM_FEATURE_CRC32 (predefined symbol) 453	ARM6 (predefined symbol)	
ARM_FEATURE_CRYPTO (predefined symbol)454	ARM7A (predefined symbol)	
ARM_FEATURE_DIRECTED_ROUNDING (predefined	ARM7EM (predefined symbol)	
symbol)	ARM7M (predefined symbol)	
ARM_FEATURE_DSP (predefined symbol) 454	ARM7R (predefined symbol)	457
ARM_FEATURE_FMA (predefined symbol) 454	ARM8A (predefined symbol)	457
ARM_FEATURE_IDIV (predefined symbol) 454	ARM8EM_MAINLINE (predefined symbol)	
ARM_FEATURE_NUMERIC_MAXMIN (predefined	ARM8M_BASELINE (predefined symbol)	457
symbol)	ARM8M_MAINLINE (predefined symbol)	457
ARM_FEATURE_UNALIGNED (predefined symbol) 455	ARM8R (predefined symbol)	457

_asm (language extension)	enable_interrupt (intrinsic function)
_as_get_base (C-RUN operator)	enable_irq (intrinsic function)
_as_get_bounds (C-RUN operator)	EXCEPTIONS (predefined symbol)
_as_make_bounds (C-RUN operator)	exit (library function)
BASE_FILE (predefined symbol)	FILE (predefined symbol)
big_endian (extended keyword)	fiq (extended keyword)
BUILD_NUMBER (predefined symbol)	fma (intrinsic function)
CDP (intrinsic function)	fmaf (intrinsic function)
CDP2 (intrinsic function)	FUNCTION (predefined symbol)
CLREX (intrinsic function)	func (predefined symbol)
CLZ (intrinsic function)	gets, in stdio.h
cmse_nonsecure_call (extended keyword) 360	get_BASEPRI (intrinsic function)
cmse_nonsecure_entry (extended keyword)	get_CONTROL (intrinsic function)
CORE (predefined symbol)	get_CPSR (intrinsic function)
COUNTER (predefined symbol)	get_FAULTMASK (intrinsic function)
cplusplus (predefined symbol)	get_FPSCR (intrinsic function)
CPU_MODE (predefined symbol)	get_interrupt_state (intrinsic function)
CRC32B (intrinsic function)	get_IPSR (intrinsic function)
crc32b (intrinsic function)	get_LR (intrinsic function)
CRC32CB (intrinsic function)	get_MSP (intrinsic function)
crc32cb (intrinsic function)	get_PRIMASK (intrinsic function)
crc32cd (intrinsic function)	get_PSP (intrinsic function)
CRC32CH (intrinsic function)	get_PSR (intrinsic function)
crc32ch (intrinsic function)	get_SB (intrinsic function)
CRC32CW (intrinsic function)	get_SP (intrinsic function)
crc32cw (intrinsic function)	iar_cos_accurate (library routine)
crc32d (intrinsic function)	iar_cos_accuratef (library routine)
CRC32H (intrinsic function)	iar_cos_accuratel (library routine)
crc32h (intrinsic function)	iar_cos_small (library routine)
CRC32W (intrinsic function)	iar_cos_smallf (library routine)
crc32w (intrinsic function)	iar_cos_smalll (library routine)
DATE (predefined symbol)	iar_exp_small (library routine)
disable_fiq (intrinsic function)	iar_exp_smallf (library routine)
disable_interrupt (intrinsic function)	iar_exp_smalll (library routine)
disable_irq (intrinsic function)	iar_log_small (library routine)
DLIB_FILE_DESCRIPTOR (configuration symbol) 153	iar_log_smallf (library routine)
DMB (intrinsic function)	iar_log_smalll (library routine)
DSB (intrinsic function)	iar_log10_small (library routine)
anable fig (intrinsic function) 417	iar log10 smallf (library routine) 138

iar_log10_smalll (library routine)	LDREXD (intrinsic function)	423
iar_maximum_atexit_calls	LDREXH (intrinsic function)	423
iar_pow_accurate (library routine)	LINE (predefined symbol)	459
iar_pow_accuratef (library routine)	little_endian (extended keyword)	362
iar_pow_accuratel (library routine)	LITTLE_ENDIAN (predefined symbol)	459
iar_pow_small (library routine)	low_level_init	140
iar_pow_smallf (library routine)	initialization phase	63
iar_pow_smalll (library routine)	low_level_init, customizing	142
iar_program_start (label)140	MCR (intrinsic function)	423
iar_ReportAssert (library function)145	MCRR (intrinsic function)	424
iar_sin_accurate (library routine)	MCRR2 (intrinsic function)	424
iar_sin_accuratef (library routine)	MCR2 (intrinsic function)	423
iar_sin_accuratel (library routine)139	MRC (intrinsic function)	425
iar_sin_small (library routine)	MRC2 (intrinsic function)	425
iar_sin_smallf (library routine)	MRRC (intrinsic function)	425
iar_sin_smalll (library routine)	MRRC2 (intrinsic function)	
IAR_SYSTEMS_ICC (predefined symbol) 458	nested (extended keyword)	362
iar_tan_accurate (library routine)	noreturn (extended keyword)	364
iar_tan_accuratef (library routine)	no_alloc (extended keyword)	363
iar_tan_accuratel (library routine)	no_alloc_str (operator)	363
iar_tan_small (library routine)	no_alloc_str16 (operator)	363
iar_tan_smallf (library routine)	no_alloc16 (extended keyword)	363
iar_tan_smalll (library routine)	no_init (extended keyword)	237, 364
iar_tls.\$\$DATA (ELF section)	no_operation (intrinsic function)	426
ICCARM (predefined symbol)	packed (extended keyword)	365
interwork (extended keyword)	pcrel (extended keyword)	359
intrinsic (extended keyword)	PKHBT (intrinsic function)	426
irq (extended keyword)	PKHTB (intrinsic function)	426
ISB (intrinsic function)	PLD (intrinsic function)	427
LDC (intrinsic function)	PLDW (intrinsic function)	427
LDCL (intrinsic function)	PLI (intrinsic function)	427
LDCL_noidx (intrinsic function)	PRETTY_FUNCTION (predefined symbol)	459
LDC_noidx (intrinsic function)	printf_args (pragma directive)	391
LDC2 (intrinsic function)	program_start (label)	140
LDC2L (intrinsic function)	QADD (intrinsic function)	427
LDC2L_noidx (intrinsic function)	QADD8 (intrinsic function)	428
LDC2_noidx (intrinsic function)	QADD16 (intrinsic function)	428
LDREX (intrinsic function)	QASX (intrinsic function)	428
LDREXB (intrinsic function) 423	OCFlag (intrinsic function)	428

QDADD (intrinsic function)	set_LR (intrinsic function)	433
QDOUBLE (intrinsic function)	set_MSP (intrinsic function)	433
QDSUB (intrinsic function)	set_PRIMASK (intrinsic function)	433
QFlag (intrinsic function)	set_PSP (intrinsic function)	433
QSAX (intrinsic function)	set_SB (intrinsic function)	433
QSUB (intrinsic function)	set_SP (intrinsic function)	433
QSUB16 (intrinsic function)	SEV (intrinsic function)	434
QSUB8 (intrinsic function)	SHADD8 (intrinsic function)	434
ramfunc (extended keyword)	SHADD16 (intrinsic function)	434
RBIT (intrinsic function)	SHASX (intrinsic function)	434
reset_QC_flag (intrinsic function)	SHSAX (intrinsic function)	434
reset_Q_flag (intrinsic function)	SHSUB16 (intrinsic function)	434
REV (intrinsic function)	SHSUB8 (intrinsic function)	434
REVSH (intrinsic function)	SMLABB (intrinsic function)	435
REV16 (intrinsic function)	SMLABT (intrinsic function)	435
rintn (intrinsic function)	SMLAD (intrinsic function)	435
rintnf (intrinsic function)	SMLADX (intrinsic function)	435
root (extended keyword)	SMLALBB (intrinsic function)	436
ROPI (predefined symbol)	SMLALBT (intrinsic function)	436
ROR (intrinsic function)	SMLALD (intrinsic function)	436
ro_placement (extended keyword)	SMLALDX (intrinsic function)	436
RRX (intrinsic function)	SMLALTB (intrinsic function)	436
RTTI (predefined symbol)	SMLALTT (intrinsic function)	436
RWPI (predefined symbol)	SMLATB (intrinsic function)	435
SADD8 (intrinsic function)	SMLATT (intrinsic function)	435
SADD16 (intrinsic function)	SMLAWB (intrinsic function)	435
SASX (intrinsic function)	SMLAWT (intrinsic function)	435
_sbrel (extended keyword)	SMLSD (intrinsic function)	435
scanf_args (pragma directive)	SMLSDX (intrinsic function)	435
section_begin (extended operator)	SMLSLD (intrinsic function)	436
section_end (extended operator)	SMLSLDX (intrinsic function)	436
section_size (extended operator)184	SMMLA (intrinsic function)	437
SEL (intrinsic function)	SMMLAR (intrinsic function)	437
set_BASEPRI (intrinsic function)	SMMLS (intrinsic function)	437
set_CONTROL (intrinsic function)	SMMLSR (intrinsic function)	437
set_CPSR (intrinsic function)	SMMUL (intrinsic function)	437
set_FAULTMASK (intrinsic function)	SMMULR (intrinsic function)	437
set_FPSCR (intrinsic function)	SMUAD (intrinsic function)	437
set interrupt state (intrinsic function) 432	SMIII (intrinsic function)	138

SMULBB (intrinsic function)	SWPB (intrinsic function)	441
SMULBT (intrinsic function)	SXTAB (intrinsic function)	442
SMULTB (intrinsic function)	SXTAB16 (intrinsic function)	442
SMULTT (intrinsic function)	SXTAH (intrinsic function)	442
SMULWB (intrinsic function)	SXTB16 (intrinsic function)	442
SMULWT (intrinsic function)	task (extended keyword)	369
SMUSD (intrinsic function)	thumb (extended keyword)	369
SMUSDX (intrinsic function)	TIMESTAMP (predefined symbol)	461
sqrt (intrinsic function)	TIME (predefined symbol)	461
sqrtf (intrinsic function)	TT (intrinsic function)	442
SSAT (intrinsic function)	TTA (intrinsic function)	442
SSAT16 (intrinsic function)	TTAT (intrinsic function)	442
SSAX (intrinsic function)	TTT (intrinsic function)	
SSUB16 (intrinsic function)	UADD8 (intrinsic function)	
SSUB8 (intrinsic function)	UADD16 (intrinsic function)	
stackless (extended keyword)	UASX (intrinsic function)	
STC (intrinsic function)	UHADD8 (intrinsic function)	443
STCL (intrinsic function)	UHADD16 (intrinsic function)	443
STCL_noidx (intrinsic function)	UHASX (intrinsic function)	
STC_noidx (intrinsic function)	UHSAX (intrinsic function)	443
STC2 (intrinsic function)	UHSUB16 (intrinsic function)	
STC2L (intrinsic function)	UHSUB8 (intrinsic function)	443
STC2L_noidx (intrinsic function)440	UMAAL (intrinsic function)	444
STC2_noidx (intrinsic function)	ungetchar, in stdio.h	472
STDC_LIB_EXT1 (predefined symbol)460	UQADD8 (intrinsic function)	
STDC_NO_ATOMICS (preprocessor symbol) 460	UQADD16 (intrinsic function)	
STDC_NO_THREADS (preprocessor symbol) 460	UQASX (intrinsic function)	444
STDC_NO_VLA (preprocessor symbol) 460	UQSAX (intrinsic function)	444
STDC_UTF16 (preprocessor symbol)	UQSUB16 (intrinsic function)	
STDC_UTF32 (preprocessor symbol)	UQSUB8 (intrinsic function)	444
STDC_VERSION (predefined symbol)	USADA8 (intrinsic function)	
STDC_WANT_LIB_EXT1 (preprocessor symbol) . 462	USAD8 (intrinsic function)	444
STDC (predefined symbol)	USAT (intrinsic function)	445
STREX (intrinsic function)	USAT16 (intrinsic function)	445
STREXB (intrinsic function)	USAX (intrinsic function)	443
STREXD (intrinsic function)	USUB16 (intrinsic function)	443
STREXH (intrinsic function)	USUB8 (intrinsic function)	443
_swi (extended keyword)	UXTAB (intrinsic function)	445
SWP (intrinsic function) 441	HYTAR16 (intrinsic function)	115

UXTAH (intrinsic function)	-f (compiler option)	271
UXTB16 (intrinsic function)	-f (IAR utility option)	
VFMA_F32 (intrinsic function)	-f (linker option)	
VFMA_F64 (intrinsic function)	-g (ielfdump option)	
VFMS_F32 (intrinsic function)	-I (compiler option)	
VFMS_F64 (intrinsic function)	-l (compiler option)	
VFNMA_F32 (intrinsic function)	for creating skeleton code	
VFNMA_F64 (intrinsic function)	-L (linker option)	
VFNMS_F32 (intrinsic function)	-O (compiler option)	
VFNMS_F64 (intrinsic function)	-o (compiler option)	287
VMAXNM_F32 (intrinsic function)	-o (iarchive option)	549
VMAXNM_F64 (intrinsic function)	-o (ielfdump option)	549
VMINNM_F32 (intrinsic function)	-o (linker option)	328
VMINNM_F64 (intrinsic function)	-r (compiler option)	264
VRINTA_F32 (intrinsic function)	-r (iarchive option)	555
VRINTA_F64 (intrinsic function)	-s (ielfdump option)	556
VRINTM_F32 (intrinsic function)	-t (iarchive option)	561
VRINTM_F64 (intrinsic function)	-V (iarchive option)	563
VRINTN_F32 (intrinsic function)	-x (iarchive option)	543
VRINTN_F64 (intrinsic function)	a (ielfdump option)	537
VRINTP_F32 (intrinsic function)449	aapcs (compiler option)	259
VRINTP_F64 (intrinsic function)448	advanced_heap (linker option)	305
VRINTR_F32 (intrinsic function)	aeabi (compiler option)	259
VRINTR_F64 (intrinsic function)	align_sp_on_irq (compiler option)	259
VRINTX_F32 (intrinsic function)	all (ielfdump option)	538
VRINTX_F64 (intrinsic function)	arm (compiler option)	260
VRINTZ_F32 (intrinsic function)449	basic_heap (linker option)	305
VRINTZ_F64 (intrinsic function)449	BE32 (linker option)	306
VSQRT_F32 (intrinsic function)	BE8 (linker option)	306
VSQRT_F64 (intrinsic function)	bin (ielftool option)	538
weak (extended keyword)370	bounds_table_size (linker option)	301
WFE (intrinsic function)	call_graph (linker option)	306
WFI (intrinsic function)	char_is_signed (compiler option)	260
write_array, in stdio.h	char_is_unsigned (compiler option)	261
write_buffered (DLIB library function)	checksum (ielftool option)	
YIELD (intrinsic function)	cmse (compiler option)	
-D (compiler option)	code (ielfdump option)	
-d (iarchive option)	config (linker option)	307
-e (compiler option)	config def (linker option)	307

config_search (linker option)	export_builtin_config (linker option)	. 315
cpp_init_routine (linker option)	extract (iarchive option)	. 543
cpu (compiler option)	extra_init (linker option)	. 316
cpu (linker option)	fill (ielftool option)	
cpu_mode (compiler option)	force_exceptions (linker option)	. 316
create (iarchive option)	force_output (linker option)	
c++ (compiler option)	fpu (compiler option)	
c89 (compiler option)	fpu (linker option)	
debug (compiler option)	front_headers (ielftool option)	
debug_heap (linker option)	generate_vfe_header (isymexport option)	. 546
default_to_complex_ranges (linker option) 309	guard_calls (compiler option)	
define_symbol (linker option)	header_context (compiler option)	
delete (iarchive option)	hide_symbols (iexe2obj option)	
dependencies (compiler option)	ignore_uninstrumented_pointers (linker option)	
dependencies (linker option)	ihex (ielftool option)	
deprecated_feature_warnings (compiler option) 265	image_input (linker option)	. 318
diagnostics_tables (compiler option)	import_cmse_lib_in (linker option)	
diagnostics_tables (linker option)312	import_cmse_lib_out (linker option)	. 319
diag_error (compiler option)	inline (linker option)	
diag_error (linker option)311	keep (linker option)	
diag_remark (compiler option)266	keep_mode_symbols (iexe2obj option)	
diag_remark (linker option)	legacy (compiler option)	
diag_suppress (compiler option)	log (linker option)	
diag_suppress (linker option)311	log_file (linker option)	
diag_warning (compiler option)	macro_positions_in_diagnostics (compiler option)	
diag_warning (linker option)	make_all_definitions_weak (compiler option)	. 275
disasm_data (ielfdump option)543	mangled_names_in_messages (linker option)	. 321
discard_unused_publics (compiler option)268	manual_dynamic_initialization (linker option)	. 321
dlib_config (compiler option)	map (linker option)	
do_segment_pad (linker option)313	merge_duplicate_sections (linker option)	. 322
edit (isymexport option)543	mfc (compiler option)	. 276
enable_hardware_workaround (compiler option)270	misrac (compiler option)	. 255
enable_hardware_workaround (linker option) 313	misrac (linker option)	
enable_restrict (compiler option)	misrac_verbose (compiler option)	. 255
entry (linker option)	misrac_verbose (linker option)	. 303
enum_is_int (compiler option)271	misrac1998 (compiler option)	
error_limit (compiler option)	misrac1998 (linker option)	
error_limit (linker option)	misrac2004 (compiler option)	
exception tables (linker option)	misrac2004 (linker option)	

no_alignment_reduction (compiler option)	no_utf8_in (ielfdump option)	548
no_bom (ielfdump option)	no_var_align (compiler option)	285
no_bom (iobjmanip option)	no_vfe (linker option)	327
no_bom (isymexport option)	no_warnings (compiler option)	286
no_clustering (compiler option)	no_warnings (linker option)	327
no_code_motion (compiler option)	no_wrap_diagnostics (compiler option)	286
no_const_align (compiler option)	no_wrap_diagnostics (linker option)	328
no_cse (compiler option)	offset (ielftool option)	549
no_dwarf3_cfi (compiler option)	only_stdout (compiler option)	287
no_dynamic_rtti_elimination (linker option)	only_stdout (linker option)	328
no_entry (linker option)	option_name (compiler option)	313
no_exceptions (compiler option)	output (compiler option)	287
no_exceptions (linker option)	output (iarchive option)	549
no_fragments (compiler option)279	output (ielfdump option)	549
no_fragments (linker option)	output (linker option)	328
no_free_heap (linker option)	parity (ielftool option)	550
no_header (ielfdump option)	pending_instantiations (compiler option)	288
no_inline (compiler option)	pi_veneers (linker option)	328
no_inline (linker option)	place_holder (linker option)	329
no_library_search (linker option)325	preconfig (linker option)	329
no_literal_pool (compiler option)	predef_macro (compiler option)	288
no_literal_pool (linker option)	prefix (iexe2obj option)	551
no_locals (linker option)	preinclude (compiler option)	288
no_loop_align (compiler option)	preprocess (compiler option)	289
no_mem_idioms (compiler option)	printf_multibytes (linker option)	330
no_path_in_file_macros (compiler option)	ram_reserve_ranges (isymexport option)	552
no_range_reservations (linker option)	range (ielfdump option)	552
no_rel_section (ielfdump option)	raw (ielfdump] option)	553
no_remove (linker option)	redirect (linker option)	330
no_rtti (compiler option)	relaxed_fp (compiler option)	290
no_rw_dynamic_init (compiler option)	remarks (compiler option)	290
no_scheduling (compiler option)	remarks (linker option)	330
no_size_constraints (compiler option)	remove_file_path (iobjmanip option)	553
no_static_destruction (compiler option)	remove_section (iobjmanip option)	553
no_strtab (ielfdump option)	rename_section (iobjmanip option)	554
no_system_include (compiler option)	rename_symbol (iobjmanip option)	
no_typedefs_in_diagnostics (compiler option)284	replace (iarchive option)	
no_unaligned_access (compiler option)	require_prototypes (compiler option)	
no unroll (compiler option)	reserve_ranges (isymexport option)	

ropi (compiler option)	titxt (ielftool option)
ropi_cb (compiler option)	toc (iarchive option)
rwpi (compiler option)	treat_rvct_modules_as_softfp (linker option)334
rwpi_near (compiler option)292	use_c++_inline (compiler option)
scanf_multibytes (linker option)	use_full_std_template_names (ielfdump option) 562
search (linker option)	use_full_std_template_names (linker option)334
section (compiler option)	use_unix_directory_separators (compiler option) 297
section (ielfdump option)	vectorize (compiler option)
segment (ielfdump option)	verbose (iarchive option)
self_reloc (ielftool option)	verbose (ielftool option)
semihosting (linker option)	version (compiler option)
show_entry_as (isymexport option)	version (linker option)
silent (compiler option)	version (utilities option)
silent (iarchive option)	vfe (linker option)
silent (ielftool option)	vla (compiler option)
silent (linker option)	warnings_affect_exit_code (compiler option) 245, 298
simple (ielftool option)558	warnings_affect_exit_code (linker option)336
simple-ne (ielftool option)	warnings_are_errors (compiler option)
skip_dynamic_initialization (linker option)	warnings_are_errors (linker option)
source (ielfdump option)	warn_about_c_style_casts (compiler option) 298
srec (ielftool option)	whole_archive (linker option)
srec-len (ielftool option)559	wrap (iexe2obj option)
srec-s3only (ielftool option)559	.bss (ELF section)506
stack_protection (compiler option)	.comment (ELF section)
stack_usage_control (linker option)	.data (ELF section)
strict (compiler option)294	.data_init (ELF section)
strip (ielftool option)	.debug (ELF section)
strip (iobjmanip option)	.exc.text (ELF section)
strip (linker option)	.iar.debug (ELF section)
symbols (iarchive option)560	.iar.dynexit (ELF section)
system_include_dir (compiler option)	.init_array (section)508
text_out (iarchive option)561	.intvec (ELF section)
text_out (ielfdump option)	.noinit (ELF section)509
text_out (iobjmanip option)	.preinit_array (section)
text_out (isymexport option)	.prepreinit_array (section)509
text_out (linker option)	.rel (ELF section)
threaded_lib (linker option)	.rela (ELF section)
thumb (compiler option)	.rodata (ELF section)
timezone lib (linker ontion)	shetrtah (FLE section) 506

.strtab (ELF section)
.symtab (ELF section)506
.text (ELF section)
.textrw (ELF section)
.textrw_init (ELF section)510
@ (operator)
placing at absolute address223
placing in sections
#include files, specifying
#include_next
#warning
#warning message (preprocessor extension)462
%Z replacement string,
implementation-defined behavior
Numerics
Mullierics
32-bits (floating-point format)
64-bits (floating-point format)